

Presentation of Specification to TSG or WG

Presentation to: TSG [T1 Meeting # 8](#)

Document for presentation: [TR 34.926](#), Version [1.0.0](#)

**3rd Generation Partnership Project; Technical Specification Group (TSG) Terminals;
Electromagnetic compatibility (EMC) Table of International requirements for Mobile terminals and
ancillary equipment (3G TR 34.926 version 1.0.0)**

Presented for: [Information](#)

Abstract of document:

This Technical Report is a compilation of regional and or national requirements for Electromagnetic Compatibility and will continuously be upgraded as standards and regulations change. Sections will be added for new regions or nations, which enter the 3GPP and have different requirements. It is the intention to reference global standards but where it is known that none exist then alternative standards mandated by the regional and or national requirements will be quoted.

The sole purpose of the document is as a reference to the current status at time of publication. When new versions are published they will supersede the previous ones.

Changes since last presentation to Meeting # [None](#)

[First presentation](#)

Outstanding Issues:

[Some titles of National EMC requirements documents to be supplied. Completion in November 2000](#)

Contentious Issues:

[None](#)

**3rd Generation Partnership Project; Technical Specification
Group (TSG) Terminals; Electromagnetic compatibility (EMC)
Table of International requirements for Mobile terminals and
ancillary equipment (3G TR 34.926 version 1.0.0)**



The present document has been developed within the 3rd Generation Partnership Project (3GPPTM) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organisational Partners and shall not be implemented.
This Specification is provided for future development work within 3GPP only. The Organisational Partners accept no liability for any use of this Specification.
Specifications and reports for implementation of the 3GPPTM system should be obtained via the 3GPP Organisational Partners' Publications Offices.

Keywords

UMTS, EMC

3GPP

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 1999, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).
All rights reserved.

Contents

Foreword 5

Introduction 5

1 Scope 7

2 References 7

3 Definitions, symbols and abbreviations 8

3.1 Definitions 8

3.2 Symbols 8

3.3 Abbreviations 10

4 Table of EMC regional and national regulatory requirements 10

Annex A: Change history 15

History 16

Foreword

This Technical Report has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

This Technical Report is a living document and will continuously be upgraded as standards and regulations change. Sections will be added for new regions or nations, which enter the 3GPP and have different requirements. It is the intention to reference global standards but where it is known that none exist then alternative standards mandated by the regional and or national requirements will be quoted.

The sole purpose of the document is as a reference to the current status at time of publication. When new versions are published they will supersede the previous ones.

1 Scope

The present document shows in tabular form all current regulatory and voluntary requirements by region or nation, and is for information purposes only.

2 References

The following documents contain provisions, which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific;
- for a specific reference, subsequent revisions do not apply;
- for a non-specific reference, subsequent revisions do apply;

IEC 61000-6-1 (1997): "Electromagnetic compatibility (EMC) – Part 6: Generic standards - Section 1: Immunity standard for residential, commercial and light-industrial environments".

IEC 61000-6-3 (1996): "Electromagnetic compatibility (EMC) – Part 6: Generic standards - Section 3: Emission standard for residential, commercial and light-industrial environments.

ISO 7637-1 (1990): "Road vehicles - Electrical disturbance by conduction and coupling - Part 1: Passenger cars and light commercial vehicles with nominal 12 V supply voltage - Electrical transient conduction along supply lines only".

ISO 7637-2 (1990): "Road vehicles - Electrical disturbance by conduction and coupling - Part 2: Commercial vehicles with nominal 24 V supply voltage - Electrical transient conduction along supply lines only".

RECOMMENDATION ITU-R SM.329-7 (1997); "SPURIOUS EMISSIONS"

IEC CISPR publication 22; 3rd edition (1997-11); "Information technology equipment; Radio disturbance characteristics – Limits and methods of measurement"

IEC CISPR publication 16-1; (1993); "Radio disturbance and immunity measuring apparatus"; Am.1 (1997); "Specification for radio disturbance and immunity measuring apparatus and methods"

IEC 61000-3-2; (1995-03); "Electromagnetic compatibility; Part 3 - Limits; section 2 – Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)"; Am.1 (1997-09)

IEC 61000-3-3; (1994-12); "Electromagnetic compatibility; Part 3 - Limits; section 2 – Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current ≤ 16 A"

IEC 61000-4-2; "Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – section 2: Electrostatic discharge immunity test – Basic EMC publication"

IEC 61000-4-3; "Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – section 3: Radiated, radio-frequency electromagnetic field immunity test"

IEC 61000-4-4; "Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – section 4: Electrical fast transient/burst immunity test – Basic EMC publication"

IEC 61000-4-5; "Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – section 5: Surge immunity test"

IEC 61000-4-6; "Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – section 6: immunity to conducted disturbances induced by radio frequency fields"

IEC 61000-4-11; "Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – section 11: Voltage dips, short interruptions, and voltage variations immunity test"

EN 300 607 - 1;

EN 55022

ARIB STD-T 57 2.0 ; ELECTROMAGNETIC COMPATIBILITY (EMC) FOR RADIO EQUIPMENT

RCR 27:

CFR 47

3 Definitions, and abbreviations

3.1 Definitions

Ancillary equipment

Equipment (apparatus), used in connection with a user equipment (UE) is considered as an ancillary equipment (apparatus) if:

- the equipment is intended for use in conjunction with a UE to provide additional operational and/or control features to the UE, (e.g. to extend control

to another position or location); and

- the equipment cannot be used on a stand alone basis to provide user functions independently of a UE; and
- the UE to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

Idle mode
Idle mode is the state of User Equipment (UE) when switched on but with no Radio Resource Control (RRC) connection.

Port
particular interface, of the specified equipment (apparatus), with the electromagnetic environment. For example, any connection point on an equipment intended for connection of cables to or from that equipment is considered as a port (see figure 1).

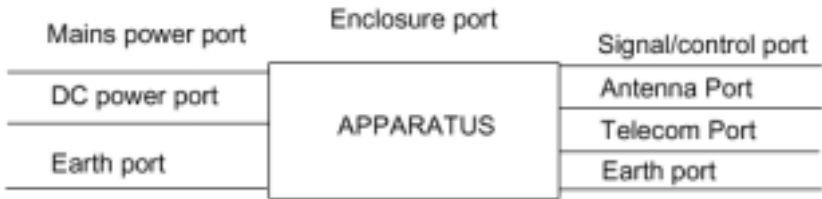


Figure 1: Examples of ports

Spurious emission from ITU-R SM 329-7 [Error! Reference source not found.]
Emission on a frequency, or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products but

exclude out-of-band emissions.

NOTE 1 – For the purpose of this Recommendation all emissions, including intermodulation products, conversion products and parasitic emissions, which fall at frequencies separated from the centre frequency of the emission by 250% or more of the necessary bandwidth of the emission will generally be considered spurious emissions. For multi-channel or multi-carrier transmitters/transponders, where several carriers may be transmitted simultaneously from a final output amplifier or an active antenna, the centre frequency of the emission is taken to be the centre of the – 3dB bandwidth of the transmitter or transponder.

Telecommunication port	ports which are intended to be connected to telecommunication networks (e.g. public switched telecommunication networks, integrated services digital networks), local area networks (e.g. Ethernet, Token Ring) and similar networks (see CISPR 22 [Error! Reference source not found.]).
Transient phenomena	Pertaining to or designating a phenomena or a quantity which varies between two consecutive steady states during a time interval short compared with the time-scale of interest (IEC 60050-161 [Error! Reference source not found.])

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

4 Table of International EMC Requirements for Mobile terminals and ancillary equipment

SPEC ITEM AREA	APPLIC.	3GPP SPECS		JAPAN		EUROPE		USA		KOREA	
		REQMENT	REF. DOC	REQMENT	REF. DOC	REQMENT	REF. DOC	REQMENT	REF. DOC	REQMENT	REF. DOC
RADIATED EMISSIONS											
Limits on Radiated Emission	Vehicular, Portable, Ancillary,		TS 34.124	class A 30 MHz-230 MHz : 40dBuV/m 230MHz-1GHz : 47 dBuV/m classB 30 MHz -230 MHz : 30 dBuV/m 230MHz-1GHz : 37 dBuV/m	ARIB T-57 2.2 reference from CISPR22 *(measurement is under receiving condition)		EN 300 607-1 Version 6 release 1997			class A (Q-peak) 30 MHz-230 MHz : 40dBuV/m 230MHz-1GHz : 47 dBuV/m classB (Q-peak) 30 MHz -230 MHz : 30 dBuV/m 230MHz-1GHz : 37 dBuV/m	CISPR22
Transmit OFF power (idle m ode)			TS 34.124	-60 dBm for PDC terminal	RCR 27 (Standard for PDC)		EN 300 607-1 Version 6 release 1997				
Limits on Radiated Emissions	Ancillary AC eqpt only		TS 34.124		CISPR 22		EN 55022	Not Req for Part 24 devices. 500uV/m >960 MHz or CISPR 22	CFR 47 Part 15.109(a),(e) needs further investigation		
CONDUCTED EMISSIONS											

A. Limits on Conducted Emission	Ancillary equipment		TS 34.124					Not Req'd for Part 24 devices.			
DC Power in/out	Vehicular, Portable, Ancillary		TS 34.124	0.15 - 0.5 MHz : Q-Peak 79dBuV Average 66dBuV 0.5 - 30 MHz : Q-Peak 73dBuV Average 60dBuV	ARIB T-57 2.3 reference from CISPR 16-1 / 22		CISPR 16-1, EN55022			0.15 - 0.5 MHz : Q-Peak 79dBuV Average 66dBuV 0.5 - 30 MHz : Q-Peak 73dBuV Average 60dBuV	CISPR22
AC Mains	Portable, Ancillary		TS 34.124	Class A 0.15 - 0.5 MHz : Q-Peak 79dBuV Average 66dBuV 0.5 - 30 MHz : Q-Peak 73dBuV Average 60dBuV Class B 0.15 - 0.5 MHz : Q-Peak 66-56 dBuV / Average 56-46 dBuV 0.5 - 5 MHz : Q-Peak 56 dBuV Average 46dBuV 5 -30 MHz : Q-Peak 60 dBuV Average 50dBuV	ARIB T-57 2.4 reference from CISPR 16-1 / 22		CISPR 22, EN55022	250 uV <30 MHz or CISPR 22	CFR part 15.107(a), (e)	Class A 0.15 - 0.5 MHz : Q-Peak 79dBuV Average 66dBuV 0.5 - 30 MHz : Q-Peak 73dBuV Average 60dBuV Class B 0.15 - 0.5 MHz : Q-Peak 66-56 dBuV / Average 56-46 dBuV 0.5 - 5 MHz : Q-Peak 56 dBuV Average 46dBuV 5 -30 MHz : Q-Peak 60 dBuV Average 50dBuV	CISPR22
Harmonic Current Emissions, AC Mains	Portable, Ancillary		TS 34.124	Not Applicable			EN 61000-3-2			Not Applicable	
Voltage Fluctuations/ Flicker	Portable, Ancillary		TS 34.124	Not Applicable			EN 61000-3-3			Not Applicable	
IMMUNITY TO RADIATED EMISSIONS											
Immunity to RF EM Fields, 80-1000 MHz	Vehicular, Portable, Ancillary eqpt,		TS 34.124	3 V/m	ARIB T-57 3.6 reference from IEC 61000-4-3 JIS 1000-4-3	3 V/m	EN 61000-4-3			3 V/m (80MHz~1GHz: No modulation)	IEC 61000-4-3

IMMUNITY TO CONDUCTED EMISSIONS											
AC Mains - Voltage Dips and interruption	Portable, Ancillary eqpt,		TS 34.124	Not applicable			EN 61000-4-11			Under Consideration	IEC 61000-4-11
AC Mains - Surges, Common Mode and Differential mode	Portable, Ancillary eqpt,		TS 34.124	Not applicable			EN 61000-4-5			1 kV	IEC 61000-4-5
DC Mains- Surges	Vehicular, Portable, Ancillary eqpt,		TS 34.124	Not applicable						Under Consideration	IEC 61000-4-5
Signal ports and Communication ports-Surges	Vehicular, Portable, Ancillary eqpt,										
DC Mains- Surges	Vehicular,		TS 34.124	50 V / -50 V and -5 V / -2.5 V / 0 V	ARIB T-57 3.10 reference from ISO 7637-1/2		ISO 7637-1/2			Under Consideration	
Fast Transients - AC/DC Power	Portable, Ancillary eqpt,		TS 34.124	Not applicable		2/1 Kv	EN 61000-4-4			1kV	IEC 61000-4-4
Fast Transients - Signal/control ports	Portable, Ancillary eqpt,		TS 34.124	Not applicable		0.5 Kv	EN 61000-4-4			0.5kV	IEC 61000-4-4
RF Conducted	Vehicular, Portable, Ancillary eqpt,		TS 34.124	3 Vrms	ARIB T-57 3.7 v. 2.0 reference from IEC 61000-4-6 (only Vehicular)	3 V rms	EN 61000-4-6			Under Consideration	IEC 61000-4-6

ELECTRO- STATIC DISCHARGE	Vehicular, Portable, Ancillary eqpt,		TS 34.124	± 8 kV (Air) / \pm 4 kV (Contact)	ARIB T-57 3.4 v.2.0 reference from IEC 61000- 4-2	± 8 kV (Air) / \pm 4 kV (Contact)	EN 61000-4-2			± 8 kV (Air) / \pm 4 kV (Contact)	IEC 61000-4-2
Power Frequency Magnetic Field	Vehicular, Portable, Ancillary eqpt,		TS 34.124	1 A/m (60 Hz or 50 Hz)	ARIB T-57 3.8 v.2.0 reference from IEC 61000-4-8						

Annex A: Change history

Change history					
TSG SA#	Version	CR	Tdoc SA	New Version	Subject/Comment

History

Document history		
34.12xx	November 1999	Preliminary draft
34.926	April 2000	34.926 version 1.0.0