

TSG RAN Meeting #25
Palm Springs, US, 7 - 9 September 2004

RP-040288

Title CRs (Rel-6) to TS25.101 & TS25.133 for WI "Technical Enhancements and Improvements"
Source TSG RAN WG4
Agenda Item 8.8

| RAN4 Tdoc | Spec | CR | R | Cat | Rel | Curr Ver | Title | Work Item |
|-----------|--------|-----|---|-----|-------|----------|--|-------------------|
| R4-040459 | 25.101 | 352 | | F | Rel-6 | 6.4.0 | Clarification of test parameter of reliable TPC command combining | TEI6 |
| R4-040520 | 25.101 | 354 | 1 | F | Rel-6 | 6.4.0 | UE maximum input level for HS-PDSCH | TEI6, HSDPA-RF |
| R4-040512 | 25.101 | 358 | | F | Rel-6 | 6.4.0 | Clarification to change of TFC and compressed mode time mask diagrams | TEI6 |
| R4-040429 | 25.133 | 680 | | F | Rel-6 | 6.6.0 | Correction to FDD inter frequency fading test case | TEI6 |
| R4-040547 | 25.133 | 681 | 1 | F | Rel-6 | 6.6.0 | Additional scenarios for cell reselection test requirements | TEI6 |
| R4-040557 | 25.133 | 687 | 2 | F | Rel-6 | 6.6.0 | RX-TX timing test modified to use soft handover, delay range for RX-TX timing test specified | TEI6 |

CHANGE REQUEST

⌘ **25.101 CR 352** ⌘ rev **6.4.0** ⌘ Current version: **6.4.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|---|-----------------|---|
| Title: | ⌘ Clarification of test parameter of reliable TPC command combining | | |
| Source: | ⌘ RAN WG4 | | |
| Work item code: | ⌘ TEI6 | Date: | ⌘ 30/08/2004 |
| Category: | ⌘ F | Release: | ⌘ Rel-6 |
| | <i>Use one of the following categories:</i> F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | <i>Use one of the following releases:</i> 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) |

| | |
|--------------------------------------|---|
| Reason for change: | ⌘ In section 8.7.3, UE output power is evaluated to verify that the UE follows only the reliable TPC commands in soft handover. However, "UL power control step size" is missing in test parameters. |
| Summary of change: | ⌘ Test parameter "UL power control step size" is added in Table 8.28B. |
| Consequences if not approved: | ⌘ Test parameter "UL power control step size" is missing. <Isolated Impact Analysis> - This CR has no impact on UE implementation since it clarifies the test parameter. |

| | | | | | | | | | | | |
|------------------------------|--|---|---|---|---|---|---|---|---|---|--|
| Clauses affected: | ⌘ 8.7.3 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> </table> Other core specifications Test specifications O&M Specifications | Y | N | X | X | X | X | X | X | ⌘ | This parameter is already included in TS34.121 section 7.7.3.4 |
| Y | N | | | | | | | | | | |
| X | X | | | | | | | | | | |
| X | X | | | | | | | | | | |
| X | X | | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

8.7.3 Combining of reliable TPC commands from radio links of different radio link sets

8.7.3.1 Minimum requirement

Test 1 verifies that the UE follows only the reliable TPC commands in soft handover. Test 2 verifies that the UE follows all the reliable TPC commands in soft handover.

Test parameters are specified in Table 8.28B. Before the start of the tests, the UE transmit power shall be initialised to -15 dBm. An actual UE transmit power may vary from the target level of -15 dBm due to inaccurate UE output power step.

During tests 1 and 2 the UE transmit power samples, which are defined as the mean power over one timeslot, shall stay 90% of the time within the range defined in Table 8.28C.

Table 8.28B: Parameters for reliable TPC command combining

| Parameter | Unit | Test 1 | Test 2 |
|--|--------------|-------------------|------------------|
| Phase reference | - | P-CPICH | |
| DPCH_Ec/Ior1 | dB | Note 1 | Note 1 & Note 3 |
| DPCH_Ec/Ior2 | dB | DPCH_Ec/Ior1 - 10 | DPCH_Ec/Ior1 + 6 |
| DPCH_Ec/Ior3 | dB | DPCH_Ec/Ior1 - 10 | - |
| \hat{I}_{or1}/I_{oc} | dB | -1 | -1 |
| \hat{I}_{or2}/I_{oc} | dB | -1 | -1 |
| \hat{I}_{or3}/I_{oc} | dB | -1 | - |
| I_{oc} | dBm/3.84 MHz | -60 | |
| Power-Control-Algorithm | - | Algorithm 1 | |
| UL Power Control step size, Δ_{TPC} | dB | 1 | |
| Cell 1 TPC commands | - | Note 2 | Note 2 |
| Cell 2 TPC commands | - | "1" | "1" |
| Cell 3 TPC commands | - | "1" | - |
| Information data Rate | kbps | 12.2 | |
| Propagation condition | - | Static | |
| Note 1: The DPCH_Ec/Ior1 is set at the level corresponding to 5% TPC error rate. Note 2: The uplink power control from cell1 shall be such that the UE transmit power would stay at -15 dBm. Note 3: The maximum DPCH_Ec/Ior1 level in cell1 is -9 dB. | | | |

Table 8.28C: Test requirements for reliable TPC command combining

| Parameter | Unit | Test 1 | Test 2 |
|-----------------|------|------------|------------|
| UE output power | dBm | -15 ± 5 dB | -15 ± 3 dB |

CR-Form-v7

CHANGE REQUEST

⌘ **25.101 CR 354** ⌘ rev **1** ⌘ Current version: **6.4.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|--|---------------------------|---|
| Title: | ⌘ UE maximum input level for HS-PDSCH | | |
| Source: | ⌘ RAN WG4 | | |
| Work item code: | ⌘ TEI6, HSDPA-RF | Date: | ⌘ 30/08/2004 |
| Category: | ⌘ F | Release: | ⌘ Rel-6 |
| | Use <u>one</u> of the following categories: | | Use <u>one</u> of the following releases: |
| | F (correction) | 2 (GSM Phase 2) | |
| | A (corresponds to a correction in an earlier release) | R96 (Release 1996) | |
| | B (addition of feature), | R97 (Release 1997) | |
| | C (functional modification of feature) | R98 (Release 1998) | |
| | D (editorial modification) | R99 (Release 1999) | |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Rel-4 (Release 4) |
| | | | Rel-5 (Release 5) |
| | | | Rel-6 (Release 6) |

| | |
|--------------------------------------|---|
| Reason for change: | ⌘ 1.) There are meaningless asterisks in the tables 7.3A and 7.3B. 2.) Due to changes in Annex C.5 the reference in section 7.4.2.1 has become unclear and needs to be clarified. |
| Summary of change: | ⌘ 1.) Asterisks in the table 7.3A and 7.3B deleted. 2.) Reference to section 7.4.2 is added to section C.5.1 |
| Consequences if not approved: | ⌘ There are meaningless asterisks in tables 7.3A and 7.3B and channel setup definition for maximum input level requirement for HS-PDSCH is unclear. |

| | | | | | | | | | | | |
|-------------------------------------|--|-------------------------------------|---|--------------------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|---------------------------|----------|
| Clauses affected: | ⌘ 7.4.2.1, C.5.1 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Y</td> <td style="padding: 2px;">N</td> </tr> <tr> <td style="padding: 2px;"><input type="checkbox"/></td> <td style="padding: 2px;"><input checked="" type="checkbox"/></td> </tr> <tr> <td style="padding: 2px;"><input checked="" type="checkbox"/></td> <td style="padding: 2px;"><input type="checkbox"/></td> </tr> <tr> <td style="padding: 2px;"><input type="checkbox"/></td> <td style="padding: 2px;"><input checked="" type="checkbox"/></td> </tr> </table> | Y | N | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | Other core specifications | ⌘ 34.121 |
| | Y | N | | | | | | | | | |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | |
| | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | |
| <input checked="" type="checkbox"/> | Test specifications | | | | | | | | | | |
| <input type="checkbox"/> | O&M Specifications | | | | | | | | | | |
| Other comments: ⌘ | | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be

downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change reques

7.4.2 Minimum requirement for HS-PDSCH reception

7.4.2.1 Minimum requirement for 16QAM

For the parameters specified in Table 7.3A, the requirements are specified in terms of a minimum information bit throughput R as shown in Table 7.3B for the DL reference channel H-Set 1 specified in Annex A.7.1.1, with the addition of the parameters added in the end of Table 7.3A and downlink physical channel setup according to Annex C.5.

Table 7.3A

| Parameter | Unit | Test |
|--|----------------------------|--|
| Phase reference | | P-CPICH |
| I_{or} | dBm/3.84 MHz | -25* |
| UE transmitted mean power | dBm | 20 (for Power class 3) 18 (for Power class 4) |
| DPCH | DPCH_Ec/I _{or} | -13 |
| HS-SCCH_1 | HS-SCCH_Ec/I _{or} | -13 |
| Redundancy and constellation version | | 6 |
| Maximum number of HARQ transmissions | | 1 |
| Note: The HS-DSCH shall be transmitted continuously with constant power but only every third TTI shall be sent to the UE under test. | | |

Table 7.3B

| HS-PDSCH E_c/I_{or} (dB) | T-put R (kbps)* |
|-------------------------------|-------------------|
| -3 | 700 |

----- (NEXT MODIFIED SECTION) -----

C.5 HSDPA DL Physical channels

C.5.1 Downlink Physical Channels connection set-up

Table C.8 is applicable for the measurements for tests in subclause [7.4.2](#), 9.2.1 and 9.3. Table C.9 is applicable for the measurements for tests in subclause 9.2.2. Table C.10 is applicable for the measurements for tests in subclause 9.2.3. Table C.11 is applicable for the measurements for tests in subclause 9.4.1. Table C.12 is applicable for the measurements in subclause 9.4.2

CHANGE REQUEST

⌘ **25.101 CR 358** ⌘ rev ⌘ Current version: **6.4.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|--|---------------------------|---|
| Title: | ⌘ Clarification to change of TFC and compressed mode time mask diagrams | | |
| Source: | ⌘ RAN WG4 | | |
| Work item code: | ⌘ TEI6 | Date: | ⌘ 30/08/2004 |
| Category: | ⌘ F | Release: | ⌘ Rel-6 |
| | Use <u>one</u> of the following categories: | | Use <u>one</u> of the following releases: |
| | F (correction) | 2 (GSM Phase 2) | |
| | A (corresponds to a correction in an earlier release) | R96 (Release 1996) | |
| | B (addition of feature), | R97 (Release 1997) | |
| | C (functional modification of feature) | R98 (Release 1998) | |
| | D (editorial modification) | R99 (Release 1999) | |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Rel-4 (Release 4) |
| | | | Rel-5 (Release 5) |
| | | | Rel-6 (Release 6) |

| | |
|--------------------------------------|---|
| Reason for change: | ⌘ The diagrams for the Power time mask have caused confusion due to the implication that there is a maximum and minimum mask power requirement. |
| Summary of change: | ⌘ The diagrams and accompanying text are modified to show the correct relationship between the nominal bursts and the on and off power requirements. In figures 6.2 and 6.3 the transient period comment introduced in v 6.4.0 has been clarified from "no requirements" to "no off power requirements". |
| Consequences if not approved: | ⌘ Confusion over the definition of the UE power vs. time profile may lead to incorrect implementation and tests. |

| | | | | | | | | | | | |
|------------------------------|---|---|---|---|---|---|---|---|---|--|----------|
| Clauses affected: | ⌘ 6.5 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> </table> | Y | N | X | X | X | X | X | X | Other core specifications Test specifications O&M Specifications | ⌘ 34.121 |
| Y | N | | | | | | | | | | |
| X | X | | | | | | | | | | |
| X | X | | | | | | | | | | |
| X | X | | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

6.5 Transmit ON/OFF power

6.5.1 Transmit OFF power

Transmit OFF power is defined as the RRC filtered mean power when the transmitter is off. The transmitter is considered to be off when the UE is not allowed to transmit. During UL compressed mode gaps, the UE is not considered to be off.

6.5.1.1 Minimum requirement

The transmit OFF power is defined as the RRC filtered mean power in a duration of at least one timeslot excluding any transient periods. The requirement for the transmit OFF power shall be less than -56 dBm.

6.5.2 Transmit ON/OFF Time mask

The time mask for transmit ON/OFF defines the transient period allowed for the UE between transmit OFF power and transmit ON power. During the transient period there are no additional requirements on UE transmit power beyond what is required in subclause 6.2 maximum output power observed over a period of at least one timeslot. ON/OFF scenarios include PRACH/PCPCH preamble bursts, the beginning or end of PRACH/PCPCH message parts and the beginning or end of UL DPCH transmissions.


6.5.2.1 Minimum requirement

The transmit power levels versus time shall meet the requirements in figure 6.2 for PRACH preambles and CPCH preambles, and the requirements in figure 6.3 for all other cases. The off power observation period is defined as the RRC filtered mean power in a duration of at least one timeslot excluding any transient periods. The on power observation period is defined as the mean power over one timeslot excluding any transient periods. For PRACH/PCPCH preambles, the on power observation period is 3904 chips (4096 chips less the transient periods).

The off power specification in figures 6.2 and 6.3 is as defined in 6.5.1.1.

The average on power specification in figures 6.2 and 6.3 depends on each possible case.

- First preamble of RACH/CPCH: Open loop accuracy (Table 6.3).
- During preamble ramping of the RACH/CPCH, and between final RACH/CPCH preamble and RACH/CPCH message part: Accuracy depending on size of the required power difference.(Table 6.7). The step in total transmitted power between final RACH/CPCH preamble and RACH/CPCH message (control part + data part) shall be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude.
- After transmission gaps in compressed mode: Accuracy as in Table 6.9.
- Power step to Maximum Power: Maximum power accuracy (Table 6.1).

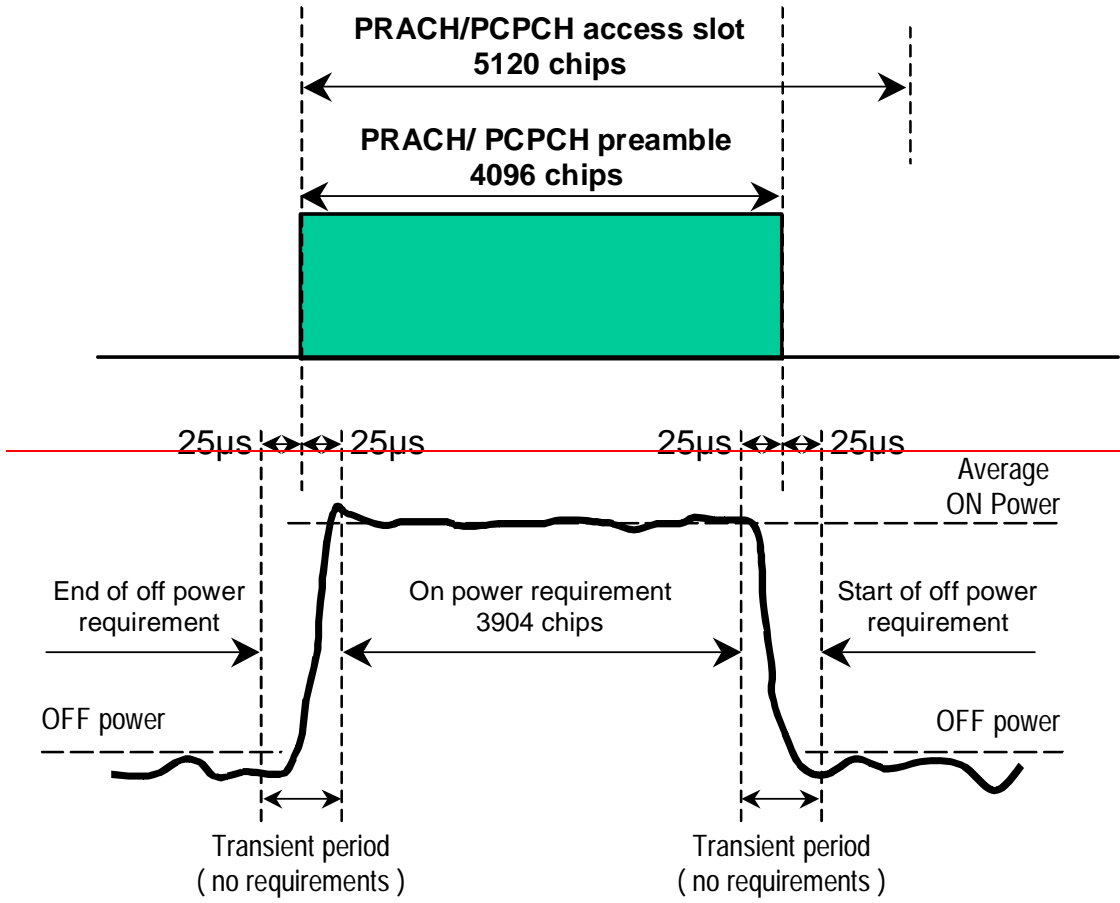

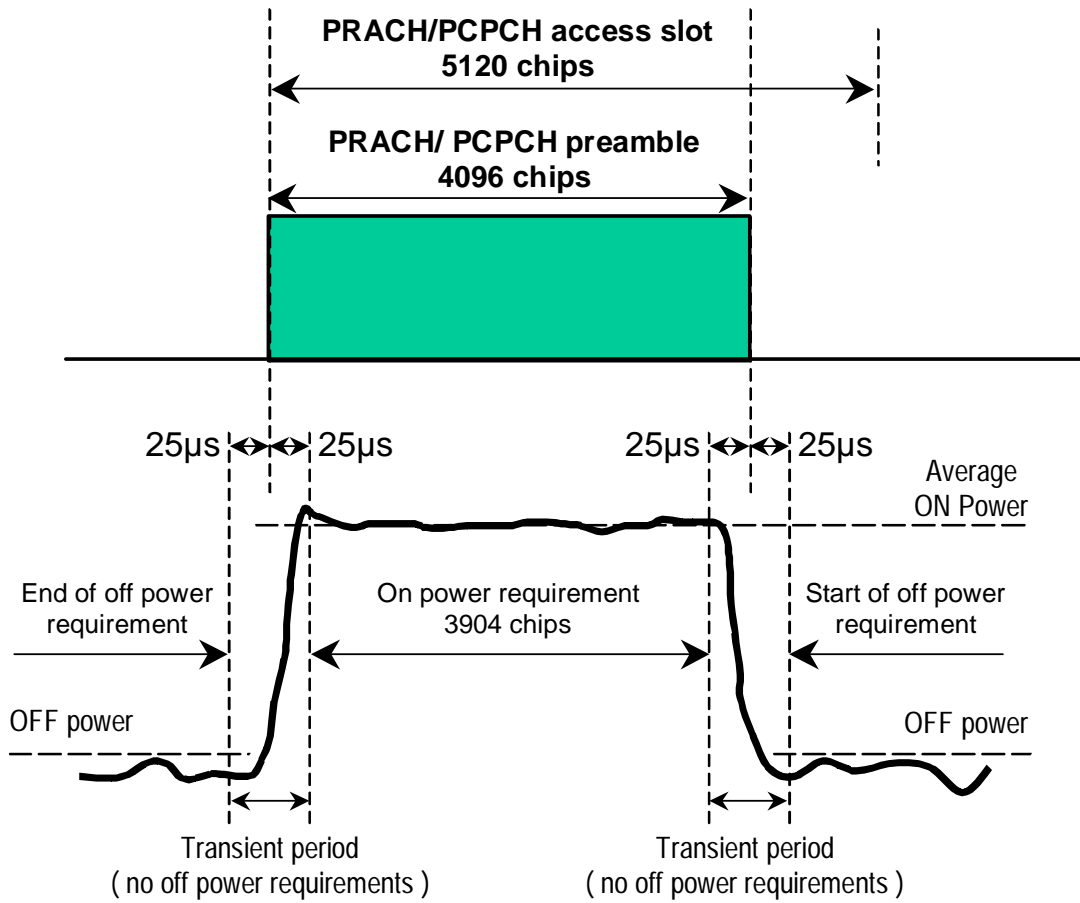


Figure 6.2: Transmit ON/OFF template for PRACH preambles and CPCH preambles

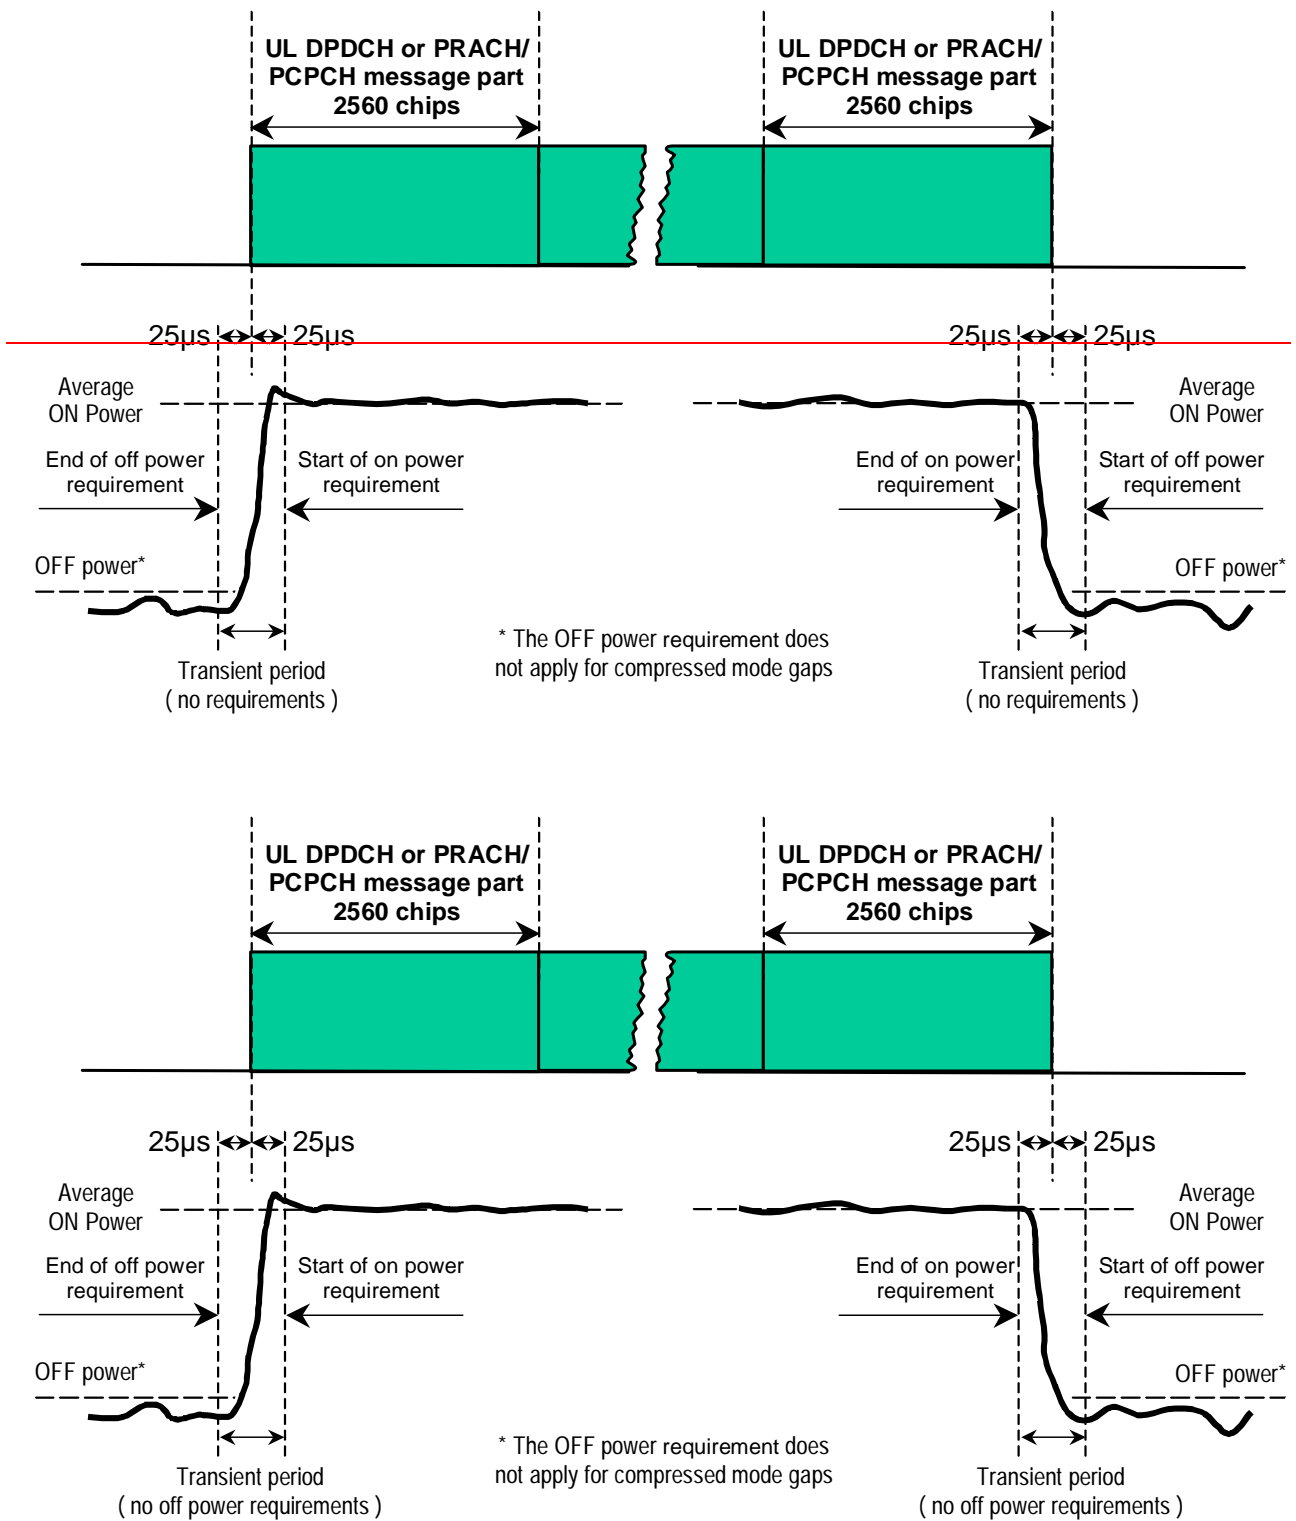


Figure 6.3: Transmit ON/OFF template for all other On/Off cases

Table 6.7: Transmitter power difference tolerance for RACH/CPCH preamble ramping, and between final RACH/CPCH preamble and RACH/CPCH message part

| Power step size (Up or down)* ΔP [dB] | Transmitter power difference tolerance [dB] |
|--|---|
| 0 | +/- 1 |
| 1 | +/- 1 |
| 2 | +/- 1.5 |
| 3 | +/- 2 |
| $4 \leq \Delta P \leq 10$ | +/- 2.5 |
| $11 \leq \Delta P \leq 15$ | +/- 3.5 |
| $16 \leq \Delta P \leq 20$ | +/- 4.5 |
| $21 \leq \Delta P$ | +/- 6.5 |

NOTE: Power step size for RACH/CPCH preamble ramping is from 1 to 8 dB with 1 dB steps.

6.5.3 Change of TFC

A change of TFC (Transport Format Combination) in uplink means that the power in the uplink varies according to the change in data rate. DTX, where the DPDCH is turned off, is a special case of variable data, which is used to minimise the interference between UE(s) by reducing the UE transmit power when voice, user or control information is not present.

6.5.3.1 Minimum requirement

A change of output power is required when the TFC, and thereby the data rate, is changed. The ratio of the amplitude between the DPDCH codes and the DPCCH code will vary. The power step due to a change in TFC shall be calculated in the UE so that the power transmitted on the DPCCH shall follow the inner loop power control. The step in total transmitted power (DPCCH + DPDCH) shall then be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude. The accuracy of the power step, given the step size, is specified in Table 6.8. The power change due to a change in TFC is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, not including the transient duration. The transient duration is from 25 μ s before the slot boundary to 25 μ s after the slot boundary.

Table 6.8: Transmitter power step tolerance

| Power step size (Up or down) ΔP [dB] | Transmitter power step tolerance [dB] |
|---|---------------------------------------|
| 0 | +/- 0.5 |
| 1 | +/- 0.5 |
| 2 | +/- 1.0 |
| 3 | +/- 1.5 |
| $4 \leq \Delta P \leq 10$ | +/- 2.0B |
| $11 \leq \Delta P \leq 15$ | +/- 3.0 |
| $16 \leq \Delta P \leq 20$ | +/- 4.0 |
| $21 \leq \Delta P$ | +/- 6.0 |

The mean power of successive slots shall be calculated according to ~~transmit power levels versus time shall meet the mask specified in~~ Figure 6.4.

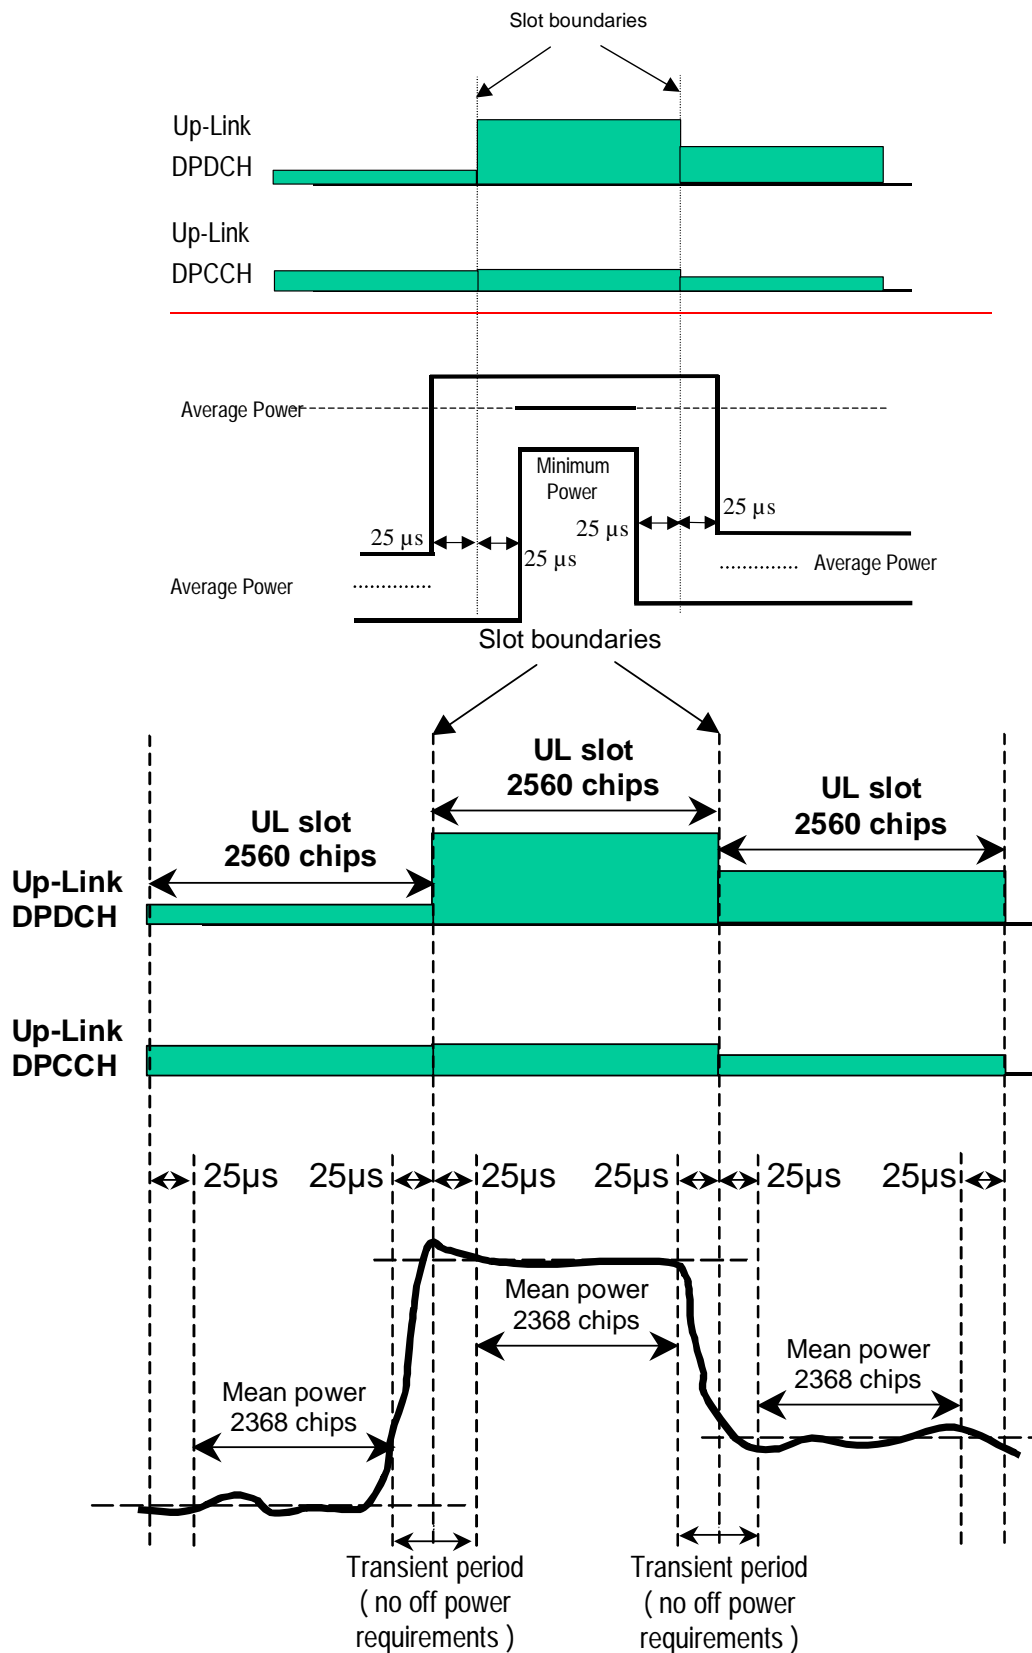


Figure 6.4: Transmit template during TFC change

6.5.4 Power setting in uplink compressed mode

Compressed mode in uplink means that the power in uplink is changed.

6.5.4.1 Minimum requirement

A change of output power is required during uplink compressed frames since the transmission of data is performed in a shorter interval. The ratio of the amplitude between the DPDCH codes and the DPCCH code will also vary. The power step due to compressed mode shall be calculated in the UE so that the energy transmitted on the pilot bits during each transmitted slot shall follow the inner loop power control.

Thereby, the power during compressed mode, and immediately afterwards, shall be such that the mean power of the DPCCH follows the steps due to inner loop power control combined with additional steps of $10\text{Log}_{10}(N_{\text{pilot,prev}} / N_{\text{pilot,curr}})$ dB where $N_{\text{pilot,prev}}$ is the number of pilot bits in the previously transmitted slot, and $N_{\text{pilot,curr}}$ is the current number of pilot bits per slot.

The resulting step in total transmitted power (DPCCH + DPDCH) shall then be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greatest magnitude. The accuracy of the power step, given the step size, is specified in Table 6.8 in subclause 6.5.3.1. The power step is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, when neither the original timeslot nor the reference timeslot are in a transmission gap. The transient duration is not included, and is from 25µs before the slot boundary to 25µs after the slot boundary.

In addition to any power change due to the ratio $N_{\text{pilot,prev}} / N_{\text{pilot,curr}}$, the mean power of the DPCCH in the first slot after a compressed mode transmission gap shall differ from the mean power of the DPCCH in the last slot before the transmission gap by an amount Δ_{RESUME} , where Δ_{RESUME} is calculated as described in clause 5.1.2.3 of TS 25.214.

The resulting difference in the total transmitted power (DPCCH + DPDCH) shall then be rounded to the closest integer dB value. A power difference exactly half-way between two integer values shall be rounded to the closest integer of greatest magnitude. The accuracy of the resulting difference in the total transmitted power (DPCCH + DPDCH) after a transmission gap of up to 14 slots shall be as specified in Table 6.9.

Table 6.9: Transmitter power difference tolerance after a transmission gap of up to 14 slots

| Power difference (Up or down) ΔP [dB] | Transmitter power step tolerance after a transmission gap [dB] |
|--|--|
| $\Delta P \leq 2$ | +/- 3 |
| 3 | +/- 3 |
| $4 \leq \Delta P \leq 10$ | +/- 3.5 |
| $11 \leq \Delta P \leq 15$ | +/- 4 |
| $16 \leq \Delta P \leq 20$ | +/- 4.5 |
| $21 \leq \Delta P$ | +/- 6.5 |

The power difference is defined as the difference between the mean power of the original (reference) timeslot before the transmission gap and the mean power of the target timeslot after the transmission gap, not including the transient durations. The transient durations at the start and end of the transmission gaps are each from 25µs before the slot boundary to 25µs after the slot boundary.

The [mean power of successive slots shall be calculated according to](#) ~~transmit power levels versus time shall meet the mask specified in~~ figure 6.5.

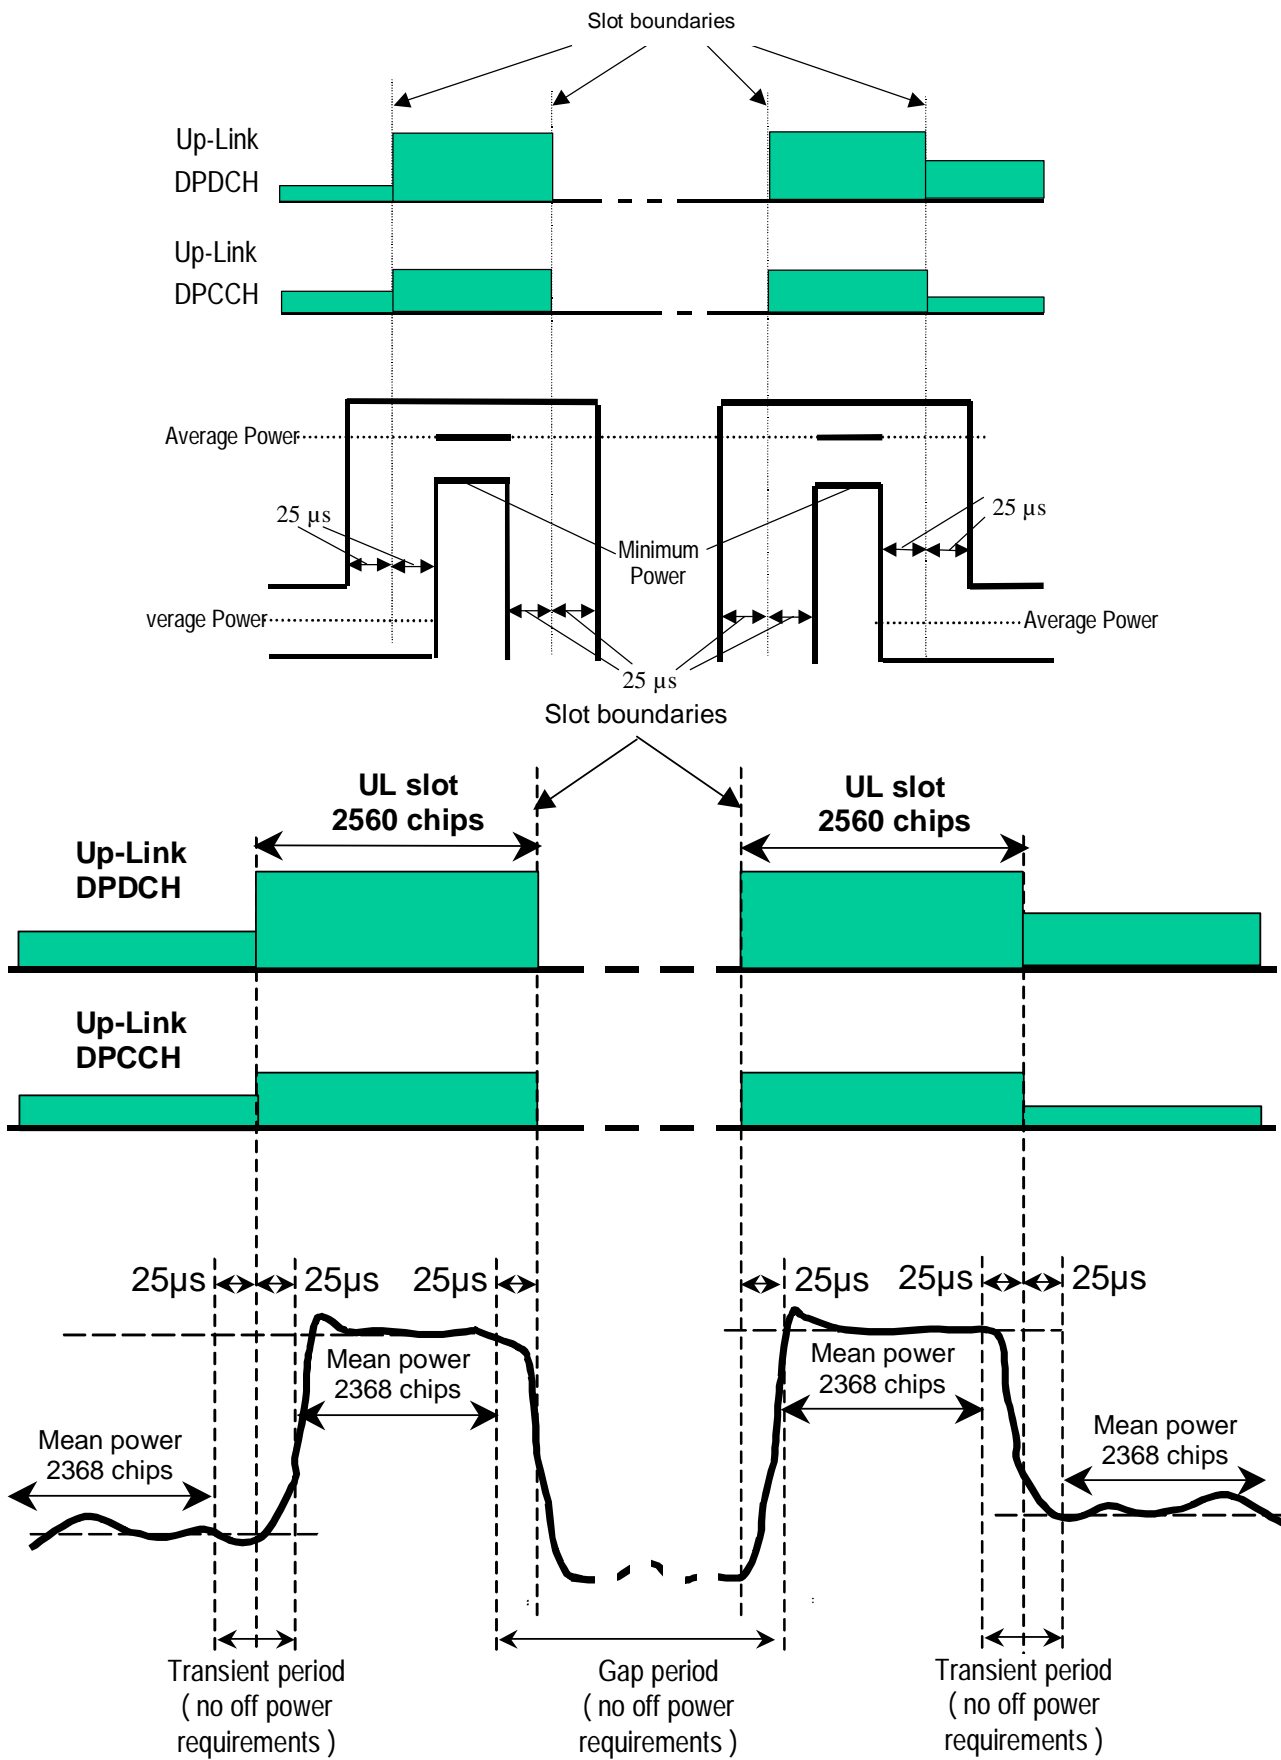


Figure 6.5: Transmit template during Compressed mode

6.5.5 HS-DPCCH

The transmission of Ack/Nack or CQI over HS-DPCCH causes the transmission power in the uplink to vary.

6.5.5.1 Minimum requirement

A change of output power is required when Ack/Nack or CQI is transmitted. The ratio of the amplitude between the DPCCH and the Ack/Nack and CQI respectively is signalled by the higher layers. The sum power on DPCCH+DPDCH shall not change by the transmission of Ack/Nack and CQI unless UE output power when Ack/Nack or CQI is transmitted would exceed the maximum allowed value whereupon the UE shall apply additional scaling to the total transmit power as defined in section 5.1.2.6 of TS.25.214. The sum in total transmitted power (DPCCH + DPDCH+HS-DPCCH) shall then be rounded to the closest integer dB value. A power step exactly half-way between two integer values shall be rounded to the closest integer of greater magnitude. The accuracy of the power step, given the step size, is specified in Table 6.9A. The power change due to transmission of Ack/Nack or CQI is defined as the relative power difference between the mean power of the original (reference) timeslot and the mean power of the target timeslot, not including the transient duration. The transient duration is from 25µs before the HS-DPCCH slot boundary to 25µs after the HS-DPCCH slot boundary.

Table 6.9A: Transmitter power step tolerance

| Power step size (Up or down) ΔP [dB] | Transmitter power step tolerance [dB] |
|---|---------------------------------------|
| 0 | +/- 0.5 |
| 1 | +/- 0.5 |
| 2 | +/- 1.0 |
| 3 | +/- 1.5 |
| $4 \leq \Delta P \leq 6$ | +/- 2.0 |

The transmit power levels versus time shall meet the mask specified in Figure 6.x.

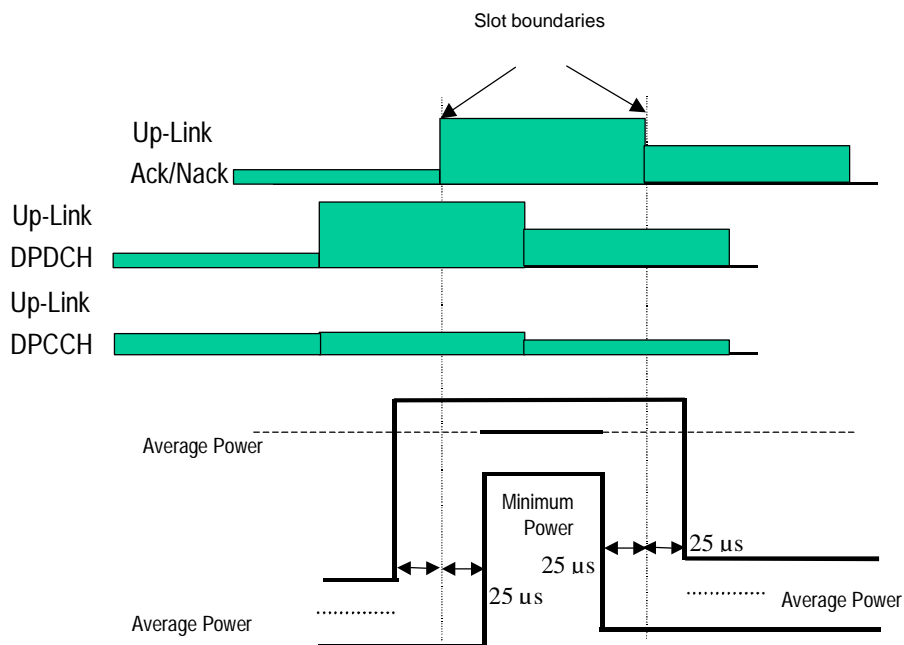


Figure 6.5A: Transmit template during Ack/Nack transmission

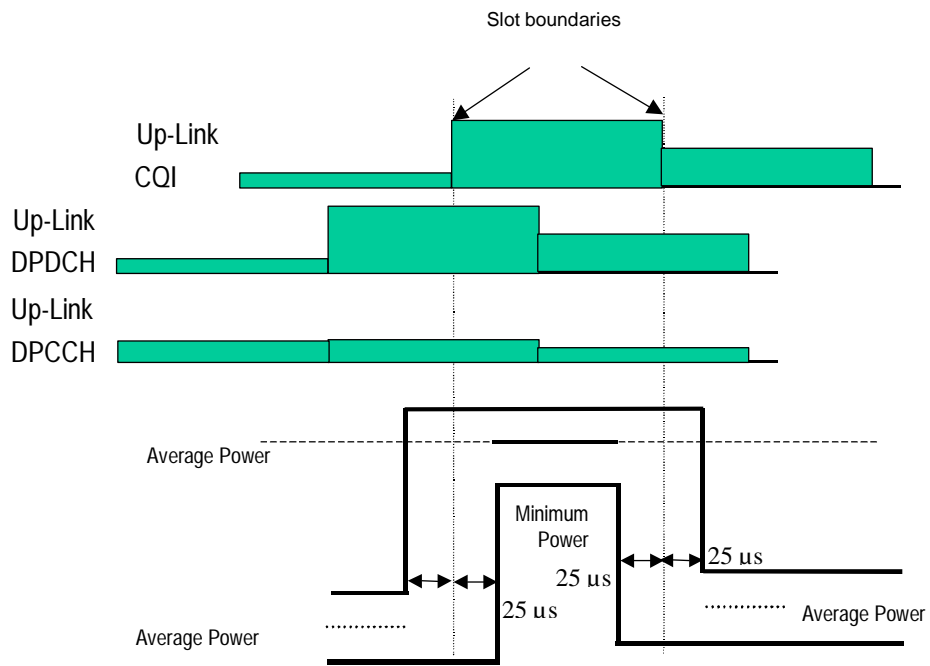


Figure 6.5B: Transmit template during CQI transmission

CHANGE REQUEST

⌘ **25.133** **CR 680** ⌘ rev ⌘ Current version: **6.6.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ⌘ ME Radio Access Network Core Network

| | | | |
|------------------------|--|---------------------------|---|
| Title: | ⌘ Correction to FDD inter frequency fading test case. | | |
| Source: | ⌘ RAN WG4 | | |
| Work item code: | ⌘ TEI6 | Date: | ⌘ 30/08/2004 |
| Category: | ⌘ F | Release: | ⌘ Rel-6 |
| | Use <u>one</u> of the following categories: | | Use <u>one</u> of the following releases: |
| | F (correction) | Ph2 (GSM Phase 2) | |
| | A (corresponds to a correction in an earlier release) | R96 (Release 1996) | |
| | B (addition of feature), | R97 (Release 1997) | |
| | C (functional modification of feature) | R98 (Release 1998) | |
| | D (editorial modification) | R99 (Release 1999) | |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | Rel-4 (Release 4) |
| | | | Rel-5 (Release 5) |
| | | | Rel-6 (Release 6) |
| | | | Rel-7 (Release 7) |

| | |
|--------------------------------------|--|
| Reason for change: | ⌘ To correct the measurement reporting delay figure in test case A.8.2.3. Currently this value is 5 seconds but according to the CM pattern used in the test case (TGL1=14, TGLP1=4) and the FDD inter frequency requirements in clause 8.1.2.3, the correct value of measurement delay is 4.4 seconds. |
| Summary of change: | ⌘ The measurement reporting delay in test case A.8.2.3 (correct reporting of neighbours in fading propagation condition using TGL1=14) is derived from the FDD inter-frequency measurement requirements specified in clause 8.1.2.3. In these requirements the limitation of 5 seconds has been removed. Accordingly the measurement reporting delay in the test case A.8.2.3 is updated. |
| Consequences if not approved: | ⌘ The FDD inter frequency fading test case in A.8.2.3, which uses dense pattern (TGL1=14) will give higher measurement reporting delay than what is expected from the inter frequency measurement requirements. Hence if the network uses dense CM (e.g. TGL1=14) then it will not benefit from the removal of the lower bound of 5 seconds in the FDD inter frequency delay requirements. |

| | | | | | | | | | | | |
|------------------------------|---|---------------------|---|--|--|--|--|--|--|---------------------------|----------|
| Clauses affected: | ⌘ A.8.2.3 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="width: 20px; text-align: center;"> </td> <td style="width: 20px; text-align: center;"> </td> </tr> <tr> <td style="width: 20px; text-align: center;"> </td> <td style="width: 20px; text-align: center;"> </td> </tr> <tr> <td style="width: 20px; text-align: center;"> </td> <td style="width: 20px; text-align: center;"> </td> </tr> </table> | Y | N | | | | | | | Other core specifications | ⌘ 34.121 |
| Y | N | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | Test specifications | | | | | | | | | |
| | | O&M Specifications | | | | | | | | | |

Other comments: ☹

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☹ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

A.8.2.3 Correct reporting of neighbours in fading propagation condition using TGL1=14

A.8.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when doing inter frequency measurements. The test will partly verify the requirements in section 8.1.2.3. The test parameters are given in Table A.8.12A and A.8.12B. In the measurement control information it is indicated to the UE that event-triggered reporting 2C shall be used. The test consists of two successive time periods, each with time duration of T1 and T2 respectively.

Table A.8.12A: General test parameters for Correct reporting of neighbours in Fading propagation condition

| Parameter | Unit | Value | Comment |
|---|------|---|--|
| DCH parameters | | DL Reference Measurement Channel 12.2 kbps | As specified in TS 25.101 section A.3.1 |
| Power Control | | On | |
| Compressed mode | | A.22 set 4 | As specified in TS 25.101 section A.5. |
| Active cell | | Cell 1 | |
| Absolute Threshold (Ec/NO) for Event 2c | dB | -18 | |
| Hysteresis | dB | 0 | |
| Time to Trigger | ms | 0 | |
| Filter coefficient | | 0 | |
| Monitored cell list size | | Total 24 8 on frequency Channel 2 | Measurement control information is sent before the compressed mode pattern starts. |
| Propagation Condition | | Case 5 | As specified in Annex B of TS 25.101. |
| Frequency offset | ppm | +/- 0.1 | Frequency offset between Cell 1 and Cell 2. |
| T1 | s | 2 | |
| T2 | s | 6 | |

Table A.8.12B: Test parameters for Correct reporting of neighbours in Fading propagation condition

| Parameter | Unit | Cell 1 | | Cell 2 | |
|------------------------|--|-----------|----|-----------|------|
| | | T1 | T2 | T1 | T2 |
| UTRA RF Channel Number | | Channel 1 | | Channel 2 | |
| CPICH_Ec/lor | dB | -10 | | -10 | |
| PCCPCH_Ec/lor | dB | -12 | | -12 | |
| SCH_Ec/lor | dB | -12 | | -12 | |
| PICH_Ec/lor | dB | -15 | | -15 | |
| DPCH_Ec/lor | dB | Note 1 | | N/A | |
| OCNS | | Note 2 | | -0.941 | |
| \hat{I}_{or}/I_{oc} | dB | 0 | | -Infinity | -1.8 |
| I_{oc} | dBm/3.84 MHz | -70 | | -70 | |
| CPICH_Ec/lo | dB | -13 | | -Infinity | -14 |
| Propagation Condition | Case 5 as specified in Annex B of TS25.101 | | | | |
| Note 1: | The DPCH level is controlled by the power control loop | | | | |
| Note 2: | The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or} . | | | | |

A.8.2.3.2 Test Requirements

- The UE shall send one Event 2C triggered measurement report, with a measurement reporting delay less than **4.4** seconds from the beginning of time period T2.
- The UE shall not send any measurement reports, as long as the reporting criteria are not fulfilled.

Error! No text of specified style in document.

4

Error! No text of specified style in document.

The rate of correct events observed during repeated tests shall be at least 90%.

CHANGE REQUEST

⌘ **25.133 CR 681** ⌘ rev **1** ⌘ Current version: **6.6.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | |
|------------------------|---|---------------------------|---|
| Title: | ⌘ Additional scenarios for cell reselection test requirements | | |
| Source: | ⌘ RAN WG4 | | |
| Work item code: | ⌘ TEI6 | Date: | ⌘ 30/08/2004 |
| Category: | ⌘ F | Release: | ⌘ Rel-6 |
| | Use <u>one</u> of the following categories: | | Use <u>one</u> of the following releases: |
| | F (correction) | R96 (Release 1996) | Ph2 (GSM Phase 2) |
| | A (corresponds to a correction in an earlier release) | R97 (Release 1997) | |
| | B (addition of feature), | R98 (Release 1998) | |
| | C (functional modification of feature) | R99 (Release 1999) | |
| | D (editorial modification) | Rel-4 (Release 4) | |
| | Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | Rel-5 (Release 5) | |
| | | Rel-6 (Release 6) | |
| | | Rel-7 (Release 7) | |

| | | | |
|--------------------------------------|--|--|--|
| Reason for change: | ⌘ There are currently no mobility testcases where HCS is activated. It is essential to test that UEs behave in a good way. | | |
| Summary of change: | ⌘ Addition of cell reselection testcase with HCS activated | | |
| Consequences if not approved: | ⌘ There are no testcases for mobility where HCS is activated | | |

| | | | | | | | | | | | |
|------------------------------|---|---|---|--|---|---|--|--|---|---------------------------|----------|
| Clauses affected: | ⌘ A 4.3 | | | | | | | | | | |
| Other specs affected: | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;"> </td> </tr> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;">N</td> </tr> </table> | Y | N | | N | X | | | N | Other core specifications | ⌘ 34.121 |
| | Y | N | | | | | | | | | |
| | | N | | | | | | | | | |
| X | | | | | | | | | | | |
| | N | | | | | | | | | | |
| Test specifications | | | | | | | | | | | |
| O&M Specifications | | | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be

downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

A.4.3 UTRAN to GSM Cell Re-Selection

A.4.3.1 Scenario 1

A.4.3.1.1 Test Purpose and Environment

This test is to verify the requirement for the UTRAN to GSM cell re-selection delay reported in section 4.2.

This scenario implies the presence of 1 UTRAN serving cell, and 1 GSM cell to be re-selected. The UE is requested to monitor neighbouring cells on 1 UMTS carrier and 12 GSM cells. Test parameters are given in Table, A.4.5, A.4.6, A.4.7. Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.5: General test parameters for UTRAN to GSM Cell Re-selection

| Parameter | | Unit | Value | Comment |
|-------------------|----------------|------|-------|----------|
| Initial condition | Active cell | | Cell1 | |
| | Neighbour cell | | Cell2 | |
| Final condition | Active cell | | Cell2 | |
| DRX cycle length | | s | 1.28 | |
| HCS | | | | Not used |
| T1 | | s | 45 | |
| T2 | | s | 35 | |

Table A.4.6: Cell re-selection UTRAN to GSM cell case (cell 1)

| Parameter | Unit | Cell 1 (UTRA) | |
|--|--------------|--------------------------------------|-------|
| | | T1 | T2 |
| UTRA RF Channel Number | | Channel 1 | |
| CPICH_Ec/lor | dB | -10 | |
| PCCPCH_Ec/lor | dB | -12 | |
| SCH_Ec/lor | dB | -12 | |
| PICH_Ec/lor | dB | -15 | |
| OCNS_Ec/lor | dB | -0.941 | |
| \hat{I}_{or}/I_{oc} | dB | 0 | -5 |
| I_{oc} | dBm/3.84 MHz | -70 | |
| CPICH_Ec/lo | dB | -13 | -16.2 |
| CPICH_RSCP | dBm | -80 | -85 |
| Propagation Condition | | AWGN | |
| Cell_selection_and_reselection_quality_measure | | CPICH E _c /N ₀ | |
| Qqualmin | dB | -20 | |
| Qrxlevmin | dBm | -115 | |
| UE_TXPWR_MAX_RACH | dBm | 21 | |
| Qoffset1 _{s,n} | dB | C1, C2: 0 | |
| Qhyst1 | dB | 0 | |
| Treselection | s | 0 | |
| Ssearch _{RAT} | dB | not sent | |

Table A.4.7: Cell re-selection UTRAN to GSM cell case (cell 2)

| Parameter | Unit | Cell 2 (GSM) | |
|----------------------------|------|--------------|-----|
| | | T1 | T2 |
| Absolute RF Channel Number | | ARFCN 1 | |
| RXLEV | dBm | -90 | -75 |
| RXLEV_ACCESS_MIN | dBm | -104 | |
| MS_TXPWR_MAX_CCH | dBm | 33 | |

A.4.3.1.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RR Channel Request message for location update to Cell 2.

The cell re-selection delay shall be less than $26\text{ s} + T_{\text{BCCH}}$, where T_{BCCH} is the maximum time allowed to read BCCH data from GSM cell [21].

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay can be expressed as: $4 * T_{\text{measureGSM}} + T_{\text{BCCH}}$, where:

$T_{\text{measureGSM}}$ See Table 4.1 in section 4.2.2.

T_{BCCH} Maximum time allowed to read BCCH data from GSM cell [21].
According to [21], the maximum time allowed to read the BCCH data, when being synchronized to a BCCH carrier, is 1.9 s.

This gives a total of $25.6\text{ s} + T_{\text{BCCH}}$, allow $26\text{ s} + T_{\text{BCCH}}$ in the test case.

A.4.3.2 Scenario 2

A.4.3.2.1 Test Purpose and Environment

This test is to verify the requirement for the UTRAN to GSM cell re-selection delay reported in section 4.2.

This scenario implies the presence of 1 UTRAN serving cell, and 1 GSM cell to be re-selected. The UE is requested to monitor neighbouring cells on 1 UMTS carrier and 12 GSM cells. Test parameters are given in Table, A.4.7A, A.4.7B, A.4.7C. Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.7A: General test parameters for UTRAN to GSM Cell Re-selection

| Parameter | Unit | Value | Comment |
|-------------------|----------------|-------|----------|
| Initial condition | Active cell | Cell1 | |
| | Neighbour cell | Cell2 | |
| Final condition | Active cell | Cell2 | |
| DRX cycle length | s | 1.28 | |
| HCS | | | Not used |
| T1 | s | 45 | |
| T2 | s | 12 | |

Table A.4.7B: Cell re-selection UTRAN to GSM cell case (cell 1)

| Parameter | Unit | Cell 1 (UTRA) | |
|--|--------------|--------------------------------------|-------|
| | | T1 | T2 |
| UTRA RF Channel Number | | Channel 1 | |
| CPICH_Ec/Ior | dB | -10 | |
| PCCPCH_Ec/Ior | dB | -12 | |
| SCH_Ec/Ior | dB | -12 | |
| PICH_Ec/Ior | dB | -15 | |
| OCNS_Ec/Ior | dB | -0.941 | |
| \hat{I}_{or}/I_{oc} | dB | 20 | -9 |
| I_{oc} | dBm/3.84 MHz | -81 | |
| CPICH_Ec/Io | dB | -10.0 | -19.5 |
| CPICH_RSCP | dBm | -70 | -100 |
| Propagation Condition | | AWGN | |
| Cell_selection_and_reselection_quality_measure | | CPICH E _c /N ₀ | |
| Qqualmin | dB | -20 | |
| Qrxlevmin | dBm | -115 | |
| UE_TXPWR_MAX_RACH | dBm | 21 | |
| Qoffset _{1s,n} | dB | C1, C2: 0 | |
| Qhyst1 | dB | 0 | |
| Treselection | s | 0 | |
| Ssearch _{RAT} | dB | not sent | |

Table A.4.7C: Cell re-selection UTRAN to GSM cell case (cell 2)

| Parameter | Unit | Cell 2 (GSM) | |
|----------------------------|------|--------------|-----|
| | | T1 | T2 |
| Absolute RF Channel Number | | ARFCN 1 | |
| RXLEV | dBm | -80 | -80 |
| RXLEV_ACCESS_MIN | dBm | -104 | |
| MS_TXPWR_MAX_CCH | dBm | 33 | |

A.4.3.2.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RR Channel Request message for location update to Cell 2.

The cell re-selection delay shall be less than $7.7 \text{ s} + T_{\text{BCCH}}$, where T_{BCCH} is the maximum time allowed to read BCCH data from GSM cell [21].

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay can be expressed as: $\text{Max}(3 * T_{\text{measureFDD}}, T_{\text{measureGSM}} + \text{DRX cycle length}) + T_{\text{BCCH}}$, where:

$T_{\text{measureFDD}}$ See Table 4.1 in section 4.2.2.

$T_{\text{measureGSM}}$ See Table 4.1 in section 4.2.2.

DRX cycle length 1.28s see Table A.4.7.A

T_{BCCH} Maximum time allowed to read BCCH data from GSM cell [21].
According to [21], the maximum time allowed to read the BCCH data, when being synchronized to a BCCH carrier, is 1.9 s.

This gives a total of $7.68 \text{ s} + T_{\text{BCCH}}$, allow $7.7 \text{ s} + T_{\text{BCCH}}$ in the test case.

A.4.3.3 Scenario 3

A.4.3.3.1 Test Purpose and Environment

This test is to verify the requirement for the UTRAN to GSM cell re-selection delay reported in section 4.2 when measurement rules according to HCS is used.

This scenario implies the presence of 1 UTRAN serving cell, and 1 GSM cell to be re-selected. The UE is requested to monitor neighbouring cells on 1 UMTS carrier and 12 GSM cells. Test parameters are given in Table, A.4.7.X, A.4.7.Y, A.4.7.Z. Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.7.X: General test parameters for UTRAN to GSM Cell Re-selection

| Parameter | Unit | Value | Comment |
|-------------------|----------------|-------|---------|
| Initial condition | Active cell | Cell1 | |
| | Neighbour cell | Cell2 | |
| Final condition | Active cell | Cell2 | |
| DRX cycle length | s | 1.28 | |
| HCS | | | Used |
| T1 | s | 45 | |
| T2 | s | 45 | |

Table A.4.7.Y: Cell re-selection UTRAN to GSM cell case (cell 1)

| Parameter | Unit | Cell 1 (UTRA) | |
|--|--------------|--------------------------|-------|
| | | T1 | T2 |
| UTRA RF Channel Number | | Channel 1 | |
| CPICH E_c/I_{or} | dB | -10 | |
| PCCPCH E_c/I_{or} | dB | -12 | |
| SCH E_c/I_{or} | dB | -12 | |
| PICH E_c/I_{or} | dB | -15 | |
| OCNS E_c/I_{or} | dB | -0.941 | |
| \hat{I}_{or}/I_{oc} | dB | 30 | 10 |
| I_{oc} | dBm/3.84 MHz | -100 | |
| CPICH E_c/I_o | dB | -10.0 | -10.4 |
| CPICH RSCP | dBm | -80 | -100 |
| Propagation Condition | | AWGN | |
| Cell selection and reselection quality measure | | CPICH E_c/N_0 | |
| Qqualmin | dB | -20 | |
| Qrxlevmin | dBm | -115 | |
| UE_TXPWR_MAX_RACH | dBm | 21 | |
| Qoffset1 _{s,n} | dB | C1, C2: 0 | |
| Qhyst1 | dB | 0 | |
| Treselection | s | 0 | |
| SsearchRAT | dB | 0 | |
| SHCS,RATm | dB | 25 | |
| Slimit,SearchRAT | dB | 0 | |
| Penalty_time | s | 0 (default value) | |
| HCS_PRIO | | 0 (default value) | |
| Qhcs | | 0 (default value) | |
| T _{Cmax} | s | not used (default value) | |

Table A.4.7.Z: Cell re-selection UTRAN to GSM cell case (cell 2)

| Parameter | Unit | Cell 2 (GSM) | |
|----------------------------|------|--------------|-----|
| | | T1 | T2 |
| Absolute RF Channel Number | | ARFCN 1 | |
| RXLEV | dBm | -80 | -80 |
| RXLEV_ACCESS_MIN | dBm | -104 | |
| MS_TXPWR_MAX_CCH | dBm | 33 | |

A.4.3.3.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RR Channel Request message for location update to Cell 2.

The cell re-selection delay shall be less than $37.7 \text{ s} + T_{\text{BCCH}}$, where T_{BCCH} is the maximum time allowed to read BCCH data from GSM cell [21].

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to unidentified GSM cells can be expressed as: $30 \text{ s} + T_{\text{measureGSM}} + \text{DRX cycle length} + T_{\text{BCCH}}$, where:

$T_{\text{measureFDD}}$ See Table 4.1 in section 4.2.2.

$T_{\text{measureGSM}}$ See Table 4.1 in section 4.2.2.

DRX cycle length 1.28s see Table A.4.X

T_{BCCH} Maximum time allowed to read BCCH data from GSM cell [21].
According to [21], the maximum time allowed to read the BCCH data, when being synchronized to a BCCH carrier, is 1.9 s.

This gives a total of $37.68 \text{ s} + T_{\text{BCCH}}$, allow $37.7 \text{ s} + T_{\text{BCCH}}$ in the test case.

CHANGE REQUEST

⌘ **25.133 CR 687** ⌘ rev **2** ⌘ Current version: **6.6.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: UICC apps ME Radio Access Network Core Network

| | | | | | |
|------------------------|--|-----------------|--|--|--|
| Title: | ⌘ RX-TX timing test modified to use soft handover, delay range for RX-TX timing test specified | | | | |
| Source: | ⌘ RAN WG4 | | | | |
| Work item code: | ⌘ TEI6 | Date: | ⌘ 30/08/2004 | | |
| Category: | ⌘ F | Release: | ⌘ Rel-6 | | |
| | <i>Use <u>one</u> of the following categories:</i> F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900 . | | <i>Use <u>one</u> of the following releases:</i> Ph2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6) Rel-7 (Release 7) | | |

| | |
|--------------------------------------|---|
| Reason for change: | ⌘ Existing UE RX-TX time difference would be hard to perform, because there is only one cell used. This cell therefore has to be the reference timing for the TX timing, and if the RX timing is altered, then the UE will always attempt to adjust its TX timing to maintain a difference of T_0 (=1024) chips between the RX and TX timing. Therefore it would be difficult to assess the accuracy of UE RX-TX time difference measurement for any time difference other than 1024 chips. This CR also clarifies that the test may be performed for UE RX-TX time differences from T_0-148 chips to T_0+148 chips in the same way that the valid ranges are defined for other time difference testcases (eg SFN-SFN). This window from T_0-148 chips to T_0+148 chips is mentioned in the requirements for RX-TX time difference measurement in section 7.2.2, so this aspect of the CR is just to confirm that the testcase covers the whole range of the requirements. |
| Summary of change: | ⌘ Add parameters for cell 2 to tables A.9.11 and A.9.12. Add text to clarify that the RX-TX time difference should be on cell 2 and that cell 1 is the reference timing. Add text to clarify the range of time differences over which the test can be performed <u>Isolated Impact Analyses:</u> The CR proposes changes to a test case and therefore it should not have an impact on UE or UTRAN implementation. |
| Consequences if not approved: | ⌘ RX-TX time difference test is hard or even impossible to perform for time differences other than 1024 chips. |

| | | | | | | | | | | | | |
|------------------------------|---------------------|---|---|---|---|--|--|---|--|---|---------------------------|------------|
| Clauses affected: | ⌘ | A.9.1.6 | | | | | | | | | | |
| Other specs affected: | ⌘ | <table border="1"><tr><td>Y</td><td>N</td></tr><tr><td>X</td><td></td></tr><tr><td></td><td>X</td></tr><tr><td></td><td>X</td></tr></table> | Y | N | X | | | X | | X | Other core specifications | ⌘ TS34.121 |
| | | Y | N | | | | | | | | | |
| | | X | | | | | | | | | | |
| | X | | | | | | | | | | | |
| | X | | | | | | | | | | | |
| | Test specifications | | | | | | | | | | | |
| | O&M Specifications | | | | | | | | | | | |
| Other comments: | ⌘ | | | | | | | | | | | |

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

A.9.1.6 UE Rx-Tx time difference

A.9.1.6.1 UE Rx-Tx time difference type 1

A.9.1.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE Rx-Tx time difference type 1 measurement accuracy is within the specified limits. This test will verify the requirements in section 9.1.9.1

The connection is started using cell 1, then cell 2 is added to the active set so that cell 1 is the timing reference. During the test the downlink DPCH time difference between Cell 1 and 2 can be set to any value from -148 to 148 chips.

Table A.9.11 defines the limits of signal strengths and code powers, where the requirements are applicable.

Table A.9.11: UE Rx-Tx time difference type 1 intra frequency test parameters

| Parameter | Unit | Cell 1 | Cell 2 |
|---|-----------------------|--|--|
| UTRA RF Channel number | | Channel 1 | Channel 1 |
| Downlink DPCH timing | Chips | Timing reference | From reference timing -148 to reference timing+148 |
| CPICH_Ec/Ior | dB | -10 | -10 |
| PCCPCH_Ec/Ior | dB | -12 | -12 |
| SCH_Ec/Ior | dB | -12 | -12 |
| PICH_Ec/Ior | dB | -15 | -15 |
| DPCH_Ec/Ior | dB | -15 | -15 |
| OCNS | dB | -1.11 | -1.11 |
| Ior/Ioc | dB | 10.5 | 10.5 |
| Ioc | dBm/3.84 MHz | <i>I_o -10.913.7 dB = I_{oc}, Note 1</i> | I_o-13.7 dB = I_{oc}, Note 1 |
| I _o | dBm/3.84 MHz | -94...-50 (Band I, IV, VI) -91...-50 (Band III) -92...-50 (Band II, V) | -94...-50 (Band I, IV, VI) -91...-50 (Band III) -92...-50 (Band II, V) |
| Propagation condition | - | AWGN | |
| NOTE 1: <i>I_{oc}</i> level shall be adjusted according the total signal power spectral density <i>I_o</i> at receiver input and the geometry factor <i>I_{or}/I_{oc}</i> . | | | |

A.9.1.6.1.2 Test Requirements

The UE Rx-Tx time difference type 1 measurement accuracy [measured for cell 2](#) shall meet the requirements in section 9.1.9.1.

A.9.1.6.2 UE Rx-Tx time difference type 2

A.9.1.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE Rx-Tx time difference type 2 measurement accuracy is within the specified limits. This test will verify the requirements in section 9.1.9.2.

The connection is started using cell 1, then cell 2 is added to the active set so that cell 1 is the timing reference. During the test the downlink DPCH time difference between Cell 1 and 2 can be set to any value from -148 to 148 chips.

Table A.9.12 defines the limits of signal strengths and code powers, where the requirements are applicable.

Table A.9.12: UE Rx-Tx time difference type 2 intra frequency test parameters

| Parameter | Unit | Cell 1 | Cell 2 |
|---|-----------------------|--|--|
| UTRA RF Channel number | | Channel 1 | Channel 1 |
| Downlink DPCH timing | Chips | Timing reference | From reference timing -148 to reference timing+148 |
| CPICH_Ec/Ior | dB | -10 | -10 |
| PCCPCH_Ec/Ior | dB | -12 | -12 |
| SCH_Ec/Ior | dB | -12 | -12 |
| PICH_Ec/Ior | dB | -15 | -15 |
| DPCH_Ec/Ior | dB | -15 | -15 |
| OCNS | dB | -1.11 | -1.11 |
| Ior/Ioc | dB | 10.5 | 10.5 |
| Ioc | dBm/ 3.84 MHz | Io -13.7 -10.9 dB = Ioc, Note 1 | Io-13.7 dB = Ioc, Note 1 |
| Io | dBm/ 3.84 MHz | -94...-50 (Band I, IV, VI) -92...-50 (Band II, V) -91...-50 (Band III) | -94...-50 (Band I, IV, VI) -92...-50 (Band II, V) -91...-50 (Band III) |
| Propagation condition | - | AWGN | |
| NOTE 1: Ioc level shall be adjusted according the total signal power spectral density Io at receiver input and the geometry factor Ior/Ioc. | | | |

A.9.1.6.2.2 Test Requirements

The UE Rx-Tx time difference type 2 measurement accuracy [measured for cell 2](#) shall meet the requirements in section 9.1.9.2.