

# 3G TR 25.952 0.0.1 (2000-09)

---

*Technical Report*

## **3rd Generation Partnership Project; Technical Specification Group Radio Access Network; TDD Base Station Classification (Release 2000)**



The present document has been developed within the 3<sup>rd</sup> Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organisational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organisational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organisational Partners' Publications Offices.

---

Keywords

---

<keyword[, keyword]>

**3GPP**

Postal address

---

3GPP support office address

---

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

---

<http://www.3gpp.org>

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2000, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).  
All rights reserved.

---

# Contents

Foreword.....	4
1 Scope.....	5
2 References.....	5
3 Definitions, symbols and abbreviations.....	5
3.1 Definitions.....	5
3.2 Symbols.....	5
3.3 Abbreviations.....	5
4 General.....	5
5 System scenarios.....	6
5.1 Indoor Environment.....	6
5.1.1 Path Loss Model.....	6
5.2 Mixed Indoor – Outdoor Environment.....	6
5.2.1 Propagation Model.....	6
5.2.2 Mobility Model.....	8
5.3 Minimum coupling loss (MCL).....	9
5.3.1 MCL for Local Area scenario.....	9
6 Base station classes.....	9
6.1 Base station class criteria.....	9
7 Changes with respect to Release 99.....	9
7.1 Changes in 25.105.....	9
7.1.1 Frequency error.....	10
7.1.2 Adjacent Channel Leakage power Ratio (ACLR).....	10
7.1.3 Reference sensitivity level.....	10
7.1.4 Spectrum emission mask.....	10
7.1.5 Adjacent Channel Selectivity (ACS).....	10
7.1.6 Blocking characteristics.....	10
7.1.7 Intermodulation characteristics.....	10
7.1.8 Demodulation in static propagation conditions.....	10
7.1.9 Demodulation of DCH in multipath fading conditions.....	10
7.2 Changes in 25.123.....	10
7.3 Changes in 25.142.....	10
8 Impacts to other WGs.....	10
8.1 WG1.....	10
8.2 WG2.....	10
8.3 WG3.....	11
9 Backward Compatibility.....	11
History.....	11

---

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

## 1 Scope

This document is a Technical Report on Release 2000 work item “TDD Base Station Classification”.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.105
- [2] 3G TS 25.123
- [3] 3G TS 25.142
- [4] 3G TR 25.942
- [5] UMTS 30.03

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

**Example:** text used to clarify abstract rules by applying them literally.

### 3.2 Symbols

### 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

---

## 4 General

Current TSG RAN WG4 specifications have been done according to the requirements for the macrocell base stations (NodeBs). For the UTRA evolution requirement specifications for other types of base stations are needed as well to take into account different use scenarios and radio environments. In this technical report, base station classification is described and requirements for each base station class are derived.

## 5 System scenarios

This section describes the system scenarios for UTRA operation that are considered when defining base station classes. It also includes typical radio parameters that are used to derive requirements.

### 5.1 Indoor Environment

#### 5.1.1 Path Loss Model

The indoor path loss model expressed in dB is in the following form, which is derived from the COST 231 indoor model:

$$L = 37 + 20 \text{Log}_{10}(R) + \sum k_{wi} L_{wi} + 18.3 n^{((n+2)/(n+1)-0.46)}$$

where:

R transmitter-receiver separation given in metres

$k_{wi}$  number of penetrated walls of type i

$L_{wi}$  loss of wall type i

n number of penetrated floors

Two types of internal walls are considered. Light internal walls with a loss factor of 3.4 dB and regular internal walls with a loss factor of 6.9 dB.

If internal walls are not modelled individually, the indoor path loss model is represented by the following formula:

$$L = 37 + 30 \text{Log}_{10}(R) + 18.3 n^{((n+2)/(n+1)-0.46)}$$

where:

R transmitter-receiver separation given in metres;

n number of penetrated floors

### 5.2 Mixed Indoor – Outdoor Environment

#### 5.2.1 Propagation Model

UMTS30.03 Manhattan scenario [5] in outdoors and UMTS30.03 pico cell scenario [5] in indoors are used so that the size of building is stretched to fit building in the Manhattan model. Alternatively, both Manhattan building block could be reduced and indoor building stretched so that their sizes correspond each other.

Path loss inside a building is a Motley-Keenan model as defined in [5]. In outdoors UMTS30.03 model is used. Parameters for both models are as defined in [5]. Attenuation from outdoors to indoors is sketched in Figure 1 below. In figure star denotes receiving object and triangle transmitting object. Co-ordinates of receivers (stars) are projected to places denoted by black dots that act as "virtual" transmitters.

First, attenuation is calculated by using Manhattan propagation model between transmitter and each projected coordinate. Next wall attenuation is added to the calculated distance attenuation. Then indoor attenuation is calculated between virtual transmitters and the receiver. Finally, lowest path loss is selected for further calculations. In UMTS30.03 indoor model no wall attenuation for inside wall is considered. If inside walls need to be considered COST indoor model may be used instead of Motley-Keenan model. Since propagation between outdoors and indoors is modeled, it is not feasible to model more than one floor in the building.

An example calculation of propagation model is shown in Figure 2. Wall attenuation inside building is not taken into account.

Propagation from indoors to outdoors is symmetrical with above models.

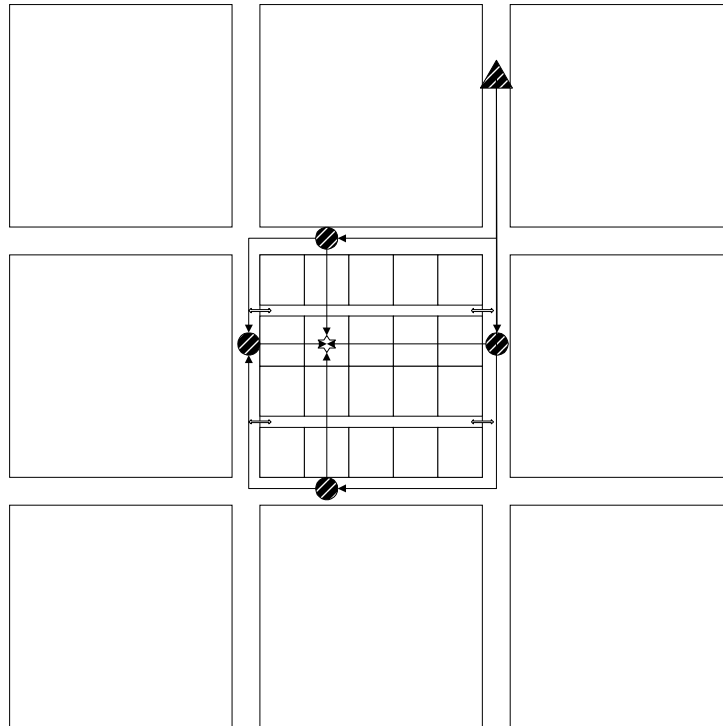


Figure 1 Simulation scenario and propagation model.

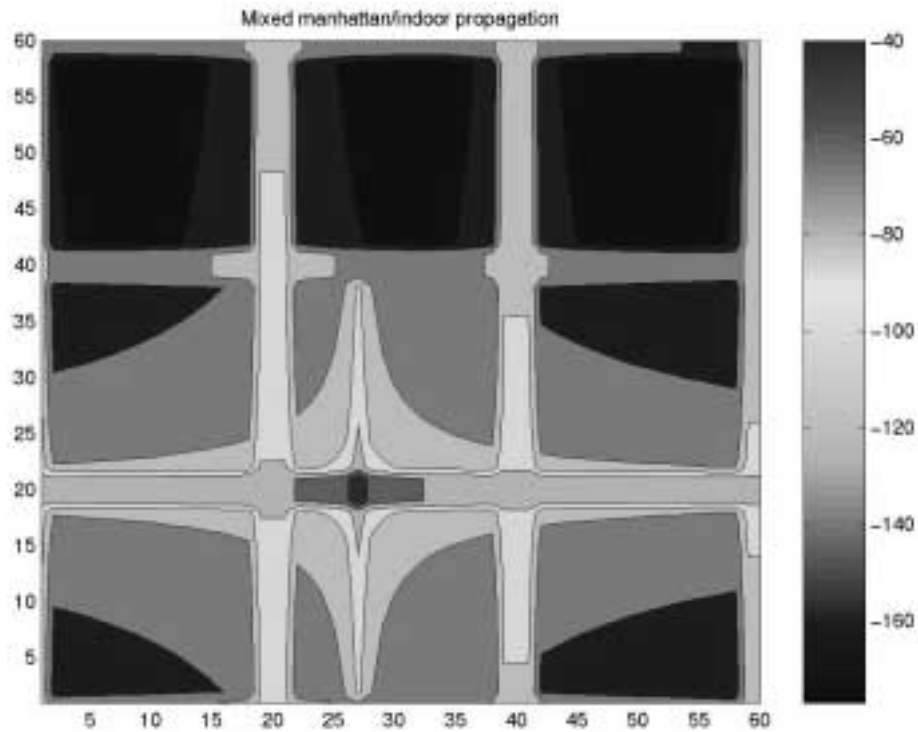


Figure 2. An example of propagation.

In the scenario users may go inside/outside only through defined entrance points. In those entrance points attenuation is defined as a linear combination of outside propagation and inside propagation so that sudden drop in the signal is avoided. There is defined area inside a building in which propagation indoor to outdoor is calculated as

$$L_{entrance} = (1 - w(r)) \cdot L_{outdoor} + w(r) \cdot L_{Indoor}$$

where

$w(r)$  weight for indoor and outdoor propagation

$L_{indoor}$  propagation calculated between receiver and transmitter by using mixed indoor-outdoor model

$L_{outdoor}$  path loss calculated by using outdoor model

$r$  distance to wall

Weight is defined as

$$w(r) = r / R$$

where

$R$  size of area in which entrance propagation is calculated

$r$  distance from wall, getting values [0, R]

Slow fading is time correlated as in UMTS30.03 model. Decorrelation length of slow fading shall be 5 meters in both environments. Standard deviation of slow fading shall be 10 dB and 12 dB for outdoors and indoors, respectively.

Parameters related to propagation models are summarised in Table 1.

**Table 1. Parameters related to mixed indoor - outdoor propagation model**

Parameter	value
Inside wall loss	5 dB
Outside wall loss	10 dB
Slow fading correlation length in indoors	5 meters
Slow fading deviation in indoors	12 dB
Slow fading correlation length in outdoors	5 meters
Slow fading deviation in outdoors	10 dB
Building size	110 x 110 meters
Street size	110 x 15 meters
Room size	22 x 25 meters
Number of rooms	5 rooms in 4 rows
Corridor size	110 x 5 meters
Number of corridors	2
Size of entrance point	5 meters
Number of base stations	4 .. 6
BS coordinates	tba

## 5.2.2 Mobility Model

The mobility model is UMTS30.03 model for indoors and Manhattan [5]. To the indoor model a possibility to leave a building is added. Correspondingly, outdoor users may enter indoors. Four entrance points are defined through which users may enter indoors or outdoors. Entrance points are seen as continuation of corridors inside building. An outdoor user may go inside with certain probability (10 %) when it locates in street aligned with entrance point. An indoor user may go outside with certain probability if it locates at one of the corridors. Parameters of mobility model are set so that system remains stable or load in indoors and outdoors is not affected due to users going inside/outside, i.e., number of users going inside should equal to number of users going outside.

**Table 2. Parameters for mobility model**

Parameter	Value
Probability to go inside(outside)	10 %



## 5.3 Minimum coupling loss (MCL)

Minimum Coupling Loss (MCL) is defined as the minimum distance loss including antenna gain measured between antenna connectors.

### 5.3.1 MCL for Local Area scenario

The minimum coupling loss between UEs is independent of the scenario, therefore the same minimum coupling loss is assumed for all environments.

Local area BSs are usually mounted under the ceiling, on wall or some other exposed position. In [4] chapter 4.1.1.2 a minimal separation of 2 metres between UE and indoor BS is assumed. Free space path loss is defined in [4] as:

$$\text{Path loss [dB]} = 38.25 + 20 \log_{10}(d \text{ [m]})$$

Taking into account 0 dBi antenna gain for Local area BS and UE and a body loss of 1 dB at the terminal, a MCL of 45.27 dB is obtained. The additional 2 dB cable loss at the BS as proposed in TR 25.942 is not considered.

The assumed MCL values are summarised in table 3.

**Table 3. Minimum Coupling Losses**

	<b>MCL</b>
MS ↔ MS	40 dB
Local area BS ↔ MS	45 dB
Local area BS ↔ Local area BS	45 dB

---

## 6 Base station classes

This section describes how the base station classes are defined.

### 6.1 Base station class criteria

Minimum Coupling Loss between BS and UE is used as criteria for classification. Two classes are defined: Wide Area BS class and Local Area BS class.

Wide Area BS class assumes relatively high MCL, as is typically found in outdoor macro and outdoor micro environments, where the BS antennas are located off masts, roof tops or high above street level. Existing requirements are used, as they are in [1], for the Wide Area BS class.

Local Area BS class assumes relatively low MCL, as is typically found indoors (offices, subway stations etc) where antennas are located on the ceilings or walls or possibly built-in in the BS on the wall. Low-CL can also be found outdoors on hot spot areas like market place, high street or railway station. New requirements, as defined in this TR, are set for the Local Area BS class.

---

## 7 Changes with respect to Release 99

### 7.1 Changes in 25.105

This section describes the considered changes to requirements on BS minimum RF characteristics, with respect to Release 1999 requirements in TS25.105.

- 7.1.1 Frequency error
- 7.1.2 Minimum Transmit Power
- 7.1.3 Transmit On/Off Time Mask
- 7.1.4 Adjacent Channel Leakage power Ratio (ACLR)
- 7.1.5 Reference sensitivity level
- 7.1.6 Spectrum emission mask
- 7.1.7 Adjacent Channel Selectivity (ACS)
- 7.1.8 Blocking characteristics
- 7.1.9 Intermodulation characteristics
- 7.1.10 Demodulation in static propagation conditions
- 7.1.11 Demodulation of DCH in multipath fading conditions
- 7.2 Changes in 25.123

This section describes the considered changes to requirements on UTRAN measurements, with respect to Release 1999 requirements in TS25.123.

### 7.3 Changes in 25.142

This section describes the considered changes to base station conformance testing, with respect to Release 1999 requirements in TS25.142.

---

## 8 Impacts to other WGs

### 8.1 WG1

### 8.2 WG2

## 8.3 WG3

---

# 9 Backward Compatibility

---

## History

<b>Document history</b>		
<b>Date</b>	<b>Version</b>	<b>Comment</b>
14 Sept 2000	0.0.1	Document created
Editor for 3G TR 25.952 is:		
Eldad Zeira (Interdigital Communications Corp.) Tel. : 631-622-4134 Fax : 631-622-0100 Email : eldad.zeira@interdigital.com		
This document is written in Microsoft Word version Word97.		

Annex <X>:  
Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New