

**TSG-RAN Meeting #11  
Palm Springs, CA, USA, 13 - 16 March 2001**

**RP-010037**

**Title: Agreed CRs (Release 4) for WI " Low Chip Rate TDD layer 2 and layer 3 protocol aspects "**

**Source: TSG-RAN WG2**

**Agenda item: 6.7.2**

Doc-1st-	Status-	Spec	CR	Rev	Phase	Subject	Cat	Version	Versio	Workitem
R2-010220	agreed	25.834	001		Rel-4	Tx diversity	B	4.0.0	4.1.0	LCRTDD-L23
R2-010221	agreed	25.834	002		Rel-4	Propagation delay measurement	B	4.0.0	4.1.0	LCRTDD-L23
R2-010563	agreed	25.834	003	1	Rel-4	Update of TR 25.834	B	4.0.0	4.1.0	LCRTDD-L23

Doc-1st-	Status-	Spec	CR	Rev	Phase	Subject	Cat	Version	Versio	Workitem
R2-010164	agreed	25.301	042		Rel-4	1.28Mcps TDD	B	3.6.0	4.0.0	LCRTDD-L23
R2-010564	agreed	25.302	090	2	Rel-4	1.28Mcps TDD	B	3.7.0	4.0.0	LCRTDD-L23
R2-010467	agreed	25.303	043		Rel-4	1.28Mcps TDD	B	3.6.0	4.0.0	LCRTDD-L23
R2-010223	agreed	25.304	057	1	Rel-4	Support of 1.28Mcps TDD	B	3.5.0	4.0.0	LCRTDD-L23
R2-010168	agreed	25.321	064		Rel-4	1.28Mcps TDD	B	3.6.0	4.0.0	LCRTDD-L23
R2-010701	agreed	25.331	706	1	Rel-4	Physical channel configuration information elements for 1.28 Mcps TDD	B	3.5.0	4.0.0	LCRTDD-L23
R2-010702	agreed	25.331	707	2	Rel-4	Changes to Measurement Related Signalling and Introduction of Cell (Re)selection Parameters for 1.28Mcps TDD	B	3.5.0	4.0.0	LCRTDD-L23
R2-010591	agreed	25.331	708	1	Rel-4	Introduction of RACH Parameters for 1.28 Mcps TDD	B	3.5.0	4.0.0	LCRTDD-L23
R2-010471	agreed	25.331	709		Rel-4	Introduction of UE radio access capability Parameters for 1.28 Mcps TDD	B	3.5.0	4.0.0	LCRTDD-L23

## CHANGE REQUEST

⌘ **25.301** **CR** **042** ⌘ rev **-** ⌘ Current version: **3.6.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ 1.28Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ 15.1.2001
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
Use <u>one</u> of the following categories: <b>F</b> (essential correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (Addition of feature), <b>C</b> (Functional modification of feature) <b>D</b> (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		Use <u>one</u> of the following releases: <b>2</b> (GSM Phase 2) <b>R96</b> (Release 1996) <b>R97</b> (Release 1997) <b>R98</b> (Release 1998) <b>R99</b> (Release 1999) <b>REL-4</b> (Release 4) <b>REL-5</b> (Release 5)	

<b>Reason for change:</b>	⌘ In 1.28Mcps TDD, timing advance control is maintained by L1 function Uplink Synchronization, thus timing advance as RRC functionality is not needed in 1.28Mcps TDD.
<b>Summary of change:</b>	⌘ In section 5.4.2, it is clarified that RRC function timing advance control is only applicable for 3.84 Mcps TDD.
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 5.4.2		
<b>Other specs affected:</b>	⌘ <input checked="" type="checkbox"/> Other core specifications	⌘	25.331
	<input type="checkbox"/> Test specifications		
	<input type="checkbox"/> O&M Specifications		
<b>Other comments:</b>	⌘		

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be

downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 5.4.2 RRC functions

The Radio Resource Control (RRC) layer handles the control plane signalling of Layer 3 between the UEs and UTRAN. The RRC performs the following functions:

- **Broadcast of information provided by the non-access stratum (Core Network).** The RRC layer performs system information broadcasting from the network to all UEs. The system information is normally repeated on a regular basis. The RRC layer performs the scheduling, segmentation and repetition. This function supports broadcast of higher layer (above RRC) information. This information may be cell specific or not. As an example RRC may broadcast Core Network location service area information related to some specific cells.
- **Broadcast of information related to the access stratum.** The RRC layer performs system information broadcasting from the network to all UEs. The system information is normally repeated on a regular basis. The RRC layer performs the scheduling, segmentation and repetition. This function supports broadcast of typically cell-specific information.
- **Broadcast of ODMA relay node neighbour information.** The RRC layer performs probe information broadcasting to allow ODMA routing information to be collected.
- **Establishment, re-establishment, maintenance and release of an RRC connection between the UE and UTRAN.** The establishment of an RRC connection is initiated by a request from higher layers at the UE side to establish the first Signalling Connection for the UE. The establishment of an RRC connection includes an optional cell re-selection, an admission control, and a layer 2 signalling link establishment. The release of an RRC connection can be initiated by a request from higher layers to release the last Signalling Connection for the UE or by the RRC layer itself in case of RRC connection failure. In case of connection loss, the UE requests re-establishment of the RRC connection. In case of RRC connection failure, RRC releases resources associated with the RRC connection.
- **Collating ODMA neighbour list and gradient information.** The ODMA relay node neighbour lists and their respective gradient information will be maintained by the RRC.
- **Maintenance of number of ODMA relay node neighbours.** The RRC will adjust the broadcast powers used for probing messages to maintain the desired number of neighbours.
- **Establishment, maintenance and release of a route between ODMA relay nodes.** The establishment of an ODMA route and RRC connection based upon the routing algorithm.
- **Interworking between the Gateway ODMA relay node and the UTRAN.** The RRC layer will control the interworking with the standard TDD or FDD communication link between the Gateway ODMA relay node and the UTRAN.
- **Establishment, reconfiguration and release of Radio Bearers.** The RRC layer can, on request from higher layers, perform the establishment, reconfiguration and release of Radio Bearers in the user plane. A number of Radio Bearers can be established to an UE at the same time. At establishment and reconfiguration, the RRC layer performs admission control and selects parameters describing the Radio Bearer processing in layer 2 and layer 1, based on information from higher layers.
- **Assignment, reconfiguration and release of radio resources for the RRC connection.** The RRC layer handles the assignment of radio resources (e.g. codes, CPCH channels) needed for the RRC connection including needs from both the control and user plane. The RRC layer may reconfigure radio resources during an established RRC connection. This function includes coordination of the radio resource allocation between multiple radio bearers related to the same RRC connection. RRC controls the radio resources in the uplink and downlink such that UE and UTRAN can communicate using unbalanced radio resources (asymmetric uplink and downlink). RRC signals to the UE to indicate resource allocations for purposes of handover to GSM or other radio systems.
- **RRC connection mobility functions.** The RRC layer performs evaluation, decision and execution related to RRC connection mobility during an established RRC connection, such as handover, preparation of handover to GSM or other systems, cell re-selection and cell/paging area update procedures, based on e.g. measurements done by the UE.
- **Paging/notification.** The RRC layer can broadcast paging information from the network to selected UEs. Higher layers on the network side can request paging and notification. The RRC layer can also initiate paging during an established RRC connection.

- **Routing of higher layer PDUs.** This function performs at the UE side routing of higher layer PDUs to the correct higher layer entity, at the UTRAN side to the correct RANAP entity.
- **Control of requested QoS.** This function shall ensure that the QoS requested for the Radio Bearers can be met. This includes the allocation of a sufficient number of radio resources.
- **UE measurement reporting and control of the reporting.** The measurements performed by the UE are controlled by the RRC layer, in terms of what to measure, when to measure and how to report, including both UMTS air interface and other systems. The RRC layer also performs the reporting of the measurements from the UE to the network.
- **Outer loop power control.** The RRC layer controls setting of the target of the closed loop power control.
- **Control of ciphering.** The RRC layer provides procedures for setting of ciphering (on/off) between the UE and UTRAN. Details of the security architecture are specified in [15].
- **Slow DCA.** Allocation of preferred radio resources based on long-term decision criteria. It is applicable only in TDD mode.
- **Arbitration of radio resources on uplink DCH.** This function controls the allocation of radio resources on uplink DCH on a fast basis, using a broadcast channel to send control information to all involved users.

NOTE: This function is implemented in the CRNC.

- **Initial cell selection and re-selection in idle mode.** Selection of the most suitable cell based on idle mode measurements and cell selection criteria.
- **Integrity protection.** This function adds a Message Authentication Code (MAC-I) to those RRC messages that are considered sensitive and/or contain sensitive information. The mechanism how the MAC-I is calculated is described in TS 33.105 [14].
- **Initial Configuration for CBS**  
This function performs the initial configuration of the BMC sublayer.
- **Allocation of radio resources for CBS**  
This function allocates radio resources for CBS based on traffic volume requirements indicated by BMC. The radio resource allocation set by RRC (i.e. the schedule for mapping of CTCH onto FACH/S-CCPCH) is indicated to BMC to enable generation of schedule messages. The resource allocation for CBS shall be broadcast as system information.
- **Configuration for CBS discontinuous reception**  
This function configures the lower layers (L1, L2) of the UE when it shall listen to the resources allocated for CBS based on scheduling information received from BMC.
- **Timing advance control.** The RRC controls the operation of timing advance. It is applicable only in [3.84 Mcps TDD mode](#).

## CHANGE REQUEST

⌘ **25.302** **CR** **090** ⌘ rev **r2** ⌘ Current version: **3.7.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ 1.28Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ 19 February 2001
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
<p>Use <u>one</u> of the following categories:</p> <p><b>F</b> (essential correction)</p> <p><b>A</b> (corresponds to a correction in an earlier release)</p> <p><b>B</b> (Addition of feature),</p> <p><b>C</b> (Functional modification of feature)</p> <p><b>D</b> (Editorial modification)</p> <p>Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p>		<p>Use <u>one</u> of the following releases:</p> <p><b>2</b> (GSM Phase 2)</p> <p><b>R96</b> (Release 1996)</p> <p><b>R97</b> (Release 1997)</p> <p><b>R98</b> (Release 1998)</p> <p><b>R99</b> (Release 1999)</p> <p><b>REL-4</b> (Release 4)</p> <p><b>REL-5</b> (Release 5)</p>	

<b>Reason for change:</b>	⌘ This CR collects the changes necessary for introducing 1.28Mcps TDD in TS25.302.
<b>Summary of change:</b>	<ul style="list-style-type: none"> <li>- Tables for UE simultaneous physical channel combinations in section 8 are updated in order to support 1.28 Mcps TDD.</li> <li>- Parameters for Access Information and Physical Channel Description are updated in order to support 1.28 Mcps TDD.</li> <li>- Revision 2 contains a clarification to the section of UE simultaneous physical channel combinations. A companion CR updates tables 8.3 and 8.4 in order to clarify the combinations of physical channels that can be supported in the TDD 3.84 Mcps option. This CR provides companion tables that indicate the combinations of physical channels that can be supported in the TDD 1.28 Mcps option. Additionally, Received SYNC_UL Timing Deviation is added to section 9.3 to support 1.28 Mcps TDD measurement for propagation delay.</li> </ul>
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 8.3, 8.4, 9.3.x (new), 10.3.3, 10.3.5.3, 10.3.5.4, 10.3.5.5, 10.3.5.7, 10.3.5.8, 10.3.5.10, 10.3.5.16, 10.3.5.17, 10.3.5.18 (new), 10.3.5.19 (new), 10.3.5.20 (new)						
<b>Other specs affected:</b>	<table style="width: 100%;"> <tr> <td style="width: 50%;">⌘ <input type="checkbox"/> Other core specifications</td> <td style="width: 50%;">⌘</td> </tr> <tr> <td><input type="checkbox"/> Test specifications</td> <td></td> </tr> <tr> <td><input type="checkbox"/> O&amp;M Specifications</td> <td></td> </tr> </table>	⌘ <input type="checkbox"/> Other core specifications	⌘	<input type="checkbox"/> Test specifications		<input type="checkbox"/> O&M Specifications	
⌘ <input type="checkbox"/> Other core specifications	⌘						
<input type="checkbox"/> Test specifications							
<input type="checkbox"/> O&M Specifications							

**Other comments:** ☞ According to WG1 decision, UpPTS and DwPTS are now called UpPCH and DwPCH, SYNC\_1 and SYNC are now called SYNC\_UL and SYNC\_DL.

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☞ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8 UE Simultaneous Physical Channels combinations

This clause describes the requirements from the UE to send and receive on multiple Transport Channels, which are mapped on different physical channels simultaneously depending on the service capabilities and requirements. The clause will describe the impacts on the support for multiple services (e.g. speech call and SMS-CB) depending on the UE capabilities.

### 8.3 TDD Uplink

#### 8.3.1 3.84 Mcps TDD Uplink

The table describes the possible combinations of 3.84Mcps TDD physical channels that can be supported in the uplink by one UE in any one 10ms frame, where a 3.84Mcps TDD physical channel corresponds to one code, one timeslot, one frequency and is mapped to one resource unit (RU). This table addresses combinations of uplink physical channels in the same 10ms frame.

**Table 3: 3.84Mcps TDD Uplink**

	Physical Channel Combination	Transport Channel Combination	Mandatory or dependent on UE radio access capabilities	Comment
1	PRACH	RACH	Mandatory	One RACH transport channel maps to one PRACH physical channel.
2	One or more DPCH	One or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities.
3	PRACH + one or more DPCH	RACH + one or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	One RACH transport channel maps to one PRACH physical channel The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities.
4	One or more PUSCH	One or more USCH coded onto one or more CCTrCH	Depending on UE radio access capabilities	It is assumed here that a USCH transport channel may map to one or more PUSCH physical channels based on system configuration. USCH requires a control channel (RACH or DCH); however, it is not required to be in the same 10ms frame as the USCH.
5	PRACH + one or more PUSCH	RACH + One or more USCH coded on to one or more CCTrCH	Depending on UE radio access capabilities	One RACH transport channel maps to one PRACH physical channel. It is assumed here that a USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
6	One or more PUSCH + one or more DPCH	One or more USCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. It is assumed here that a USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
7	PRACH + one or more PUSCH + one or more DPCH	RACH + one or more USCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	One RACH transport channel maps to one PRACH physical channel. The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. It is assumed here that a USCH transport channel may map to one or more PUSCH physical channels based on system configuration.



### 8.3.2 1.28 Mcps TDD Uplink

The table addresses the possible combinations of 1.28 Mcps TDD physical channels that can be supported in the uplink by one UE simultaneously on the same frequency in the TDD 1.28 Mcps option in any one 5 ms subframe. In 1.28Mcps TDD a physical channel corresponds to one code, one timeslot, one frequency.

**Table 4: 1.28 Mcps TDD Uplink**

	<u>Physical Channel Combination</u>	<u>Transport Channel Combination</u>	<u>Mandatory or dependent on UE radio access capabilities</u>	<u>Comment</u>
1	<u>UpPCH</u>	<u>N/A</u>	<u>Mandatory</u>	<u>UpPCH is used to establish the uplink synchronisation.</u>
2	<u>PRACH</u>	<u>RACH</u>	<u>Mandatory</u>	
3	<u>UpPCH + One DPCH</u>	<u>One or more DCH coded into a single CcTrCH</u>	<u>Mandatory</u>	<u>One DPCH is needed as reference measurement channel. UpPCH transmission to target cell in case of handover.</u>
4	<u>One DPCH</u>	<u>One or more DCH coded into a single CcTrCH</u>	<u>Mandatory</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This combination is required for the reference measurement channel.</u>
5	<u>More than one DPCH</u>	<u>One or more DCH coded into one or more CcTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs, the maximum number of CcTrCH and the maximum channel bit rate are dependent on UE radio access capabilities.</u>
6	<u>UpPCH+ one or more DPCH</u>	<u>One or more DCH coded into one or more CcTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs, the maximum number of CcTrCH and the maximum channel bit rate are dependent on UE radio access capabilities. This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
7	<u>PRACH + one or more DPCHs</u>	<u>RACH + one or more DCH coded into one or more than one CcTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs, the maximum number of CcTrCH and the maximum channel bit rate are dependent on UE radio access capabilities. This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
8	<u>One or more PUSCH</u>	<u>One or more USCH coded onto one or more CcTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is required for UE that operate shared channels.</u>
9	<u>UpPCH + one or more PUSCH</u>	<u>One or more USCH coded onto one or more CcTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This combination may be used for shared channel operation only.</u>
10	<u>PRACH + one or more PUSCH</u>	<u>RACH + One or more USCH coded onto one or more CcTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This combination may be used for shared channel operation only</u>
11	<u>One or more PUSCH + one or more DPCH</u>	<u>One or more USCH coded onto one or more CcTrCH + one or more DCH coded onto one or more CcTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This configuration is required for UE that operate shared channels and dedicated channels simultaneously</u>

	<u>Physical Channel Combination</u>	<u>Transport Channel Combination</u>	<u>Mandatory or dependent on UE radio access capabilities</u>	<u>Comment</u>
<u>12</u>	<u>UpPCH + one or more PUSCH + one or more DPCH</u>	<u>One or more USCH coded onto one or more CTrCH + one or more DCH coded into one or more CTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This combination may be used for shared channel operation.</u>
<u>13</u>	<u>PRACH + one or more PUSCH + one or more DPCH</u>	<u>RACH + one or more USCH coded onto one or more CTrCH + one or more DCH coded into one or more CTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This combination may be used for shared channel operation.</u>

## 8.4.8.4 TDD Downlink

### 8.4.1 3.84 Mcps TDD Downlink

The table describes the possible combinations of 3.84Mcps TDD physical channels that can be supported in the downlink by one UE in any one 10ms frame, where a 3.84Mcps TDD physical channel corresponds to one code, one timeslot, one frequency and is mapped to one resource unit (RU). This table addresses combinations of downlink physical channels in the same 10ms frame.

**Table 45: 3.84 Mcps TDD Downlink**

	Physical Channel Combination	Transport Channel Combination	Mandatory or dependent on UE radio access capabilities	Comment
1	P-CCPCH and/or One or more S-CCPCH + PICH	BCH and/or PCH and/or one or more FACH	Mandatory	BCH maps to the P-CCPCH in a frame. FACH can map to multiple S-CCPCH in a frame. PCH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
2	One or more DPCH	One or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities.
3	P-CCPCH and/or One or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH + one or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The number of DCHs and the maximum channel bit rate are dependent on the UE radio access capabilities. BCH maps to the P-CCPCH in a frame. FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
4	One or more PDSCH	One or more DSCH coded onto one or more CCTrCH	Depending on UE radio access capabilities	It is assumed here that a DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.
5	One or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH	BCH and/or PCH and/or one or more FACH + one or more DSCH coded onto one or more CCTrCH	Depending on UE radio access capabilities	BCH maps to the P-CCPCH in a frame. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. It is assumed here that a DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. For the case of DSCH + BCH, DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.
6	One or more PDSCH + one or more DPCH	One or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. It is assumed here that a DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.

	Physical Channel Combination	Transport Channel Combination	Mandatory or dependent on UE radio access capabilities	Comment
7	One or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH + one or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	BCH maps to the P-CCPCH in a frame. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. It is assumed here that a DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.
NOTE: Reference: TS 25.221: Physical Channels and Mapping of Transport Channels Onto Physical Channels (TDD).				

### 8.4.2 1.28 Mcps TDD Downlink

The table addresses the possible combinations of 1.28 Mcps TDD physical channels that can be supported in the downlink by one UE simultaneously on the same frequency in any one 5ms subframe. In 1.28Mcps TDD a physical channel corresponds to one code, one timeslot, one frequency.

Depending on UE radio capabilities UEs may be required to occasionally decode P-CCPCH of its own cell in the following Physical Channel Combinations: 5, 11,12,13,14,15,16,17.

To support handover it depends on UE capabilities if a UE can support the occasional decoding of neighbour cell P-CCPCH in the physical channel combinations 8, 9, 10, 11, 15,16, 17

**Table 6: 1.28 Mcps TDD Downlink**

	Physical Channel Combination	Transport Channel Combination	Mandatory or dependent on UE radio access capabilities	Comment
1	FPACH	N/A	Mandatory	FPACH is used to answer the UE and to adjust the timing and synchronization shift of the UE
2	P-CCPCH	BCH	Mandatory	
3	S-CCPCH	FACH or/and PCH	Mandatory	
4	P-CCPCH +S-CCPCH	BCH + (FACH or/and PCH)	Mandatory	
5	More than one S-CCPCH	one or more FACH+ one ore more PCH	Depending on UE capabilities	
6	PICH	N/A	Mandatory	
7	FPACH + P-CCPCH + none, one or more S-CCPCH	BCH + (none,one or more FACH+ none.one ore more PCH)	Depending on UE capabilities	
8	2 DPCH	One or more DCH coded into a single CCTrCH	Mandatory	The maximum number of DCH and the maximum channel bit rate are dependent on UE radio access capabilities This channel is used as reference measurement channel
9	One or more DPCH	One or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities.

	<u>Physical Channel Combination</u>	<u>Transport Channel Combination</u>	<u>Mandatory or dependent on UE radio access capabilities</u>	<u>Comment</u>
10	<u>FPACH + one or more DPCH</u>	<u>One or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>FPACH is used to answer the UE and to adjust the timing and synchronization shift of the UE.</u>  <u>The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities.</u>  <u>This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
11	<u>One or more S-CCPCH + one or more DPCH</u>	<u>(One or more FACH or/and PCH) + one or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities.</u> <u>This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
12	<u>One or more PDSCH</u>	<u>One or more DSCH coded onto one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is required for UE that operate shared channels.</u>
13	<u>FPACH + one or more PDSCH</u>	<u>One or more DSCH coded onto one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is desirable but not essential for UE supporting shared channels.</u>
14	<u>One or more S-CCPCH + one or more PDSCH</u>	<u>(One or more FACH and/or PCH) + One or more DSCH coded onto one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is desirable but not essential for UE supporting shared channels.</u>
15	<u>One or more PDSCH + one or more DPCH</u>	<u>One or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
16	<u>FPACH + one or more PDSCH + one or more DPCH</u>	<u>one or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities.</u>	<u>FPACH is used to answer the UE and to adjust the timing and synchronization shift of the UE.</u>  <u>This configuration is desirable but not essential for UE supporting shared channels and dedicated channels simultaneously.</u>
17	<u>One or more S-CCPCH + one or more PDSCH + one or more DPCH</u>	<u>(One or more FACH and/or PCH) + one or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities.</u>	<u>This configuration is desirable but not essential for UE supporting shared channels and dedicated channels simultaneously.</u>

## 9.3 UTRAN Measurements

### 9.3.x Received SYNC\_UL Timing Deviation

<u>Measurement</u>	<u>Received SYNC_UL Timing Deviation</u>
<u>Source</u>	L1 (Node B)
<u>Destination</u>	RRC (RNC)
<u>Reporting Trigger</u>	Event triggered
<u>Definition</u>	<p>'Received SYNC_UL Timing Deviation' is the time difference</p> $UpPCH_{POS} = UpPTS_{R_{path}} - UpPTS_{TS}$ <p>Where</p> <ul style="list-style-type: none"> <li>- <math>UpPTS_{R_{path}}</math>: time of the reception in the Node B of the SYNC_UL to be used in the uplink synchronization process</li> <li>- <math>UpPTS_{TS}</math>: time instance two symbols prior to the end of the DwPCH according to the Node B internal timing</li> </ul>

## 10.3 Parameter definition

### 10.3.1 Error code

- Hardware failure.

### 10.3.2 Event value

- Maximum transmission power has been reached.
- Allowable transmission power has been reached.
- Average transmission power is below allowable transmission power.
- Loss of DL DPCCCH.
- Completion of CPCH Emergency stop.
- CPCH Start of Message Indicator was received.
- CPCH Start of Message Indicator was not received.
- Maximum number of frames for CPCH transmission has been reached.
- End of Frame for CPCH transmission has been received.

### 10.3.3 Access Information

- ~~—~~ Ready for RACH data transmission (in case of FDD mode: when Ack on AICH has been received, in case of 1.28 Mcps TDD: when Ack on FPACH has been received).
- timeout, no response on AICH (FDD only) or AP-AICH (FDD only) or FPACH (1.28 Mcps TDD only) has been received while maximum number of access preamble transmissions (FDD only) /synchronisation attempts (1.28 Mcps TDD only) has been performed;

The following values of this parameter apply to FDD only:

- NACK on AICH or AP-AICH has been received;
- ~~—timeout, no response on AICH or AP-AICH has been received while maximum number of access preamble transmissions has been performed;~~
- ready for CPCH data transmission (CD or CD/CA information received on CD/CA-ICH);
- mismatch of CD/CA-ICH signatures;
- no response on CD/CA-ICH received;
- timeout, no CD/CA-ICH received.

### 10.3.4 Transport Format Subset

- A subset of the Transport Format set of a Transport Channel.

### 10.3.5 Physical channel description

#### 10.3.5.1 Primary SCH

- Tx diversity mode.

### 10.3.5.2 Secondary SCH

- Tx diversity mode.

### 10.3.5.3 Primary CCPCH

- Frequency info.
- DL scrambling code.
- Tx diversity mode.
- Timeslot (TDD only).
- Burst type ([3.84 Mcps](#) TDD only).
- Offset (TDD only).
- Repetition period (TDD only).
- Repetition length (TDD only).

### 10.3.5.4 Secondary CCPCH

- DL scrambling code.
- Channelisation code.
- Tx diversity mode.
- Timeslot (TDD only).
- Burst type ([3.84 Mcps](#) TDD only).
- Midamble shift (TDD only).
- Offset (TDD only).
- Repetition period (TDD only).
- Repetition length (TDD only).
- TFCI presence (TDD only).

### 10.3.5.5 PRACH

- Access Slot ([FDD only](#)).
- Preamble spreading code (FDD only).
- Preamble signature (FDD only).
- Spreading factor for data part.
- Power control info:
  - UL target SIR;
  - primary CCPCH DL TX Power;
  - UL interference;
  - power offset (Power ramping) (FDD only).
- Access Service Class Selection:



- preamble signature classification information ([FDD only](#)).
- AICH transmission timing parameter (FDD only).
- Timeslots (TDD only).
- Spreading codes (TDD only).
- Midamble codes (TDD only).

#### 10.3.5.6 Uplink DPDCH+DPCCH

- UL scrambling code.
- DPCCH Gate rate.
- DPCCH slot structure ( $N_{\text{pilot}}$ ,  $N_{\text{TPC}}$ ,  $N_{\text{TFCI}}$ ,  $N_{\text{FBI}}$ ).
- Transmission Time offset value.

#### 10.3.5.7 Uplink DPCH

- Timing Advance (TDD only).
- DPCH channelisation code (TDD only).
- Burst Type ([3.84 Mcps](#) TDD only).
- DPCH midamble shift (TDD only).
- Timeslot (TDD only).
- Offset (TDD only).
- Repetition Period (TDD only).
- Repetition length (TDD only).
- TFCI presence (TDD only).

#### 10.3.5.8 Downlink DPCH

- Transmission Time offset value.
- DPCCH Gate rate (FDD only).
- DL scrambling code:
  - DL Channelisation code.
- Tx diversity mode:
  - FB mode (FDD only).
- Slot structure ( $N_{\text{pilot}}$ ,  $N_{\text{TPC}}$ ,  $N_{\text{TFCI}}$ ,  $N_{\text{FBI}}$ ,  $N_{\text{data1}}$ ,  $N_{\text{data2}}$ ) (FDD only).
- Special slot structure only for CPCH ( $N_{\text{pilot}}$ ,  $N_{\text{TPC}}$ ,  $N_{\text{TFCI}}$ ,  $N_{\text{CCC}}$ ) (FDD only)
- Burst Type ([3.84 Mcps](#) TDD only).
- DPCH midamble shift (TDD only).
- Timeslot (TDD only).
- Offset (TDD only).
- Repetition period (TDD only).

- Repetition length (TDD only).
- TFCI presence (TDD only).

#### 10.3.5.9 PCPCH (Physical Common Packet Channel)

- CPCH Set ID to which this PCPCH belongs.
- Parameters related to the AP preamble:
  - Access Preamble (AP) scrambling code;
  - available AP signatures/subchannels for access request;
- Parameters related to the CD preamble:
  - CD preamble scrambling code;
  - available CD signatures/subchannels;
- Parameters related to PCPCH message part:
  - PCPCH scrambling code;
  - PCPCH Channelisation code;
  - data rate (spreading factor);
  - N\_frames\_max: Maximum length of CPCH message in radio frames.

#### 10.3.5.10 PICH

- Scrambling code.
- Channelisation code.
- Timeslot (TDD only).
- Burst Type ([3.84 Mcps](#) TDD only).
- Midamble shift (TDD only).
- Offset (TDD only).
- Repetition period (TDD only).
- Repetition length (TDD only).

#### 10.3.5.11 AICH

- Scrambling code.
- Channelisation code.
- Tx diversity mode.

NOTE: The value for the parameters needs to be consistent with the corresponding PRACH.

#### 10.3.5.12 AP-AICH

- CPCH Set ID.
- Scrambling code.
- Channelisation code.

- Tx diversity mode.

#### 10.3.5.13 CD-ICH

- CPCH Set ID.
- Scrambling code.
- Channelisation code.
- Tx diversity mode.

NOTE: This physical channel is used in conjunction with PCPCH when UE Channel Selection is active.

#### 10.3.5.14 CD/CA-ICH

- CPCH Set ID.
- Scrambling code.
- Channelisation code.
- Tx diversity mode.

NOTE: This physical channel is used in conjunction with PCPCH when Channel Assignment is active.

#### 10.3.5.15 CSICH

- CPCH Set ID.
- Scrambling code.
- Channelisation code.
- Tx diversity mode.

NOTE: The values for the parameters need to be consistent with the AP-AICH which is time-multiplexed with this CSICH.

#### 10.3.5.16 PDSCH

- Scrambling code.
- Channelisation code.
- Tx diversity mode:
  - FB mode (FDD only).
- DL channelisation code (TDD only).
- Burst Type ([3.84 Mcps](#) TDD only).
- PDSCH Midamble shift (TDD only).
- Timeslot (TDD only).
- Offset (TDD only).
- Repetition period (TDD only).
- Repetition length (TDD only).
- TFCI presence (TDD only).

### 10.3.5.17 PUSCH

- PUSCH channelisation code.
- Burst Type ([3.84 Mcps TDD only](#)).
- PUSCH midamble shift (TDD only).
- Timeslot (TDD only).
- Offset (TDD only).
- Repetition period (TDD only).
- Repetition length (TDD only).
- TFCI presence (TDD only).
- Timing Advance (TDD only).

### 10.3.5.18 DwPCH (1.28 Mcps TDD only)

- Tx diversity mode.
- SYNC\_DL code ID.

### 10.3.5.19 UpPCH (1.28 Mcps TDD only)

- SYNC\_UL code ID.

### 10.3.5.20 FPACH (1.28 Mcps TDD only)

- Scrambling code
- Channelisation code
- Timeslot
- Midamble shift
- Tx diversity mode.

## CHANGE REQUEST

⌘ **25.303** **CR** **043** ⌘ rev **-** ⌘ Current version: **3.6.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ 1.28Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ February 12, 2001
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
<p>Use <u>one</u> of the following categories:</p> <p><b>F</b> (essential correction)  <b>A</b> (corresponds to a correction in an earlier release)  <b>B</b> (Addition of feature),  <b>C</b> (Functional modification of feature)  <b>D</b> (Editorial modification)</p> <p>Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p>		<p>Use <u>one</u> of the following releases:</p> <p>2 (GSM Phase 2)  R96 (Release 1996)  R97 (Release 1997)  R98 (Release 1998)  R99 (Release 1999)  REL-4 (Release 4)  REL-5 (Release 5)</p>	

<b>Reason for change:</b>	⌘ This CR collects the changes necessary for introducing 1.28Mcps TDD in TS25.303.
<b>Summary of change:</b>	⌘ Random access transmission sequence for 1.28Mcps TDD is introduced.
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 6.7.3		
<b>Other specs affected:</b>	⌘ <input type="checkbox"/> Other core specifications	⌘	
	<input type="checkbox"/> Test specifications		
	<input type="checkbox"/> O&M Specifications		
<b>Other comments:</b>	⌘		

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 6.7.3 Random access transmission sequence(TDD)

### 6.7.3.1 Random access transmission sequence (3.84Mcps TDD)

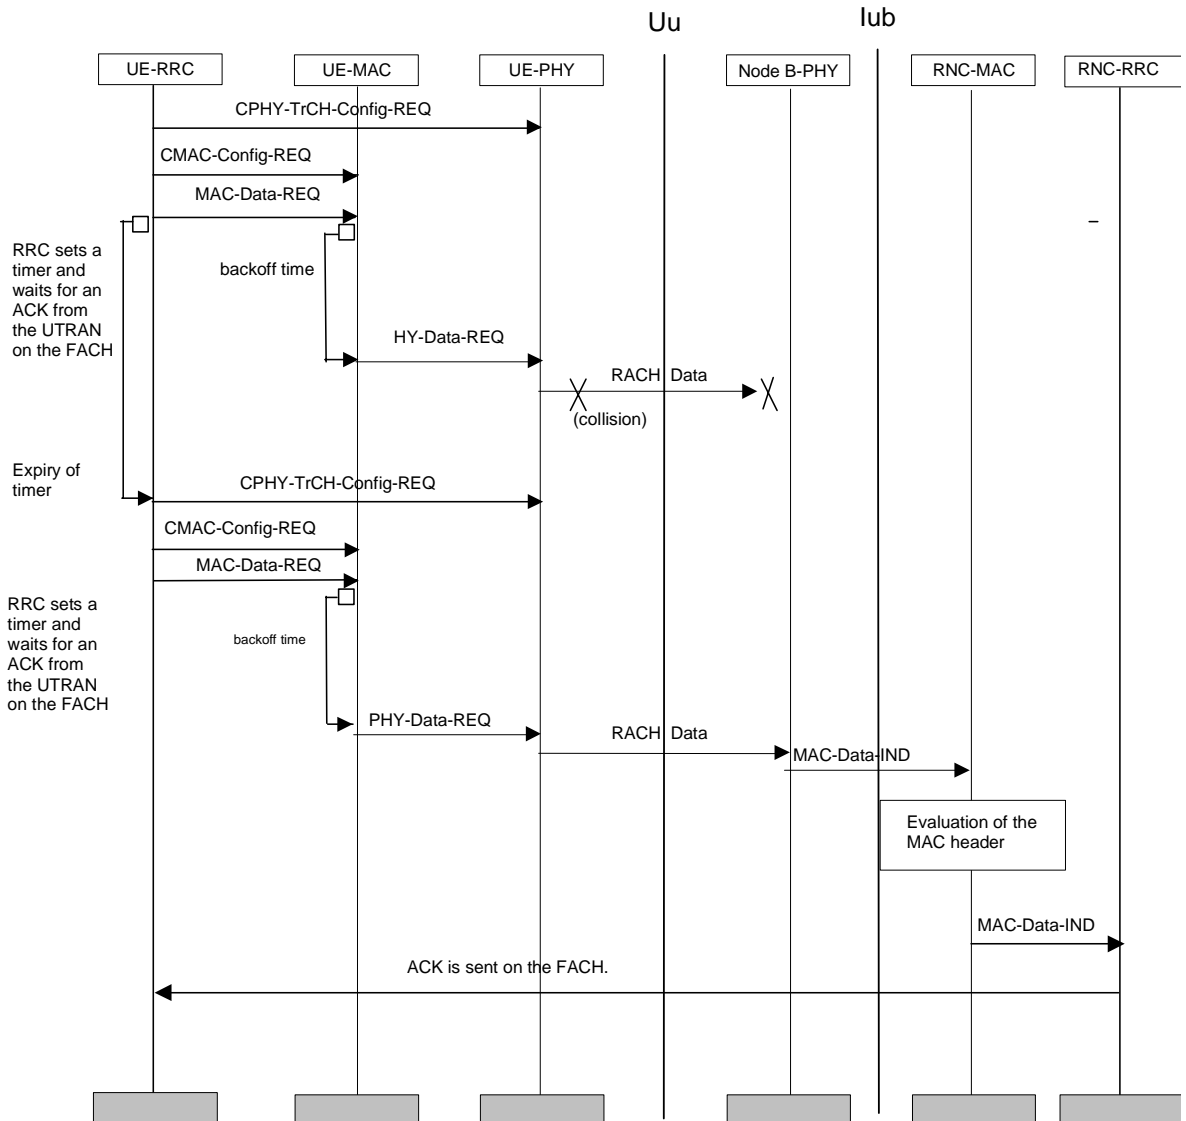


Figure 44: Random access transmission

#### sequence (3.84Mcps TDD)

The RACH is configured once via a CPHY-TrCH-Config-REQ primitive. This primitive needs to be used only for initial configuration (e.g. power parameter) or when a parameter shall be changed, not for every RACH transmission.

The CMAC-Config-REQ primitive is used to configure MAC parameters required for the random access procedure. The parameters could include random access control parameters such as, persistence value and Access Service Class (ASC) parameters.


When there is data to be transmitted on the RACH, i.e. reception of a MAC-Data-REQ primitive, the RACH transmission control procedure is started, which includes selection of an Access Service Class (ASC).

After some backoff, a primitive PHY-Data-REQ is sent to L1, which triggers the PRACH message transmission, i.e. the physical layer selects a PRACH spreading-code without further backoff delay imposed on L1, but within the constraints of the selected ASC. Note that the backoff time on MAC may in certain conditions be set to zero (e.g. when the uplink load is low).

At the UTRAN-side MAC the further processing of received RACH message depends on the MAC header. An acknowledgement that the message was received correctly is given by a RRC procedure. In case of transparent

RLC, message retransmission shall be handled entirely on RRC employing retransmission timers. In case of non-transparent RLC, the timers are controlled by the RLC. The parameters of PRACH transmission are chosen such that the number of retransmissions for the messages are kept low. Message loss on the PRACH should be due to a collision on the same spreading code.

### 6.7.3.2 Random access transmission sequence (1.28Mcps TDD)

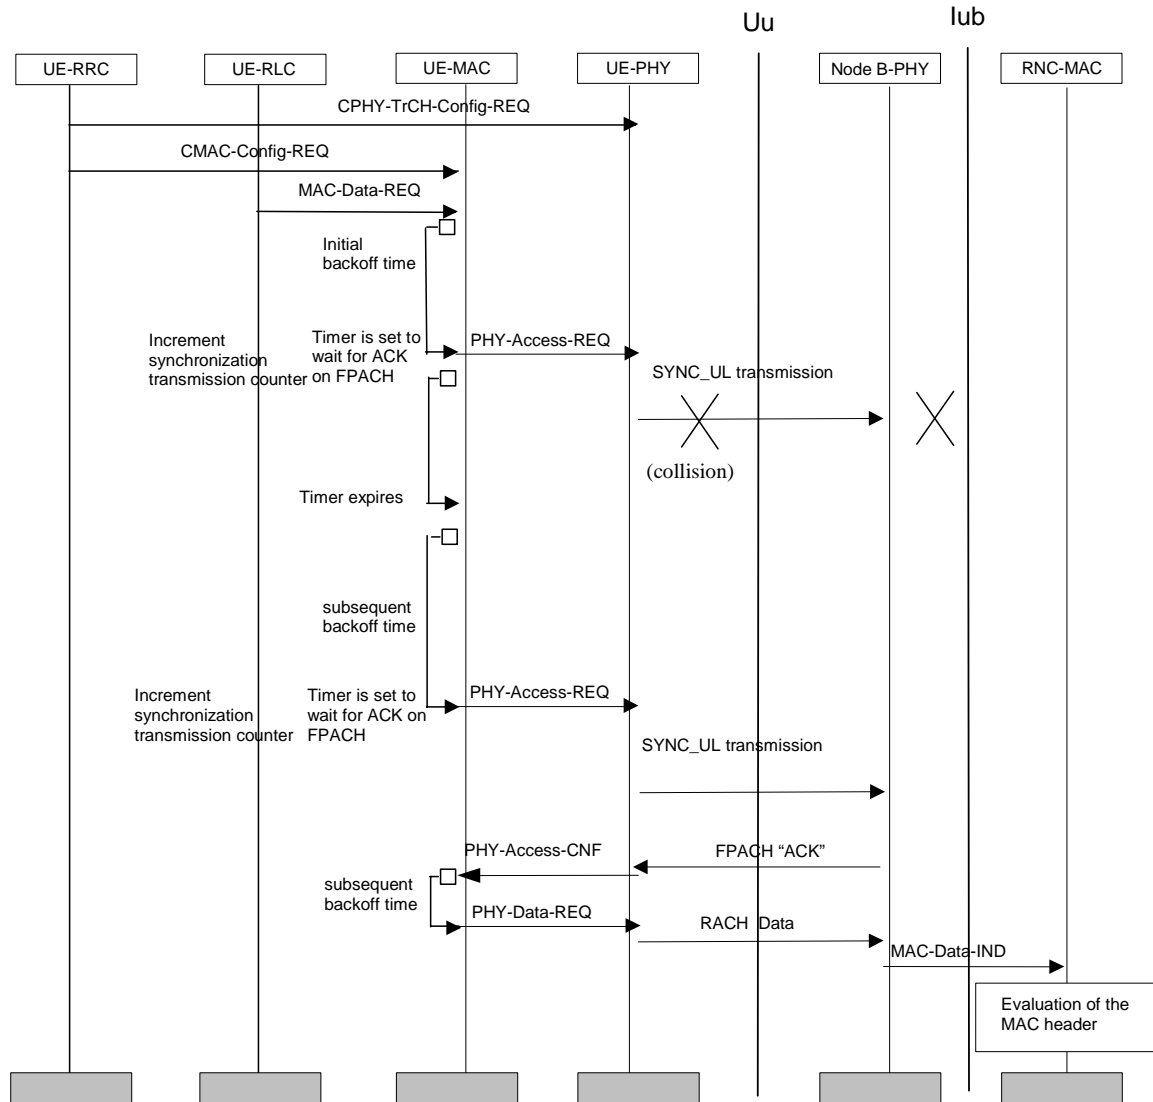

**Figure x: Random access transmission sequence(1.28Mcps TDD)**

The RACH is configured once via a CPHY-TrCH-Config-REQ primitive. This primitive needs to be used only for initial configuration or when a parameter shall be changed, not for every RACH transmission.

The CMAC-Config-REQ primitive is used to configure MAC parameters required for the random access procedure. The parameters could include random access control parameters such as persistence value, Access Service Class (ASC) parameters and maximum number of synchronisation attempts.

When there is data to be transmitted on the RACH, i.e. reception of a MAC-Data-REQ primitive, the RACH transmission control procedure is started, which includes selection of an Access Service Class (ASC).

After some backoff, a primitive PHY-Access-REQ is sent to L1, which triggers the PRACH message transmission, i.e. the physical layer selects a SYNC\_UL code without further backoff delay imposed on L1, but within the constraints of the selected ASC.

If PHY received no acknowledgement on the FPACH and the maximum number of synchronisation attempts permitted has not been exceeded, the PHY-Access-REQ procedure is repeated.

If the SYNC\_UL burst has been acknowledged on the FPACH, MAC receives an acknowledgement via PHY-Access-CNF primitive. Then data transmission is requested with a PHY-DATA-REQ primitive, and the PRACH transmission procedure shall be completed with transmission of the PRACH message on the PRACH resources associated with FPACH.



CR-Form-v3	
<b>CHANGE REQUEST</b>	
⌘ <b>25.304</b> <b>CR</b> <b>057</b> ⌘ rev <b>r1</b> ⌘	Current version: <b>3.5.0</b> ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Support of 1.28 Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ 15.1.2001
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
	<i>Use one of the following categories:</i> <b>F</b> (essential correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (Addition of feature), <b>C</b> (Functional modification of feature) <b>D</b> (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		<i>Use one of the following releases:</i> <b>2</b> (GSM Phase 2) <b>R96</b> (Release 1996) <b>R97</b> (Release 1997) <b>R98</b> (Release 1998) <b>R99</b> (Release 1999) <b>REL-4</b> (Release 4) <b>REL-5</b> (Release 5)

<b>Reason for change:</b>	⌘ The support of 1.28 Mpcs TDD is introduced in TS 25.304.		
<b>Summary of change:</b>	⌘ In section 8.3 (DRX), it is indicated that there is only one burst type in 1.28 Mcps TDD.		
<b>Consequences if not approved:</b>	⌘		

<b>Clauses affected:</b>	⌘ 8.3		
<b>Other specs affected:</b>	<input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications	⌘	
<b>Other comments:</b>	⌘		

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8.3 Discontinuous Reception

The UE may use Discontinuous Reception (DRX) in idle mode in order to reduce power consumption. When DRX is used the UE needs only to monitor one Page Indicator, PI, (see definition in [7] and [8]) in one Paging Occasion per DRX cycle.

The DRX cycle length shall be  $2^k \cdot \text{PBP}$  frames, where  $k$  is an integer and PBP is the Paging Block Periodicity. PBP is only applicable for TDD and is equal to the PICH repetition period that is broadcast in system information. For FDD,  $\text{PBP}=1$ .

The UE may be attached to different CN domains with different CN domain specific DRX cycle lengths. The UE shall store each CN domain specific DRX cycle length for each CN domain the UE is attached to and use the shortest of those DRX cycle lengths. The CS CN specific DRX cycle length coefficient shall be updated locally in the UE using information given in system information. On the other hand, the PS CN specific DRX cycle length coefficient shall be updated after the negotiation between the UE and PS CN by NAS procedure. If no specific value "k" is negotiated in NAS procedure, the UE and PS CN shall use the DRX cycle length given for PS CN domain in system information.

The DRX cycle lengths to use for UTRAN connected mode is the shortest of the following:

- UTRAN DRX cycle length;
- any of the stored CN domain specific DRX cycle length for the CN domains the UE is only attached to with no signalling connection established.

The UE shall use the IMSI, the number of available SCCPCH which carry a PCH ( $K$ ) as derived according to subclause 8.1, the Cell System Frame Number (SFN),  $N_p$  (for FDD,  $N_p$  is the number of page indicators within a frame; for TDD,  $N_p$  is the number of page indicators within a paging block), Frame offset (For FDD, Frame offset = 0; for TDD, PICH frame offset values are given in system information), PBP and the DRX cycle length to determine the Paging Occasions.

The value of the Paging Occasion (i.e. the SFN of the first frame of the Paging Block) is determined as follows:

$$\text{Paging Occasion} = \{(\text{IMSI} \div K) \bmod (\text{DRX cycle length} \div \text{PBP})\} * \text{PBP} + n * \text{DRX cycle length} + \text{Frame Offset}$$

Where  $n = 0, 1, 2, \dots$  as long as SFN is below its maximum value.

The actual Page Indicator within a Paging Occasion that the UE shall read is similarly determined based on IMSI.

The Page Indicator to use is calculated by using the following formula:

$$\text{PI} = \text{DRX Index} \bmod N_p$$

$$\text{where DRX Index} = \{(\text{IMSI} \div K) \div (\text{DRX cycle length} \div \text{PBP})\}$$

In FDD mode,  $N_p = (18, 36, 72, 144)$  is the number of Page Indicators per frame, and is given in IE "Number of PI per frame", part of system information in FDD mode. In TDD mode,  $N_p$  is the number of Page Indicators per paging block and is calculated by the Paging Indicator Length  $L_{PI}$ , the Burst Type (long or short midamble [for 3.84 Mpcs TDD](#)) and the PICH repetition length, which are given in system information..

If the UE has no IMSI, for instance when making an emergency call without USIM, the UE shall use a default number,  $\text{IMSI} = 0$ , in the formulas above.

For FDD, see [7] for details about the timing between a PICH frame and when the paging message is transmitted on the PCH in the associated S-CCPCH frame. In TDD mode, the Paging Message Receiving Occasion is calculated using the following formula:

$$\text{Paging Message Receiving Occasion} = \text{Paging Occasion} + N_{\text{PICH}} + N_{\text{GAP}} + \{(\text{DRX Index} \div N_p) \bmod N_{\text{PCH}}\} * 2$$

The value  $N_{\text{PICH}}$  is the number of frames for PICH transmission and is equal to the PICH repetition length given in system information. The value  $N_{\text{GAP}}$  is the number of frames between the last frame carrying PICH for this Paging Occasion and the first frame carrying paging messages for this Paging Occasion. The value  $N_{\text{PCH}}$  is the number of Paging Groups.  $N_{\text{PCH}}$  and  $N_{\text{GAP}}$  are given in system information.

## CHANGE REQUEST

⌘ **25.321** **CR** **064** ⌘ rev **-** ⌘ Current version: **3.6.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ 1.28Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ 15.1.2001
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
<p>Use <u>one</u> of the following categories:</p> <p><b>F</b> (essential correction)</p> <p><b>A</b> (corresponds to a correction in an earlier release)</p> <p><b>B</b> (Addition of feature),</p> <p><b>C</b> (Functional modification of feature)</p> <p><b>D</b> (Editorial modification)</p> <p>Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p>		<p>Use <u>one</u> of the following releases:</p> <p><b>2</b> (GSM Phase 2)</p> <p><b>R96</b> (Release 1996)</p> <p><b>R97</b> (Release 1997)</p> <p><b>R98</b> (Release 1998)</p> <p><b>R99</b> (Release 1999)</p> <p><b>REL-4</b> (Release 4)</p> <p><b>REL-5</b> (Release 5)</p>	

<b>Reason for change:</b>	⌘ This CR collects the changes necessary for introducing 1.28Mcps TDD in TS25.321
<b>Summary of change:</b>	⌘ <ul style="list-style-type: none"> <li>- RACH transmission control elements have been updated to support 1.28 Mcps TDD.</li> <li>- ASC description has been updated to reflect the partitioning of SYNC1resources in 1.28 Mcps TDD.</li> <li>- Section 11.2.x has been added to describe the control of RACH transmissions for 1.28 Mcps TDD.</li> </ul>
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 8.3.2, 11.2.1, 11.2.3, 11.2.3.2 (new)		
<b>Other specs affected:</b>	⌘ <input type="checkbox"/> Other core specifications	⌘	<input type="checkbox"/>
	<input type="checkbox"/> Test specifications		<input type="checkbox"/>
	<input type="checkbox"/> O&M Specifications		<input type="checkbox"/>
<b>Other comments:</b>	⌘		

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8.3.2 Parameters

See TS 25.331 for a detailed description of the UE, RB and TrCH information elements.

- a) UE information elements
  - S-RNTI
  - SRNC identity
  - C-RNTI
  - Activation time
- b) RB information elements
  - RB multiplexing info (Transport channel identity, Logical channel identity, MAC logical channel priority)
- c) TrCH information elements
  - Transport Format Combination Set
- d) Measurement information elements
  - Mode (periodic, event-triggered or both)
  - THU
  - THL
  - Measurement quantity identifiers
  - Report Interval
- e) Measurement result
  - Mode
  - Reporting Quantities
  - Event ID (4a or 4b)
- f) Status info
  - when set to value "transmission unsuccessful" this parameter indicates to RRC that transmission of a TM RLC PDU failed (due to e.g. Maximum number of preamble ramping cycles reached for RACH in FDD), when set to value "transmission successful" this parameter indicates to RRC that the requested TM RLC PDU(s) has been submitted for transmission by the physical layer..
- g) RACH transmission control elements
  - Set of ASC parameters (identifier for PRACH partitions, persistence values)
  - Maximum number of preamble ramping cycles ([FDD](#)) or [synchronisation attempts \(1.28Mcps TDD\)](#)  $M_{\max}$
  - Minimum and maximum number of time units between two preamble ramping cycles,  $N_{BO1\min}$  and  $N_{BO1\max}$  ([FDD only](#))
- h) Cipherring elements
  - Cipherring mode
  - Cipherring key
  - Cipherring sequence number
- i) CPCH transmission control elements
  - CPCH persistency value, P for each Transport Format
  - Maximum number of preamble ramping cycles  $N_{\text{access\_fails}}$
  - NF\_max (Maximum number of frames for CPCH transmission for each Transport Format)
  - N\_EOT (Number of EOT for release of CPCH transmission)
  - Backoff control timer parameters
  - Transport Format Set
  - Initial Priority Delays
  - Channel Assignment Active indication

## 11.2 Control of RACH transmissions

The MAC sublayer is in charge of controlling the timing of RACH transmissions on transmission time interval level (i.e. on 10 ms-radio frame level; the timing on access slot level is controlled by L1). Note that retransmissions in case of erroneously received RACH message part are under control of higher layers, i.e. RLC, or RRC for CCCH (and SHCCH for TDD).

### 11.2.1 Access Service Class selection

The physical RACH resources (i.e. access slots and preamble signatures for FDD, timeslot and channelisation code for [3.84 Mcps TDD](#), [SYNCl code for 1.28 Mcps TDD](#)) may be divided between different Access Service Classes in order to provide different priorities of RACH usage. It is possible for more than one ASC or for all ASCs to be assigned to the same access slot/signature space [or SYNCl code](#).

Access Service Classes are numbered in the range  $0 \leq i \leq \text{NumASC} \leq 7$  (i.e. the maximum number of ASCs is  $\text{NumASC}+1 = 8$ ). An ASC is defined by an identifier  $i$  that defines a certain partition of the PRACH resources and an associated persistence value  $P_i$ . A set of ASC parameters consists of  $\text{NumASC}+1$  such parameters  $(i, P_i)$ ,  $i = 0, \dots, \text{NumASC}$ . The PRACH partitions and the persistence values  $P_i$  are derived by the RRC protocol from system information (see TS 25.331 [7]). The set of ASC parameters is provided to MAC with the CMAC-Config-REQ primitive. The ASC enumeration is such that it corresponds to the order of priority (ASC 0 = highest priority, ASC 7 = lowest priority). ASC 0 shall be used in case of Emergency Call or for reasons with equivalent priority.

At radio bearer setup/reconfiguration each involved logical channel is assigned a MAC Logical channel Priority (MLP) in the range 1, ..., 8. When the MAC sublayer is configured for RACH transmission in the UE, these MLP levels shall be employed for ASC selection on MAC.

The following ASC selection scheme shall be applied, where NumASC is the highest available ASC number and MinMLP the highest logical channel priority assigned to one logical channel:

- in case all TBs in the TB set have the same MLP, select  $\text{ASC} = \min(\text{NumASC}, \text{MLP})$ ;
- in case TBs in a TB set have different priority, determine the highest priority level MinMLP and select  $\text{ASC} = \min(\text{NumASC}, \text{MinMLP})$ .

### 11.2.3 Control of RACH transmissions for TDD

#### [11.2.3.1 Control of RACH transmissions for 3.84 Mcps TDD](#)

The RACH transmissions are performed by the UE as shown in figure 11.2.3.1.

- NOTE: The figure shall illustrate the operation of the transmission control procedure as specified below. It shall not impose restrictions on implementation.

MAC receives the following RACH transmission control parameters from RRC with the CMAC-Config-REQ primitive:

- a set of Access Service Class (ASC) parameters, which includes for each ASC,  $i=0, \dots, \text{NumASC}$  an identification of a PRACH partition and a persistence value  $P_i$  (transmission probability).

When there is data to be transmitted, MAC selects the ASC from the available set of ASCs, which consists of an identifier  $i$  of a certain PRACH partition and an associated persistence value  $P_i$ . The procedure to be applied for ASC selection is described in subclause 11.2.1.

Based on the persistence value  $P$ , the UE decides whether to send the message on the RACH. If transmission is allowed, the PRACH transmission procedure is initiated by sending of a PHY-Data-REQ primitive. If transmission is not allowed, a new persistency check is performed in the next transmission time interval. The persistency check is repeated until transmission is permitted.

Successful completion (TX status) of the MAC transmission control procedure shall be indicated to higher layer individually for each logical channel of which data was included in the transport block set of that access attempt. When

transparent mode RLC is employed (i.e. for CCCH), transmission status is reported to RRC with CMAC-STATUS-Ind primitive. For logical channels employing acknowledged or unacknowledged mode RLC, transmission status is reported to RLC with MAC-STATUS-Ind primitive.

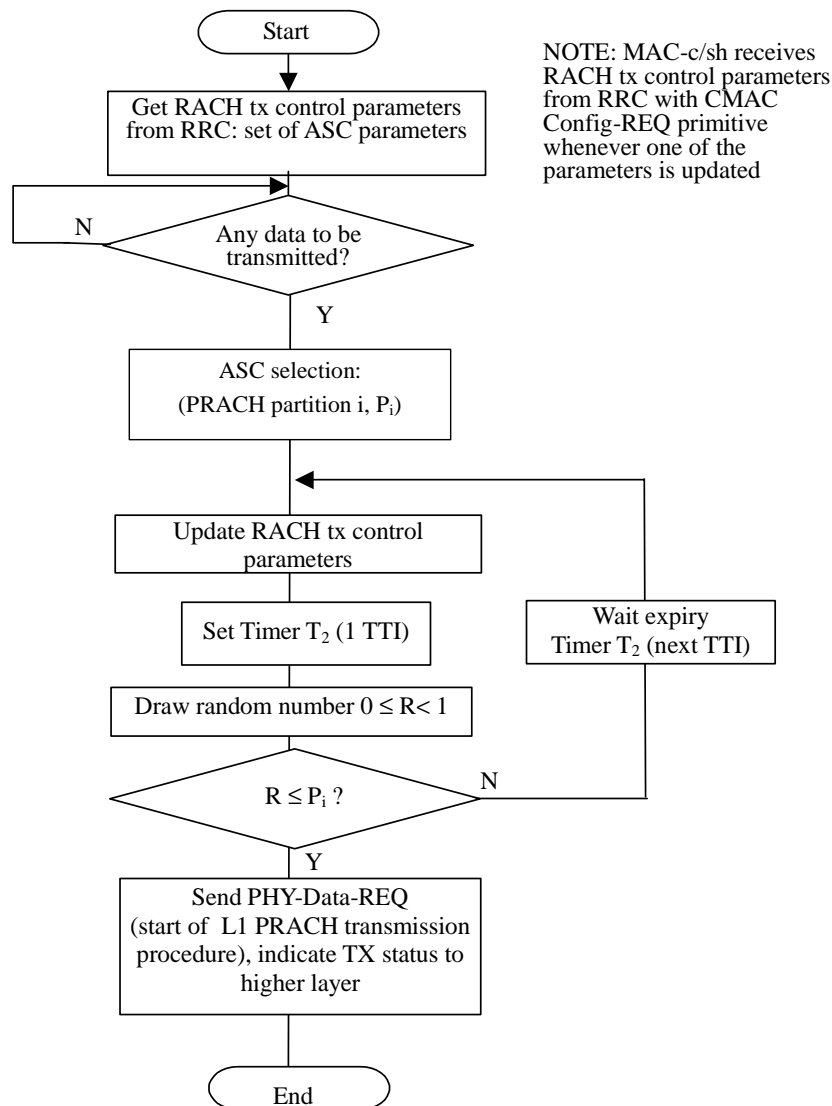


Figure 11.2.3.1: RACH transmission control procedure for TDD (UE side, informative)

### 11.2.3.2 Control of RACH Transmissions for 1.28 Mcps TDD

The RACH transmissions are performed by the UE as shown in figure x.

NOTE: The figure shall illustrate the operation of the transmission control procedure as specified below. It shall not impose restrictions on implementation.

UE MAC receives the following RACH transmission control parameters from RRC with the CMAC-Config-REQ primitive:


- a set of Access Service Class (ASC) parameters, which includes for each ASC,  $i=0, \dots, \text{NumASC}$  an identification of a PRACH partition and a persistence value  $P_i$  (transmission probability),
- maximum number of synchronisation attempts  $M_{\text{max}}$ .

When there is data to be transmitted, MAC selects the ASC from the available set of ASCs, which consists of an identifier  $i$  of a certain PRACH partition and an associated persistence value  $P_i$ .

Based on the persistence value  $P_i$ , the UE MAC decides whether to start the L1 PRACH procedure in the present transmission time interval or not. If transmission is allowed, the PRACH transmission procedure (starting with the selection and transmission of a SYNC1 burst) is initiated by the sending of a PHY-ACCESS-REQ primitive. MAC then waits for access information from L1 via the PHY-ACCESS-CNF primitive. If transmission is not allowed, a new persistency check is performed in the next transmission time interval. The persistency check is repeated until transmission is permitted.

If the synchronisation burst has been acknowledged on the FPACH, L1 access information with parameter “ready for RACH data transmission” is indicated to MAC with a PHY-ACCESS-CNF primitive. Then data transmission is requested with a PHY-DATA-REQ primitive, and the PRACH transmission procedure shall be completed with transmission of the PRACH message on the P-RACH resources associated with the FPACH.

If PHY received no acknowledgement on the FPACH and the maximum number of synchronisation attempts permitted has not been exceeded, then a new persistency test is performed in the next transmission time interval and the PHY-ACCESS-REQ procedure is repeated. The timer  $T_2$  ensures that two successive persistency tests are separated by at least one transmission time interval. If the maximum number of synchronisation attempts is exceeded then MAC abandons the RACH procedure and the message is discarded.

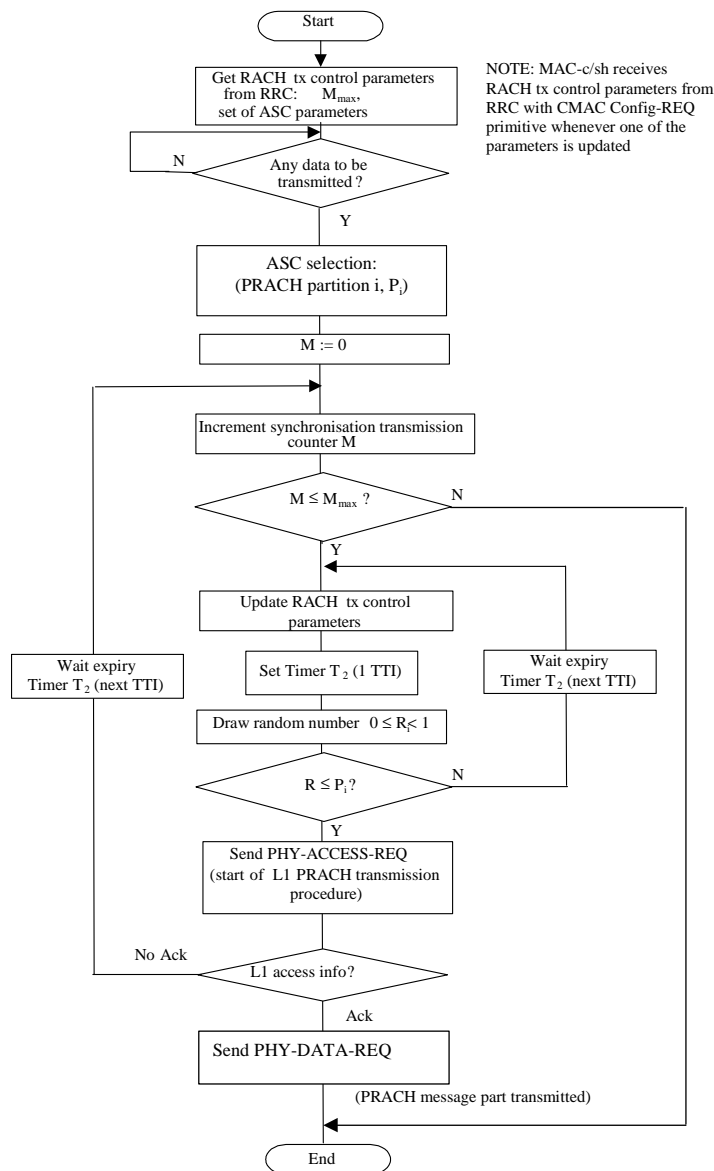

**Figure x: RACH transmission control procedure for 1.28 Mcps TDD (UE side, informative)**





## CHANGE REQUEST

⌘ **25.331** **CR 706** ⌘ rev **r1** ⌘ Current version: **3.5.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Physical channel configuration information elements for 1.28 Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23		<b>Date:</b> ⌘ February 10, 2001
<b>Category:</b>	⌘ <b>B</b>		<b>Release:</b> ⌘ REL-4
<p style="text-align: center;"><i>Use <u>one</u> of the following categories:</i></p> <p><b>F</b> (essential correction)  <b>A</b> (corresponds to a correction in an earlier release)  <b>B</b> (Addition of feature),  <b>C</b> (Functional modification of feature)  <b>D</b> (Editorial modification)</p> <p style="text-align: center;">Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p>		<p style="text-align: center;"><i>Use <u>one</u> of the following releases:</i></p> <p><b>2</b> (GSM Phase 2)  <b>R96</b> (Release 1996)  <b>R97</b> (Release 1997)  <b>R98</b> (Release 1998)  <b>R99</b> (Release 1999)  <b>REL-4</b> (Release 4)  <b>REL-5</b> (Release 5)</p>	

<b>Reason for change:</b>	⌘ Support of 1.28Mcps TDD is introduced in TS25.331
<b>Summary of change:</b>	⌘ Description and information elements for physical channel configuration are updated in order to support 1.28Mcps TDD.
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 4, 8.1.1.6.5, 8.1.1.6.6, 8.2.10.3, 8.5.7, 8.6.3.7, 8.6.3.7a (new), 8.6.6.11, 10.2.23, 10.2.28, 10.2.31, 10.2.34, 10.2.51, 10.2.59, 10.3.6.24, 10.3.6.37, 10.3.6.41, 10.3.6.49, 10.3.6.57, 10.3.6.58, 10.3.6.65, 10.3.6.79, 10.3.6.84, 10.3.6.x (new), 10.3.6.91, 10.3.6.92, 10.3.6.93, 10.3.6.95, 10.3.6.96, 10.3.8.15, 10.3.10, 11, A.3		
<b>Other specs affected:</b>	⌘ <input type="checkbox"/> Other core specifications	⌘	
	<input type="checkbox"/> Test specifications		
	<input type="checkbox"/> O&M Specifications		
<b>Other comments:</b>	⌘		

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at:  
[http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be

downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

---

## 4 General

If not specified else descriptions are relevant for both FDD and TDD. Descriptions for TDD only are relevant for both 1.28 Mcps TDD and 3.84 Mcps TDD if not specified else.

### 8.1.1.6.5 System Information Block type 5

The UE should store all relevant IEs included in this system information block. The UE shall:

- if in connected mode, and System Information Block type 6 is indicated as used in the cell:
  - read and act on information sent in System Information Block type 6.
- replace the TFS of the transport channel with the identical transport channel identity with the one stored in the UE if any;
- let the physical channel(s) of type PRACH given by the IE(s) "PRACH info" be the default in uplink for the PRACH if UE is in CELL\_FACH state;
- start to receive the physical channel of type AICH using the parameters given by the IE "AICH info" (FDD only) when given allocated PRACH is used;
- select a Secondary CCPCH as specified in subclause 8.6, and start to receive the physical channel of type PICH associated with the PCH carried by the selected Secondary CCPCH using the parameters given by the IE "PICH info" if UE is in Idle mode or in CELL\_PCH or URA\_PCH state;
- start to monitor its paging occasions on the selected PICH if UE is in Idle mode or in CELL\_PCH or URA\_PCH state;
- start to receive the selected physical channel of type Secondary CCPCH using the parameters given by the IE(s) "Secondary CCPCH info" if UE is in CELL\_FACH state;
- in TDD: use the IE "Midamble configuration" for receiver configuration;
- in 3.84 Mcps TDD: use the IE "TDD open loop power control" as defined in subclause 8.5.7;
- in TDD: if the IE "PDSCH system information" and/or the IE "PUSCH system information" is included, store each of the configurations given there with the associated identity given in the IE "PDSCH Identity" and/or "PUSCH Identity" respectively. For every configuration, for which the IE "SFN Time info" is included, the information shall be stored for the duration given there.

If in idle mode and System Information Block type 5 is not scheduled on BCH or System Information Block type 5 is scheduled but AICH info or PICH info is not present, the UE shall:

- consider the cell to be barred according to [4]; and
- consider the barred cell as using the value "allowed" in the IE "Intra-frequency cell re-selection indicator", and the maximum value in the IE " $T_{\text{barred}}$ ".

If in connected mode and System Information Block type 5 is not scheduled on BCH, and System Information Block type 6 is not scheduled on BCH, or any of System Information Block type 5 or type 6 is scheduled but IE "AICH info" or IE "PICH info" is not present, the UE shall:

- consider the cell to be barred according to [4]; and
- consider the barred cell as using the value "allowed" in the IE "Intra-frequency cell re-selection indicator", and the maximum value in the IE " $T_{\text{barred}}$ ".

### 8.1.1.6.6 System Information Block type 6

If in connected mode, the UE should store all relevant IEs included in this system information block. The UE shall:

- replace the TFS of the transport channel with the identical transport channel identity with the one stored in the UE if any;
- let the physical channel(s) of type PRACH given by the IE(s) "PRACH info" be the default in uplink if UE is in CELL\_FACH state. If the IE "PRACH info" is not included, the UE shall read the corresponding IE(s) in System Information Block type 5 and use that information to configure the PRACH;

- start to receive the physical channel of type AICH using the parameters given by the IE "AICH info" when associated PRACH is used. If the IE "AICH info" is not included, the UE shall read the corresponding IE in System Information Block type 5 and use that information (FDD only);
- select a Secondary CCPCH as specified in subclause 8.6, and start to receive the physical channel of type PICH associated with the PCH carried by the selected Secondary CCPCH using the parameters given by the IE "PICH info" if the UE is in CELL\_PCH or URA\_PCH state. If the IE "PICH info" is not included, the UE shall read the corresponding IE in System Information Block type 5 and use that information;
- start to monitor its paging occasions on the selected PICH if the UE is in CELL\_PCH or URA\_PCH state;
- start to receive the selected physical channel of type Secondary CCPCH using the parameters given by the IE(s) "Secondary CCPCH info" if the UE is in CELL\_FACH state. If the IE "Secondary CCPCH info" is not included, the UE shall read the corresponding IE(s) in System Information Block type 5 and use that information;
- in 3.84 Mcps TDD: use the IE "TDD open loop power control" as defined in subclause 8.5.7;
- in TDD: if the IE "PDSCH system information" and/or the IE "PUSCH system information" is included, store each of the configurations given there with the associated identity given in the IE "PDSCH Identity" and/or "PUSCH Identity" respectively. For every configuration, for which the IE "SFN Time info" is included, the information shall be stored for the duration given there.

If in idle mode, the UE shall not use the values of the IEs in this system information block.

## 8.2.10 Uplink Physical Channel Control [TDD only]

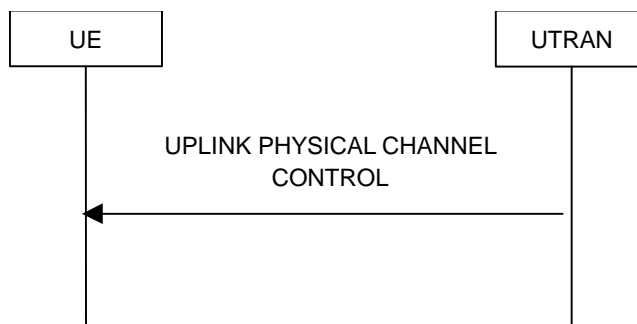


Figure 36: Uplink Physical Channel Control

### 8.2.10.1 General

The uplink physical channel control procedure is used in TDD to control the uplink outer loop power control and timing advance running in the UE.

### 8.2.10.2 Initiation

The UTRAN initiates the procedure by transmitting the UPLINK PHYSICAL CHANNEL CONTROL message on the downlink DCCH using AM or UM RLC in order to update parameters for uplink open loop power control in the UE for one CCTrCH or to inform the UE about a new timing advance value to be applied. Especially, uplink interference information measured by the UTRAN can be included for the uplink timeslots used for the CCTrCH.

### 8.2.10.3 Reception of UPLINK PHYSICAL CHANNEL CONTROL message by the UE

Upon reception of the UPLINK PHYSICAL CHANNEL CONTROL message, the UE shall act upon all received information elements as specified in subclause 8.6.

In 3.84 Mcps TDD if the IEs "Uplink DPCH Power Control Info", "Constant Value", "Alpha" or IE group "list of UL Timeslot Interference" are transmitted, this information shall be taken into account by the UE for uplink open loop power control as specified in subclause 8.5.7.

The UE shall clear the entry for the UPLINK PHYSICAL CHANNEL CONTROL message in the table "Accepted transactions" in the variable TRANSACTIONS and the procedure ends.

### 8.2.10.4 Invalid UPLINK PHYSICAL CHANNEL CONTROL message

If the UE receives a UPLINK PHYSICAL CHANNEL CONTROL message, which contains a protocol error causing the variable PROTOCOL\_ERROR\_REJECT to be set to TRUE according to clause 9, the UE shall perform procedure specific error handling as follows:

- transmit an RRC STATUS message on the uplink DCCH using AM RLC, setting the information elements as specified below:
  - include the IE "Identification of received message"; and
  - set the IE "Received message type" to UPLINK PHYSICAL CHANNEL CONTROL; and
  - set the IE "RRC transaction identifier" to the value of "RRC transaction identifier" in the entry for the UPLINK PHYSICAL CHANNEL CONTROL message in the table "Rejected transactions" in the variable TRANSACTIONS; and
  - clear that entry;
  - include the IE "Protocol error information" with contents set to the value of the variable PROTOCOL\_ERROR\_INFORMATION;

- when the RRC STATUS message has been submitted to lower layers for transmission:
  - resume normal operation as if the invalid UPLINK PHYSICAL CHANNEL CONTROL message has not been received.



## 8.5.7 Open loop power control

For FDD and prior to PRACH or PCPCH transmission the UE shall:

- read the IEs "Primary CPICH DL TX power", "UL interference" and "Constant value" in System Information Block type 6 (or System Information Block type 5, if system information block type 6 is not being broadcast) and System Information Block type 7.
- measure the value for the CPICH\_RSCP
- calculate the power for the first preamble as:

$$\text{Preamble\_Initial\_Power} = \text{Primary CPICH DL TX power} - \text{CPICH\_RSCP} + \text{UL interference} + \text{Constant Value}$$

Where,

Primary CPICH DL TX power shall have the value of IE "Primary CPICH DL TX power",

UL interference shall have the value of IE "UL interference"; and

Constant Value shall have the value of IE "Constant Value".

- as long as the physical layer is configured for PRACH or PCPCH transmission, continuously recalculate the Preamble\_Initial\_Power when any of the broadcast parameters used in the above formula changes and resubmit to the physical layer the new calculated Preamble\_Initial\_Power.

For 3.84Mcps TDD the UE shall:

- if in the IE "Uplink DPCH Power Control" the "CHOICE UL OL PC info" has the value "Broadcast UL OL PC info":
  - acquire Reference Power, Constant Values from System Information Block type 5 and System Information Block type 6, and  $I_{\text{BTS}}$  for all active UL timeslots from System Information Block type 14 on the BCH;
- otherwise:
  - acquire Reference Power, Constant Values and  $I_{\text{BTS}}$  for all active UL timeslots from the IE "Uplink DPCH Power Control".
- for PUSCH and PRACH power control acquire Reference Power, Constant Values and  $I_{\text{BTS}}$  for all active UL timeslots from System Information Block type 5, System Information Block type and System Information Block type 14 on the BCH,

calculate the UL transmit power according to the following formula for the PRACH continuously while the physical channel is active:

$$P_{\text{PRACH}} = L_{\text{PCCPCH}} + I_{\text{BTS}} + \text{RACH Constant value},$$

where, 3dB shall be added to RACH Constant Value for the case where RACH Spreading Factor = 8

- calculate the UL transmit power according to the following formula for the DPCH continuously while the physical channel is active:

$$P_{\text{DPCH}} = \alpha L_{\text{PCCPCH}} + (1-\alpha)L_0 + I_{\text{BTS}} + \text{SIR}_{\text{TARGET}} + \text{DPCH Constant value}$$

- calculate the UL transmit power according to the following formula for the PUSCH continuously while the physical channel is active:

$$P_{\text{USCH}} = \alpha L_{\text{PCCPCH}} + (1-\alpha)L_0 + I_{\text{BTS}} + \text{SIR}_{\text{TARGET}} + \text{USCH Constant value}$$

Where, for all the above equations for TDD the following apply:

- $P_{\text{PRACH}}$ ,  $P_{\text{DPCH}}$ , &  $P_{\text{USCH}}$ : Transmitter power level in dBm,
- $L_{\text{PCCPCH}}$ : Measurement representing path loss in dB (reference transmit power "Primary CCPCH Tx Power" is broadcast on BCH in System Information Block type 5 and System Information Block type 6, or individually signalled to each UE in the IE "Uplink DPCH Power Control").
- $L_0$ : Long term average of path loss in dB
- $I_{\text{BTS}}$ : Interference signal power level at cell's receiver in dBm ("UL Interference" is broadcast on BCH in System Information Block type 14 or individually signalled to each UE in the IE "Uplink DPCH Power Control" for each active uplink timeslot).
- $\alpha$ :  $\alpha$  is a weighting parameter, which represents the quality of path loss measurements.  $\alpha$  may be a function of the time delay between the uplink time slot and the most recent down link PCCPCH time slot.  $\alpha$  is calculated at the UE.
- $\text{SIR}_{\text{TARGET}}$ : Target SNR in dB. This value is individually signalled to UEs in IEs "UL DPCH Power Control Info" and "PUSCH Power Control Info".
- RACH Constant value: This value is broadcast on BCH and shall be read on System Information Block type 5 and System Information Block type 6.
- DPCH Constant value: This value is broadcast on BCH and shall be read on System Information Block type 5 and System Information Block type 6, or individually signalled to each UE in the IE "Uplink DPCH Power Control".
- USCH Constant Value: This value is broadcast on BCH and shall be read on System Information Block type 5 and System Information Block type 6.

For 1.28 Mcps TDD the UE shall:

- calculate the UL transmit power according to the following formula for each UpPCH code transmission:

$$P_{\text{UpPCH}} = L_{\text{PCCPCH}} + \text{PRX}_{\text{UpPCHdes}} + i * P_{\text{WTramp}}$$

- calculate the UL transmit power according to the following formula for each PRACH transmission:

$$P_{\text{PRACH}} = L_{\text{PCCPCH}} + \text{PRX}_{\text{PRACHdes}} + i * P_{\text{WTramp}}$$

- calculate the initial UL transmit power according to the following formula for the PUSCH. Once the UE receives TPC bits relating to the PUSCH then it transitions to closed loop power control. If successive PUSCH resource allocations are contiguous then no return is made to open loop power control at the beginning of the succeeding resource allocation.

$$P_{\text{USCH}} = \text{SIR}_{\text{TARGET}} + L_{\text{PCCPCH}}$$

- calculate the initial UL transmit power according to the following formula for the DPCH. Once the UE receives TPC bits relating to the uplink DPCH then it transitions to closed loop power control.

$$P_{\text{DPCH}} = \text{SIR}_{\text{TARGET}} + L_{\text{PCCPCH}}$$

Where,

- $P_{\text{UpPCH}}$ ,  $P_{\text{PRACH}}$ ,  $P_{\text{DPCH}}$ , &  $P_{\text{USCH}}$ : Transmitter power level in dBm,
- $L_{\text{PCCPCH}}$ : Measurement representing path loss in dB (reference transmit power "Primary CCPCH Tx Power" is broadcast on BCH in System Information Block type 5 and System Information Block type 6, or individually signalled to each UE in the IE "Uplink DPCH Power Control").
- $\text{SIR}_{\text{TARGET}}$ : Target SIR in dB. This value is individually signalled to UEs in IEs "UL DPCH Power Control Info" and "PUSCH Power Control Info".
- $i$  is the number of transmission attempts on UpPCH

- $PRX_{PRACHdes}$ : Desired PRACH RX power at the cell's receiver in dBm signalled to the UE by the network in the FPACH response to the UE's successful SYNC UL transmission.
- $PRX_{UpPCHdes}$ : Desired UpPCH RX power at the cell's receiver in dBm. The value is broadcast on BCH and shall be read on System Information Block type 5 and System Information Block type 6. It can also be signalled directly to the UE in a protocol message triggering a hard handover.
- $Pwr_{ramp}$ : The UE shall increase its transmission power by the value of the IE "Power Ramp step" by every UpPCH transmission

### 8.6.3.7 UL Timing Advance

If the IE "UL Timing Advance Control" is present, the UE shall:

- For the TDD 3.84 Mcps option:
  - if IE "Uplink Timing Advance Control" has the value "disabled":
    - reset timing advance to 0;
    - disable calculated timing advance following handover;
    - in case of handover start uplink transmissions in the target cell without applying timing advance;
  - if IE "Uplink Timing Advance Control" has the value "enabled":
    - evaluate and apply the timing advance value for uplink transmission as indicated in IE "Uplink Timing Advance" at the CFN indicated in the IE "Activation Time";
  - enable UE autonomous timing advance calculation for handover;
  - update uplink timing advance as indicated in IE "Uplink Timing Advance" in advance of the UE autonomous timing advance calculation
- For the TDD 1.28 Mcps option:
  - if IE "Uplink Timing Advance Control" has the value "disabled":
    - transmit on newly assigned physical resources by applying autonomous timing advance calculation procedure as defined in 25.224.
  - if IE "Uplink Timing Advance Control" has the value "enabled"
    - if the IE "Synchronization parameters" is not present the UE shall:
      - start uplink transmissions on resources allocated in the target cell using the autonomously calculated timing correction.
    - if the IE "Synchronization parameters" is present the UE shall:
      - complete a SYNC\_UL/FPACH exchange to obtain a timing correction from FPACH before transmitting on newly assigned resources as specified in 25.224 and apply power settings as specified in 8.5.7.

#### 8.6.3.7a Uplink synchronisation parameters

The UE shall apply uplink synchronisation using the values of the IEs "Uplink synchronisation step size" and "Uplink synchronisation frequency" as specified in 25.224.

### 8.6.6.11 Uplink DPCH power control info

The UE shall:

- in FDD:
  - if the IE "Uplink DPCH power control info" is included:
    - calculate and set an initial uplink transmission power;
    - start inner loop power control as specified in subclause 8.5.3;
    - for the UL inner loop power control:
      - use the parameters specified in the IE.
- in 3.84 Mcps TDD:
  - if the IE "Uplink DPCH power control info" is included:
    - use the parameters specified in the IE for open loop power control as defined in subclause 8.5.7.
- in 1.28 Mcps TDD:
  - if the IE "Uplink DPCH power control info" is included:
    - calculate and set an initial uplink transmission power;
    - start inner loop power control ;
    - for the UL inner loop power control:
      - use the parameter specified in the IE
- both in FDD and TDD;
  - if the IE "Uplink DPCH power control info" is not included:
    - use the current uplink transmission power.

## 10.2.23 PHYSICAL CHANNEL RECONFIGURATION COMPLETE

This message is sent from the UE when a physical channel reconfiguration has been done.

RLC-SAP: AM

Logical channel: DCCH

Direction: UE → UTRAN

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
<b>UE information elements</b>					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Uplink integrity protection activation info	OP		Integrity protection activation info 10.3.3.17		
CHOICE mode	MP				
>FDD				(no data)	
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD	MP				REL-4
>>>>Uplink Timing Advance	OP		Uplink Timing Advance 10.3.6.95		
>>>>1.28 Mcps TDD				(no data)	REL-4
<b>RB Information elements</b>					
COUNT-C activation time	OP		Activation time 10.3.3.1	Used for radio bearers mapped on RLC-TM. Only applicable if the UE is moving to CELL_DCH state due to this procedure	
Radio bearer uplink ciphering activation time info	OP		RB activation time info 10.3.4.13		
RB with PDCP information list	OP	1 to <maxRB allRABs>			
>RB with PDCP information	MP		RB with PDCP information 10.3.4.22		

## 10.2.28 RADIO BEARER RECONFIGURATION COMPLETE

This message is sent from the UE when a RB and signalling link reconfiguration has been done.

RLC-SAP: AM

Logical channel: DCCH

Direction: UE → UTRAN

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
<b>UE information elements</b>					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Uplink integrity protection activation info	OP		Integrity protection activation info 10.3.3.17		
CHOICE mode	MP				
>FDD				(no data)	
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Uplink Timing Advance	OP		Uplink Timing Advance 10.3.6.95		
>>>>1.28 Mcps TDD				(no data)	REL-4
<b>RB Information elements</b>					
COUNT-C activation time	OP		Activation time 10.3.3.1	Used for radio bearers mapped on RLC-TM. Only applicable if the UE is moving to CELL_DCH state due to this procedure	
Radio bearer uplink ciphering activation time info	OP		RB activation time info 10.3.4.13		
RB with PDCP information list	OP	1 to <maxRB allRBs>			
>RB with PDCP information	MP		RB with PDCP information 10.3.4.22		

## 10.2.31 RADIO BEARER RELEASE COMPLETE

This message is sent from the UE when radio bearer release has been completed.

RLC-SAP: AM

Logical channel: DCCH

Direction: UE → UTRAN

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
<b>UE information elements</b>					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16	Integrity check info is included if integrity protection is applied	
Uplink integrity protection activation info	OP		Integrity protection activation info 10.3.3.17		
CHOICE mode	MP				
>FDD				(no data)	
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Uplink Timing Advance	OP		Uplink Timing Advance 10.3.6.95	This information element shall be present in case of handover procedure if timing advance is enabled. Calculated timing advance value for the new cell after handover in a synchronous TDD network	
>>>>1.28 Mcps TDD				(no data)	REL-4
<b>RB Information elements</b>					
COUNT-C activation time	OP		Activation time 10.3.3.1	Used for radio bearers mapped on RLC-TM. Only applicable if the UE is moving to CELL_DCH state due to this procedure	
Radio bearer uplink ciphering activation time info	OP		RB activation time info 10.3.4.13		
RB with PDCP information list	OP	1 to <maxRB allRBs>		This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
>RB with PDCP information	MP		RB with PDCP information 10.3.4.22		



## 10.2.34 RADIO BEARER SETUP COMPLETE

This message is sent by UE to confirm the establishment of the radio bearer.

RLC-SAP: AM

Logical channel: DCCH

Direction: UE → UTRAN

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
<b>UE information elements</b>					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Uplink integrity protection activation info	OP		Integrity protection activation info 10.3.3.17		
CHOICE mode	OP				
>FDD				(no data)	
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Uplink Timing Advance	OP		Uplink Timing Advance 10.3.6.95	This information element shall be present in case of handover procedure if timing advance is enabled. Calculated timing advance value for the new cell after handover in a synchronous TDD network	
>>>>1.28 Mcps TDD				(No data)	REL-4
START	OP		START 10.3.3.38	This information element is not needed for transparent mode RBs	
<b>RB Information elements</b>					
COUNT-C activation time	OP		Activation time 10.3.3.1	Used for radio bearers mapped on RLC-TM. Only applicable if the UE is moving to CELL_DCH state due to this procedure	
Radio bearer uplink ciphering activation time info	OP		RB activation time info 10.3.4.13		
RB with PDCP information list	OP	1 to <maxRB allRBs>		This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
>RB with PDCP information	MP		RB with PDCP information 10.3.4.22		

## 10.2.51 TRANSPORT CHANNEL RECONFIGURATION COMPLETE

This message is sent from the UE when a transport channel reconfiguration has been done.

RLC-SAP: AM

Logical channel: DCCH

Direction: UE → UTRAN

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
<b>UE information elements</b>					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Uplink integrity protection activation info	OP		Integrity protection activation info 10.3.3.17		
CHOICE mode	OP				
>FDD				(no data)	
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Uplink Timing Advance	OP		Uplink Timing Advance 10.3.6.95		
>>>>1.28 Mcps TDD				(no data)	REL-4
<b>RB Information elements</b>					
COUNT-C activation time	OP		Activation time 10.3.3.1	Used for radio bearers mapped on RLC-TM. Only applicable if the UE is moving to CELL_DCH state due to this procedure	
Radio bearer uplink ciphering activation time info	OP		RB activation time info 10.3.4.13		
RB with PDCP information list	OP	1 to <maxRB allRABs>			
>RB with PDCP information	MP		RB with PDCP information 10.3.4.22		

## 10.2.59 UPLINK PHYSICAL CHANNEL CONTROL

NOTE: Only for TDD.

This message is used to transfer uplink physical channel parameters to the UE.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN→UE

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
Message Type	MP		Message Type		
<b>UE information elements</b>					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	OP		Integrity check info 10.3.3.16		
<b>PhyCH information elements</b>					
CCTrCH power control info	OP		CCTrCH power control info 10.3.6.8	Power control information for one CCTrCH	
<u>CHOICE TDD option</u>	<u>MP</u>				<u>REL-4</u>
<u>&gt;3.84Mcps TDD</u>					<u>REL-4</u>
<u>&gt;&gt;Alpha</u>	OP		Alpha 10.3.6.5		
<u>&gt;&gt;Timing Advance Control</u>	OP		UL Timing Advance Control 10.3.6.96		
<u>&gt;&gt;PRACH Constant Value</u>	OP		Constant value 10.3.6.11	Operator controlled PRACH Margin	
<u>&gt;&gt;PUSCH Constant Value</u>	OP		Constant value 10.3.6.11	Operator controlled PUSCH Margin	
<u>&gt;1.28 Mcps TDD</u>					<u>REL-4</u>
<u>&gt;&gt;Uplink synchronisation parameters</u>	<u>MD</u>			Default: Uplink synchronisation step size 1. Uplink synchronisation frequency 1.	<u>REL-4</u>
<u>&gt;&gt;&gt;Uplink synchronisation step size</u>	<u>MP</u>		<u>Integer(1..8)</u>	This parameter specifies the step size to be used for the adjustment of the uplink transmission timing	<u>REL-4</u>
<u>&gt;&gt;&gt;Uplink synchronisation frequency</u>	<u>MP</u>		<u>Integer(1..8)</u>	This parameter specifies the frequency of the adjustment of the uplink transmission timing	<u>REL-4</u>

## 10.3.6.24 Downlink information common for all radio links

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Downlink DPCH info common for all RL	OP		Downlink DPCH info common for all RL 10.3.6.18		
CHOICE mode					
>FDD					
>>DPCH compressed mode info	MD		DPCH compressed mode info 10.3.6.33	Default value is the existing value of DPCH compressed mode information	
>>TX Diversity Mode	MD		TX Diversity Mode 10.3.6.86	Default value is the existing value of TX Diversity mode	
>>SSDT information	OP		SSDT information 10.3.6.77		
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD				(no data)	REL-4
>>>1.28 Mcps TDD					REL-4
>>>>TSTD indicator	MP		TSTD indicator 10.3.6.x		REL-4
Default DPCH Offset Value	OP		Default DPCH Offset Value, 10.3.6.16		

## 10.3.6.37 Individual timeslot info

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Timeslot number	MP		Timeslot number 10.3.6.84	Timeslot within a frame	
TFCI existence	MP		Boolean	TRUE indicates that the TFCI exists. It shall be coded in the first physical channel of this timeslot.	
Midamble Shift and burst type	MP		Midamble shift and burst type 10.3.6.41		
CHOICE TDD option	MP				REL-4
>3.84 Mcps TDD				(no data)	REL-4
>1.28 Mcps TDD					REL-4
>>Modulation	MP		Enumerated(QPSK, 8PSK)		REL-4
>>SS-TPC Symbols	MP		Enumerated(0, 1, 16/SF)	Denotes amount of SS and TPC bits send in this timeslot	REL-4



### 10.3.6.41 Midamble shift and burst type

NOTE: Only for TDD.

This information element indicates burst type and midamble allocation. Three different midamble allocation schemes exist:

- Default midamble: the midamble shift is selected by layer 1 depending on the associated channelisation code (DL and UL)
- Common midamble: the midamble shift is chosen by layer 1 depending on the number of channelisation codes (possible in DL only)
- UE specific midamble: a UE specific midamble is explicitly assigned (DL and UL).

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<u>CHOICE TDD option</u>	<u>MP</u>				<u>REL-4</u>
>3.84 Mcps TDD					<u>REL-4</u>
>>CHOICE Burst Type	<u>MP</u>				
>>>Type 1					
>>>>Midamble Allocation Mode	<u>MP</u>		Enumerated (Default midamble, Common midamble, UE specific midamble)		
>>>>Midamble Shift	<u>CV UE</u>		Integer(0..15)		
>>>>Type 2					
>>>>Midamble Allocation Mode	<u>MP</u>		Enumerated (Default midamble, Common midamble, UE specific midamble)		
>>>>Midamble Shift	<u>CV UE</u>		Integer(0..5)		
>>>>Type 3					
>>>>Midamble Allocation Mode	<u>MP</u>		Enumerated (Default midamble, UE specific midamble)		
>>>>Midamble Shift	<u>CV UE</u>		Integer (0..15)	NOTE: Burst Type 3 is only used in uplink.	
>1.28 Mcps TDD					<u>REL-4</u>
>>Midamble Allocation Mode	<u>MP</u>		Enumerated (Default midamble, UE specific midamble)		<u>REL-4</u>
>>Midamble configuration	<u>MP</u>		Integer(2, 4, 6, 8, 10, 12, 14, 16)	As defined in [24]	<u>REL-4</u>
>>Midamble Shift	<u>CV UE</u>		Integer (0..15)		<u>REL-4</u>

Condition	Explanation
<i>UE</i>	This information element is only sent when the value of the "Midamble Allocation Mode" IE is "UE-specific midamble".

## 10.3.6.49 PICH Info

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE <i>mode</i>	MP				
>FDD					
>>Channelisation code	MP		Integer(0..255)	SF is fixed and equal to 256	
>>Number of PI per frame	MP		Integer (18, 36 72 144)		
>>STTD indicator	MP		STTD Indicator 10.3.6.78		
>TDD					
>>Channelisation code	MD		Enumerated ( (16/1)...(16/16) )	Default value is the channelisation code used by the SCCPCH carrying the associated PCH.	
>>Timeslot number	MD		Timeslot number 10.3.6.84	Default value is the timeslot used by the SCCPCH carrying the associated PCH.	
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Channelisation code	MD		Enumerated ( (16/1)...(16/16) )	Default value is the channelisation code used by the SCCPCH carrying the associated PCH.	
>>>> CHOICE Burst Type	MP				
>>>>>Type 1					
>>>>>>Midamble Shift	MP		Integer(0..15)		
>>>>>>Type 2					
>>>>>>>Midamble Shift	MP		Integer(0..5)		
>>>>1.28 Mcps TDD					REL-4
>>>>>Midamble shift and burst type	MP		Midamble shift and burst type 10.3.6.41		REL-4
>>Repetition period/length	MD		Enumerated((4/2),(8/2), (8/4),(16/2), (16/4), (32/2),(32/4),(64/2),(64/4))	Default value is "(64/2)".	
>>Offset	MP		Integer (0...Repetition period -1)	SFN mod Repetitionperiod = Offset.	
>>Paging indicator length	MD		Integer (4, 8, 16)	Indicates the length of one paging indicator in Bits. Default value is 4.	
>>NGAP	MD		Integer(2, 4, 8)	Number of frames between the last frame carrying PICH for this Paging Occasion and the first frame carrying paging messages for this Paging Occasion. Default value is 4.	

>>NPCH	MD		Integer(1 .. 8)	Number of paging groups. Default value is 2.	
--------	----	--	-----------------	--	--

## 10.3.6.57 Primary CCPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE <i>mode</i>	MP				
>FDD					
>>TX Diversity indicator	MP		Boolean		
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>CHOICE SyncCase	OP				
>>>>>Sync Case 1					
>>>>>>Timeslot	MP		Integer (0...14)	PCCPCH timeslot	
>>>>>>Sync Case 2					
>>>>>>>Timeslot	MP		Integer(0..6)		
>>>>1.28 Mcps TDD					REL-4
>>>>TSTD indicator	MP		TSTD indicator 10.3.6.x		REL-4
>>Cell parameters ID	OP		Cell parameters Id 10.3.6.9	The Cell parameters ID is described in 25.223.	
>>Block STTD indicator	MP		Block STTD indicator 10.3.6.7		

## 10.3.6.58 Primary CCPCH info post

NOTE: Only for TDD

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE TDD option	MP				REL-4
>3.84 Mcps TDD					REL-4
>>CHOICE SyncCase	MP				
>>>Sync Case 1					
>>>>Timeslot	MP		Integer (0...14)	PCCPCH timeslot	
>>>>Sync Case 2					
>>>>>Timeslot	MP		Integer(0..6)		
>1.28 Mcps TDD					REL-4
>>TSTD indicator	MP		TSTD indicator 10.3.6.x		REL-4
Cell parameters ID	MP		Cell parameters Id 10.3.6.9	The Cell parameters ID is described in 25.223.	
Block STTD indicator	MP		Block STTD indicator 10.3.6.7		



## 10.3.6.65 PUSCH power control info

NOTE: Only for TDD.

Interference level measured for a frequency at the UTRAN access point used by UE to set PUSCH output power.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
UL target SIR	MP		Real (-11 .. 20 by step of 0.5)	in dB	
<u>CHOICE TDD option</u>	<u>MP</u>				<u>REL-4</u>
<u>&gt;3.84 Mcps TDD</u>				(no data)	<u>REL-4</u>
<u>&gt;1.28 Mcps TDD</u>					<u>REL-4</u>
<u>&gt;&gt;TPC Step Size</u>	<u>OP</u>		<u>Integer</u> (1, 2, 3)	In dB	<u>REL-4</u>
<u>&gt;&gt;DL CCTrCH TPC List</u>	<u>OP</u>	<u>0..&lt;maxCCTrCH&gt;</u>		<u>DL CCTrCH identities for TPC commands associated with this UL CCTrCH</u>	<u>REL-4</u>
<u>&gt;&gt;&gt;DL TPC TFCS Identity</u>	<u>MP</u>		<u>Transport Format Combination Set Identity</u> 10.3.5.21		<u>REL-4</u>

## 10.3.6.79 TDD open loop power control

This information element contains parameters for open loop power control setting for TDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	<u>Version</u>
Primary CCPCH Tx Power	OP		Primary CCPCH Tx Power 10.3.6.59	For path loss calculation	
<u>CHOICE TDD option</u>	<u>MP</u>				<u>REL-4</u>
<u>&gt;3.84 Mcps TDD</u>					<u>REL-4</u>
<u>&gt;&gt;Alpha</u>	<u>OP</u>		Alpha 10.3.6.5		
<u>&gt;&gt;PRACH Constant Value</u>	<u>OP</u>		Constant Value 10.3.6.11	Operator controlled PRACH Margin	
<u>&gt;&gt;DPCH Constant Value</u>	<u>OP</u>		Constant Value 10.3.6.11	Operator controlled UL DPCH Margin	
<u>&gt;&gt;PUSCH Constant Value</u>	<u>OP</u>		Constant Value 10.3.6.11	Operator controlled PUSCH Margin	
<u>&gt;1.28 Mcps TDD</u>				(no data)	<u>REL-4</u>

## 10.3.6.84 Timeslot number

<b>Information Element/Group name</b>	<b>Need</b>	<b>Multi</b>	<b>Type and reference</b>	<b>Semantics description</b>	<b>Version</b>
<u>CHOICE TDD option</u>	<u>MP</u>				<u>REL-4</u>
<u>&gt;3.84 Mcps TDD</u>					<u>REL-4</u>
<u>&gt;&gt;Timeslot number</u>	<u>MP</u>		<u>Integer(0..14)</u>	Timeslot within a frame	
<u>&gt;1.28 Mcps TDD</u>					<u>REL-4</u>
<u>&gt;&gt;Timeslot number</u>	<u>MP</u>		<u>Integer(0..6)</u>	Timeslot within a subframe	<u>REL-4</u>

## 10.3.6.x TSTD indicator

NOTE: Only for 1.28Mcps TDD.

<b>Information Element/Group name</b>	<b>Need</b>	<b>Multi</b>	<b>Type and reference</b>	<b>Semantics description</b>	<b>Version</b>
<u>TSTD indicator</u>	<u>MD</u>		<u>Boolean</u>	Default value is <u>"TRUE"</u>	<u>REL-4</u>

## 10.3.6.91 Uplink DPCH power control info

Parameters used by UE to set DPCH initial output power and to use for closed-loop power control in FDD and 1.28Mcps TDD and parameters for uplink open loop power control in 3.84Mcps TDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE <i>mode</i>	MP				
>FDD					
>>DPCCH Power offset	MP		Integer(-164,...-6 by step of 2)	In dB	
>>PC Preamble	MP		Integer (0, 15)		
>>Power Control Algorithm	MP		Enumerated (algorithm 1, algorithm 2)	Specifies algorithm to be used by UE to interpret TPC commands	
>>TPC step size	CV algo		Integer (1, 2)	In dB	
>TDD					
>>UL target SIR	MP		Real (-11 .. 20 by step of 0.5dB)	In dB	
>>CHOICE UL OL PC info	MP				
>>>Broadcast UL OL PC info			Null	No data	
>>>Individually Signalled	OP				
>>>>CHOICE TDD option	MP				REL-4
>>>>>3.84Mcps TDD					REL-4
>>>>>>Individual timeslot interference info	MP	1 to <maxTS>			
>>>>>>>Individual timeslot interference	MP		Individual timeslot interference 10.3.6.38		
>>>>>>>DPCH Constant Value	OP		Constant Value 10.3.6.11	Quality Margin	
>>>>>>>1.28 Mcps TDD					REL-4
>>>>>>>TPC step size	MP		Integer(1,2,3)		REL-4
>>>>>>>>Primary CCPCH Tx Power	OP		Primary CCPCH Tx Power 10.3.6.59	For Pathloss Calculation	

Condition	Explanation
<i>algo</i>	The IE is mandatory if "Power Control Algorithm" is set to "algorithm 1", otherwise the IE is not needed

## 10.3.6.92 Uplink DPCH power control info Post

Parameters used by UE to set DPCH initial output power and to use for closed-loop power control.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE <i>mode</i>	MP				
>FDD					
>>Power Control Algorithm	MP		Enumerated (algorithm 1, algorithm 2)	Specifies algorithm to be used by UE to interpret TPC commands	
>>TPC step size	CV algo		Integer (1, 2)	In dB	
>TDD					
>>UL target SIR	MP		Real (-11 .. 20 by step of 0.5dB)	In dB	
>>>Choice TDD option	MP				REL-4
>>>>3.84Mcps TDD					REL-4
>>>>UL Timeslot Interference	MP		UL Interference 10.3.6.87		
>>>>1.28Mcps TDD				(no data)	REL-4

Condition	Explanation
<i>algo</i>	The IE is mandatory if "Power Control Algorithm" is set to "algorithm 1", otherwise the IE is not needed

### 10.3.6.93 Uplink DPCH power control info Pre

Parameters used by UE to set DPCH initial output power and to use for closed-loop power control in FDD and parameters for uplink open loop power control in 3.84 Mcps TDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE <i>mode</i>	MP				
>FDD					
>>DPCCH Power offset	MP		Integer(-164..-6 by step of 2)	In dB	
>>PC Preamble	MP		Integer (0, 15)		
>TDD					
>>Choice TDD option	MP				REL-4
>>>3.84Mcps TDD					REL-4
>>>>DPCH Constant Value	MP		Constant Value 10.3.6.11	Quality Margin	
>>>>1.28Mcps TDD				(no data)	REL-4

Condition	Explanation
<i>Algo</i>	The IE is mandatory if "Power Control Algorithm" is set to "algorithm 1", otherwise the IE is not needed

### 10.3.6.95 Uplink Timing Advance

NOTE: Only for 3.84 Mcps TDD.

<b>Information Element/Group name</b>	<b>Need</b>	<b>Multi</b>	<b>Type and reference</b>	<b>Semantics description</b>	<b><u>Version</u></b>
UL Timing Advance	MP		Integer (0..63)	Absolute timing advance value to be used to avoid large delay spread at the NodeB	

### 10.3.6.96 Uplink Timing Advance Control

NOTE: Only for TDD

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE Timing Advance	MP				
>Disabled			Null	Indicates that no timing advance is applied	
>Enabled					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>UL Timing Advance	MD		Uplink Timing Advance 10.3.6.95	Absolute timing advance value to be used to avoid large delay spread at the NodeB. Default value is the existing value for uplink timing advance.	
>>>>Activation Time	OP		Activation Time 10.3.3.1	Frame number timing advance is to be applied. This IE is required when a new UL Timing Advance adjustment is specified and Activation Time is not otherwise specified in the RRC message.	
>>1.28 Mcps TDD				(no data)	REL-4
>>>Uplink synchronisation parameters	MD			Default: Uplink synchronisation parameters is 1. Uplink synchronisation frequency is 1.	REL-4
>>>>Uplink synchronisation step size	MP		Integer(1..8)	This parameter specifies the step size to be used for the adjustment of the uplink transmission timing	REL-4
>>>>Uplink synchronisation frequency	MP		Integer(1..8)	This parameter specifies the frequency of the adjustment of the uplink transmission timing	REL-4
>>>Synchronization parameters	OP				
>>>>SYNC_UL codes bitmap	MD		Bitstring(8)	00000001 indicates code 0 can be used, 10000001 indicates that codes 0 and 7 can be used. Default: all SYNC_UL codes can be used	REL-4
>>>>FPACH info	MP		FPACH info 10.3.6.?		REL-4
>>>>SYNC_UL procedure	MD			Default is: Max SYNC_UL Transmission is 2. Power Ramping Step is 2.	REL-4

<u>&gt;&gt;&gt;&gt;Max SYNC UL Transmissions</u>	<u>MP</u>		<u>Integer(1,2,4,8)</u>	<u>Maximum numbers of SYNC UL transmissions in a power ramping sequence.</u>	<u>REL-4</u>
<u>&gt;&gt;&gt;&gt;Power Ramping Step</u>	<u>MP</u>		<u>Integer(0,1,2,3)</u>	<u>In dB</u>	<u>REL-4</u>

### 10.3.8.15 Rplmn information

Contains information to provide faster RPLMN selection in the UE.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
GSM BA Range	OP	1 to maxNumGSMFreqRanges		GSM BA Range	
> GSM Lower Range (UARFCN)	MP		Integer(0..16383)	Lower bound for range of GSM BA freqs	
> GSM Upper Range (UARFCN)	MP		Integer(0..16383)	Upper bound for range of GSM BA freqs	
FDD UMTS Frequency list	OP	1 to maxNumFDDFreqs			
> UARFCN (Nlow)	MP		Integer(0..16383)	3GPP TS 25.101	
> UARFCN (Nupper)	OP		Integer(0..16383)	3GPP TS 25.101 This IE is only needed when the FDD frequency list is specifying a range.	
<u>3.84 Mcps TDD UMTS Frequency list</u>	OP	1 to maxNumTDDFreqs			
> UARFCN	MP		Integer(0..16383)	3GPP TS 25.102	
<u>1.28 Mcps TDD UMTS Frequency list</u>	<u>OP</u>	<u>1 to maxNumTDDFreqs</u>			<u>REL-4</u>
<u>&gt; UARFCN</u>	<u>MP</u>		<u>Integer(0..16383)</u>	<u>3GPP TS 25.102</u>	<u>REL-4</u>
CDMA2000 UMTS Frequency list	OP	1 to maxNumCDMA2000Freqs			
> BAND_CLASS	MP		Bitstring(5 bits)	TIA/EIA/IS-2000	
> CDMA_FREQ	MP		Bitstring (11 bits)	TIA/EIA/IS-2000	

### 10.3.10 Multiplicity values and type constraint values

The following table includes constants that are either used as multi bounds (name starting with "max") or as high or low value in a type specification (name starting with "lo" or "hi"). Constants are specified only for values appearing more than once in the RRC specification. In case a constant is related to one or more other constants, an expression is included in the "value" column instead of the actual value.



Constant	Explanation	Value
<b>CN information</b>		
MaxCNdomains	Maximum number of CN domains	4
<b>UTRAN mobility information</b>		
MaxRAT	Maximum number of Radio Access Technologies	maxOtherRAT + 1
MaxOtherRAT	Maximum number of other Radio Access Technologies	15
MaxURA	Maximum number of URAs in a cell	8
MaxInterSysMessages	Maximum number of Inter System Messages	4
MaxRABsetup	Maximum number of RABs to be established	16
<b>UE information</b>		
Maxtransactions	Maximum number of parallel RRC transactions in downlink	25
MaxPDCPalgoType	Maximum number of PDCP algorithm types	8
MaxDRACclasses	Maximum number of UE classes which would require different DRAC parameters	8
MaxFrequencybands	Maximum number of frequency bands supported by the UE as defined in 25.102	4
MaxPage1	Number of UEs paged in the Paging Type 1 message	8
MaxSystemCapability	Maximum number of system specific capabilities that can be requested in one message.	16
<b>RB information</b>		
MaxPredefConfig	Maximum number of predefined configurations	16
MaxRB	Maximum number of RBs	32
MaxSRBsetup	Maximum number of signalling RBs to be established	8
MaxRBperRAB	Maximum number of RBs per RAB	8
MaxRBallRABs	Maximum number of non signalling RBs	27
MaxRBMuxOptions	Maximum number of RB multiplexing options	8
MaxLoCHperRLC	Maximum number of logical channels per RLC entity	2
<b>TrCH information</b>		
MaxTrCH	Maximum number of transport channels used in one direction (UL or DL)	32
MaxTrCHpreconf	Maximum number of preconfigured Transport channels, per direction	16
MaxCCTrCH	Maximum number of CCTrCHs	8
MaxTF	Maximum number of different transport formats that can be included in the Transport format set for one transport channel	32
MaxTF-CPCH	Maximum number of TFs in a CPCH set	16
MaxTFC	Maximum number of Transport Format Combinations	1024
MaxTFCl-1-Combs	Maximum number of TFCl (field 1) combinations	512
MaxTFCl-2-Combs	Maximum number of TFCl (field 2) combinations	512
MaxCPCHsets	Maximum number of CPCH sets per cell	16
MaxSIBperMsg	Maximum number of complete system information blocks per SYSTEM INFORMATION message	16
MaxSIB	Maximum number of references to other system information blocks.	32
MaxSIB-FACH	Maximum number of references to system information blocks on the FACH	8
<b>PhyCH information</b>		
MaxSubCh	Maximum number of sub-channels on PRACH	12
MaxPCPCH-APsubCH	Maximum number of available sub-channels for AP signature on PCPCH	12
MaxPCPCH-CDsubCH	Maximum number of available sub-channels for CD signature on PCPCH	12
MaxSig	Maximum number of signatures on PRACH	16
MaxPCPCH-APsig	Maximum number of available signatures for AP on PCPCH	16
MaxPCPCH-CDsig	Maximum number of available signatures for CD on PCPCH	16
MaxAC	Maximum number of access classes	16
MaxASC	Maximum number of access service classes	8
MaxASCmap	Maximum number of access class to access service classes mappings	7
MaxASCpersist	Maximum number of access service classes for which persistence scaling factors are specified	6
MaxPRACH	Maximum number of PRACHs in a cell	16

MaxFACHPCH	Maximum number of FACHs and PCHs mapped onto one secondary CCPCHs	8
MaxRL	Maximum number of radio links	8
MaxSCCPCH	Maximum number of secondary CCPCHs per cell	16
MaxDPDCH-UL	Maximum number of DPDCHs per cell	6
MaxDPCH-DLchan	Maximum number of channelisation codes used for DL DPCH	8
MaxDPCHcodesPerTS	Maximum number of codes for one timeslots (TDD)	16
MaxPUSCH	Maximum number of PUSCHs	(8)
MaxPDSCH	Maximum number of PDSCHs	8
MaxPDSCHcodes	Maximum number of codes for PDSCH	16
MaxPDSCH-TFCIgroups	Maximum number of TFCI groups for PDSCH	256
MaxPDSCHcodeGroups	Maximum number of code groups for PDSCH	256
MaxPCPCHs	Maximum number of PCPCH channels in a CPCH Set	64
MaxPCPCH-SF	Maximum number of available SFs on PCPCH	7
MaxTS	Maximum number of timeslots used in one direction (UL or DL)	146 (1.28 Mcps TDD) 14 (3.84 Mcps TDD)
HiPUSCHIdentities	Maximum number of PDSCH Identities	64
HiPDSCHIdentities	Maximum number of PDSCH Identities	64
<b>Measurement information</b>		
MaxTGPS	Maximum number of transmission gap pattern sequences	6
MaxAdditionalMeas	Maximum number of additional measurements for a given measurement identity	4
MaxMeasEvent	Maximum number of events that can be listed in measurement reporting criteria	8
MaxMeasParEvent	Maximum number of measurement parameters (e.g. thresholds) per event	2
MaxMeasIntervals	Maximum number of intervals that define the mapping function between the measurements for the cell quality Q of a cell and the representing quality value	1
MaxCellMeas	Maximum number of cells to measure	32
MaxReportedGSMCells	Maximum number of GSM cells to be reported	6
MaxFreq	Maximum number of frequencies to measure	8
MaxSat	Maximum number of satellites to measure	16
HiRM	Maximum number that could be set as rate matching attribute for a transport channel	256
<b>Frequency information</b>		
MaxFDDFreqList	Maximum number of FDD carrier frequencies to be stored in USIM	4
MaxTDDFreqList	Maximum number of TDD carrier frequencies to be stored in USIM	4
MaxFDDFreqCellList	Maximum number of neighbouring FDD cells to be stored in USIM	32
MaxTDDFreqCellList	Maximum number of neighbouring TDD cells to be stored in USIM	32
MaxGSMCellList	Maximum number of GSM cells to be stored in USIM	32
<b>Other information</b>		
MaxNumGSMFreqRanges	Maximum number of GSM Frequency Ranges to store	32
MaxNumFDDFreqs	Maximum number of FDD centre frequencies to store	8
MaxNumTDDFreqs	Maximum number of TDD centre frequencies to store	8
MaxNumCDMA2000Freqs	Maximum number of CDMA2000 centre frequencies to store	8

## A.3 Frequency information

Neighbour cell list.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
FDD cell list	OP	<1 to maxFDDFreqList>			
>UARFCN uplink (Nu)	OP		Integer(0..16383)	[25.101] If IE not present, default duplex distance of 190 MHz shall be used.	
>UARFCN downlink (Nd)	MP		Integer(0 .. 16383)	[25.101]	
> Primary scrambling code	OP	<1 to maxFDDFreqCell List>	Primary CPICH info 10.3.6.60		
<u>3.84 Mcps TDD cell list</u>	OP	<1 to maxTDDFreqList>			
>UARFCN (Nt)	MP		Integer(0 .. 16383)	[25.102]	
> Cell parameters ID	OP	<1 to maxTDDFreqCell List>	Integer (0..127)	The Cell parameters ID is described in 25.223.	
<u>1.28 Mcps TDD cell list</u>	<u>OP</u>	<u>&lt;1 to maxTDDFreqList&gt;</u>			<u>REL-4</u>
<u>&gt;UARFCN (Nt)</u>	<u>MP</u>		<u>Integer(0 .. 16383)</u>	<u>[25.102]</u>	<u>REL-4</u>
<u>&gt; Cell parameters ID</u>	<u>OP</u>	<u>&lt;1 to maxTDDFreqCell List&gt;</u>	<u>Integer (0..127)</u>	<u>The Cell parameters ID is described in 25.223.</u>	<u>REL-4</u>
GSM Neighbour cell list	OP				
>GSM neighbour cell info	MP	<1 to maxGSMCellList>			
>> BSIC	MP				
>> BCCH ARFCN	MP				

## A.4 Multiplicity values and type constraint values

Constant	Explanation	Value
<b>Ciphering information</b>		
MaxCNDomains	Maximum number of CN domains	4
<b>Frequency information</b>		
MaxFDDFreqList	Maximum number of FDD carrier frequencies to be stored in USIM	4
MaxTDDFreqList	Maximum number of TDD carrier frequencies to be stored in USIM	4
MaxFDDFreqCellList	Maximum number of neighbouring FDD cells on one carrier to be stored in USIM	32
MaxTDDFreqCellList	Maximum number of neighbouring TDD cells on one carrier to be stored in USIM	32
MaxGSMCellList	Maximum number of GSM cells to be stored in USIM	32

# 11 Message and Information element abstract syntax (with ASN.1)

This clause contains definitions for RRC PDUs and IEs using a subset of ASN.1 as specified in TR 25.921. PDU and IE definitions are grouped into separate ASN.1 modules.

## 11.1 General message structure

```
Class-definitions DEFINITIONS AUTOMATIC TAGS ::=
```

```
BEGIN
```

```
IMPORTS
```

```

    ActiveSetUpdate-r3,
    ActiveSetUpdateComplete,
    ActiveSetUpdateFailure,
    AssistanceDataDelivery-r3,
    CellChangeOrderFromUTRAN-r3,
    CellChangeFailureFromUTRAN,
    CellUpdate,
    CellUpdateConfirm-CCCH-r3,
    CellUpdateConfirm-CCCH-r4,
    CellUpdateConfirm-r3,
    CellUpdateConfirm-r4,
    CounterCheck-r3,
    CounterCheck-r4,
    CounterCheckResponse,
    DownlinkDirectTransfer-r3,
    HandoverToUTRANComplete,
    InitialDirectTransfer,
    HandoverFromUTRANCommand-GSM-r3,
    HandoverFromUTRANCommand-CDMA2000-r3,
    HandoverFromUTRANFailure,
    MeasurementControl-r3,
    MeasurementControl-r4,
    MeasurementControlFailure,
    MeasurementReport,
    PagingType1,
    PagingType2,
    PhysicalChannelReconfiguration-r3,
    PhysicalChannelReconfiguration-r4,
    PhysicalChannelReconfigurationComplete,
    PhysicalChannelReconfigurationFailure,
    PhysicalSharedChannelAllocation-r3,
    PhysicalSharedChannelAllocation-r4,
    PUSCHCapacityRequest,
    RadioBearerReconfiguration-r3,
    RadioBearerReconfiguration-r4,
    RadioBearerReconfigurationComplete,
    RadioBearerReconfigurationFailure,
    RadioBearerRelease-r3,
    RadioBearerRelease-r4,
    RadioBearerReleaseComplete,
    RadioBearerReleaseFailure,
    RadioBearerSetup-r3,
    RadioBearerSetup-r4,
    RadioBearerSetupComplete,
    RadioBearerSetupFailure,
    RRCConnectionReject-r3,
    RRCConnectionRelease-r3,
    RRCConnectionRelease-r4,
    RRCConnectionRelease-CCCH-r3,
    RRCConnectionRelease-CCCH-r4,
    RRCConnectionReleaseComplete,
    RRCConnectionRequest,
    RRCConnectionSetup-r3,
    RRCConnectionSetup-r4,
    RRCConnectionSetupComplete,
    RRCStatus,
    SecurityModeCommand-r3,
    SecurityModeComplete,
    SecurityModeFailure,
    SignallingConnectionRelease-r3,
    SignallingConnectionReleaseRequest,

```

```

SystemInformation-BCH,
SystemInformation-FACH,
SystemInformationChangeIndication,
TransportChannelReconfiguration-r3,
TransportChannelReconfiguration-r4,
TransportChannelReconfigurationComplete,
TransportChannelReconfigurationFailure,
TransportFormatCombinationControl,
TransportFormatCombinationControlFailure,
UECapabilityEnquiry-r3,
UECapabilityInformation,
UECapabilityInformationConfirm-r3,
UplinkDirectTransfer,
UplinkPhysicalChannelControl-r3,
UplinkPhysicalChannelControl-r4,
URAUpdate,
URAUpdateConfirm-r3,
URAUpdateConfirm-CCCH-r3,
UTRANMobilityInformation,
UTRANMobilityInformationConfirm,
UTRANMobilityInformationFailure
FROM PDU-definitions

-- User Equipment IEs :
IntegrityCheckInfo
FROM InformationElements;

--*****
--
-- Downlink DCCH messages
--
--*****

DL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  DL-DCCH-MessageType
}

DL-DCCH-MessageType ::= CHOICE {
    activeSetUpdate                ActiveSetUpdate-r3,
    assistanceDataDelivery          AssistanceDataDelivery-r3,
    cellChangeOrderFromUTRAN       CellChangeOrderFromUTRAN-r3,
    cellUpdateConfirm               CellUpdateConfirm-r3,
    counterCheck                    CounterCheck-r3,
    downlinkDirectTransfer          DownlinkDirectTransfer-r3,
    handoverFromUTRANCommand-GSM    HandoverFromUTRANCommand-GSM-r3,
    handoverFromUTRANCommand-CDMA2000 HandoverFromUTRANCommand-CDMA2000-r3,
    measurementControl              MeasurementControl-r3,
    pagingType2                     PagingType2,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
    physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
    radioBearerReconfiguration      RadioBearerReconfiguration-r3,
    radioBearerRelease              RadioBearerRelease-r3,
    radioBearerSetup                RadioBearerSetup-r3,
    rrcConnectionRelease            RRCConnectionRelease-r3,
    securityModeCommand             SecurityModeCommand-r3,
    signallingConnectionRelease     SignallingConnectionRelease-r3,
    transportChannelReconfiguration TransportChannelReconfiguration-r3,
    transportFormatCombinationControl TransportFormatCombinationControl,
    ueCapabilityEnquiry             UECapabilityEnquiry-r3,
    ueCapabilityInformationConfirm   UECapabilityInformationConfirm-r3,
    uplinkPhysicalChannelControl     UplinkPhysicalChannelControl-r3,
    uraUpdateConfirm                URAUpdateConfirm-r3,
    utranMobilityInformation         UTRANMobilityInformation,
    extension                        NULL
}

DL-DCCH-MessageType-r4 ::= CHOICE {
    activeSetUpdate                ActiveSetUpdate-r3,
    assistanceDataDelivery          AssistanceDataDelivery-r3,
    cellChangeOrderFromUTRAN       CellChangeOrderFromUTRAN-r3,
    cellUpdateConfirm               CellUpdateConfirm-r4,
    counterCheck                    CounterCheck-r3,
    downlinkDirectTransfer          DownlinkDirectTransfer-r3,
    handoverFromUTRANCommand-GSM    HandoverFromUTRANCommand-GSM-r3,
    handoverFromUTRANCommand-CDMA2000 HandoverFromUTRANCommand-CDMA2000-r3,
    measurementControl              MeasurementControl-r4,
    pagingType2                     PagingType2,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r4,
    physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r4,
    radioBearerReconfiguration      RadioBearerReconfiguration-r4,
    radioBearerRelease              RadioBearerRelease-r4,
    radioBearerSetup                RadioBearerSetup-r4,

```

rrcConnectionRelease	RRCCConnectionRelease-r4,
securityModeCommand	SecurityModeCommand-r3,
signallingConnectionRelease	SignallingConnectionRelease-r3,
transportChannelReconfiguration	TransportChannelReconfiguration-r4,
transportFormatCombinationControl	TransportFormatCombinationControl,
ueCapabilityEnquiry	UECapabilityEnquiry-r3,
ueCapabilityInformationConfirm	UECapabilityInformationConfirm-r3,
uplinkPhysicalChannelControl	UplinkPhysicalChannelControl-r4,
uraUpdateConfirm	URAUpdateConfirm-r3,
utranMobilityInformation	UTRANMobilityInformation,
extension	NULL

```

}
--*****
--
-- Uplink DCCH messages
--
--*****

UL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  UL-DCCH-MessageType
}

UL-DCCH-MessageType ::= CHOICE {
    activeSetUpdateComplete      ActiveSetUpdateComplete,
    activeSetUpdateFailure      ActiveSetUpdateFailure,
    cellChangeFailureFromUTRAN  CellChangeFailureFromUTRAN,
    counterCheckResponse        CounterCheckResponse,
    handoverToUTRANComplete     HandoverToUTRANComplete,
    initialDirectTransfer       InitialDirectTransfer,
    handoverFromUTRANFailure    HandoverFromUTRANFailure,
    measurementControlFailure   MeasurementControlFailure,
    measurementReport           MeasurementReport,
    physicalChannelReconfigurationComplete PhysicalChannelReconfigurationComplete,
    physicalChannelReconfigurationFailure PhysicalChannelReconfigurationFailure,
    radioBearerReconfigurationComplete RadioBearerReconfigurationComplete,
    radioBearerReconfigurationFailure RadioBearerReconfigurationFailure,
    radioBearerReleaseComplete  RadioBearerReleaseComplete,
    radioBearerReleaseFailure   RadioBearerReleaseFailure,
    radioBearerSetupComplete    RadioBearerSetupComplete,
    radioBearerSetupFailure     RadioBearerSetupFailure,
    rrcConnectionReleaseComplete RRCCConnectionReleaseComplete,
    rrcConnectionSetupComplete  RRCCConnectionSetupComplete,
    rrcStatus                    RRCStatus,
    securityModeComplete        SecurityModeComplete,
    securityModeFailure         SecurityModeFailure,
    signallingConnectionReleaseRequest SignallingConnectionReleaseRequest,
    transportChannelReconfigurationComplete TransportChannelReconfigurationComplete,
    transportChannelReconfigurationFailure TransportChannelReconfigurationFailure,
    transportFormatCombinationControlFailure TransportFormatCombinationControlFailure,
    ueCapabilityInformation      UECapabilityInformation,
    uplinkDirectTransfer         UplinkDirectTransfer,
    utranMobilityInformationConfirm UTRANMobilityInformationConfirm,
    utranMobilityInformationFailure UTRANMobilityInformationFailure,
    extension                    NULL
}

--*****
--
-- Downlink CCCH messages
--
--*****

DL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  DL-CCCH-MessageType
}

DL-CCCH-MessageType ::= CHOICE {
    cellUpdateConfirm          CellUpdateConfirm-CCCH-r3,
    rrcConnectionReject        RRCCConnectionReject-r3,
    rrcConnectionRelease       RRCCConnectionRelease-CCCH-r3,
    rrcConnectionSetup         RRCCConnectionSetup-r3,
    uraUpdateConfirm           URAUpdateConfirm-CCCH-r3,
    extension                  NULL
}

```

```

DL-CCCH-MessageType-r4 ::= CHOICE {
    cellUpdateConfirm           CellUpdateConfirm-CCCH-r4,
    rrcConnectionReject        RRCCConnectionReject-r3,
    rrcConnectionRelease       RRCCConnectionRelease-CCCH-r4,
    rrcConnectionSetup         RRCCConnectionSetup-r4,
    uraUpdateConfirm           URAUpdateConfirm-CCCH-r3,
    extension                   NULL
}

--*****
--
-- Uplink CCCH messages
--
--*****

UL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo          IntegrityCheckInfo          OPTIONAL,
    message                     UL-CCCH-MessageType
}

UL-CCCH-MessageType ::= CHOICE {
    cellUpdate                  CellUpdate,
    rrcConnectionRequest        RRCCConnectionRequest,
    uraUpdate                   URAUpdate,
    extension                   NULL
}

--*****
--
-- PCCH messages
--
--*****

PCCH-Message ::= SEQUENCE {
    message                     PCCH-MessageType
}

PCCH-MessageType ::= CHOICE {
    pagingType1                 PagingType1,
    extension                   NULL
}

--*****
--
-- Downlink SHCCH messages
--
--*****

DL-SHCCH-Message ::= SEQUENCE {
    message                     DL-SHCCH-MessageType
}

DL-SHCCH-MessageType ::= CHOICE {
    physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
    extension                   NULL
}

DL-SHCCH-MessageType-r4 ::= CHOICE {
    physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r4,
    extension                   NULL
}

--*****
--
-- Uplink SHCCH messages
--
--*****

UL-SHCCH-Message ::= SEQUENCE {
    message                     UL-SHCCH-MessageType
}

UL-SHCCH-MessageType ::= CHOICE {
    puschCapacityRequest        PUSCHCapacityRequest,
    extension                   NULL
}

--*****
--

```

```

-- BCCH messages sent on FACH
--
--*****
BCCH-FACH-Message ::= SEQUENCE {
    message          BCCH-FACH-MessageType
}

BCCH-FACH-MessageType ::= CHOICE {
    systemInformation          SystemInformation-FACH,
    systemInformationChangeIndication SystemInformationChangeIndication,
    extension                  NULL
}

--*****
--
-- BCCH messages sent on BCH
--
--*****

BCCH-BCH-Message ::= SEQUENCE {
    message          SystemInformation-BCH
}

END

```

## 11.2 PDU definitions

```

--*****
--
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--
--*****

PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--*****
--
-- IE parameter types from other modules
--
--*****

IMPORTS

-- Core Network IEs :
    CN-DomainIdentity,
    CN-InformationInfo,
    NAS-Message,
    PagingRecordTypeID,
-- UTRAN Mobility IEs :
    URA-Identity,
-- User Equipment IEs :
    ActivationTime,
    C-RNTI,
    CapabilityUpdateRequirement,
    CellUpdateCause,
    CipheringAlgorithm,
    CipheringModeInfo,
    EstablishmentCause,
    FailureCauseWithProtErr,
    FailureCauseWithProtErrTrId,
    InitialUE-Identity,
    IntegrityProtActivationInfo,
    IntegrityProtectionModeInfo,
    N-308,
    PagingCause,
    PagingRecordList,
    ProtocolErrorIndicator,
    ProtocolErrorIndicatorWithMoreInfo,
    Rb-timer-indicator,
    Re-EstablishmentTimer,
    RedirectionInfo,
    RejectionCause,
    ReleaseCause,
    RRC-StateIndicator,
    RRC-TransactionIdentifier,

```



```

SecurityCapability,
START-Value,
STARTList,
U-RNTI,
U-RNTI-Short,
UE-RadioAccessCapability,
UE-ConnTimersAndConstants,
URA-UpdateCause,
UTRAN-DRX-CycleLengthCoefficient,
WaitTime,
-- Radio Bearer IEs :
  PredefinedConfigIdentity,
  RAB-Info,
  RAB-Info-Post,
  RAB-InformationList,
  RAB-InformationReconfigList,
  RAB-InformationSetupList,
  RB-ActivationTimeInfo,
  RB-ActivationTimeInfoList,
  RB-COUNT-C-InformationList,
  RB-COUNT-C-MSB-InformationList,
  RB-IdentityList,
  RB-InformationAffectedList,
  RB-InformationReconfigList,
  RB-InformationReleaseList,
  RB-InformationSetupList,
  RB-WithPDCP-InfoList,
  SRB-InformationSetupList,
  SRB-InformationSetupList2,
-- Transport Channel IEs:
  CPCH-SetID,
  DL-AddReconfTransChInfo2List,
  DL-AddReconfTransChInfoList,
  DL-CommonTransChInfo,
  DL-DeletedTransChInfoList,
  DRAC-StaticInformationList,
  TFC-Subset,
  TFCS-Identity,
  UL-AddReconfTransChInfoList,
  UL-CommonTransChInfo,
  UL-DeletedTransChInfoList,
-- Physical Channel IEs :
  AllocationPeriodInfo,
  Alpha,
  CCTrCH-PowerControlInfo,
  CCTrCH-PowerControlInfo-r4,
  ConstantValue,
  CPCH-SetInfo,
  DL-CommonInformation,
  DL-CommonInformation-r4,
  DL-CommonInformationPost,
  DL-InformationPerRL,
  DL-InformationPerRL-List,
  DL-InformationPerRL-List-r4,
  DL-InformationPerRL-ListPostFDD,
  DL-InformationPerRL-PostTDD,
  DL-InformationPerRL-PostTDD-LCR,
  DL-DPCH-PowerControlInfo,
  DL-PDSCH-Information,
  DPCH-CompressedModeStatusInfo,
  FrequencyInfo,
  FrequencyInfoFDD,
  FrequencyInfoTDD,
  IndividualTS-InterferenceList,
  MaxAllowedUL-TX-Power,
  PDSCH-CapacityAllocationInfo,
  PDSCH-CapacityAllocationInfo-r4,
  PDSCH-Identity,
  PDSCH-Info,
  PDSCH-Info-r4,
  PRACH-RACH-Info,
  PrimaryCCPCH-TX-Power,
  PUSCH-CapacityAllocationInfo,
  PUSCH-CapacityAllocationInfo-r4,
  PUSCH-Identity,
  RL-AdditionInformationList,
  RL-RemovalInformationList,
  SSDT-Information,
  TFC-ControlDuration,
  TimeslotList,
  TimeslotList-r4,
  TX-DiversityMode,
  UL-ChannelRequirement,

```

```

|   UL-ChannelRequirement-r4,
|   UL-ChannelRequirementWithCPCH-SetID,
|   UL-ChannelRequirementWithCPCH-SetID-r4,
|   UL-DPCH-Info,
|   UL-DPCH-Info-r4,
|   UL-DPCH-InfoPostFDD,
|   UL-DPCH-InfoPostTDD,
|   UL-DPCH-InfoPostTDD-LCR,
|   UL-SynchronisationParameters,
|   UL-TimingAdvance,
|   UL-TimingAdvanceControl,
|   UL-TimingAdvanceControl-r4,
-- Measurement IEs :
  AdditionalMeasurementID-List,
  EventResults,
|   InterFreqEventResults-LCR,
|   InterRAT-TargetCellDescription,
  MeasuredResults,
  MeasuredResultsList,
  MeasuredResultsOnRACH,
  MeasurementCommand,
|   MeasurementCommand-r4,
  MeasurementIdentity,
  MeasurementReportingMode,
  PrimaryCCPCH-RSCP,
  TimeslotListWithISCP,
  TrafficVolumeMeasuredResultsList,
  UP-GPS-AssistanceData,
  UP-OTDOA-AssistanceData,
-- Other IEs :
  BCCH-ModificationInfo,
  CDMA2000-MessageList,
  GSM-MessageList,
  InterRAT-ChangeFailureCause,
  InterRAT-HO-Failure,
  InterRAT-UE-RadioAccessCapabilityList,
  InterRATMessage,
  IntraDomainNasNodeSelector,
  ProtocolErrorInformation,
  ProtocolErrorMoreInformation,
  Rplmn-Information,
|   Rplmn-Information-r4,
  SegCount,
  SegmentIndex,
  SFN-Prime,
  SIB-Data-fixed,
  SIB-Data-variable,
  SIB-Type
FROM InformationElements

  maxSIBperMsg,
  maxSystemCapability
FROM Constant-definitions;

-- *****
--
-- ACTIVE SET UPDATE (FDD only)
--
-- *****

ActiveSetUpdate-r3 ::= CHOICE {
  r3
    activeSetUpdate-r3
    nonCriticalExtensions
  },
  criticalExtensions
}

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier          RRC-TransactionIdentifier,
  integrityProtectionModeInfo        IntegrityProtectionModeInfo    OPTIONAL,
  cipheringModeInfo                  CipheringModeInfo              OPTIONAL,
  activationTime                      ActivationTime                  OPTIONAL,
  newU-RNTI                           U-RNTI                          OPTIONAL,
  -- Core network IEs
  cn-InformationInfo                  CN-InformationInfo              OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList                RB-WithPDCP-InfoList           OPTIONAL,
  -- Physical channel IEs
  maxAllowedUL-TX-Power                MaxAllowedUL-TX-Power          OPTIONAL,
  rl-AdditionInformationList           RL-AdditionInformationList      OPTIONAL,
  rl-RemovalInformationList            RL-RemovalInformationList       OPTIONAL,

```

```

        tx-DiversityMode          TX-DiversityMode          OPTIONAL,
        ssdt-Information          SSDT-Information          OPTIONAL
    }
-- *****
--
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- *****

ActiveSetUpdateComplete ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo      OPTIONAL,
    -- Radio bearer IES
    rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList      OPTIONAL,
    rb-WithPDCP-InfoList           RB-WithPDCP-InfoList            OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions           SEQUENCE {} OPTIONAL
}
-- *****
--
-- ACTIVE SET UPDATE FAILURE (FDD only)
--
-- *****

ActiveSetUpdateFailure ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions           SEQUENCE {} OPTIONAL
}
-- *****
--
-- Assistance Data Delivery
--
-- *****

AssistanceDataDelivery-r3 ::= CHOICE {
    r3                             SEQUENCE {
        assistanceDataDelivery-r3 AssistanceDataDelivery-r3-IEs,
        nonCriticalExtensions     SEQUENCE {} OPTIONAL
    },
    criticalExtensions             SEQUENCE {}
}

AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
    --Assistance Data Information Elements
    up-GPS-AssistanceData         UP-GPS-AssistanceData          OPTIONAL,
    up-OTDOA-AssistanceData       UP-OTDOA-AssistanceData      OPTIONAL
}
-- *****
--
-- CELL CHANGE ORDER FROM UTRAN
--
-- *****

CellChangeOrderFromUTRAN-r3 ::= CHOICE {
    r3                             SEQUENCE {
        cellChangeOrderFromUTRAN-IEs CellChangeOrderFromUTRAN-r3-IEs,
        nonCriticalExtensions         SEQUENCE {} OPTIONAL
    },
    criticalExtensions             SEQUENCE {}
}

CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
    -- User equipment IES
    integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
    activationTime                 ActivationTime                  OPTIONAL,
    rab-InformationList            RAB-InformationList           OPTIONAL,
    interRAT-TargetCellDescription InterRAT-TargetCellDescription
}
-- *****
--
-- CELL CHANGE FAILURE FROM UTRAN
--
-- *****

```

```

CellChangeFailureFromUTRAN ::= CHOICE {
  r3 SEQUENCE {
    r3-IEs CellChangeFailureFromUTRAN-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

CellChangeFailureFromUTRAN-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  interRAT-ChangeFailureCause InterRAT-ChangeFailureCause
}

-- *****
--
-- CELL UPDATE
--
-- *****

CellUpdate ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI U-RNTI,
  startList STARTList,
  am-RLC-ErrorIndicationC-plane BOOLEAN,
  am-RLC-ErrorIndicationU-plane BOOLEAN,
  cellUpdateCause CellUpdateCause,
  failureCause FailureCauseWithProtErrTrId OPTIONAL,
  -- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
  rb-timer-indicator Rb-timer-indicator,
  -- Measurement IEs
  measuredResultsOnRACH MeasuredResultsOnRACH OPTIONAL,
  -- Extension mechanism for non-release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- CELL UPDATE CONFIRM
--
-- *****

CellUpdateConfirm-r3 ::= CHOICE {
  r3 SEQUENCE {
    cellUpdateConfirm-r3 CellUpdateConfirm-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

CellUpdateConfirm-r4 ::= CHOICE {
  r3 SEQUENCE {
    cellUpdateConfirm-r3 CellUpdateConfirm-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions CHOICE {
    r4 SEQUENCE {
      cellUpdateConfirm-r4 CellUpdateConfirm-r4-IEs,
      nonCriticalExtensions SEQUENCE {} OPTIONAL
    },
    criticalExtensions SEQUENCE {}
  }
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo CipheringModeInfo OPTIONAL,
  activationTime ActivationTime OPTIONAL,
  new-U-RNTI U-RNTI OPTIONAL,
  new-C-RNTI C-RNTI OPTIONAL,
  rrc-StateIndicator RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  rlc-ResetIndicatorC-Plane BOOLEAN,
  rlc-ResetIndicatorU-Plane BOOLEAN,
  -- CN information elements
  cn-InformationInfo CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity URA-Identity OPTIONAL,
  -- Radio bearer IEs
  rb-InformationReleaseList RB-InformationReleaseList OPTIONAL,
}

```

```

rb-InformationReconfigList      RB-InformationReconfigList      OPTIONAL,
rb-InformationAffectedList      RB-InformationAffectedList      OPTIONAL,
rb-WithPDCP-InfoList           RB-WithPDCP-InfoList           OPTIONAL,
-- Transport channel IEs
ul-CommonTransChInfo           UL-CommonTransChInfo           OPTIONAL,
ul-deletedTransChInfoList      UL-DeletedTransChInfoList      OPTIONAL,
ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList    OPTIONAL,
modeSpecificTransChInfo        CHOICE {
    fdd                           SEQUENCE {
        cpch-SetID                CPCH-SetID                OPTIONAL,
        addReconfTransChDRAC-Info  DRAC-StaticInformationList OPTIONAL
    },
    tdd                           NULL
},
dl-CommonTransChInfo           DL-CommonTransChInfo           OPTIONAL,
dl-DeletedTransChInfoList      DL-DeletedTransChInfoList      OPTIONAL,
dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList    OPTIONAL,
-- Physical channel IEs
frequencyInfo                   FrequencyInfo                   OPTIONAL,
maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
ul-ChannelRequirement          UL-ChannelRequirement          OPTIONAL,
modeSpecificPhysChInfo         CHOICE {
    fdd                           SEQUENCE {
        dl-PDSCH-Information      DL-PDSCH-Information      OPTIONAL
    },
    tdd                           NULL
},
dl-CommonInformation           DL-CommonInformation           OPTIONAL,
dl-InformationPerRL-List       DL-InformationPerRL-List       OPTIONAL
}

```

```

CellUpdateConfirm-r4-IEs ::= SEQUENCE {
-- User equipment IEs
rrc-TransactionIdentifier      RRC-TransactionIdentifier,
integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
cipheringModeInfo              CipheringModeInfo              OPTIONAL,
activationTime                  ActivationTime                  OPTIONAL,
new-U-RNTI                     U-RNTI                        OPTIONAL,
new-C-RNTI                     C-RNTI                        OPTIONAL,
rrc-StateIndicator             RRC-StateIndicator,
utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
rlc-ResetIndicatorC-Plane      BOOLEAN,
rlc-ResetIndicatorU-Plane      BOOLEAN,
-- CN information elements
cn-InformationInfo             CN-InformationInfo             OPTIONAL,
-- UTRAN mobility IEs
ura-Identity                   URA-Identity                   OPTIONAL,
-- Radio bearer IEs
rb-InformationReleaseList      RB-InformationReleaseList      OPTIONAL,
rb-InformationReconfigList     RB-InformationReconfigList     OPTIONAL,
rb-InformationAffectedList     RB-InformationAffectedList     OPTIONAL,
rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
-- Transport channel IEs
ul-CommonTransChInfo           UL-CommonTransChInfo           OPTIONAL,
ul-deletedTransChInfoList      UL-DeletedTransChInfoList      OPTIONAL,
ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList    OPTIONAL,
modeSpecificTransChInfo        CHOICE {
    fdd                           SEQUENCE {
        cpch-SetID                CPCH-SetID                OPTIONAL,
        addReconfTransChDRAC-Info  DRAC-StaticInformationList OPTIONAL
    },
    tdd                           NULL
},
dl-CommonTransChInfo           DL-CommonTransChInfo           OPTIONAL,
dl-DeletedTransChInfoList      DL-DeletedTransChInfoList      OPTIONAL,
dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList    OPTIONAL,
-- Physical channel IEs
frequencyInfo                   FrequencyInfo                   OPTIONAL,
maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
ul-ChannelRequirement          UL-ChannelRequirement-r4       OPTIONAL,
modeSpecificPhysChInfo         CHOICE {
    fdd                           SEQUENCE {
        dl-PDSCH-Information      DL-PDSCH-Information      OPTIONAL
    },
    tdd                           NULL
},
dl-CommonInformation           DL-CommonInformation-r4        OPTIONAL,
dl-InformationPerRL-List       DL-InformationPerRL-List-r4    OPTIONAL
}

```

```

-- *****
--

```

```

-- CELL UPDATE CONFIRM for CCCH
--
-- *****

CellUpdateConfirm-CCCH-r3 ::= CHOICE {
  r3 SEQUENCE {
    -- User equipment IEs
    u-RNTI U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    cellUpdateConfirm-r3 CellUpdateConfirm-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

CellUpdateConfirm-CCCH-r4 ::= CHOICE {
  r3 SEQUENCE {
    -- User equipment IEs
    u-RNTI U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    cellUpdateConfirm-r3 CellUpdateConfirm-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions CHOICE {
    r4 SEQUENCE {
      -- User equipment IEs
      u-RNTI U-RNTI,
      -- The rest of the message is identical to the one sent on DCCH.
      cellUpdateConfirm-r4 CellUpdateConfirm-r4-IEs,
      nonCriticalExtensions SEQUENCE {} OPTIONAL
    },
    criticalExtensions SEQUENCE {}
  }
}

-- *****
--
-- COUNTER CHECK
--
-- *****

CounterCheck-r3 ::= CHOICE {
  r3 SEQUENCE {
    counterCheck-r3 CounterCheck-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

CounterCheck-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  -- Radio bearer IEs
  rb-COUNT-C-MSB-InformationList RB-COUNT-C-MSB-InformationList
}

-- *****
--
-- COUNTER CHECK RESPONSE
--
-- *****

CounterCheckResponse ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  -- Radio bearer IEs
  rb-COUNT-C-InformationList RB-COUNT-C-InformationList OPTIONAL,
  -- Extension mechanism for non-release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- DOWNLINK DIRECT TRANSFER
--
-- *****

DownlinkDirectTransfer-r3 ::= CHOICE {
  r3 SEQUENCE {
    downlinkDirectTransfer-r3 DownlinkDirectTransfer-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  }
}

```

```

    },
    criticalExtensions          SEQUENCE {}
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
-- Core network IEs
  cn-DomainIdentity           CN-DomainIdentity,
  nas-Message                  NAS-Message
}

-- *****
--
-- HANOVER TO UTRAN COMMAND
--
-- *****

HandoverToUTRANCommand-r3 ::= CHOICE {
  r3          SEQUENCE {
    handoverToUTRANCommand-r3    HandoverToUTRANCommand-r3-IEs,
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions          SEQUENCE {}
}

HandoverToUTRANCommand-r4 ::= CHOICE {
  r3          SEQUENCE {
    handoverToUTRANCommand-r3    HandoverToUTRANCommand-r3-IEs,
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions          CHOICE {
    r4          SEQUENCE {
    handoverToUTRANCommand-r4    HandoverToUTRANCommand-r4-IEs,
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
  }
}

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
-- User equipment IEs
  new-U-RNTI                U-RNTI-Short,
  activationTime             ActivationTime          OPTIONAL,
  cipheringAlgorithm         CipheringAlgorithm     OPTIONAL,
-- Radio bearer IEs
  rab-Info                   RAB-Info-Post,
-- Specification mode information
  specificationMode          CHOICE {
    complete                  SEQUENCE {
      srb-InformationSetupList SRB-InformationSetupList,
      rab-InformationSetupList RAB-InformationSetupList          OPTIONAL,
      ul-CommonTransChInfo    UL-CommonTransChInfo,
      dl-CommonTransChInfo    DL-CommonTransChInfo,
      dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
      ul-DPCH-Info            UL-DPCH-Info,
      modeSpecificInfo        CHOICE {
        fdd                    SEQUENCE {
          dl-PDSCH-Information DL-PDSCH-Information OPTIONAL,
          cpch-SetInfo         CPCH-SetInfo          OPTIONAL
        },
        tdd                    NULL
      },
      dl-CommonInformation    DL-CommonInformation,
      dl-InformationPerRL-List DL-InformationPerRL-List,
      frequencyInfo           FrequencyInfo
    },
    preconfiguration         SEQUENCE {
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
      predefinedConfigIdentity PredefinedConfigIdentity,
      rab-Info                 RAB-Info-Post          OPTIONAL,
      modeSpecificInfo         CHOICE {
        fdd                    SEQUENCE {
          ul-DPCH-Info         UL-DPCH-InfoPostFDD,
          dl-CommonInformationPost DL-CommonInformationPost,
          dl-InformationPerRL-ListPostFDD DL-InformationPerRL-ListPostFDD,
          frequencyInfoFDD     FrequencyInfoFDD
        }
      }
    }
  }
}

```

```

        tdd
            ul-DPCH-Info
            dl-InformationPerRL
            frequencyInfo
            primaryCCPCH-TX-Power
        }
    }
}
-- Physical channel IEs
maxAllowedUL-TX-Power
MaxAllowedUL-TX-Power
}

HandoverToUTRANCommand-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    new-U-RNTI
    activationTime
    cipheringAlgorithm
    -- Radio bearer IEs
    rab-Info
    -- Specification mode information
    specificationMode
        complete
            srb-InformationSetupList
            rab-InformationSetupList
            ul-CommonTransChInfo
            ul-AddReconfTransChInfoList
            dl-CommonTransChInfo
            dl-AddReconfTransChInfoList
            ul-DPCH-Info
            modeSpecificInfo
                fdd
                    dl-PDSCH-Information
                    cpch-SetInfo
                }
                tdd
                    dl-CommonInformation
                    dl-InformationPerRL-List
                    frequencyInfo
            }
            predefinedConfigIdentity
            rab-Info
            modeSpecificInfo
                fdd
                    ul-DPCH-Info
                    dl-CommonInformationPost
                    dl-InformationPerRL-List
                    frequencyInfo
                }
                tdd
                    tdd384
                    tdd128
            }
    -- Physical channel IEs
    maxAllowedUL-TX-Power
}

-- *****
--
-- HANDOVER TO UTRAN COMPLETE
--
-- *****

```



```

HandoverToUTRANComplete ::= SEQUENCE {
  --TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  -- TABULAR: the IE below is conditional on history.
  startList          STARTList          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {}      OPTIONAL
}

-- *****
--
-- INITIAL DIRECT TRANSFER
--
-- *****

InitialDirectTransfer ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity          CN-DomainIdentity,
  intraDomainNasNodeSelector IntraDomainNasNodeSelector,
  nas-Message                NAS-Message,
  -- Measurement IEs
  measuredResultsOnRACH      MeasuredResultsOnRACH          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions      SEQUENCE {}                    OPTIONAL
}

-- *****
--
-- HANDOVER FROM UTRAN COMMAND
--
-- *****

HandoverFromUTRANCommand-GSM-r3 ::= CHOICE {
  r3          SEQUENCE {
    handoverFromUTRANCommand-GSM-r3
    nonCriticalExtensions          HandoverFromUTRANCommand-GSM-r3-IEs,
    SEQUENCE {}                   OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

HandoverFromUTRANCommand-GSM-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  activationTime                 ActivationTime              OPTIONAL,
  -- Radio bearer IEs
  remainingRAB-Info             RAB-Info                    OPTIONAL,
  -- Other IEs
  message-and-extension         CHOICE {
    gsm-Message                  SEQUENCE {},
    -- In this case, what follows the basic production is a variable length bit string
    -- with no length field, containing the GSM message including GSM padding up to end
    -- of container, to be analysed according to GSM specifications
    with-extension              SEQUENCE {
      messages                    GSM-MessageList
    }
  }
}

HandoverFromUTRANCommand-CDMA2000-r3 ::= CHOICE {
  r3          SEQUENCE {
    handoverFromUTRANCommand-CDMA2000-r3
    nonCriticalExtensions          HandoverFromUTRANCommand-CDMA2000-r3-IEs,
    SEQUENCE {}                   OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  activationTime                 ActivationTime              OPTIONAL,
  -- Radio bearer IEs
  remainingRAB-Info             RAB-Info                    OPTIONAL,
  -- Other IEs
  cdma2000-MessageList          CDMA2000-MessageList
}

-- *****
--
-- HANDOVER FROM UTRAN FAILURE

```

```

--
-- *****
HandoverFromUTRANFailure ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Other IES
  interRAT-HO-Failure           InterRAT-HO-Failure           OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                   OPTIONAL
}
-- *****
--
-- MEASUREMENT CONTROL
--
-- *****

MeasurementControl-r3 ::= CHOICE {
  r3 SEQUENCE {
    measurementControl-r3      MeasurementControl-r3-IEs,
    nonCriticalExtensions      SEQUENCE {} OPTIONAL
  },
  criticalExtensions          SEQUENCE {}
}

MeasurementControl-r4 ::= CHOICE {
  r3 SEQUENCE {
    measurementControl-r3      MeasurementControl-r3-IEs,
    nonCriticalExtensions      SEQUENCE {} OPTIONAL
  },
  criticalExtensions          CHOICE {
    r4 SEQUENCE {
      measurementControl-r4    MeasurementControl-r4-IEs,
      nonCriticalExtensions    SEQUENCE {} OPTIONAL
    },
    criticalExtensions        SEQUENCE {}
  }
}

MeasurementControl-r3-IEs ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Measurement IES
  measurementIdentity           MeasurementIdentity,
  measurementCommand            MeasurementCommand,
  -- TABULAR: The measurement type is included in MeasurementCommand.
  measurementReportingMode      MeasurementReportingMode      OPTIONAL,
  additionalMeasurementList     AdditionalMeasurementID-List  OPTIONAL,
  -- Physical channel IES
  dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo OPTIONAL
}

MeasurementControl-r4-IEs ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Measurement IES
  measurementIdentity           MeasurementIdentity,
  measurementCommand            MeasurementCommand-r4,
  -- TABULAR: The measurement type is included in MeasurementCommand.
  measurementReportingMode      MeasurementReportingMode      OPTIONAL,
  additionalMeasurementList     AdditionalMeasurementID-List  OPTIONAL,
  -- Physical channel IES
  dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo OPTIONAL
}
-- *****
--
-- MEASUREMENT CONTROL FAILURE
--
-- *****

MeasurementControlFailure ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                   OPTIONAL
}
-- *****
--

```

```

-- MEASUREMENT REPORT
--
-- *****

MeasurementReport ::= SEQUENCE {
  -- Measurement IEs
  measurementIdentity      MeasurementIdentity,
  measuredResults           MeasuredResults           OPTIONAL,
  measuredResultsOnRACH    MeasuredResultsOnRACH     OPTIONAL,
  additionalMeasuredResults MeasuredResultsList     OPTIONAL,
  eventResults             EventResults             OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {
    interFreqEventResults-LCR InterFreqEventResults-LCR OPTIONAL
  }
}

-- *****
--
-- PAGING TYPE 1
--
-- *****

PagingType1 ::= SEQUENCE {
  -- User equipment IEs
  pagingRecordList        PagingRecordList          OPTIONAL,
  -- Other IEs
  bcch-ModificationInfo  BCCH-ModificationInfo     OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions  SEQUENCE {} OPTIONAL
}

-- *****
--
-- PAGING TYPE 2
--
-- *****

PagingType2 ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  pagingCause              PagingCause,
  -- Core network IEs
  cn-DomainIdentity       CN-DomainIdentity,
  pagingRecordTypeID      PagingRecordTypeID,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions   SEQUENCE {} OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION
--
-- *****

PhysicalChannelReconfiguration-r3 ::= CHOICE {
  r3 SEQUENCE {
    physicalChannelReconfiguration-r3
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

PhysicalChannelReconfiguration-r4 ::= CHOICE {
  r3 SEQUENCE {
    physicalChannelReconfiguration-r3
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions CHOICE {
    r4 SEQUENCE {
    physicalChannelReconfiguration-r4
    nonCriticalExtensions SEQUENCE {} OPTIONAL
    },
    criticalExtensions SEQUENCE {}
  }
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {

```

```

-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo             CipheringModeInfo                      OPTIONAL,
  activationTime                 ActivationTime                        OPTIONAL,
  new-U-RNTI                    U-RNTI                             OPTIONAL,
  new-C-RNTI                    C-RNTI                             OPTIONAL,
  rrc-StateIndicator            RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
-- Core network IEs
  cn-InformationInfo            CN-InformationInfo              OPTIONAL,
-- UTRAN mobility IEs
  ura-Identity                  URA-Identity                      OPTIONAL,
-- Radio bearer IEs
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList              OPTIONAL,
-- Physical channel IEs
  frequencyInfo                FrequencyInfo                      OPTIONAL,
  maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power            OPTIONAL,
  ul-ChannelRequirement        UL-ChannelRequirementWithCPCH-SetID  OPTIONAL,
  -- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
  -- between UL DPCH info, CPCH SET info and CPCH set ID.
  modeSpecificInfo             CHOICE {
    fdd                         SEQUENCE {
      dl-PDSCH-Information      DL-PDSCH-Information          OPTIONAL
    },
    tdd                         NULL
  },
  dl-CommonInformation          DL-CommonInformation            OPTIONAL,
  dl-InformationPerRL-List     DL-InformationPerRL-List        OPTIONAL
}

```

```

PhysicalChannelReconfiguration-r4-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo             CipheringModeInfo                      OPTIONAL,
  activationTime                 ActivationTime                        OPTIONAL,
  new-U-RNTI                    U-RNTI                             OPTIONAL,
  new-C-RNTI                    C-RNTI                             OPTIONAL,
  rrc-StateIndicator            RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- Core network IEs
  cn-InformationInfo            CN-InformationInfo              OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                  URA-Identity                      OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList              OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                FrequencyInfo                      OPTIONAL,
  maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power            OPTIONAL,
  ul-ChannelRequirement        UL-ChannelRequirementWithCPCH-SetID-r4  OPTIONAL,
  -- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
  -- between UL DPCH info, CPCH SET info and CPCH set ID.
  modeSpecificInfo             CHOICE {
    fdd                         SEQUENCE {
      dl-PDSCH-Information      DL-PDSCH-Information          OPTIONAL
    },
    tdd                         NULL
  },
  dl-CommonInformation          DL-CommonInformation-r4          OPTIONAL,
  dl-InformationPerRL-List     DL-InformationPerRL-List-r4      OPTIONAL
}

```

```

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
--
-- *****

```

```

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo    IntegrityProtActivationInfo        OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for 3.84Mcps TDD mode only.
  ul-TimingAdvance             UL-TimingAdvance                  OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime       ActivationTime                      OPTIONAL,
  rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList         OPTIONAL,
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList              OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                        OPTIONAL
}

```

```

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
--
-- *****

PhysicalSharedChannelAllocation-r3 ::= CHOICE {
  r3                             SEQUENCE {
    physicalSharedChannelAllocation-r3
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions             SEQUENCE {}
}

PhysicalSharedChannelAllocation-r4 ::= CHOICE {
  r3                             SEQUENCE {
    physicalSharedChannelAllocation-r3
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions             CHOICE {
    r4                           SEQUENCE {
    physicalSharedChannelAllocation-r4
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
    },
    criticalExtensions           SEQUENCE {}
  }
}

PhysicalSharedChannelAllocation-r3-IEs ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  c-RNTI                         C-RNTI                        OPTIONAL,
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Physical channel IEs
  ul-TimingAdvance              UL-TimingAdvanceControl    OPTIONAL,
  pusch-CapacityAllocationInfo   PUSCH-CapacityAllocationInfo  OPTIONAL,
  pdsch-CapacityAllocationInfo   PDSCH-CapacityAllocationInfo  OPTIONAL,
  confirmRequest                 ENUMERATED {
    confirmPDSCH, confirmPUSCH } OPTIONAL,
  -- TABULAR: If the above value is not present, the default value "No Confirm"
  -- shall be used as specified in 10.2.25.
  iscpTimeslotList              TimeslotList                    OPTIONAL
}

PhysicalSharedChannelAllocation-r4-IEs ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  c-RNTI                         C-RNTI                        OPTIONAL,
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Physical channel IEs
  ul-TimingAdvance              UL-TimingAdvanceControl-r4  OPTIONAL,
  pusch-CapacityAllocationInfo   PUSCH-CapacityAllocationInfo-r4  OPTIONAL,
  pdsch-CapacityAllocationInfo   PDSCH-CapacityAllocationInfo-r4  OPTIONAL,
  confirmRequest                 ENUMERATED {
    confirmPDSCH, confirmPUSCH } OPTIONAL,
  -- TABULAR: If the above value is not present, the default value "No Confirm"
  -- shall be used in 10.2.25.
  iscpTimeslotList              TimeslotList-r4                  OPTIONAL
}

-- *****
--
-- PUSCH CAPACITY REQUEST (TDD only)
--
-- *****

```

```

PUSCHCapacityRequest ::= SEQUENCE {
  -- User equipment IEs
  c-RNTI                               C-RNTI                               OPTIONAL,
  -- Measurement IEs
  trafficVolumeMeasuredResultsList     TrafficVolumeMeasuredResultsList,
  timeslotListWithISCP                 TimeslotListWithISCP                 OPTIONAL,
  primaryCCPCH-RSCP                    PrimaryCCPCH-RSCP                    OPTIONAL,
  allocationConfirmation                CHOICE {
    pdschConfirmation                  PDSCH-Identity,
    pusochConfirmation                  PUSCH-Identity
  }                                     OPTIONAL,
  protocolErrorIndicator                ProtocolErrorIndicatorWithMoreInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                 SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RECONFIGURATION
--
-- *****

RadioBearerReconfiguration-r3 ::= CHOICE {
  r3                                     SEQUENCE {
    radioBearerReconfiguration-r3     RadioBearerReconfiguration-r3-IEs,
    nonCriticalExtensions              SEQUENCE {} OPTIONAL
  },
  criticalExtensions                   SEQUENCE {}
}

RadioBearerReconfiguration-r4 ::= CHOICE {
  r3                                     SEQUENCE {
    radioBearerReconfiguration-r3     RadioBearerReconfiguration-r3-IEs,
    nonCriticalExtensions              SEQUENCE {} OPTIONAL
  },
  criticalExtensions                   CHOICE {
    r4                                  SEQUENCE {
      radioBearerReconfiguration-r4   RadioBearerReconfiguration-r4-IEs,
      nonCriticalExtensions            SEQUENCE {} OPTIONAL
    },
    criticalExtensions                 SEQUENCE {}
  }
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier            RRC-TransactionIdentifier,
  integrityProtectionModeInfo          IntegrityProtectionModeInfo          OPTIONAL,
  cipheringModeInfo                   CipheringModeInfo                   OPTIONAL,
  activationTime                       ActivationTime                       OPTIONAL,
  new-U-RNTI                           U-RNTI                              OPTIONAL,
  new-C-RNTI                           C-RNTI                              OPTIONAL,
  rrc-StateIndicator                   RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff           UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
  -- Core network IEs
  cn-InformationInfo                   CN-InformationInfo                   OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                          URA-Identity                          OPTIONAL,
  -- Radio bearer IEs
  rab-InformationReconfigList          RAB-InformationReconfigList          OPTIONAL,
  rb-InformationReconfigList           RB-InformationReconfigList           OPTIONAL,
  rb-InformationAffectedList           RB-InformationAffectedList           OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo                 UL-CommonTransChInfo                 OPTIONAL,
  ul-deletedTransChInfoList            UL-DeletedTransChInfoList            OPTIONAL,
  ul-AddReconfTransChInfoList          UL-AddReconfTransChInfoList          OPTIONAL,
  modeSpecificTransChInfo              CHOICE {
    fdd                                 SEQUENCE {
      cpch-SetID                       CPCH-SetID                           OPTIONAL,
      addReconfTransChDRAC-Info         DRAC-StaticInformationList            OPTIONAL
    },
    tdd                                 NULL
  }                                     OPTIONAL,
  dl-CommonTransChInfo                 DL-CommonTransChInfo                 OPTIONAL,
  dl-DeletedTransChInfoList             DL-DeletedTransChInfoList            OPTIONAL,
  dl-AddReconfTransChInfoList          DL-AddReconfTransChInfo2List         OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                        FrequencyInfo                          OPTIONAL,
  maxAllowedUL-TX-Power                 MaxAllowedUL-TX-Power                 OPTIONAL,
  ul-ChannelRequirement                 UL-ChannelRequirement                 OPTIONAL,
}

```

```

modeSpecificPhysChInfo      CHOICE {
  fdd      SEQUENCE {
    dl-PDSCH-Information      DL-PDSCH-Information      OPTIONAL
  },
  tdd      NULL
},
dl-CommonInformation        DL-CommonInformation        OPTIONAL,
dl-InformationPerRL-List    DL-InformationPerRL-List
}

```

```

RadioBearerReconfiguration-r4-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo              CipheringModeInfo                  OPTIONAL,
  activationTime                  ActivationTime                      OPTIONAL,
  new-U-RNTI                      U-RNTI                          OPTIONAL,
  new-C-RNTI                      C-RNTI                          OPTIONAL,
  rrc-StateIndicator              RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- Core network IEs
  cn-InformationInfo              CN-InformationInfo                OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                    URA-Identity                      OPTIONAL,
  -- Radio bearer IEs
  rab-InformationReconfigList     RAB-InformationReconfigList      OPTIONAL,
  rb-InformationReconfigList      RB-InformationReconfigList,
  rb-InformationAffectedList      RB-InformationAffectedList        OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo           UL-CommonTransChInfo             OPTIONAL,
  ul-deletedTransChInfoList       UL-DeletedTransChInfoList        OPTIONAL,
  ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList      OPTIONAL,
  modeSpecificTransChInfo         CHOICE {
    fdd      SEQUENCE {
      cpch-SetID              CPCH-SetID                      OPTIONAL,
      addReconfTransChDRAC-Info  DRAC-StaticInformationList  OPTIONAL
    },
    tdd      NULL
  }
  dl-CommonTransChInfo           DL-CommonTransChInfo             OPTIONAL,
  dl-DeletedTransChInfoList       DL-DeletedTransChInfoList        OPTIONAL,
  dl-AddReconfTransChInfoList     DL-AddReconfTransChInfo2List     OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                  FrequencyInfo                      OPTIONAL,
  maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power            OPTIONAL,
  ul-ChannelRequirement           UL-ChannelRequirement-r4         OPTIONAL,
  modeSpecificPhysChInfo         CHOICE {
    fdd      SEQUENCE {
      dl-PDSCH-Information      DL-PDSCH-Information      OPTIONAL
    },
    tdd      NULL
  },
  dl-CommonInformation            DL-CommonInformation-r4          OPTIONAL,
  dl-InformationPerRL-List        DL-InformationPerRL-List-r4
}

```

```

-- *****
--
-- RADIO BEARER RECONFIGURATION COMPLETE
--
-- *****

```

```

RadioBearerReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo      OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for 3.84Mcps TDD mode only.
  ul-TimingAdvance              UL-TimingAdvance                OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList       OPTIONAL,
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList           OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

```

```

-- *****
--
-- RADIO BEARER RECONFIGURATION FAILURE
--
-- *****

```

```

RadioBearerReconfigurationFailure ::= SEQUENCE {

```

```

-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
-- Radio bearer IEs
  potentiallySuccessfulBearerList RB-IdentityList                OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE
--
-- *****

RadioBearerRelease-r3 ::= CHOICE {
  r3 SEQUENCE {
    radioBearerRelease-r3      RadioBearerRelease-r3-IEs,
    nonCriticalExtensions      SEQUENCE {} OPTIONAL
  },
  criticalExtensions          SEQUENCE {}
}

RadioBearerRelease-r4 ::= CHOICE {
  r3 SEQUENCE {
    radioBearerRelease-r3      RadioBearerRelease-r3-IEs,
    nonCriticalExtensions      SEQUENCE {} OPTIONAL
  },
  criticalExtensions          CHOICE {
    r4 SEQUENCE {
      radioBearerRelease-r4      RadioBearerRelease-r4-IEs,
      nonCriticalExtensions      SEQUENCE {} OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
  }
}

RadioBearerRelease-r3-IEs ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
  cipheringModeInfo              CipheringModeInfo              OPTIONAL,
  activationTime                  ActivationTime                  OPTIONAL,
  new-U-RNTI                      U-RNTI                      OPTIONAL,
  new-C-RNTI                      C-RNTI                      OPTIONAL,
  rrc-StateIndicator              RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
-- Core network IEs
  cn-InformationInfo              CN-InformationInfo              OPTIONAL,
  signallingConnectionRelIndication CN-DomainIdentity              OPTIONAL,
-- UTRAN mobility IEs
  ura-Identity                    URA-Identity                    OPTIONAL,
-- Radio bearer IEs
  rab-InformationReconfigList      RAB-InformationReconfigList      OPTIONAL,
  rb-InformationReleaseList        RB-InformationReleaseList,
  rb-InformationAffectedList       RB-InformationAffectedList       OPTIONAL,
  rb-WithPDCP-InfoList            RB-WithPDCP-InfoList            OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo            UL-CommonTransChInfo            OPTIONAL,
  ul-deletedTransChInfoList        UL-DeletedTransChInfoList        OPTIONAL,
  ul-AddReconfTransChInfoList      UL-AddReconfTransChInfoList      OPTIONAL,
  modeSpecificTransChInfo          CHOICE {
    fdd SEQUENCE {
      cpch-SetID                  CPCH-SetID                  OPTIONAL,
      addReconfTransChDRAC-Info    DRAC-StaticInformationList  OPTIONAL
    },
    tdd NULL
  }
  dl-CommonTransChInfo            DL-CommonTransChInfo            OPTIONAL,
  dl-DeletedTransChInfoList        DL-DeletedTransChInfoList        OPTIONAL,
  dl-AddReconfTransChInfoList      DL-AddReconfTransChInfo2List     OPTIONAL,
-- Physical channel IEs
  frequencyInfo                   FrequencyInfo                   OPTIONAL,
  maxAllowedUL-TX-Power            MaxAllowedUL-TX-Power            OPTIONAL,
  ul-ChannelRequirement            UL-ChannelRequirement            OPTIONAL,
  modeSpecificPhysChInfo           CHOICE {
    fdd SEQUENCE {
      dl-PDSCH-Information         DL-PDSCH-Information         OPTIONAL
    },
    tdd NULL
  },
  dl-CommonInformation            DL-CommonInformation            OPTIONAL,
}

```



```

        dl-InformationPerRL-List          DL-InformationPerRL-List          OPTIONAL
    }

RadioBearerRelease-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier            RRC-TransactionIdentifier,
    integrityProtectionModeInfo          IntegrityProtectionModeInfo          OPTIONAL,
    cipheringModeInfo                    CipheringModeInfo                    OPTIONAL,
    activationTime                        ActivationTime                        OPTIONAL,
    new-U-RNTI                            U-RNTI                              OPTIONAL,
    new-C-RNTI                            C-RNTI                              OPTIONAL,
    rrc-StateIndicator                    RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff            UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
    cn-InformationInfo                    CN-InformationInfo                  OPTIONAL,
    signallingConnectionRelIndication     CN-DomainIdentity                  OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                          URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
    rab-InformationReconfigList           RAB-InformationReconfigList         OPTIONAL,
    rb-InformationReleaseList             RB-InformationReleaseList           OPTIONAL,
    rb-InformationAffectedList            RB-InformationAffectedList          OPTIONAL,
    rb-WithPDCP-InfoList                  RB-WithPDCP-InfoList                OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo                  UL-CommonTransChInfo                OPTIONAL,
    ul-deletedTransChInfoList             UL-DeletedTransChInfoList           OPTIONAL,
    ul-AddReconfTransChInfoList           UL-AddReconfTransChInfoList         OPTIONAL,
    modeSpecificTransChInfo                CHOICE {
        fdd                                SEQUENCE {
            cpch-SetID                      CPCH-SetID                          OPTIONAL,
            addReconfTransChDRAC-Info        DRAC-StaticInformationList           OPTIONAL
        },
        tdd                                NULL
    } OPTIONAL,
    dl-CommonTransChInfo                  DL-CommonTransChInfo                OPTIONAL,
    dl-DeletedTransChInfoList             DL-DeletedTransChInfoList           OPTIONAL,
    dl-AddReconfTransChInfoList           DL-AddReconfTransChInfo2List        OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                          FrequencyInfo                         OPTIONAL,
    maxAllowedUL-TX-Power                  MaxAllowedUL-TX-Power                OPTIONAL,
    ul-ChannelRequirement                  UL-ChannelRequirement-r4             OPTIONAL,
    modeSpecificPhysChInfo                  CHOICE {
        fdd                                SEQUENCE {
            dl-PDSCH-Information             DL-PDSCH-Information                OPTIONAL
        },
        tdd                                NULL
    }
    },
    dl-CommonInformation                  DL-CommonInformation-r4              OPTIONAL,
    dl-InformationPerRL-List               DL-InformationPerRL-List-r4          OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE COMPLETE
--
-- *****

RadioBearerReleaseComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier            RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo           IntegrityProtActivationInfo           OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for 3.84Mcps TDD mode only.
    ul-TimingAdvance                      UL-TimingAdvance                     OPTIONAL,
    -- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo         RB-ActivationTimeInfoList            OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions                  SEQUENCE {}                           OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE FAILURE
--
-- *****

RadioBearerReleaseFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier            RRC-TransactionIdentifier,
    failureCause                          FailureCauseWithProtErr,
    -- Radio bearer IEs
    potentiallySuccessfulBearerList       RB-IdentityList                       OPTIONAL,
    -- Extension mechanism for non- release99 information

```

```

        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    }
-- *****
--
-- RADIO BEARER SETUP
--
-- *****

RadioBearerSetup-r3 ::= CHOICE {
    r3          SEQUENCE {
        radioBearerSetup-r3          RadioBearerSetup-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

RadioBearerSetup-r4 ::= CHOICE {
    r3          SEQUENCE {
        radioBearerSetup-r3          RadioBearerSetup-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions          CHOICE {
        r4          SEQUENCE {
            radioBearerSetup-r4          RadioBearerSetup-r4-IEs,
            nonCriticalExtensions        SEQUENCE {}          OPTIONAL
        },
        criticalExtensions          SEQUENCE {}
    }
}

RadioBearerSetup-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    integrityProtectionModeInfo        IntegrityProtectionModeInfo          OPTIONAL,
    cipheringModeInfo                  CipheringModeInfo                      OPTIONAL,
    activationTime                      ActivationTime                          OPTIONAL,
    new-U-RNTI                          U-RNTI                                  OPTIONAL,
    new-C-RNTI                          C-RNTI                                  OPTIONAL,
    rrc-StateIndicator                  RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff          UTRAN-DRX-CycleLengthCoefficient      OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity                        URA-Identity                            OPTIONAL,
-- Core network IEs
    cn-InformationInfo                  CN-InformationInfo                      OPTIONAL,
-- Radio bearer IEs
    srb-InformationSetupList            SRB-InformationSetupList                OPTIONAL,
    rab-InformationSetupList            RAB-InformationSetupList                OPTIONAL,
    rb-InformationAffectedList          RB-InformationAffectedList              OPTIONAL,
-- Transport channel IEs
    ul-CommonTransChInfo                UL-CommonTransChInfo                    OPTIONAL,
    ul-DeletedTransChInfoList           UL-DeletedTransChInfoList               OPTIONAL,
    ul-AddReconfTransChInfoList         UL-AddReconfTransChInfoList             OPTIONAL,
    modeSpecificTransChInfo             CHOICE {
        fdd          SEQUENCE {
            cpch-SetID          CPCH-SetID          OPTIONAL,
            addReconfTransChDRAC-Info          DRAC-StaticInformationList          OPTIONAL
        },
        tdd          NULL
    }
    dl-CommonTransChInfo                DL-CommonTransChInfo                    OPTIONAL,
    dl-DeletedTransChInfoList           DL-DeletedTransChInfoList               OPTIONAL,
    dl-AddReconfTransChInfoList         DL-AddReconfTransChInfoList             OPTIONAL,
-- Physical channel IEs
    frequencyInfo                       FrequencyInfo                            OPTIONAL,
    maxAllowedUL-TX-Power                MaxAllowedUL-TX-Power                    OPTIONAL,
    ul-ChannelRequirement                UL-ChannelRequirement                    OPTIONAL,
    modeSpecificPhysChInfo               CHOICE {
        fdd          SEQUENCE {
            dl-PDSCH-Information          DL-PDSCH-Information          OPTIONAL
        },
        tdd          NULL
    },
    dl-CommonInformation                DL-CommonInformation                    OPTIONAL,
    dl-InformationPerRL-List             DL-InformationPerRL-List                OPTIONAL
}

RadioBearerSetup-r4-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    integrityProtectionModeInfo        IntegrityProtectionModeInfo          OPTIONAL,
    cipheringModeInfo                  CipheringModeInfo                      OPTIONAL,
    activationTime                      ActivationTime                          OPTIONAL,

```

new-U-RNTI	U-RNTI	OPTIONAL,
new-C-RNTI	C-RNTI	OPTIONAL,
rrc-StateIndicator	RRC-StateIndicator,	
utran-DRX-CycleLengthCoeff	UTRAN-DRX-CycleLengthCoefficient	OPTIONAL,
-- UTRAN mobility IEs		
ura-Identity	URA-Identity	OPTIONAL,
-- Core network IEs		
cn-InformationInfo	CN-InformationInfo	OPTIONAL,
-- Radio bearer IEs		
srb-InformationSetupList	SRB-InformationSetupList	OPTIONAL,
rab-InformationSetupList	RAB-InformationSetupList	OPTIONAL,
rb-InformationAffectedList	RB-InformationAffectedList	OPTIONAL,
-- Transport channel IEs		
ul-CommonTransChInfo	UL-CommonTransChInfo	OPTIONAL,
ul-deletedTransChInfoList	UL-DeletedTransChInfoList	OPTIONAL,
ul-AddReconfTransChInfoList	UL-AddReconfTransChInfoList	OPTIONAL,
modeSpecificTransChInfo	CHOICE {	
fdd	SEQUENCE {	
cpch-SetID	CPCH-SetID	OPTIONAL,
addReconfTransChDRAC-Info	DRAC-StaticInformationList	OPTIONAL
},		
tdd	NULL	
}		OPTIONAL,
dl-CommonTransChInfo	DL-CommonTransChInfo	OPTIONAL,
dl-DeletedTransChInfoList	DL-DeletedTransChInfoList	OPTIONAL,
dl-AddReconfTransChInfoList	DL-AddReconfTransChInfoList	OPTIONAL,
-- Physical channel IEs		
frequencyInfo	FrequencyInfo	OPTIONAL,
maxAllowedUL-TX-Power	MaxAllowedUL-TX-Power	OPTIONAL,
ul-ChannelRequirement	UL-ChannelRequirement-r4	OPTIONAL,
modeSpecificPhysChInfo	CHOICE {	
fdd	SEQUENCE {	
dl-PDSCH-Information	DL-PDSCH-Information	OPTIONAL
},		
tdd	NULL	
},		
dl-CommonInformation	DL-CommonInformation-r4	OPTIONAL,
dl-InformationPerRL-List	DL-InformationPerRL-List-r4	OPTIONAL
}		
-- *****		
--		
-- RADIO BEARER SETUP COMPLETE		
--		
-- *****		
RadioBearerSetupComplete ::= SEQUENCE {		
-- User equipment IEs		
rrc-TransactionIdentifier	RRC-TransactionIdentifier,	
ul-IntegProtActivationInfo	IntegrityProtActivationInfo	OPTIONAL,
-- TABULAR: UL-TimingAdvance is applicable for 3.84Mcps TDD mode only.		
ul-TimingAdvance	UL-TimingAdvance	OPTIONAL,
start-Value	START-Value	OPTIONAL,
-- Radio bearer IEs		
count-C-ActivationTime	ActivationTime	OPTIONAL,
rb-UL-CiphActivationTimeInfo	RB-ActivationTimeInfoList	OPTIONAL,
rb-WithPDCP-InfoList	RB-WithPDCP-InfoList	OPTIONAL,
-- Extension mechanism for non- release99 information		
nonCriticalExtensions	SEQUENCE {	OPTIONAL
}		
-- *****		
--		
-- RADIO BEARER SETUP FAILURE		
--		
-- *****		
RadioBearerSetupFailure ::= SEQUENCE {		
-- User equipment IEs		
rrc-TransactionIdentifier	RRC-TransactionIdentifier,	
failureCause	FailureCauseWithProtErr,	
-- Radio bearer IEs		
potentiallySuccessfulBearerList	RB-IdentityList	OPTIONAL,
-- Extension mechanism for non- release99 information		
nonCriticalExtensions	SEQUENCE {	OPTIONAL
}		
-- *****		
--		
-- RRC CONNECTION REJECT		
--		
-- *****		

```

RRCConnectionReject-r3 ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionReject-r3      RRCConnectionReject-r3-IEs,
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionReject-r3-IEs ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IES
  initialUE-Identity      InitialUE-Identity,
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  rejectionCause          RejectionCause,
  waitTime                WaitTime,
  redirectionInfo         RedirectionInfo          OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE
--
-- *****

RRCConnectionRelease-r3 ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionRelease-r3      RRCConnectionRelease-r3-IEs,
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionRelease-r4 ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionRelease-r3      RRCConnectionRelease-r3-IEs,
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
  },
  criticalExtensions              CHOICE {
    r4          SEQUENCE {
      rrcConnectionRelease-r4      RRCConnectionRelease-r4-IEs,
      nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
  }
}

RRCConnectionRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  n-308                          N-308                      OPTIONAL,
  -- The IE above is conditional on the UE state.
  releaseCause                  ReleaseCause,
  rplmn-information             Rplmn-Information          OPTIONAL
}

RRCConnectionRelease-r4-IEs ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  n-308                          N-308                      OPTIONAL,
  -- The IE above is conditional on the UE state.
  releaseCause                  ReleaseCause,
  rplmn-information             Rplmn-Information-r4        OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE for CCCH
--
-- *****

RRCConnectionRelease-CCCH-r3 ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionRelease-CCCH-r3  RRCConnectionRelease-CCCH-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionRelease-CCCH-r4 ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionRelease-CCCH-r3  RRCConnectionRelease-CCCH-r3-IEs,

```

```

    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              CHOICE {
    r4                            SEQUENCE {
      rrcConnectionRelease-CCCH-r4  RRCConnectionRelease-CCCH-r4-IEs,
      nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
  }
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                          U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease            RRCConnectionRelease-r3-IEs
}

RRCConnectionRelease-CCCH-r4-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                          U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease            RRCConnectionRelease-r4-IEs
}

-- *****
--
-- RRC CONNECTION RELEASE COMPLETE
--
-- *****

RRCConnectionReleaseComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier        RRC-TransactionIdentifier,
  errorIndication                  FailureCauseWithProtErr          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {} OPTIONAL
}

-- *****
--
-- RRC CONNECTION REQUEST
--
-- *****

RRCConnectionRequest ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  initialUE-Identity               InitialUE-Identity,
  establishmentCause                EstablishmentCause,
  protocolErrorIndicator            ProtocolErrorIndicator,
  -- The IE above is MD, but for compactness reasons no default value
  -- has been assigned to it.
  -- Measurement IEs
  measuredResultsOnRACH             MeasuredResultsOnRACH          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {} OPTIONAL
}

-- *****
--
-- RRC CONNECTION SETUP
--
-- *****

RRCConnectionSetup-r3 ::= CHOICE {
  r3                                SEQUENCE {
    rrcConnectionSetup-r3          RRCConnectionSetup-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionSetup-r4 ::= CHOICE {
  r3                                SEQUENCE {
    rrcConnectionSetup-r3          RRCConnectionSetup-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              CHOICE {
    r4                            SEQUENCE {
      rrcConnectionSetup-r4        RRCConnectionSetup-r4-IEs,
      nonCriticalExtensions        SEQUENCE {} OPTIONAL
    }
  }
}

```

```

}
criticalExtensions SEQUENCE {}
}
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
initialUE-Identity InitialUE-Identity,
rrc-TransactionIdentifier RRC-TransactionIdentifier,
activationTime ActivationTime OPTIONAL,
new-U-RNTI U-RNTI,
new-c-RNTI C-RNTI OPTIONAL,
rrc-StateIndicator RRC-StateIndicator,
utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient,
capabilityUpdateRequirement CapabilityUpdateRequirement OPTIONAL,
-- TABULAR: If the IE is not present, the default value defined in 10.3.3.2 shall
-- be used.
-- Radio bearer IEs
srb-InformationSetupList SRB-InformationSetupList2,
-- Transport channel IEs
ul-CommonTransChInfo UL-CommonTransChInfo OPTIONAL,
ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
dl-CommonTransChInfo DL-CommonTransChInfo OPTIONAL,
dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
-- Physical channel IEs
frequencyInfo FrequencyInfo OPTIONAL,
maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
ul-ChannelRequirement UL-ChannelRequirement OPTIONAL,
dl-CommonInformation DL-CommonInformation OPTIONAL,
dl-InformationPerRL-List DL-InformationPerRL-List OPTIONAL
}

```

```

RRCConnectionSetup-r4-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
initialUE-Identity InitialUE-Identity,
rrc-TransactionIdentifier RRC-TransactionIdentifier,
activationTime ActivationTime OPTIONAL,
new-U-RNTI U-RNTI,
new-c-RNTI C-RNTI OPTIONAL,
rrc-StateIndicator RRC-StateIndicator,
utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient,
capabilityUpdateRequirement CapabilityUpdateRequirement OPTIONAL,
-- TABULAR: If the IE is not present, the default value defined in 10.3.3.2 shall
-- be used.
-- Radio bearer IEs
srb-InformationSetupList SRB-InformationSetupList2,
-- Transport channel IEs
ul-CommonTransChInfo UL-CommonTransChInfo OPTIONAL,
ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
dl-CommonTransChInfo DL-CommonTransChInfo OPTIONAL,
dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
-- Physical channel IEs
frequencyInfo FrequencyInfo OPTIONAL,
maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
ul-ChannelRequirement UL-ChannelRequirement-r4 OPTIONAL,
dl-CommonInformation DL-CommonInformation-r4 OPTIONAL,
dl-InformationPerRL-List DL-InformationPerRL-List-r4 OPTIONAL
}

```

```

-- *****
--
-- RRC CONNECTION SETUP COMPLETE
--
-- *****

```

```

RRCConnectionSetupComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
rrc-TransactionIdentifier RRC-TransactionIdentifier,
startList STARTList,
ue-RadioAccessCapability UE-RadioAccessCapability OPTIONAL,
-- Other IEs
ue-RATSpecificCapability InterRAT-UE-RadioAccessCapabilityList OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

```

```

-- *****
--
-- RRC STATUS

```

```

--
-- *****
RRCStatus ::= SEQUENCE {
  -- Other IEs
  protocolErrorInformation      ProtocolErrorMoreInformation,
  -- TABULAR: Identification of received message is nested in
  -- ProtocolErrorMoreInformation
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

SecurityModeCommand-r3 ::= CHOICE {
  r3                            SEQUENCE {
    securityModeCommand-r3      SecurityModeCommand-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}      OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}

-- *****
--
-- SECURITY MODE COMMAND
--
-- *****

SecurityModeCommand-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  securityCapability              SecurityCapability,
  cipheringModeInfo              CipheringModeInfo              OPTIONAL,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
  -- Core network IEs
  cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SECURITY MODE COMPLETE
--
-- *****

SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.

  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo    OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList    OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- *****
--
-- SECURITY MODE FAILURE
--
-- *****

SecurityModeFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                    FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE
--
-- *****

SignallingConnectionRelease-r3 ::= CHOICE {
  r3                              SEQUENCE {
    signallingConnectionRelease-r3 SignallingConnectionRelease-r3-IEs,
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

```

```

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Core network IEs
  cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE REQUEST
--
-- *****

SignallingConnectionReleaseRequest ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity              CN-DomainIdentity,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- SYSTEM INFORMATION for BCH
--
-- *****

SystemInformation-BCH ::= SEQUENCE {
  -- Other information elements
  sfn-Prime                      SFN-Prime,
  payload                         CHOICE {
    noSegment                     NULL,
    firstSegment                  FirstSegment,
    subsequentSegment             SubsequentSegment,
    lastSegmentShort              LastSegmentShort,
    lastAndFirst                  SEQUENCE {
      lastSegmentShort            LastSegmentShort,
      firstSegment                FirstSegmentShort
    },
    lastAndComplete               SEQUENCE {
      lastSegmentShort            LastSegmentShort,
      completeSIB-List            CompleteSIB-List
    },
    lastAndCompleteAndFirst       SEQUENCE {
      lastSegmentShort            LastSegmentShort,
      completeSIB-List            CompleteSIB-List,
      firstSegment                FirstSegmentShort
    },
    completeSIB-List              CompleteSIB-List,
    completeAndFirst              SEQUENCE {
      completeSIB-List            CompleteSIB-List,
      firstSegment                FirstSegmentShort
    },
    completeSIB                   CompleteSIB,
    lastSegment                   LastSegment
  }
}

-- *****
--
-- SYSTEM INFORMATION for FACH
--
-- *****

SystemInformation-FACH ::= SEQUENCE {
  -- Other information elements
  payload                         CHOICE {
    noSegment                     NULL,
    firstSegment                  FirstSegment,
    subsequentSegment             SubsequentSegment,
    lastSegmentShort              LastSegmentShort,
    lastAndFirst                  SEQUENCE {
      lastSegmentShort            LastSegmentShort,
      firstSegment                FirstSegmentShort
    },
    lastAndComplete               SEQUENCE {
      lastSegmentShort            LastSegmentShort,
      completeSIB-List            CompleteSIB-List
    },
    lastAndCompleteAndFirst       SEQUENCE {
      lastSegmentShort            LastSegmentShort,
      completeSIB-List            CompleteSIB-List,
      firstSegment                FirstSegmentShort
    }
}

```



```

    },
    completeSIB-List          CompleteSIB-List,
    completeAndFirst         SEQUENCE {
        completeSIB-List     CompleteSIB-List,
        firstSegment         FirstSegmentShort
    },
    completeSIB              CompleteSIB,
    lastSegment              LastSegment
}

-- *****
--
-- First segment
--
-- *****

FirstSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        seg-Count         SegCount,
        sib-Data-fixed    SIB-Data-fixed
    }

-- *****
--
-- First segment (short)
--
-- *****

FirstSegmentShort ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        seg-Count         SegCount,
        sib-Data-variable SIB-Data-variable
    }

-- *****
--
-- Subsequent segment
--
-- *****

SubsequentSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex      SegmentIndex,
        sib-Data-fixed    SIB-Data-fixed
    }

-- *****
--
-- Last segment
--
-- *****

LastSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex      SegmentIndex,
        sib-Data-fixed    SIB-Data-fixed
        -- In case the SIB data is less than 222 bits, padding shall be used
        -- The same padding bits shall be used as defined in clause 12.1
    }

LastSegmentShort ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex      SegmentIndex,
        sib-Data-variable SIB-Data-variable
    }

-- *****
--
-- Complete SIB
--
-- *****

CompleteSIB-List ::=
    SEQUENCE (SIZE (1..maxSIBperMsg)) OF
        CompleteSIBshort

```

```

CompleteSIB ::=
  -- Other information elements
  sib-Type          SIB-Type,
  sib-Data-fixed    BIT STRING (SIZE (226))
  -- In case the SIB data is less than 226 bits, padding shall be used
  -- The same padding bits shall be used as defined in clause 12.1
}

CompleteSIBshort ::=
  -- Other information elements
  sib-Type          SIB-Type,
  sib-Data-variable SIB-Data-variable
}

-- *****
--
-- SYSTEM INFORMATION CHANGE INDICATION
--
-- *****

SystemInformationChangeIndication ::= SEQUENCE {
  -- Other IEs
  bcch-ModificationInfo          BCCH-ModificationInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION
--
-- *****

TransportChannelReconfiguration-r3 ::= CHOICE {
  r3          SEQUENCE {
    transportChannelReconfiguration-r3
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions          SEQUENCE {}
}

TransportChannelReconfiguration-r4 ::= CHOICE {
  r3          SEQUENCE {
    transportChannelReconfiguration-r3
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions          CHOICE {
    r4          SEQUENCE {
    transportChannelReconfiguration-r4
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
  }
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier          RRC-TransactionIdentifier,
  integrityProtectionModeInfo        IntegrityProtectionModeInfo          OPTIONAL,
  cipheringModeInfo                  CipheringModeInfo                    OPTIONAL,
  activationTime                      ActivationTime                        OPTIONAL,
  new-U-RNTI                          U-RNTI                            OPTIONAL,
  new-C-RNTI                          C-RNTI                            OPTIONAL,
  rrc-StateIndicator                  RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff          UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
  -- Core network IEs
  cn-InformationInfo                  CN-InformationInfo                    OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                        URA-Identity                          OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList                RB-WithPDCP-InfoList                  OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo                UL-CommonTransChInfo                  OPTIONAL,
  ul-AddReconfTransChInfoList          UL-AddReconfTransChInfoList            OPTIONAL,
  modeSpecificTransChInfo              CHOICE {
    fdd          SEQUENCE {
      cpch-SetID          CPCH-SetID          OPTIONAL,
      addReconfTransChDRAC-Info          DRAC-StaticInformationList    OPTIONAL
    },
    tdd          NULL
  }
}

```

```

    }
    dl-CommonTransChInfo          DL-CommonTransChInfo          OPTIONAL,
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList   OPTIONAL,
-- Physical channel IEs
    frequencyInfo                 FrequencyInfo                 OPTIONAL,
    maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power         OPTIONAL,
    ul-ChannelRequirement         UL-ChannelRequirement         OPTIONAL,
    modeSpecificPhysChInfo        CHOICE {
        fdd                       SEQUENCE {
            dl-PDSCH-Information   DL-PDSCH-Information   OPTIONAL
        },
        tdd                       NULL
    },
    dl-CommonInformation           DL-CommonInformation           OPTIONAL,
    dl-InformationPerRL-List       DL-InformationPerRL-List       OPTIONAL
}

```

```

TransportChannelReconfiguration-r4-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
    cipheringModeInfo              CipheringModeInfo              OPTIONAL,
    activationTime                  ActivationTime                   OPTIONAL,
    new-U-RNTI                     U-RNTI                         OPTIONAL,
    new-C-RNTI                     C-RNTI                         OPTIONAL,
    rrc-StateIndicator             RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- Core network IEs
    cn-InformationInfo             CN-InformationInfo             OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity                   URA-Identity                   OPTIONAL,
-- Radio bearer IEs
    rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
-- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo          OPTIONAL,
    ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList   OPTIONAL,
    modeSpecificTransChInfo        CHOICE {
        fdd                       SEQUENCE {
            cpch-SetID             CPCH-SetID                   OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList   OPTIONAL
        },
        tdd                       NULL
    }
    dl-CommonTransChInfo          DL-CommonTransChInfo          OPTIONAL,
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList   OPTIONAL,
-- Physical channel IEs
    frequencyInfo                 FrequencyInfo                 OPTIONAL,
    maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power         OPTIONAL,
    ul-ChannelRequirement         UL-ChannelRequirement-r4      OPTIONAL,
    modeSpecificPhysChInfo        CHOICE {
        fdd                       SEQUENCE {
            dl-PDSCH-Information   DL-PDSCH-Information   OPTIONAL
        },
        tdd                       NULL
    }
    dl-CommonInformation           DL-CommonInformation-r4       OPTIONAL,
    dl-InformationPerRL-List       DL-InformationPerRL-List-r4   OPTIONAL
}

```

```

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
--
-- *****

```

```

TransportChannelReconfigurationComplete ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo     OPTIONAL,
-- TABULAR: UL-TimingAdvance is applicable for 3.84Mcps TDD mode only.
    ul-TimingAdvance               UL-TimingAdvance               OPTIONAL,
-- Radio bearer IEs
    count-C-ActivationTime         ActivationTime                   OPTIONAL,
    rb-UL-CiphActivationTimeInfo    RB-ActivationTimeInfoList      OPTIONAL,
    rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}                   OPTIONAL
}

```

```

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
--

```

```

-- *****
TransportChannelReconfigurationFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}
-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL
--
-- *****

TransportFormatCombinationControl ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message when transmitting this
  message
  -- on the transparent mode signalling DCCH.
  rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
  -- The information element is not included when transmitting the message
  -- on the transparent mode signalling DCCH
  modeSpecificInfo              CHOICE {
    fdd                          NULL,
    tdd                          SEQUENCE {
      tfcs-ID                    TFCS-Identity      OPTIONAL
    }
  },
  dpch-TFCS-InUplink            TFC-Subset,
  tfc-ControlDuration           TFC-ControlDuration      OPTIONAL,
  -- The information element is not included when transmitting the message
  -- on the transparent mode signalling DCCH and is optional otherwise
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}
-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
--
-- *****

TransportFormatCombinationControlFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}
-- *****
--
-- UE CAPABILITY ENQUIRY
--
-- *****

UECapabilityEnquiry-r3 ::= CHOICE {
  r3                             SEQUENCE {
    ueCapabilityEnquiry-r3       UECapabilityEnquiry-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}      OPTIONAL
  },
  criticalExtensions             SEQUENCE {}
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  capabilityUpdateRequirement    CapabilityUpdateRequirement
}
-- *****
--
-- UE CAPABILITY INFORMATION
--
-- *****

UECapabilityInformation ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
  ue-RadioAccessCapability       UE-RadioAccessCapability      OPTIONAL,
  -- Other IEs

```

```

        ue-RATSpecificCapability          InterRAT-UE-RadioAccessCapabilityList
OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions                SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UE CAPABILITY INFORMATION CONFIRM
--
-- *****

UECapabilityInformationConfirm-r3 ::= CHOICE {
    r3                                SEQUENCE {
        ueCapabilityInformationConfirm-r3
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

UECapabilityInformationConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier
}

-- *****
--
-- UPLINK DIRECT TRANSFER
--
-- *****

UplinkDirectTransfer ::= SEQUENCE {
    -- Core network IEs
    cn-DomainIdentity                  CN-DomainIdentity,
    nas-Message                         NAS-Message,
    -- Measurement IEs
    measuredResultsOnRACH               MeasuredResultsOnRACH          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UPLINK PHYSICAL CHANNEL CONTROL
--
-- *****

UplinkPhysicalChannelControl-r3 ::= CHOICE {
    r3                                SEQUENCE {
        uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

UplinkPhysicalChannelControl-r4 ::= CHOICE {
    r3                                SEQUENCE {
        uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    },
    criticalExtensions                CHOICE {
        r4                                SEQUENCE {
            uplinkPhysicalChannelControl-r4 UplinkPhysicalChannelControl-r4-IEs,
            nonCriticalExtensions      SEQUENCE {}          OPTIONAL
        },
        criticalExtensions              SEQUENCE {}
    }
}

UplinkPhysicalChannelControl-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    -- Physical channel IEs
    ccTrCH-PowerControlInfo           CCTrCH-PowerControlInfo          OPTIONAL,
    timingAdvance                     UL-TimingAdvanceControl          OPTIONAL,
    alpha                              Alpha                             OPTIONAL,
    prach-ConstantValue               ConstantValue                    OPTIONAL,
    pusch-ConstantValue               ConstantValue                    OPTIONAL
}

```

```

UplinkPhysicalChannelControl-r4-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Physical channel IEs
  ccTrCH-PowerControlInfo       CCTrCH-PowerControlInfo-r4      OPTIONAL,
  tddOption                      CHOICE {
    tdd384                        SEQUENCE {
      timingAdvance                UL-TimingAdvanceControl-r4  OPTIONAL,
      alpha                        Alpha                        OPTIONAL,
      prach-ConstantValue          ConstantValue              OPTIONAL,
      pusch-ConstantValue          ConstantValue              OPTIONAL
    },
    tdd128                        SEQUENCE {
      ul-SynchronisationParameters UL-SynchronisationParameters  OPTIONAL
    }
  }
}

-- *****
--
-- URA UPDATE
--
-- *****

URAUUpdate ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                          U-RNTI,
  ura-UpdateCause                  URA-UpdateCause,
  protocolErrorIndicator            ProtocolErrorIndicatorWithMoreInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions             SEQUENCE {}      OPTIONAL
}

-- *****
--
-- URA UPDATE CONFIRM
--
-- *****

URAUUpdateConfirm-r3 ::= CHOICE {
  r3                                SEQUENCE {
    uraUpdateConfirm-r3             URAUpdateConfirm-r3-IEs,
    nonCriticalExtensions           SEQUENCE {}      OPTIONAL
  },
  criticalExtensions                SEQUENCE {}
}

URAUUpdateConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier          RRC-TransactionIdentifier,
  integrityProtectionModeInfo       IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo                 CipheringModeInfo                 OPTIONAL,
  new-U-RNTI                         U-RNTI                            OPTIONAL,
  new-C-RNTI                         C-RNTI                            OPTIONAL,
  rrc-StateIndicator                 RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff         UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- CN information elements
  cn-InformationInfo                 CN-InformationInfo                OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                       URA-Identity                       OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList              RB-WithPDCP-InfoList              OPTIONAL
}

-- *****
--
-- URA UPDATE CONFIRM for CCCH
--
-- *****

URAUUpdateConfirm-CCCH-r3 ::= CHOICE {
  r3                                SEQUENCE {
    uraUpdateConfirm-CCCH-r3        URAUpdateConfirm-CCCH-r3-IEs,
    nonCriticalExtensions           SEQUENCE {}      OPTIONAL
  },
  criticalExtensions                SEQUENCE {}
}

URAUUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                          U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  uraUpdateConfirm                  URAUpdateConfirm-r3-IEs
}

```

```

-- *****
--
-- UTRAN MOBILITY INFORMATION
--
-- *****

UTRANMobilityInformation ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo              CipheringModeInfo                    OPTIONAL,
  new-U-RNTI                      U-RNTI                            OPTIONAL,
  new-C-RNTI                      C-RNTI                            OPTIONAL,
  ue-ConnTimersAndConstants       UE-ConnTimersAndConstants        OPTIONAL,
  -- CN information elements
  cn-InformationInfo              CN-InformationInfo                OPTIONAL,
  -- UTRAN mobility IES
  ura-Identity                    URA-Identity                        OPTIONAL,
  -- Radio bearer IES
  count-C-ActivationTime          ActivationTime                      OPTIONAL,
  rb-WithPDCP-InfoList            RB-WithPDCP-InfoList              OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}                      OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION CONFIRM
--
-- *****

UTRANMobilityInformationConfirm ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo      IntegrityProtActivationInfo        OPTIONAL,
  -- Radio bearer IES
  rb-UL-CiphActivationTimeInfo    RB-ActivationTimeInfoList         OPTIONAL,
  rb-WithPDCP-InfoList            RB-WithPDCP-InfoList              OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}                      OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION FAILURE
--
-- *****

UTRANMobilityInformationFailure ::= SEQUENCE {
  -- UE information elements
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}                      OPTIONAL
}

END

```

## 11.3 Information element definitions

InformationElements DEFINITIONS AUTOMATIC TAGS ::=

```

-- *****
--
-- CORE NETWORK INFORMATION ELEMENTS (10.3.1)
--
-- *****

```

BEGIN

IMPORTS

```

  hiPDSCHidentities,
  hiPUSCHidentities,
  hiRM,
  maxAC,
  maxAdditionalMeas,
  maxASC,
  maxASCmap,
  maxASCpersist,

```

```

maxCCTrCH,
maxCellMeas,
maxCellMeas-1,
maxCNdomains,
maxCPCHsets,
maxDPCH-DLchan,
maxDPCHcodesPerTS,
maxDPDCH-UL,
maxDRACclasses,
maxFACH,
maxFreq,
maxFrequencybands,
maxInterSysMessages,
maxLoCHperRLC,
maxMeasEvent,
maxMeasIntervals,
maxMeasParEvent,
maxNumCDMA2000Freqs,
maxNumFDDFreqs,
maxNumGSMFreqRanges,
maxNumTDDFreqs,
maxOtherRAT,
maxPage1,
maxPCPCH-APsig,
maxPCPCH-APsubCh,
maxPCPCH-CDSig,
maxPCPCH-CDSUBch,
maxPCPCH-SF,
maxPCPCHs,
maxPDCPAlgoType,
maxPDSCH,
maxPDSCH-TFCIgroups,
maxPRACH,
maxPUSCH,
maxRABsetup,
maxRAT,
maxRB,
maxRBallRABs,
maxRBMuxOptions,
maxRBperRAB,
maxReportedGSMCells,
maxSRBsetup,
maxRL,
maxRL-1,
maxSCCPCH,
maxSat,
maxSIB,
maxSIB-FACH,
maxSig,
maxSubCh,
maxSystemCapability,
maxTF,
maxTF-CPCH,
maxTFC,
maxTFCI-2-Combs,
maxTGPS,
maxTrCH,
maxTS,
maxTS-1,
maxTS-LCR,
maxTS-LCR-1,
maxURA

```

FROM Constant-definitions;

```

CN-DomainIdentity ::=          ENUMERATED {
                                cs-domain,
                                ps-domain }

CN-DomainInformation ::=      SEQUENCE {
                                cn-DomainIdentity,
                                cn-DomainSpecificNAS-Info
                                }

CN-DomainInformationList ::=  SEQUENCE (SIZE (1..maxCNdomains)) OF
                                CN-DomainInformation

CN-DomainSysInfo ::=          SEQUENCE {
                                cn-DomainIdentity,
                                cn-Type
                                    CHOICE {
                                        gsm-MAP
                                        ansi-41
                                    }
                                },
                                cn-DRX-CycleLengthCoeff
                                CN-DRX-CycleLengthCoefficient

```



```

}

CN-DomainSysInfoList ::=          SEQUENCE (SIZE (1..maxCNdomains)) OF
                                   CN-DomainSysInfo

CN-InformationInfo ::=          SEQUENCE {
    plmn-Identity                 PLMN-Identity                 OPTIONAL,
    cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP  OPTIONAL,
    cn-DomainInformationList      CN-DomainInformationList      OPTIONAL
}

Digit ::=                        INTEGER (0..9)

IMEI ::=                         SEQUENCE (SIZE (15)) OF
                                   IMEI-Digit

IMEI-Digit ::=                  INTEGER (0..15)

IMSI-GSM-MAP ::=               SEQUENCE (SIZE (6..15)) OF
                                   Digit

IntraDomainNasNodeSelector ::=  BIT STRING (SIZE (16))

LAI ::=                         SEQUENCE {
    plmn-Identity                 PLMN-Identity,
    lac                           BIT STRING (SIZE (16))
}

MCC ::=                         SEQUENCE (SIZE (3)) OF
                                   Digit

MNC ::=                         SEQUENCE (SIZE (2..3)) OF
                                   Digit

NAS-Message ::=                OCTET STRING (SIZE (1..4095))

NAS-Synchronisation-Indicator ::= BIT STRING(SIZE(4))

NAS-SystemInformationGSM-MAP ::= OCTET STRING (SIZE (1..8))

P-TMSI-GSM-MAP ::=             BIT STRING (SIZE (32))

PagingRecordTypeID ::=         ENUMERATED {
    imsi-GSM-MAP,
    tmsi-GSM-MAP-P-TMSI,
    imsi-DS-41,
    tmsi-DS-41 }

PLMN-Identity ::=              SEQUENCE {
    mcc                            MCC,
    mnc                            MNC
}

PLMN-Type ::=                  CHOICE {
    gsm-MAP                        SEQUENCE {
        plmn-Identity
    },
    ansi-41                        SEQUENCE {
        p-REV,
        min-P-REV,
        sid,
        nid
    },
    gsm-MAP-and-ANSI-41            SEQUENCE {
        plmn-Identity,
        p-REV,
        min-P-REV,
        sid,
        nid
    }
}

RAB-Identity ::=               CHOICE {
    gsm-MAP-RAB-Identity           BIT STRING (SIZE (8)),
    ansi-41-RAB-Identity           BIT STRING (SIZE (8))
}

RAI ::=                         SEQUENCE {
    lai                            LAI,
    rac                            RoutingAreaCode
}

```

```

RoutingAreaCode ::=          BIT STRING (SIZE (8))

TMSI-GSM-MAP ::=          BIT STRING (SIZE (32))

-- *****
--
--      UTRAN MOBILITY INFORMATION ELEMENTS (10.3.2)
--
-- *****

AccessClassBarred ::=          ENUMERATED {
                                barred, notBarred }

AccessClassBarredList ::=      SEQUENCE (SIZE (maxAC)) OF
                                AccessClassBarred

AllowedIndicator ::=          ENUMERATED {
                                allowed, notAllowed }

CellAccessRestriction ::=      SEQUENCE {
                                cellBarred          CellBarred,
                                cellReservedForOperatorUse  ReservedIndicator,
                                cellReservedForSOLSA      ReservedIndicator,
                                accessClassBarredList     AccessClassBarredList           OPTIONAL
                                }

CellBarred ::=                CHOICE {
                                barred              SEQUENCE {
                                                        intraFreqCellReselectionInd  AllowedIndicator,
                                                        t-Barred          T-Barred
                                                    },
                                notBarred          NULL
                                }

CellIdentity ::=              BIT STRING (SIZE (28))

CellSelectReselectInfoSIB-3-4 ::= SEQUENCE {
                                mappingInfo          MappingInfo           OPTIONAL,
                                cellSelectQualityMeasure  CHOICE {
                                                        cpich-Ec-No          SEQUENCE {
                                                                    q-HYST-2-S          Q-Hyst-S           OPTIONAL
                                                                    -- Default value for q-HYST-2-S is q-HYST-1-S
                                                                },
                                                        cpich-RSCP          NULL
                                                    },
                                modeSpecificInfo        CHOICE {
                                                        fdd              SEQUENCE {
                                                                    s-Intrasearch      S-SearchQual      OPTIONAL,
                                                                    s-Intersearch      S-SearchQual      OPTIONAL,
                                                                    s-SearchHCS        S-SearchRXLEV     OPTIONAL,
                                                                    rat-List           RAT-FDD-InfoList  OPTIONAL,
                                                                    q-QualMin          Q-QualMin,
                                                                    q-RxlevMin         Q-RxlevMin
                                                                },
                                                        tdd              SEQUENCE {
                                                                    s-Intrasearch      S-SearchRXLEV     OPTIONAL,
                                                                    s-Intersearch      S-SearchRXLEV     OPTIONAL,
                                                                    s-SearchHCS        S-SearchRXLEV     OPTIONAL,
                                                                    rat-List           RAT-TDD-InfoList  OPTIONAL,
                                                                    q-RxlevMin         Q-RxlevMin
                                                                }
                                                    },
                                q-Hyst-1-S            Q-Hyst-S,
                                t-Reselection-S        T-Reselection-S,
                                hcs-ServingCellInformation  HCS-ServingCellInformation  OPTIONAL,
                                maxAllowedUL-TX-Power  MaxAllowedUL-TX-Power
                                }

MapParameter ::=              INTEGER (0..99)

Mapping ::=                    SEQUENCE {
                                rat                  RAT,
                                mappingFunctionParameterList  MappingFunctionParameterList
                                }

MappingFunctionParameter ::=  SEQUENCE {
                                functionType          MappingFunctionType,
                                mapParameter1         MapParameter           OPTIONAL,
                                mapParameter2         MapParameter,
                                upperLimit           UpperLimit           OPTIONAL
                                -- The parameter is conditional on the number of repetition
                                }

```

```

MappingFunctionParameterList ::= SEQUENCE (SIZE (1..maxMeasIntervals)) OF
    MappingFunctionParameter

MappingFunctionType ::= ENUMERATED {
    linear,
    functionType2,
    functionType3,
    functionType4 }

MappingInfo ::= SEQUENCE (SIZE (1..maxRAT)) OF
    Mapping

-- Actual value = IE value * 2
Q-Hyst-S ::= INTEGER (0..20)

RAT ::= ENUMERATED {
    ultra-FDD,
    ultra-TDD,
    gsm,
    cdma2000 }

RAT-FDD-Info ::= SEQUENCE {
    rat-Identifier          RAT-Identifier,
    s-SearchRAT            S-SearchQual,
    s-HCS-RAT              S-SearchRXLEV          OPTIONAL,
    s-Limit-SearchRAT      S-SearchQual
}

RAT-FDD-InfoList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
    RAT-FDD-Info

RAT-Identifier ::= ENUMERATED {
    gsm, cdma2000 }

RAT-TDD-Info ::= SEQUENCE {
    rat-Identifier          RAT-Identifier,
    s-SearchRAT            S-SearchRXLEV,
    s-HCS-RAT              S-SearchRXLEV          OPTIONAL,
    s-Limit-SearchRAT      S-SearchRXLEV
}

RAT-TDD-InfoList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
    RAT-TDD-Info

ReservedIndicator ::= ENUMERATED {
    reserved,
    notReserved }

-- Actual value = IE value * 2
S-SearchQual ::= INTEGER (-16..10)

-- Actual value = (IE value * 2) + 1
S-SearchRXLEV ::= INTEGER (-53..45)

T-Barred ::= ENUMERATED {
    s10, s20, s40, s80,
    s160, s320, s640, s1280 }

T-Reselection-S ::= INTEGER (0..31)

-- The used range depends on the RAT used.
UpperLimit ::= INTEGER (1..91)

URA-Identity ::= BIT STRING (SIZE (16))

URA-IdentityList ::= SEQUENCE (SIZE (1..maxURA)) OF
    URA-Identity

-- *****
--
--     USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
--
-- *****

ActivationTime ::= INTEGER (0..255)
-- TABULAR : value 'now' always appear as default, and is encoded by absence of the field

BackoffControlParams ::= SEQUENCE {
    n-AP-RetransMax      N-AP-RetransMax,
    n-AccessFails        N-AccessFails,
    nf-BO-NoAICH          NF-BO-NoAICH,

```

```

    ns-BO-Busy           NS-BO-Busy,
    nf-BO-AllBusy       NF-BO-AllBusy,
    nf-BO-Mismatch      NF-BO-Mismatch,
    t-CPCH              T-CPCH
}

C-RNTI ::=              BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::= SEQUENCE {
    ue-RadioCapabilityUpdateRequirement BOOLEAN,
    systemSpecificCapUpdateReqList     SystemSpecificCapUpdateReqList     OPTIONAL
}

CellUpdateCause ::=    ENUMERATED {
    cellReselection,
    periodicalCellUpdate,
    uplinkDataTransmission,
    utran-pagingResponse,
    re-enteredServiceArea,
    radiolinkFailure,
    rlc-unrecoverableError,
    spare1 }

ChipRateCapability ::=  ENUMERATED {
    mcps3-84, mcps1-28 }

CipheringAlgorithm ::=  ENUMERATED {
    uea0, uea1 }

CipheringModeCommand ::= CHOICE {
    startRestart         CipheringAlgorithm,
    stopCiphering        NULL
}

CipheringModeInfo ::=   SEQUENCE {
    cipheringModeCommand CipheringModeCommand,
    -- TABULAR: The ciphering algorithm is included in
    -- the CipheringModeCommand.
    activationTimeForDPCH      ActivationTime      OPTIONAL,
    rb-DL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL
}

CN-DRX-CycleLengthCoefficient ::= INTEGER (6..9)

CN-PagedUE-Identity ::= CHOICE {
    imsi-GSM-MAP          IMSI-GSM-MAP,
    tmsi-GSM-MAP          TMSI-GSM-MAP,
    p-TMSI-GSM-MAP        P-TMSI-GSM-MAP,
    imsi-DS-41            IMSI-DS-41,
    tmsi-DS-41            TMSI-DS-41
}

CompressedModeMeasCapability ::= SEQUENCE {
    fdd-Measurements      BOOLEAN,
    -- TABULAR: The IEs below are made optional since they are conditional based
    -- on another information element. Their absence corresponds to the case where
    -- the condition is not true.
    tdd-Measurements      BOOLEAN      OPTIONAL,
    gsm-Measurements      GSM-Measurements OPTIONAL,
    multiCarrierMeasurements BOOLEAN    OPTIONAL
}

CPCH-Parameters ::=    SEQUENCE {
    initialPriorityDelayList InitialPriorityDelayList     OPTIONAL,
    backoffControlParams     BackoffControlParams,
    powerControlAlgorithm    PowerControlAlgorithm,
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    dl-DPCCH-BER            DL-DPCCH-BER
}

DL-DPCCH-BER ::=       INTEGER (0..63)

DL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPCH-PDSCH-Codes     INTEGER (1..8),
    maxNoPhysChBitsReceived   MaxNoPhysChBitsReceived,
    supportForSF-512          BOOLEAN,
    supportOfPDSCH            BOOLEAN,
    simultaneousSCCPCH-DPCH-Reception SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityTDD ::= SEQUENCE {

```

maxTS-PerFrame	MaxTS-PerFrame,
maxPhysChPerFrame	MaxPhysChPerFrame,
minimumSF	MinimumSF-DL,
supportOfPDSCH	BOOLEAN,
maxPhysChPerTS	MaxPhysChPerTS
}	
DL-TransChCapability ::=	SEQUENCE {
maxNoBitsReceived	MaxNoBits,
maxConvCodeBitsReceived	MaxNoBits,
turboDecodingSupport	TurboSupport,
maxSimultaneousTransChs	MaxSimultaneousTransChsDL,
maxSimultaneousCCTrCH-Count	MaxSimultaneousCCTrCH-Count,
maxReceivedTransportBlocks	MaxTransportBlocksDL,
maxNumberOfTFC-InTFCS	MaxNumberOfTFC-InTFCS-DL,
maxNumberOfTF	MaxNumberOfTF
}	
DRAC-SysInfo ::=	SEQUENCE {
transmissionProbability	TransmissionProbability,
maximumBitRate	MaximumBitRate
}	
DRAC-SysInfoList ::=	SEQUENCE (SIZE (1..maxDRACclasses)) OF
	DRAC-SysInfo
ESN-DS-41 ::=	BIT STRING (SIZE (32))
EstablishmentCause ::=	ENUMERATED {
	originatingConversationalCall,
	originatingStreamingCall,
	originatingInteractiveCall,
	originatingBackgroundCall,
	originatingSubscribedTrafficCall,
	terminatingConversationalCall,
	terminatingStreamingCall,
	terminatingInteractiveCall,
	terminatingBackgroundCall,
	emergencyCall,
	interRAT-CellReselection,
	interRAT-CellChangeOrder,
	registration,
	detach,
	highPrioritySignalling,
	lowPrioritySignalling,
	callRe-establishment,
	spare1 }
FailureCauseWithProtErr ::=	CHOICE {
configurationUnsupported	NULL,
physicalChannelFailure	NULL,
incompatibleSimultaneousReconfiguration	NULL,
compressedModeRuntimeError	TGPSI,
protocolError	ProtocolErrorInformation,
cellReselection	NULL,
invalidConfiguration	NULL,
configurationIncomplete	NULL,
unsupportedMeasurement	NULL,
spare1	NULL,
spare2	NULL,
spare3	NULL,
spare4	NULL,
spare5	NULL,
spare6	NULL,
spare7	NULL,
}	
FailureCauseWithProtErrTrId ::=	SEQUENCE {
rrc-TransactionIdentifier	RRC-TransactionIdentifier,
failureCause	FailureCauseWithProtErr
}	
GSM-Measurements ::=	SEQUENCE {
gsm900	BOOLEAN,
dcs1800	BOOLEAN,
gsm1900	BOOLEAN
}	
ICS-Version ::=	ENUMERATED {
	r99 }

```

IMSI-and-ESN-DS-41 ::= SEQUENCE {
    imsi-DS-41
    esn-DS-41
}

IMSI-DS-41 ::= OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::= SEQUENCE (SIZE (maxASC)) OF
    NS-IP

InitialUE-Identity ::= CHOICE {
    imsi
    tmsi-and-LAI
    p-TMSI-and-RAI
    imei
    esn-DS-41
    imsi-DS-41
    imsi-and-ESN-DS-41
    tmsi-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode
    rrc-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList
}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uial
}

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection SEQUENCE {
        integrityProtInitNumber
    },
    modify SEQUENCE {
        dl-IntegrityProtActivationInfo
    }
}

IntegrityProtectionModeInfo ::= SEQUENCE {
    integrityProtectionModeCommand IntegrityProtectionModeCommand,
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionAlgorithm IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MaxHcContextSpace ::= ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192
}

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am32
}

-- Actual value = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600
}

MaxNoBits ::= ENUMERATED {
    b640, b1280, b2560, b3840, b5120,
    b6400, b7680, b8960, b10240,
    b20480, b40960, b81920, b163840
}

MaxNoPhysChBitsReceived ::= ENUMERATED {
    b600, b1200, b2400, b3600,
    b4800, b7200, b9600, b14400,

```

```

        b19200, b28800, b38400, b48000,
        b57600, b67200, b76800 }

MaxNoSCCPCH-RL ::=          ENUMERATED {
                               r11 }

MaxNumberOfTF ::=          ENUMERATED {
                               tf32, tf64, tf128, tf256,
                               tf512, tf1024 }

MaxNumberOfTFC-InTFCS-DL ::= ENUMERATED {
                               tfc16, tfc32, tfc48, tfc64, tfc96,
                               tfc128, tfc256, tfc512, tfc1024 }

MaxNumberOfTFC-InTFCS-UL ::= ENUMERATED {
                               tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
                               tfc96, tfc128, tfc256, tfc512, tfc1024 }

MaxPhysChPerFrame ::=      INTEGER (1..224)

MaxPhysChPerTimeslot ::=   ENUMERATED {
                               ts1, ts2 }

MaxPhysChPerTS ::=         INTEGER (1..16)

MaxSimultaneousCCTrCH-Count ::= INTEGER (1..8)

MaxSimultaneousTransChsDL ::= ENUMERATED {
                               e4, e8, e16, e32 }

MaxSimultaneousTransChsUL ::= ENUMERATED {
                               e2, e4, e8, e16, e32 }

MaxTransportBlocksDL ::=   ENUMERATED {
                               tb4, tb8, tb16, tb32, tb48,
                               tb64, tb96, tb128, tb256, tb512 }

MaxTransportBlocksUL ::=   ENUMERATED {
                               tb2, tb4, tb8, tb16, tb32, tb48,
                               tb64, tb96, tb128, tb256, tb512 }

MaxTS-PerFrame ::=         INTEGER (1..14)

-- TABULAR: This IE contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.
MeasurementCapability ::=   SEQUENCE {
    downlinkCompressedMode    CompressedModeMeasCapability,
    uplinkCompressedMode      CompressedModeMeasCapability
}

MessageAuthenticationCode ::= BIT STRING (SIZE (32))

MinimumSF-DL ::=           ENUMERATED {
                               sf1, sf16 }

MinimumSF-UL ::=           ENUMERATED {
                               sf1, sf2, sf4, sf8, sf16 }

MultiModeCapability ::=    ENUMERATED {
                               tdd, fdd, fdd-tdd }

MultiRAT-Capability ::=    SEQUENCE {
    supportOfGSM              BOOLEAN,
    supportOfMulticarrier     BOOLEAN
}

N-300 ::=                  INTEGER (0..7)

N-301 ::=                  INTEGER (0..7)

N-302 ::=                  INTEGER (0..7)

N-304 ::=                  INTEGER (0..7)

N-308 ::=                  INTEGER (1..8)

N-310 ::=                  INTEGER (0..7)

N-312 ::=                  ENUMERATED {
                               s1, s50, s100, s200, s400,
                               s600, s800, s1000 }

```

```

N-313 ::=
    ENUMERATED {
        s1, s2, s4, s10, s20,
        s50, s100, s200 }

N-315 ::=
    ENUMERATED {
        s1, s50, s100, s200, s400,
        s600, s800, s1000 }

N-AccessFails ::=
    INTEGER (1..64)

N-AP-RetransMax ::=
    INTEGER (1..64)

NetworkAssistedGPS-Supported ::=
    ENUMERATED {
        networkBased,
        ue-Based,
        bothNetworkAndUE-Based,
        noNetworkAssistedGPS }

NF-BO-AllBusy ::=
    INTEGER (0..31)

NF-BO-NoAICH ::=
    INTEGER (0..31)

NF-BO-Mismatch ::=
    INTEGER (0..127)

NS-BO-Busy ::=
    INTEGER (0..63)

NS-IP ::=
    INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::=
    SEQUENCE {
        p-TMSI
        rai
    }

PagingCause ::=
    ENUMERATED {
        terminatingConversationalCall,
        terminatingStreamingCall,
        terminatingInteractiveCall,
        terminatingBackgroundCall,
        highPrioritySignalling,
        lowPrioritySignalling
    }

PagingRecord ::=
    CHOICE {
        cn-Identity
            SEQUENCE {
                pagingCause
                cn-DomainIdentity
                cn-pagedUE-Identity
            },
        utran-Identity
            SEQUENCE {
                u-RNTI
                cn-OriginatedPage-connectedMode-UE
                pagingCause
                cn-DomainIdentity
                pagingRecordTypeID
            }
    }
    OPTIONAL

PagingRecordList ::=
    SEQUENCE (SIZE (1..maxPage1)) OF
        PagingRecord

PDCP-Capability ::=
    SEQUENCE {
        losslessSRNS-RelocationSupport
        supportForRfc2507
    }
    CHOICE {
        notSupported
        supported
    }
    BOOLEAN,
    NULL,
    MaxHcContextSpace

PhysicalChannelCapability ::=
    SEQUENCE {
        fddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                uplinkPhysChCapability
            }
            DL-PhysChCapabilityFDD,
            UL-PhysChCapabilityFDD
            OPTIONAL,
        tddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                uplinkPhysChCapability
            }
            DL-PhysChCapabilityTDD,
            UL-PhysChCapabilityTDD
            OPTIONAL
    }

ProtocolErrorCause ::=
    ENUMERATED {

```



```

        asn1-ViolationOrEncodingError,
        messageTypeNonexistent,
        messageNotCompatibleWithReceiverState,
        ie-ValueNotComprehended,
        conditionalInformationElementError,
        messageExtensionNotComprehended,
        spare1, spare2 }

ProtocolErrorIndicator ::=          ENUMERATED {
        noError, errorOccurred }

ProtocolErrorIndicatorWithMoreInfo ::=
        CHOICE {
        noError                      NULL,
        errorOccurred                SEQUENCE {
                rrc-TransactionIdentifier    RRC-TransactionIdentifier,
                protocolErrorInformation     ProtocolErrorInformation
        }
        }

ProtocolErrorMoreInformation ::=    SEQUENCE {
        diagnosticsType              CHOICE {
                type1                    CHOICE {
                        asn1-ViolationOrEncodingError    NULL,
                        messageTypeNonexistent           NULL,
                        messageNotCompatibleWithReceiverState
                                IdentificationOfReveivedMessage,
                        ie-ValueNotComprehended          IdentificationOfReveivedMessage,
                        conditionalInformationElementError IdentificationOfReveivedMessage,
                        messageExtensionNotComprehended  IdentificationOfReveivedMessage,
                        spare1                          NULL,
                        spare2                          NULL
                },
                spare                      NULL
        }
        }

RadioFrequencyBand ::=             ENUMERATED {
        a, b, c, ab, ac, bc, abc }

Rb-timer-indicator ::=            SEQUENCE {
        t314-expired                 BOOLEAN,
        t315-expired                 BOOLEAN }

Re-EstablishmentTimer ::=         ENUMERATED {
        useT314, useT315
        }

RedirectionInfo ::=              CHOICE {
        frequencyInfo                FrequencyInfo,
        interRATInfo                 InterRATInfo
        }

RejectionCause ::=              ENUMERATED {
        congestion,
        unspecified }

ReleaseCause ::=                 ENUMERATED {
        normalEvent,
        unspecified,
        pre-emptiveRelease,
        congestion,
        re-establishmentReject,
        directedsignallingconnectionre-establishment,
        userInactivity }

RF-Capability ::=                SEQUENCE {
        fddRF-Capability              SEQUENCE {
                ue-PowerClass            UE-PowerClass,
                txRxFrequencySeparation  TxRxFrequencySeparation
        },
        tddRF-Capability              SEQUENCE {
                ue-PowerClass            UE-PowerClass,
                radioFrequencyBandList   RadioFrequencyBand,
                chipRateCapability        ChipRateCapability
        },
        OPTIONAL
        }

RLC-Capability ::=              SEQUENCE {
        totalRLC-AM-BufferSize        TotalRLC-AM-BufferSize,

```

```

    maximumRLC-WindowSize           MaximumRLC-WindowSize,
    maximumAM-EntityNumber         MaximumAM-EntityNumberRLC-Cap
}

RRC-MessageSequenceNumber ::=      INTEGER (0..15)

RRC-MessageSequenceNumberList ::=  SEQUENCE (SIZE (4..5)) OF
                                     RRC-MessageSequenceNumber

RRC-StateIndicator ::=             ENUMERATED {
                                     cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::=      INTEGER (0..3)

S-RNTI ::=                         BIT STRING (SIZE (20))

S-RNTI-2 ::=                       BIT STRING (SIZE (10))

SecurityCapability ::=             SEQUENCE {
    cipheringAlgorithmCap          BIT STRING (SIZE (16)),
    integrityProtectionAlgorithmCap BIT STRING (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported                   NULL,
    supported                       SEQUENCE {
        maxNoSCCPCH-RL             MaxNoSCCPCH-RL,
        simultaneousSCCPCH-DPCH-DPDCH-Reception
                                     BOOLEAN
        -- The IE above is applicable only if IE Support of PDSCH = TRUE
    }
}

SRNC-Identity ::=                 BIT STRING (SIZE (12))

START-Value ::=                   BIT STRING (SIZE (20))

STARTList ::=                      SEQUENCE (SIZE (1..maxCNdomains)) OF
                                     STARTSingle

STARTSingle ::=                    SEQUENCE {
    cn-DomainIdentity              CN-DomainIdentity,
    start-Value                     START-Value
}

SystemSpecificCapUpdateReq ::=     ENUMERATED {
    gsm }

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
                                     SystemSpecificCapUpdateReq

T-300 ::=                          ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000 }

T-301 ::=                          ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000 }

T-302 ::=                          ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000 }

T-304 ::=                          ENUMERATED {
    ms100, ms200, ms400,
    ms1000, ms2000 }

T-305 ::=                          ENUMERATED {
    noUpdate, m5, m10, m30,
    m60, m120, m360, m720 }

T-307 ::=                          ENUMERATED {
    s5, s10, s15, s20,

```

```

        s30, s40, s50 }
T-308 ::= ENUMERATED {
        ms40, ms80, ms160, ms320 }
T-309 ::= INTEGER (1..8)
T-310 ::= ENUMERATED {
        ms40, ms80, ms120, ms160,
        ms200, ms240, ms280, ms320 }
T-311 ::= ENUMERATED {
        ms250, ms500, ms750, ms1000,
        ms1250, ms1500, ms1750, ms2000 }
T-312 ::= INTEGER (0..15)
T-313 ::= INTEGER (0..15)
T-314 ::= ENUMERATED {
        s0, s2, s4, s6, s8,
        s12, s16, s20 }
T-315 ::= ENUMERATED {
        s0, s10, s30, s60, s180,
        s600, s1200, s1800 }
T-316 ::= ENUMERATED {
        s0, s10, s20, s30, s40,
        s50, s-inf }
T-317 ::= ENUMERATED {
        s0, s10, s30, s60, s180,
        s600, s1200, s1800 }
T-CPCH ::= ENUMERATED {
        ct0, ct1 }
TMSI-and-LAI-GSM-MAP ::= SEQUENCE {
        tmsi
        lai
}
TMSI-DS-41 ::= OCTET STRING (SIZE (2..12))
TotalRLC-AM-BufferSize ::= ENUMERATED {
        kb2, kb10, kb50, kb100,
        kb150, kb500, kb1000 }
-- Actual value = IE value * 0.125
TransmissionProbability ::= INTEGER (1..8)
TransportChannelCapability ::= SEQUENCE {
        dl-TransChCapability
        ul-TransChCapability
}
TurboSupport ::= CHOICE {
        notSupported
        supported
}
TxRxFrequencySeparation ::= ENUMERATED {
        mhz190, mhz174-8-205-2,
        mhz134-8-245-2 }
U-RNTI ::= SEQUENCE {
        srnc-Identity
        s-RNTI
}
U-RNTI-Short ::= SEQUENCE {
        srnc-Identity
        s-RNTI-2
}
UE-ConnTimersAndConstants ::= SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
        t-301 T-301 DEFAULT ms2000,
        n-301 N-301 DEFAULT 2,
        t-302 T-302 DEFAULT ms4000,
        n-302 N-302 DEFAULT 3,

```

t-304	T-304	OPTIONAL,
n-304	N-304	OPTIONAL,
t-305	T-305	DEFAULT m30,
t-307	T-307	DEFAULT s30,
t-308	T-308	OPTIONAL,
t-309	T-309	OPTIONAL,
t-310	T-310	DEFAULT ms160,
n-310	N-310	DEFAULT 4,
t-311	T-311	DEFAULT ms2000,
t-312	T-312	DEFAULT 1,
n-312	N-312	DEFAULT s1,
t-313	T-313	OPTIONAL,
n-313	N-313	OPTIONAL,
t-314	T-314	OPTIONAL,
t-315	T-315	OPTIONAL,
n-315	N-315	OPTIONAL,
t-316	T-316	OPTIONAL,
t-317	T-317	OPTIONAL
}		
UE-IdleTimersAndConstants ::=	SEQUENCE {	
t-300	T-300,	
n-300	N-300,	
t-312	T-312,	
n-312	N-312	
}		
UE-MultiModeRAT-Capability ::=	SEQUENCE {	
multiRAT-CapabilityList	MultiRAT-Capability,	
multiModeCapability	MultiModeCapability	
}		
UE-PowerClass ::=	INTEGER (1..4)	
UE-RadioAccessCapability ::=	SEQUENCE {	
ics-Version	ICS-Version,	
pdcp-Capability	PDCP-Capability,	
rlc-Capability	RLC-Capability,	
transportChannelCapability	TransportChannelCapability,	
rf-Capability	RF-Capability,	
physicalChannelCapability	PhysicalChannelCapability,	
ue-MultiModeRAT-Capability	UE-MultiModeRAT-Capability,	
securityCapability	SecurityCapability,	
up-Capability	UP-Capability,	
measurementCapability	MeasurementCapability	OPTIONAL
}		
UL-PhysChCapabilityFDD ::=	SEQUENCE {	
maxNoDPDCH-BitsTransmitted	MaxNoDPDCH-BitsTransmitted,	
supportOfPCPCH	BOOLEAN	
}		
UL-PhysChCapabilityTDD ::=	SEQUENCE {	
maxTS-PerFrame	MaxTS-PerFrame,	
maxPhysChPerTimeslot	MaxPhysChPerTimeslot,	
minimumSF	MinimumSF-UL,	
supportOfPUSCH	BOOLEAN	
}		
UL-TransChCapability ::=	SEQUENCE {	
maxNoBitsTransmitted	MaxNoBits,	
maxConvCodeBitsTransmitted	MaxNoBits,	
turboDecodingSupport	TurboSupport,	
maxSimultaneousTransChs	MaxSimultaneousTransChsUL,	
modeSpecificInfo	CHOICE {	
fdd	NULL,	
tdd	SEQUENCE {	
maxSimultaneousCCTrCH-Count	MaxSimultaneousCCTrCH-Count	
}		
},		
maxTransmittedBlocks	MaxTransportBlocksUL,	
maxNumberOfTFC-InTFCS	MaxNumberOfTFC-InTFCS-UL,	
maxNumberOfTF	MaxNumberOfTF	
}		
UP-Capability ::=	SEQUENCE {	
standaloneLocMethodsSupported	BOOLEAN,	
ue-BasedOTDOA-Supported	BOOLEAN,	
networkAssistedGPS-Supported	NetworkAssistedGPS-Supported,	
gps-ReferenceTimeCapable	BOOLEAN,	
supportForIDL	BOOLEAN	
}		

```

URA-UpdateCause ::=
    ENUMERATED {
        changeOfURA,
        periodicURAUpdate,
        re-enteredServiceArea,
        spare1 }

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::=
    INTEGER (0..15)

-- *****
--
--     RADIO BEARER INFORMATION ELEMENTS (10.3.4)
--
-- *****

AlgorithmSpecificInfo ::=
    CHOICE {
        rfc2507-Info
    }

-- Upper limit is 2^32 - 1
COUNT-C ::=
    INTEGER (0..4294967295)

-- Upper limit is 2^25 - 1
COUNT-C-MSB ::=
    INTEGER (0..33554431)

DL-AM-RLC-Mode ::=
    SEQUENCE {
        inSequenceDelivery
        receivingWindowSize
        dl-RLC-StatusInfo
    }

DL-LogicalChannelMapping ::=
    SEQUENCE {
        -- TABULAR: DL-TransportChannelType contains TransportChannelIdentity as well.
        dl-TransportChannelType
        logicalChannelIdentity
    }

DL-LogicalChannelMappingList ::=
    SEQUENCE (SIZE (1..maxLoCHperRLC)) OF
        DL-LogicalChannelMapping

DL-RLC-Mode ::=
    CHOICE {
        dl-AM-RLC-Mode
        dl-UM-RLC-Mode
        dl-TM-RLC-Mode
    }

DL-RLC-StatusInfo ::=
    SEQUENCE {
        timerStatusProhibit
        timerEPC
        missingPU-Indicator
        timerStatusPeriodic
    }

DL-TM-RLC-Mode ::=
    SEQUENCE {
        segmentationIndication
    }

DL-TransportChannelType ::=
    CHOICE {
        dch
        fach
        dsch
    }

ExpectReordering ::=
    ENUMERATED {
        reorderingNotExpected,
        reorderingExpected }

ExplicitDiscard ::=
    SEQUENCE {
        timerMRW
        timerDiscard
        maxMRW
    }

HeaderCompressionInfo ::=
    SEQUENCE {
        algorithmSpecificInfo
    }

HeaderCompressionInfoList ::=
    SEQUENCE (SIZE (1..maxPDCPALgoType)) OF
        HeaderCompressionInfo

```

```

LogicalChannelIdentity ::= INTEGER (1..15)

LosslessSRNS-RelocSupport ::= CHOICE {
    supported
    notSupported
}

MAC-LogicalChannelPriority ::= INTEGER (1..8)

MaxDAT ::= ENUMERATED {
    dat1, dat2, dat3, dat4, dat5, dat6,
    dat7, dat8, dat9, dat10, dat15, dat20,
    dat25, dat30, dat35, dat40 }

MaxDAT-Retransmissions ::= SEQUENCE {
    maxDAT
    timerMRW
    maxMRW
}

MaxMRW ::= ENUMERATED {
    mm1, mm4, mm6, mm8, mm12, mm16,
    mm24, mm32 }

MaxPDCP-SN-WindowSize ::= ENUMERATED {
    sn255, sn65535 }

MaxRST ::= ENUMERATED {
    rst1, rst4, rst6, rst8, rst12,
    rst16, rst24, rst32 }

NoExplicitDiscard ::= ENUMERATED {
    dt10, dt20, dt30, dt40, dt50,
    dt60, dt70, dt80, dt90, dt100 }

PDCP-Info ::= SEQUENCE {
    losslessSRNS-RelocSupport          OPTIONAL,
    pdcp-PDU-Header                    OPTIONAL,
    -- TABULAR: The IE above is MD in the tabular format and it can be encoded
    -- in one bit, so the OPTIONAL is removed for compactness.
    headerCompressionInfoList         OPTIONAL
}

PDCP-InfoReconfig ::= SEQUENCE {
    pdcp-Info
    pdcp-SN-Info
}

PDCP-PDU-Header ::= ENUMERATED {
    present, absent }

PDCP-SN-Info ::= INTEGER (0..65535)

Poll-PU ::= ENUMERATED {
    pu1, pu2, pu4, pu8, pu16,
    pu32, pu64, pu128 }

Poll-SDU ::= ENUMERATED {
    sdu1, sdu4, sdu16, sdu64 }

PollingInfo ::= SEQUENCE {
    timerPollProhibit          OPTIONAL,
    timerPoll                  OPTIONAL,
    poll-PU                    OPTIONAL,
    poll-SDU                   OPTIONAL,
    lastTransmissionPU-Poll    BOOLEAN,
    lastRetransmissionPU-Poll  BOOLEAN,
    pollWindow                 OPTIONAL,
    timerPollPeriodic          OPTIONAL
}

PollWindow ::= ENUMERATED {
    pw50, pw60, pw70, pw80, pw85,
    pw90, pw95, pw99 }

PredefinedConfigIdentity ::= INTEGER (0..15)

PredefinedConfigValueTag ::= INTEGER (0..15)

PredefinedRB-Configuration ::= SEQUENCE {
    srb-InformationList
    SRB-InformationSetupList,

```

```

    rb-InformationList                RB-InformationSetupList
}

PreDefRadioConfiguration ::=      SEQUENCE {
    -- User equipment IEs
    re-EstablishmentTimer          Re-EstablishmentTimer,
    -- Radio bearer IEs
    predefinedRB-Configuration      PredefinedRB-Configuration,
    -- Transport channel IEs
    preDefTransChConfiguration      PreDefTransChConfiguration,
    -- Physical channel IEs
    preDefPhyChConfiguration        PreDefPhyChConfiguration
}

RAB-Info ::=                        SEQUENCE {
    rab-Identity                    RAB-Identity,
    cn-DomainIdentity               CN-DomainIdentity,
    nas-Synchronisation-Indicator   NAS-Synchronisation-Indicator OPTIONAL,
    re-EstablishmentTimer           Re-EstablishmentTimer
}
RAB-InformationList ::=             SEQUENCE (SIZE (1..maxRABsetup)) OF
    RAB-Info

RAB-InformationReconfigList ::=     SEQUENCE (SIZE (1.. maxRABsetup)) OF
    RAB-InformationReconfig

RAB-InformationReconfig ::=         SEQUENCE {
    rab-Identity                    RAB-Identity,
    cn-DomainIdentity               CN-DomainIdentity,
    nas-Synchronisation-Indicator   NAS-Synchronisation-Indicator
}

RAB-Info-Post ::=                  SEQUENCE {
    rab-Identity                    RAB-Identity,
    cn-DomainIdentity               CN-DomainIdentity,
    nas-Synchronisation-Indicator   NAS-Synchronisation-Indicator OPTIONAL
}

RAB-InformationSetup ::=           SEQUENCE {
    rab-Info                        RAB-Info,
    rb-InformationSetupList          RB-InformationSetupList
}

RAB-InformationSetupList ::=       SEQUENCE (SIZE (1..maxRABsetup)) OF
    RAB-InformationSetup

RB-ActivationTimeInfo ::=          SEQUENCE {
    rb-Identity                      RB-Identity,
    rlc-SequenceNumber              RLC-SequenceNumber
}

RB-ActivationTimeInfoList ::=      SEQUENCE (SIZE (1..maxRB)) OF
    RB-ActivationTimeInfo

RB-COUNT-C-Information ::=         SEQUENCE {
    rb-Identity                      RB-Identity,
    count-C-UL                       COUNT-C,
    count-C-DL                       COUNT-C
}

RB-COUNT-C-InformationList ::=     SEQUENCE (SIZE (1..maxRBallRABs)) OF
    RB-COUNT-C-Information

RB-COUNT-C-MSB-Information ::=     SEQUENCE {
    rb-Identity                      RB-Identity,
    count-C-MSB-UL                   COUNT-C-MSB,
    count-C-MSB-DL                   COUNT-C-MSB
}

RB-COUNT-C-MSB-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
    RB-COUNT-C-MSB-Information

RB-Identity ::=                    INTEGER (1..32)

RB-IdentityList ::=                SEQUENCE (SIZE (1..maxRB)) OF
    RB-Identity

RB-InformationAffected ::=         SEQUENCE {
    rb-Identity                      RB-Identity,
    rb-MappingInfo                  RB-MappingInfo
}

```

```

RB-InformationAffectedList ::= SEQUENCE (SIZE (1..maxRB)) OF
                               RB-InformationAffected

RB-InformationReconfig ::= SEQUENCE {
    rb-Identity                RB-Identity,
    pdcp-Info                  PDCP-InfoReconfig           OPTIONAL,
    rlc-Info                    RLC-Info                   OPTIONAL,
    rb-MappingInfo             RB-MappingInfo              OPTIONAL,
    rb-StopContinue            RB-StopContinue             OPTIONAL
}

RB-InformationReconfigList ::= SEQUENCE (SIZE (1..maxRB)) OF
                               RB-InformationReconfig

RB-InformationReleaseList ::= SEQUENCE (SIZE (1..maxRB)) OF
                               RB-Identity

RB-InformationSetup ::= SEQUENCE {
    rb-Identity                RB-Identity,
    pdcp-Info                  PDCP-Info                   OPTIONAL,
    rlc-Info                    RLC-Info,
    rb-MappingInfo             RB-MappingInfo
}

RB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRBperRAB)) OF
                              RB-InformationSetup

RB-MappingInfo ::= SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
                   RB-MappingOption

RB-MappingOption ::= SEQUENCE {
    ul-LogicalChannelMappings UL-LogicalChannelMappings  OPTIONAL,
    dl-LogicalChannelMappingList DL-LogicalChannelMappingList  OPTIONAL
}

RB-StopContinue ::= ENUMERATED {
    stopRB, continueRB }

RB-WithPDCP-Info ::= SEQUENCE {
    rb-Identity                RB-Identity,
    pdcp-SN-Info               PDCP-SN-Info
}

RB-WithPDCP-InfoList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
                           RB-WithPDCP-Info

ReceivingWindowSize ::= ENUMERATED {
    rw1, rw8, rw16, rw32, rw64, rw128, rw256,
    rw512, rw768, rw1024, rw1536, rw2047,
    rw2560, rw3072, rw3584, rw4095 }

RFC2507-Info ::= SEQUENCE {
    f-MAX-PERIOD                INTEGER (1..65535)           DEFAULT 256,
    f-MAX-TIME                  INTEGER (1..255)           DEFAULT 5,
    max-HEADER                  INTEGER (60..65535)        DEFAULT 168,
    tcp-SPACE                   INTEGER (3..255)           DEFAULT 15,
    non-TCP-SPACE               INTEGER (3..65535)         DEFAULT 15,
    expectReordering            ExpectReordering
    -- TABULAR: The IE above has only two possible values, so using Optional or Default
    -- would be wasteful
}

RLC-Info ::= SEQUENCE {
    ul-RLC-Mode                 UL-RLC-Mode                OPTIONAL,
    dl-RLC-Mode                 DL-RLC-Mode                OPTIONAL
}

RLC-SequenceNumber ::= INTEGER (0..4095)

RLC-SizeInfo ::= SEQUENCE {
    rlc-SizeIndex               INTEGER (1..maxTF)
}

RLC-SizeExplicitList ::= SEQUENCE (SIZE (1..maxTF)) OF
                           RLC-SizeInfo

SRB-InformationSetup ::= SEQUENCE {
    rb-Identity                RB-Identity                OPTIONAL,
    -- The default value for the IE above is the smallest value not used yet.
    rlc-Info                   RLC-Info,
    rb-MappingInfo             RB-MappingInfo
}

```



```

}

SRB-InformationSetupList ::= SEQUENCE (SIZE (1..maxSRBsetup)) OF
    SRB-InformationSetup

SRB-InformationSetupList2 ::= SEQUENCE (SIZE (3..4)) OF
    SRB-InformationSetup

TimerDiscard ::= ENUMERATED {
    td0-1, td0-25, td0-5, td0-75,
    td1, td1-25, td1-5, td1-75,
    td2, td2-5, td3, td3-5, td4,
    td4-5, td5, td7-5 }

TimerEPC ::= ENUMERATED {
    te50, te60, te70, te80, te90,
    te100, te120, te140, te160, te180,
    te200, te300, te400, te500, te700,
    te900 }

TimerMRW ::= ENUMERATED {
    te50, te60, te70, te80, te90, te100,
    te120, te140, te160, te180, te200,
    te300, te400, te500, te700, te900 }

TimerPoll ::= ENUMERATED {
    tp10, tp20, tp30, tp40, tp50,
    tp60, tp70, tp80, tp90, tp100,
    tp110, tp120, tp130, tp140, tp150,
    tp160, tp170, tp180, tp190, tp200,
    tp210, tp220, tp230, tp240, tp250,
    tp260, tp270, tp280, tp290, tp300,
    tp310, tp320, tp330, tp340, tp350,
    tp360, tp370, tp380, tp390, tp400,
    tp410, tp420, tp430, tp440, tp450,
    tp460, tp470, tp480, tp490, tp500,
    tp510, tp520, tp530, tp540, tp550,
    tp600, tp650, tp700, tp750, tp800,
    tp850, tp900, tp950, tp1000 }

TimerPollPeriodic ::= ENUMERATED {
    tper100, tper200, tper300, tper400,
    tper500, tper750, tper1000, tper2000 }

TimerPollProhibit ::= ENUMERATED {
    tpp10, tpp20, tpp30, tpp40, tpp50,
    tpp60, tpp70, tpp80, tpp90, tpp100,
    tpp110, tpp120, tpp130, tpp140, tpp150,
    tpp160, tpp170, tpp180, tpp190, tpp200,
    tpp210, tpp220, tpp230, tpp240, tpp250,
    tpp260, tpp270, tpp280, tpp290, tpp300,
    tpp310, tpp320, tpp330, tpp340, tpp350,
    tpp360, tpp370, tpp380, tpp390, tpp400,
    tpp410, tpp420, tpp430, tpp440, tpp450,
    tpp460, tpp470, tpp480, tpp490, tpp500,
    tpp510, tpp520, tpp530, tpp540, tpp550,
    tpp600, tpp650, tpp700, tpp750, tpp800,
    tpp850, tpp900, tpp950, tpp1000 }

TimerRST ::= ENUMERATED {
    tr50, tr100, tr150, tr200, tr250, tr300,
    tr350, tr400, tr450, tr500, tr550,
    tr600, tr700, tr800, tr900, tr1000 }

TimerStatusPeriodic ::= ENUMERATED {
    tsp100, tsp200, tsp300, tsp400, tsp500,
    tsp750, tsp1000, tsp2000 }

TimerStatusProhibit ::= ENUMERATED {
    tsp10, tsp20, tsp30, tsp40, tsp50,
    tsp60, tsp70, tsp80, tsp90, tsp100,
    tsp110, tsp120, tsp130, tsp140, tsp150,
    tsp160, tsp170, tsp180, tsp190, tsp200,
    tsp210, tsp220, tsp230, tsp240, tsp250,
    tsp260, tsp270, tsp280, tsp290, tsp300,
    tsp310, tsp320, tsp330, tsp340, tsp350,
    tsp360, tsp370, tsp380, tsp390, tsp400,
    tsp410, tsp420, tsp430, tsp440, tsp450,
    tsp460, tsp470, tsp480, tsp490, tsp500,
    tsp510, tsp520, tsp530, tsp540, tsp550,
    tsp600, tsp650, tsp700, tsp750, tsp800,
    tsp850, tsp900, tsp950, tsp1000 }

```

```

TransmissionRLC-Discard ::= CHOICE {
    timerBasedExplicit
    timerBasedNoExplicit
    maxDAT-Retransmissions
    noDiscard
}

TransmissionWindowSize ::= ENUMERATED {
    tw1, tw8, tw16, tw32, tw64, tw128, tw256,
    tw512, tw768, tw1024, tw1536, tw2047,
    tw2560, tw3072, tw3584, tw4095 }

UL-AM-RLC-Mode ::= SEQUENCE {
    transmissionRLC-Discard
    transmissionWindowSize
    timerRST
    max-RST
    pollingInfo
}

UL-LogicalChannelMapping ::= SEQUENCE {
    -- TABULAR: UL-TransportChannelType contains TransportChannelIdentity as well.
    ul-TransportChannelType
    logicalChannelIdentity
    rlc-SizeList
    mac-LogicalChannelPriority
    CHOICE {
        allSizes
        configured
        explicitList
    }
    LogicalChannelIdentity OPTIONAL,
    RLC-SizeExplicitList
    MAC-LogicalChannelPriority
}

UL-LogicalChannelMappingList ::= SEQUENCE {
    rlc-LogicalChannelMappingIndicator
    ul-LogicalChannelMapping
    BOOLEAN,
    SEQUENCE (SIZE (maxLoChperRLC)) OF
    UL-LogicalChannelMapping
}

UL-LogicalChannelMappings ::= CHOICE {
    oneLogicalChannel
    twoLogicalChannels
    UL-LogicalChannelMapping,
    UL-LogicalChannelMappingList
}

UL-RLC-Mode ::= CHOICE {
    ul-AM-RLC-Mode
    ul-UM-RLC-Mode
    ul-TM-RLC-Mode
    spare
    UL-AM-RLC-Mode,
    UL-UM-RLC-Mode,
    UL-TM-RLC-Mode,
    NULL
}

UL-TM-RLC-Mode ::= SEQUENCE {
    transmissionRLC-Discard
    segmentationIndication
    TRANSMISSIONRLC-DISCARD OPTIONAL,
    BOOLEAN
}

UL-UM-RLC-Mode ::= SEQUENCE {
    transmissionRLC-Discard
    TRANSMISSIONRLC-DISCARD OPTIONAL
}

UL-TransportChannelType ::= CHOICE {
    dch
    rach
    cpch
    usch
    TransportChannelIdentity,
    NULL,
    NULL,
    NULL
}

-- *****
--
-- TRANSPORT CHANNEL INFORMATION ELEMENTS (10.3.5)
--
-- *****

AllowedTFC-List ::= SEQUENCE (SIZE (1..maxTFC)) OF
    TFC-Value

AllowedTFI-List ::= SEQUENCE (SIZE (1..maxTF)) OF
    INTEGER (0..31)

BitModeRLC-SizeInfo ::= CHOICE {
    sizeType1
    sizeType2
    INTEGER (1..127),
    SEQUENCE {

```

```

    part1                INTEGER (0..15),
    part2                INTEGER (1..7)                OPTIONAL
    -- Actual size = (part1 * 8) + 128 + part2
  },
  sizeType3             SEQUENCE {
    part1                INTEGER (0..47),
    part2                INTEGER (1..15)                OPTIONAL
    -- Actual size = (part1 * 16) + 256 + part2
  },
  sizeType4             SEQUENCE {
    part1                INTEGER (0..62),
    part2                INTEGER (1..63)                OPTIONAL
    -- Actual size = (part1 * 64) + 1024 + part2
  }
}
-- Actual value = IE value * 0.1
BLER-QualityValue ::= INTEGER (-63..0)

ChannelCodingType ::= CHOICE {
  noCoding              NULL,
  convolutional         CodingRate,
  turbo                NULL
}

CodingRate ::= ENUMERATED {
  half,
  third }

CommonDynamicTF-Info ::= SEQUENCE {
  rlc-Size              CHOICE {
    fdd                 SEQUENCE {
      octetModeRLC-SizeInfoType2  OctetModeRLC-SizeInfoType2
    },
    tdd                 SEQUENCE {
      commonTDD-Choice          CHOICE {
        bitModeRLC-SizeInfo      BitModeRLC-SizeInfo,
        octetModeRLC-SizeInfoType1  OctetModeRLC-SizeInfoType1
      }
    }
  },
  numberOfTbSizeList   SEQUENCE (SIZE (1..maxTF)) OF
    NumberOfTransportBlocks,
  logicalChannelList   LogicalChannelList
}

CommonDynamicTF-Info-DynamicTTI ::= SEQUENCE {
  commonTDD-Choice     CHOICE {
    bitModeRLC-SizeInfo      BitModeRLC-SizeInfo,
    octetModeRLC-SizeInfoType1  OctetModeRLC-SizeInfoType1
  },
  numberOfTbSizeAndTTIList  NumberOfTbSizeAndTTIList,
  logicalChannelList     LogicalChannelList
}

CommonDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
  CommonDynamicTF-Info

CommonDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
  CommonDynamicTF-Info-DynamicTTI

CommonTransChTFS ::= SEQUENCE {
  tti                 CHOICE {
    tti10              CommonDynamicTF-InfoList,
    tti20              CommonDynamicTF-InfoList,
    tti40              CommonDynamicTF-InfoList,
    tti80              CommonDynamicTF-InfoList,
    dynamic            CommonDynamicTF-InfoList-DynamicTTI
  },
  semistaticTF-Information  SemistaticTF-Information
}

CPCH-SetID ::= INTEGER (1..maxCPCHsets)

CRC-Size ::= ENUMERATED {
  crc0, crc8, crc12, crc16, crc24 }

DedicatedDynamicTF-Info ::= SEQUENCE {
  rlc-Size           CHOICE {
    bitMode          BitModeRLC-SizeInfo,
    octetModeType1  OctetModeRLC-SizeInfoType1
  },

```

```

    numberOfTbSizeList                SEQUENCE (SIZE (1..maxTF)) OF
    NumberOfTransportBlocks,          LogicalChannelList
    logicalChannelList
}

DedicatedDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    rlc-Size                           CHOICE {
        bitMode                         BitModeRLC-SizeInfo,
        octetModeTypel                  OctetModeRLC-SizeInfoTypel
    },
    numberOfTbSizeAndTTIList           NumberOfTbSizeAndTTIList,
    logicalChannelList                 LogicalChannelList
}

DedicatedDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info

DedicatedDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info-DynamicTTI

DedicatedTransChTFS ::= SEQUENCE {
    tti                                 CHOICE {
        tti10                           DedicatedDynamicTF-InfoList,
        tti20                           DedicatedDynamicTF-InfoList,
        tti40                           DedicatedDynamicTF-InfoList,
        tti80                           DedicatedDynamicTF-InfoList,
        dynamic                          DedicatedDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information            SemistaticTF-Information
}

DL-AddReconfTransChInfo2List ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation2

DL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of messages other than: Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation ::= SEQUENCE {
    dl-transportChannelIdentity         TransportChannelIdentity,
    tfs-SignallingMode                 CHOICE {
        explicit                         TransportFormatSet,
        sameAsULTrCH                    TransportChannelIdentity
    },
    dch-QualityTarget                  QualityTarget                OPTIONAL,
    tm-SignallingInfo                  TM-SignallingInfo          OPTIONAL
}

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation2 ::= SEQUENCE {
    transportChannelIdentity            TransportChannelIdentity,
    tfs-SignallingMode                 CHOICE {
        explicit                         TransportFormatSet,
        sameAsULTrCH                    TransportChannelIdentity
    },
    qualityTarget                       QualityTarget                OPTIONAL
}

DL-CommonTransChInfo ::= SEQUENCE {
    sccpch-TFCS                        TFCS                        OPTIONAL,
    modeSpecificInfo                   CHOICE {
        fdd                             SEQUENCE {
            tfcs-SignallingMode          CHOICE {
                explicit                 TFCS,
                sameAsUL                 NULL
            }
        },
        tdd                             SEQUENCE {
            individualDL-CCTrCH-InfoList IndividualDL-CCTrCH-InfoList OPTIONAL
        }
    }
}

DL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

DRAC-ClassIdentity ::= INTEGER (1..maxDRACclasses)

```

```

DRAC-StaticInformation ::=
  transmissionTimeValidity
  timeDurationBeforeRetry
  drac-ClassIdentity
}
SEQUENCE {
  TransmissionTimeValidity,
  TimeDurationBeforeRetry,
  DRAC-ClassIdentity
}

DRAC-StaticInformationList ::=
SEQUENCE (SIZE (1..maxTrCH)) OF
  DRAC-StaticInformation

ExplicitTFCS-Configuration ::=
  complete
  addition
  removal
  replacement
  tfcsRemoval
  tfcsAdd
}
CHOICE {
  TFCS-ReconfAdd,
  TFCS-ReconfAdd,
  TFCS-RemovalList,
  SEQUENCE {
    TFCS-RemovalList,
    TFCS-ReconfAdd
  }
}

GainFactor ::=
INTEGER (0..15)

GainFactorInformation ::=
  signalledGainFactors
  computedGainFactors
}
CHOICE {
  SignalledGainFactors,
  ReferenceTFC-ID
}

IndividualDL-CCTrCH-Info ::=
  dl-TFCS-Identity
  tfcs-SignallingMode
  explicit
  sameAsUL
}
SEQUENCE {
  TFCS-Identity,
  CHOICE {
    TFCS,
    TFCS-Identity
  }
}

IndividualDL-CCTrCH-InfoList ::=
SEQUENCE (SIZE (1..maxCCTrCH)) OF
  IndividualDL-CCTrCH-Info

IndividualUL-CCTrCH-Info ::=
  ul-TFCS-Identity
  ul-TFCS
}
SEQUENCE {
  TFCS-Identity,
  TFCS
}

IndividualUL-CCTrCH-InfoList ::=
SEQUENCE (SIZE (1..maxCCTrCH)) OF
  IndividualUL-CCTrCH-Info

LogicalChannelByRB ::=
  rb-Identity
  logChOfRb
}
SEQUENCE {
  RB-Identity,
  INTEGER (0..1)
}
OPTIONAL

LogicalChannelList ::=
  allSizes
  configured
  explicitList
}
CHOICE {
  NULL,
  NULL,
  SEQUENCE (SIZE (1..15)) OF
    LogicalChannelByRB
}

NumberOfTbSizeAndTTIList ::=
  numberOfTransportBlocks
  transmissionTimeInterval
}
SEQUENCE (SIZE (1..maxTF)) OF SEQUENCE {
  NumberOfTransportBlocks,
  TransmissionTimeInterval
}

MessType ::=
ENUMERATED {
  transportFormatCombinationControl }

Non-allowedTFC-List ::=
SEQUENCE (SIZE (1..maxTFC)) OF
  TFC-Value

NumberOfTransportBlocks ::=
  zero
  one
  small
  large
}
CHOICE {
  NULL,
  NULL,
  INTEGER (2..17),
  INTEGER (18..512)
}

OctetModeRLC-SizeInfoType1 ::=
  sizeType1
  -- Actual size = (8 * sizeType1) + 16
  sizeType2
  part1
  part2
}
CHOICE {
  INTEGER (0..31),
  SEQUENCE {
    INTEGER (0..23),
    INTEGER (1..3)
  }
}
OPTIONAL

```

```

        -- Actual size = (32 * part1) + 272 + (part2 * 8)
    },
    sizeType3
        part1
        part2
        -- Actual size = (64 * part1) + 1040 + (part2 * 8)
    }
}

OctetModeRLC-SizeInfoType2 ::=          CHOICE {
    sizeType1
        -- Actual size = (sizeType1 * 8) + 48
        sizeType2
        -- Actual size = (sizeType2 * 16) + 312
        sizeType3
        -- Actual size = (sizeType3 * 64) + 1384
    }

PowerOffsetInformation ::=              SEQUENCE {
    gainFactorInformation
        -- PowerOffsetPp-m is always absent in TDD
    powerOffsetPp-m
}

PowerOffsetPp-m ::=                    INTEGER (-5..10)

PreDefTransChConfiguration ::=         SEQUENCE {
    ul-CommonTransChInfo
    ul-AddReconfTrChInfoList
    dl-CommonTransChInfo
    dl-TrChInfoList
}

QualityTarget ::=                     SEQUENCE {
    bler-QualityValue
}

RateMatchingAttribute ::=              INTEGER (1..hIRM)

ReferenceTFC-ID ::=                   INTEGER (0..3)

RestrictedTrChInfo ::=                 SEQUENCE {
    restrictedTrChIdentity
    allowedTFI-List
}

RestrictedTrChInfoList ::=             SEQUENCE (SIZE (1..maxTrCH)) OF
    RestrictedTrChInfo

SemistaticTF-Information ::=           SEQUENCE {
    -- TABULAR: Transmission time interval has been included in the IE CommonTransChTFS.
    channelCodingType
    rateMatchingAttribute
    crc-Size
}

SignalledGainFactors ::=               SEQUENCE {
    modeSpecificInfo
        fdd
            gainFactorBetaC
        },
        tdd
            NULL
    },
    gainFactorBetaD
    referenceTFC-ID
}

SplitTFCI-Signalling ::=              SEQUENCE {
    splitType
    tfci-Field2-Length
    tfci-Field1-Information
    tfci-Field2-Information
}

SplitType ::=                          ENUMERATED {
    hardSplit, logicalSplit }

TFC-Subset ::=                         CHOICE {
    minimumAllowedTFC-Number
    allowedTFC-List
    non-allowedTFC-List
}

```

```

    restrictedTrChInfoList          RestrictedTrChInfoList,
    fullTFCS                       NULL
}

TFC-Value ::=                     INTEGER (0..1023)

TFCI-Field2-Information ::=       CHOICE {
    tfci-Range                     TFCI-RangeList,
    explicit                       ExplicitTFCS-Configuration
}

TFCI-Range ::=                   SEQUENCE {
    maxTFCIField2Value            INTEGER (1..1023),
    tfcs-InfoForDSCH             TFCI-InfoForDSCH
}

TFCI-RangeList ::=              SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    TFCI-Range

TFCS ::=                         CHOICE {
    normalTFCS-Signalling         ExplicitTFCS-Configuration,
    splitTFCS-Signalling         SplitTFCS-Signalling
}

TFCS-Identity ::=               SEQUENCE {
    tfcs-ID                       INTEGER (1..8)                DEFAULT 1,
    sharedChannelIndicator        BOOLEAN
}

TFCS-IdentityPlain ::=          INTEGER (1..8)

TFCS-InfoForDSCH ::=           CHOICE {
    ctfc2bit                      INTEGER (0..3),
    ctfc4bit                      INTEGER (0..15),
    ctfc6bit                      INTEGER (0..63),
    ctfc8bit                      INTEGER (0..255),
    ctfc12bit                    INTEGER (0..4095),
    ctfc16bit                    INTEGER (0..65535),
    ctfc24bit                    INTEGER (0..16777215)
}

TFCS-ReconfAdd ::=             SEQUENCE{
    ctfcSize                       CHOICE{
        ctfc2Bit                  SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc2                  INTEGER (0..3),
            gainFactorInformation  PowerOffsetInformation          OPTIONAL
        },
        ctfc4Bit                  SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc4                  INTEGER (0..15),
            gainFactorInformation  PowerOffsetInformation          OPTIONAL
        },
        ctfc6Bit                  SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc6                  INTEGER (0..63),
            gainFactorInformation  PowerOffsetInformation          OPTIONAL
        },
        ctfc8Bit                  SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc8                  INTEGER (0..255),
            gainFactorInformation  PowerOffsetInformation          OPTIONAL
        },
        ctfc12Bit                 SEQUENCE (SIZE(1..maxTFC)) OF SEQUENCE {
            ctfc12                 INTEGER (0..4095),
            gainFactorInformation  PowerOffsetInformation          OPTIONAL
        },
        ctfc16Bit                 SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc16                 INTEGER(0..65535),
            gainFactorInformation  PowerOffsetInformation          OPTIONAL
        },
        ctfc24Bit                 SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc24                 INTEGER(0..16777215),
            gainFactorInformation  PowerOffsetInformation          OPTIONAL
        }
    }
}

TFCS-Removal ::=               SEQUENCE {
    tfci                           INTEGER (0..1023)
}

TFCS-RemovalList ::=           SEQUENCE (SIZE (1..maxTFC)) OF
    TFCS-Removal

TimeDurationBeforeRetry ::=     INTEGER (1..256)

```

```

TM-SignallingInfo ::= SEQUENCE {
    messType          MessType,
    tm-SignallingMode CHOICE {
        mode1          NULL,
        mode2          SEQUENCE {
            ul-controlledTrChList  UL-ControlledTrChList
        }
    }
}

TransmissionTimeInterval ::= ENUMERATED {
    tti10, tti20, tti40, tti80 }

TransmissionTimeValidity ::= INTEGER (1..256)

TransportChannelIdentity ::= INTEGER (1..32)

TransportFormatSet ::= CHOICE {
    dedicatedTransChTFS  DedicatedTransChTFS,
    commonTransChTFS     CommonTransChTFS
}

UL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    UL-AddReconfTransChInformation

UL-AddReconfTransChInformation ::= SEQUENCE {
    transportChannelIdentity  TransportChannelIdentity,
    transportFormatSet        TransportFormatSet
}

UL-CommonTransChInfo ::= SEQUENCE {
    tfc-Subset          TFC-Subset          OPTIONAL,
    prach-TFCS          TFCS                OPTIONAL,
    modeSpecificInfo   CHOICE {
        fdd             SEQUENCE {
            ul-TFCS     TFCS
        },
        tdd             SEQUENCE {
            individualUL-CCTrCH-InfoList  IndividualUL-CCTrCH-InfoList  OPTIONAL,
            ul-TFCS                       TFCS
        }
    }
}

UL-ControlledTrChList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

UL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

-- *****
--
--     PHYSICAL CHANNEL INFORMATION ELEMENTS (10.3.6)
--
-- *****

AC-To-ASC-Mapping ::= INTEGER (0..7)

AC-To-ASC-MappingTable ::= SEQUENCE (SIZE (maxASCmap)) OF
    AC-To-ASC-Mapping

AccessServiceClass ::= SEQUENCE {
    availableSignatureStartIndex  INTEGER (0..15),
    availableSignatureEndIndex    INTEGER (0..15),
    assignedSubChannelNumber      BIT STRING (SIZE(4))
}

AccessServiceClassIndex ::= INTEGER (1..8)

AICH-Info ::= SEQUENCE {
    channelisationCode256  ChannelisationCode256,
    sttd-Indicator         BOOLEAN,
    aich-TransmissionTiming  AICH-TransmissionTiming
}

AICH-PowerOffset ::= INTEGER (-22..5)

AICH-TransmissionTiming ::= ENUMERATED {

```



```

        e0, e1 }

AllocationPeriodInfo ::= SEQUENCE {
    allocationActivationTime    INTEGER (1..256),
    allocationDuration          INTEGER (1..256)
}
Alpha ::= INTEGER (0..8)

AP-AICH-ChannelisationCode ::= INTEGER (0..255)

AP-PreambleScramblingCode ::= INTEGER (0..79)

AP-Signature ::= INTEGER (0..15)

AP-Signature-VCAM ::= SEQUENCE {
    ap-Signature                AP-Signature,
    availableAP-SubchannelList  AvailableAP-SubchannelList OPTIONAL
}

AP-Subchannel ::= INTEGER (0..11)

ASC ::= SEQUENCE {
    accessServiceClass          AccessServiceClassIndex,
    repetitionPeriodAndOffset  ASC-RepetitionPeriodAndOffset OPTIONAL
    -- TABULAR: The offset is nested in the repetition period
}

ASC-RepetitionPeriodAndOffset ::= CHOICE {
    rp1                        NULL,
    rp2                        INTEGER (0..1),
    rp4                        INTEGER (0..3),
    rp8                        INTEGER (0..7)
}

ASCSetting ::= SEQUENCE {
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available signature and sub-channels
    accessServiceClass        AccessServiceClass OPTIONAL
}

AvailableAP-Signature-VCAMList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
    AP-Signature-VCAM

AvailableAP-SignatureList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
    AP-Signature

AvailableAP-SubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-APsubCh)) OF
    AP-Subchannel

AvailableMinimumSF-ListVCAM ::= SEQUENCE (SIZE (1..maxPCPCH-SF)) OF
    AvailableMinimumSF-VCAM

AvailableMinimumSF-VCAM ::= SEQUENCE {
    minimumSpreadingFactor    MinimumSpreadingFactor,
    nf-Max                    NF-Max,
    maxAvailablePCPCH-Number  MaxAvailablePCPCH-Number,
    availableAP-Signature-VCAMList AvailableAP-Signature-VCAMList
}

AvailableSignatures ::= BIT STRING(SIZE(16))

AvailableSubChannelNumbers ::= BIT STRING(SIZE(12))

BurstType ::= ENUMERATED {
    short1, long2 }

BurstType1 ::= ENUMERATED { ms4, ms8, ms16 }

BurstType2 ::= ENUMERATED { ms3, ms6 }

CCTrCH-PowerControlInfo ::= SEQUENCE {
    tfcs-Identity              TFCS-Identity OPTIONAL,
    ul-DPCH-PowerControlInfo  UL-DPCH-PowerControlInfo
}

CCTrCH-PowerControlInfo-r4 ::= SEQUENCE {
    tfcs-Identity              TFCS-Identity OPTIONAL,
    ul-DPCH-PowerControlInfo  UL-DPCH-PowerControlInfo-r4
}

```

```

CD-AccessSlotSubchannel ::= INTEGER (0..11)

CD-AccessSlotSubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsubCh)) OF
    CD-AccessSlotSubchannel

CD-CA-ICH-ChannelisationCode ::= INTEGER (0..255)

CD-PreambleScramblingCode ::= INTEGER (0..79)

CD-SignatureCode ::= INTEGER (0..15)

CD-SignatureCodeList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsig)) OF
    CD-SignatureCode

CellParametersID ::= INTEGER (0..127)

Cfntargetsfmframeoffset ::= INTEGER(0..255)

ChannelAssignmentActive ::= CHOICE {
    notActive      NULL,
    isActive      AvailableMinimumSF-ListVCAM
}

ChannelisationCode256 ::= INTEGER (0..255)

ChannelReqParamsForUCSM ::= SEQUENCE {
    availableAP-SignatureList AvailableAP-SignatureList,
    availableAP-SubchannelList AvailableAP-SubchannelList           OPTIONAL
}

ClosedLoopTimingAdjMode ::= ENUMERATED {
    slot1, slot2 }

CodeNumberDSCH ::= INTEGER (0..255)

CodeRange ::= SEQUENCE {
    pdsch-CodeMapList PDSCH-CodeMapList,
    codeNumberStart   CodeNumberDSCH,
    codeNumberStop    CodeNumberDSCH
}

CodeWordSet ::= ENUMERATED {
    longCWS,
    mediumCWS,
    shortCWS,
    ssdtOff }

CommonTimeslotInfo ::= SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode SecondInterleavingMode,
    tfci-Coding             TFCI-Coding           OPTIONAL,
    puncturingLimit        PuncturingLimit,
    repetitionPeriodAndLength RepetitionPeriodAndLength OPTIONAL
}

CommonTimeslotInfoSCCPCH ::= SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode SecondInterleavingMode,
    tfci-Coding             TFCI-Coding           OPTIONAL,
    puncturingLimit        PuncturingLimit,
    repetitionPeriodLengthAndOffset RepetitionPeriodLengthAndOffset OPTIONAL
}

ConstantValue ::= INTEGER (-35..10)

CPCH-PersistenceLevels ::= SEQUENCE {
    cpch-SetID          CPCH-SetID,
    dynamicPersistenceLevelTF-List DynamicPersistenceLevelTF-List
}

CPCH-PersistenceLevelsList ::= SEQUENCE (SIZE (1..maxCPCHsets)) OF
    CPCH-PersistenceLevels

CPCH-SetInfo ::= SEQUENCE {
    cpch-SetID          CPCH-SetID,
    transportFormatSet TransportFormatSet,
    tfcs                TFCS,
    ap-PreambleScramblingCode AP-PreambleScramblingCode,
    ap-AICH-ChannelisationCode AP-AICH-ChannelisationCode,
    cd-PreambleScramblingCode CD-PreambleScramblingCode,

```

```

cd-CA-ICH-ChannelisationCode      CD-CA-ICH-ChannelisationCode,
cd-AccessSlotSubchannelList       CD-AccessSlotSubchannelList    OPTIONAL,
cd-SignatureCodeList              CD-SignatureCodeList           OPTIONAL,
deltaPp-m                          DeltaPp-m,
ul-DPCCH-SlotFormat               UL-DPCCH-SlotFormat,
n-StartMessage                     N-StartMessage,
n-EOT                              N-EOT,
channelAssignmentActive            ChannelAssignmentActive,
-- TABULAR: VCAM info has been nested inside ChannelAssignmentActive,
-- which in turn is mandatory since it's only a binary choice.
cpch-StatusIndicationMode         CPCH-StatusIndicationMode,
pcpch-ChannelInfoList             PCPCH-ChannelInfoList
}

CPCH-SetInfoList ::=                SEQUENCE (SIZE (1..maxCPCHsets)) OF
                                   CPCH-SetInfo

CPCH-StatusIndicationMode ::=      ENUMERATED {
                                   pa-mode,
                                   pamsf-mode }

CSICH-PowerOffset ::=              INTEGER (-10..5)

-- DefaultDPCH-OffsetValueFDD and DefaultDPCH-OffsetValueTDD corresponds to
-- IE "Default DPCH Offset Value" depending on the mode.
-- Actual value = IE value * 512
DefaultDPCH-OffsetValueFDD ::=     INTEGER (0..599)

DefaultDPCH-OffsetValueTDD ::=     INTEGER (0..7)

DeltaPp-m ::=                       INTEGER (-10..10)

-- Actual value = IE value * 0.1
DeltaSIR ::=                       INTEGER (0..30)

DL-CCTrCh ::=                      SEQUENCE {
  tfcs-Identity                    TFCS-IdentityPlain             OPTIONAL,
  timeInfo                         TimeInfo,
  dl-CCTrCH-TimeslotsCodes         DownlinkTimeslotsCodes         OPTIONAL,
  ul-CCTrChTPCList                 UL-CCTrChTPCList                 OPTIONAL
}

DL-CCTrCh-r4 ::=                   SEQUENCE {
  tfcs-Identity                    TFCS-IdentityPlain             OPTIONAL,
  timeInfo                         TimeInfo,
  tddOption                        CHOICE {
    tdd384                          SEQUENCE {
      dl-CCTrCH-TimeslotsCodes       DownlinkTimeslotsCodes         OPTIONAL
    }
    tdd128                          SEQUENCE {
      dl-CCTrCH-TimeslotsCodes       DownlinkTimeslotsCodes-LCR     OPTIONAL
    }
  }
  ul-CCTrChTPCList                 UL-CCTrChTPCList                 OPTIONAL
}

DL-CCTrChList ::=                  SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                   DL-CCTrCh

DL-CCTrChList-r4 ::=                SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                   DL-CCTrCh-r4

DL-CCTrChTPCList ::=                SEQUENCE (SIZE (0..maxCCTrCH)) OF
                                   TFCS-Identity

DL-ChannelisationCode ::=          SEQUENCE {
  secondaryScramblingCode          SecondaryScramblingCode         OPTIONAL,
  sf-AndCodeNumber                 SF512-AndCodeNumber,
  scramblingCodeChange              ScramblingCodeChange           OPTIONAL
}

DL-ChannelisationCodeList ::=       SEQUENCE (SIZE (1..maxDPCH-DLchan)) OF
                                   DL-ChannelisationCode

DL-CommonInformation ::=            SEQUENCE {
  dl-DPCH-InfoCommon               DL-DPCH-InfoCommon             OPTIONAL,
  modeSpecificInfo                 CHOICE {
    fdd                              SEQUENCE {
      defaultDPCH-OffsetValue        DefaultDPCH-OffsetValueFDD     OPTIONAL,
      dpch-CompressedModeInfo        DPCH-CompressedModeInfo       OPTIONAL,
      tx-DiversityMode               TX-DiversityMode              OPTIONAL,
      ssdt-Information                SSDT-Information              OPTIONAL
    }
  }
}

```

```

    },
    tdd
        defaultDPCH-OffsetValue
            SEQUENCE {
                DefaultDPCH-OffsetValueTDD OPTIONAL
            }
    }
}

DL-CommonInformation-r4 ::= SEQUENCE {
    dl-DPCH-InfoCommon DL-DPCH-InfoCommon OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd
            SEQUENCE {
                defaultDPCH-OffsetValue DefaultDPCH-OffsetValueFDD OPTIONAL,
                dpch-CompressedModeInfo DPCH-CompressedModeInfo OPTIONAL,
                tx-DiversityMode TX-DiversityMode OPTIONAL,
                ssdt-Information SSDT-Information OPTIONAL
            },
        tdd
            SEQUENCE {
                tddOption CHOICE {
                    tdd384 NULL,
                    tdd128 SEQUENCE {
                        tstd-Indicator BOOLEAN
                    }
                }
            }
        defaultDPCH-OffsetValue DefaultDPCH-OffsetValueTDD OPTIONAL
    }
}

DL-CommonInformationPost ::= SEQUENCE {
    dl-DPCH-InfoCommon DL-DPCH-InfoCommonPost
}

DL-CommonInformationPredef ::= SEQUENCE {
    dl-DPCH-InfoCommon DL-DPCH-InfoCommonPredef OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd
            SEQUENCE {
                defaultDPCH-OffsetValue DefaultDPCH-OffsetValueFDD
            },
        tdd
            SEQUENCE {
                defaultDPCH-OffsetValue DefaultDPCH-OffsetValueTDD
            }
    }
}

DL-CompressedModeMethod ::= ENUMERATED {
    puncturing, sf-2,
    higherLayerScheduling }

DL-DPCH-InfoCommon ::= SEQUENCE {
    cfnHandling CHOICE {
        maintain NULL,
        initialise SEQUENCE {
            cfntargetsfnsframeoffset Cfntargetsfnsframeoffset OPTIONAL
        }
    },
    modeSpecificInfo CHOICE {
        fdd
            SEQUENCE {
                dl-DPCH-PowerControlInfo DL-DPCH-PowerControlInfo OPTIONAL,
                dl-rate-matching-restriction DL-rate-matching-restriction OPTIONAL,
                spreadingFactorAndPilot SF512-AndPilot,
                -- TABULAR: The number of pilot bits is nested inside the spreading factor.
                positionFixedOrFlexible PositionFixedOrFlexible,
                tfci-Existence BOOLEAN
            },
        tdd
            SEQUENCE {
                commonTimeslotInfo CommonTimeslotInfo OPTIONAL
            }
    }
}

DL-DPCH-InfoCommonPost ::= SEQUENCE {
    dl-DPCH-PowerControlInfo DL-DPCH-PowerControlInfo OPTIONAL
}

DL-DPCH-InfoCommonPredef ::= SEQUENCE {
    modeSpecificInfo CHOICE {
        fdd
            SEQUENCE {
                spreadingFactorAndPilot SF512-AndPilot,
                -- TABULAR: The number of pilot bits is nested inside the spreading factor.
                positionFixedOrFlexible PositionFixedOrFlexible,
                tfci-Existence BOOLEAN
            }
    }
}

```

```

    },
    tdd
        commonTimeslotInfo
    }
}

DL-DPCH-InfoPerRL ::=
    CHOICE {
        fdd
            PCPICH-UsageForChannelEst
            dcpH-FrameOffset
            secondaryCPICH-Info
            dl-ChannelisationCodeList
            tpc-CombinationIndex
            ssdt-CellIdentity
            closedLoopTimingAdjMode
        },
        tdd
            DL-CCTrChList
    }

DL-DPCH-InfoPerRL-r4 ::=
    CHOICE {
        fdd
            PCPICH-UsageForChannelEst
            dcpH-FrameOffset
            secondaryCPICH-Info
            dl-ChannelisationCodeList
            tpc-CombinationIndex
            ssdt-CellIdentity
            closedLoopTimingAdjMode
        },
        tdd
            DL-CCTrChList-r4
    }

DL-DPCH-InfoPerRL-PostFDD ::=
    SEQUENCE {
        pcpich-UsageForChannelEst
        dl-ChannelisationCode
        tpc-CombinationIndex
    }

DL-DPCH-InfoPerRL-PostTDD ::=
    SEQUENCE {
        dl-CCTrCh-TimeslotsCodes
    }

DL-DPCH-InfoPerRL-PostTDD-LCR ::=
    SEQUENCE {
        dl-CCTrCh-TimeslotsCodes
    }

DL-DPCH-PowerControlInfo ::=
    SEQUENCE {
        modeSpecificInfo
        fdd
            dpc-Mode
        },
        tdd
            tpc-StepSizeTDD
    }

DL-FrameType ::=
    ENUMERATED {
        dl-FrameTypeA, dl-FrameTypeB
    }

DL-InformationPerRL ::=
    SEQUENCE {
        modeSpecificInfo
        fdd
            primaryCPICH-Info
            pdsch-SHO-DCH-Info
            pdsch-CodeMapping
        },
        tdd
            PrimaryCCPCH-Info
    },
    dl-DPCH-InfoPerRL
    secondaryCCPCH-Info
}

DL-InformationPerRL-r4 ::=
    SEQUENCE {
        modeSpecificInfo
        fdd
            primaryCPICH-Info
            pdsch-SHO-DCH-Info
            pdsch-CodeMapping
        },
        tdd
            PrimaryCCPCH-Info
    }
}

```

```

    tdd
    }
    dl-DPCH-InfoPerRL DL-DPCH-InfoPerRL-r4 OPTIONAL,
    secondaryCCPCH-Info SecondaryCCPCH-Info-r4 OPTIONAL
  }
DL-InformationPerRL-List ::= SEQUENCE (SIZE (1..maxRL)) OF
    DL-InformationPerRL
DL-InformationPerRL-List-r4 ::= SEQUENCE (SIZE (1..maxRL)) OF
    DL-InformationPerRL-r4
DL-InformationPerRL-ListPostFDD ::= SEQUENCE (SIZE (1..maxRL)) OF
    DL-InformationPerRL-PostFDD
DL-InformationPerRL-PostFDD ::= SEQUENCE {
    primaryCPICH-Info PrimaryCPICH-Info,
    dl-DPCH-InfoPerRL DL-DPCH-InfoPerRL-PostFDD
}
DL-InformationPerRL-PostTDD ::= SEQUENCE {
    primaryCCPCH-Info PrimaryCCPCH-InfoPost,
    dl-DPCH-InfoPerRL DL-DPCH-InfoPerRL-PostTDD
}
DL-InformationPerRL-PostTDD-LCR ::= SEQUENCE {
    primaryCCPCH-Info PrimaryCCPCH-InfoPostTDD-LCR,
    dl-DPCH-InfoPerRL DL-DPCH-InfoPerRL-PostTDD-LCR
}
DL-PDSCH-Information ::= SEQUENCE {
    pdsch-SHO-DCH-Info PDSCH-SHO-DCH-Info OPTIONAL,
    pdsch-CodeMapping PDSCH-CodeMapping OPTIONAL
}
DL-rate-matching-restriction ::= SEQUENCE {
    restrictedTrCH-InfoList RestrictedTrCH-InfoList OPTIONAL
}
DL-TS-ChannelisationCode ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }
DL-TS-ChannelisationCodesShort ::= SEQUENCE {
    codesRepresentation CHOICE {
        consecutive SEQUENCE {
            firstChannelisationCode DL-TS-ChannelisationCode,
            lastChannelisationCode DL-TS-ChannelisationCode
        },
        bitmap BIT STRING (SIZE (16))
    }
}
DownlinkAdditionalTimeslots ::= SEQUENCE {
    parameters CHOICE {
        sameAsLast SEQUENCE {
            timeslotNumber TimeslotNumber
        },
        newParameters SEQUENCE {
            individualTimeslotInfo IndividualTimeslotInfo,
            dl-TS-ChannelisationCodesShort DL-TS-ChannelisationCodesShort
        }
    }
}
DownlinkAdditionalTimeslots-LCR ::= SEQUENCE {
    parameters CHOICE {
        sameAsLast SEQUENCE {
            timeslotNumber TimeslotNumber-LCR
        },
        newParameters SEQUENCE {
            individualTimeslotInfo IndividualTimeslotInfo-LCR,
            dl-TS-ChannelisationCodesShort DL-TS-ChannelisationCodesShort
        }
    }
}
DownlinkTimeslotsCodes ::= SEQUENCE {
    firstIndividualTimeslotInfo IndividualTimeslotInfo,
}

```

```

dl-TS-ChannelisationCodesShort      DL-TS-ChannelisationCodesShort,
moreTimeslots                       CHOICE {
  noMore                             NULL,
  additionalTimeslots                 CHOICE {
    consecutive                       INTEGER (1..maxTS-1),
    timeslotList                      SEQUENCE (SIZE (1..maxTS-1)) OF
                                      DownlinkAdditionalTimeslots
  }
}
}

DownlinkTimeslotsCodes-LCR ::= SEQUENCE {
  firstIndividualTimeslotInfo        IndividualTimeslotInfo-LCR,
  dl-TS-ChannelisationCodesShort     DL-TS-ChannelisationCodesShort,
  moreTimeslots                      CHOICE {
    noMore                           NULL,
    additionalTimeslots              CHOICE {
      consecutive                     INTEGER (1..maxTS-LCR-1),
      timeslotList                    SEQUENCE (SIZE (1..maxTS-LCR-1)) OF
                                      DownlinkAdditionalTimeslots-LCR
    }
  }
}

DPC-Mode ::=
ENUMERATED {
  singleTPC,
  tpcTripletInSoft }

-- The actual value of DPCCH power offset is the value of this IE * 2.
DPCCH-PowerOffset ::=
INTEGER (-82..-3)

DPCH-CompressedModeInfo ::=
SEQUENCE {
  tgp-SequenceList                  TGP-SequenceList
}

DPCH-CompressedModeStatusInfo ::= SEQUENCE (SIZE (1..maxTGPS)) OF
TGP-SequenceShort

-- TABULAR: Actual value = IE value * 256
DPCH-FrameOffset ::=
INTEGER (0..149)

DSCH-Mapping ::=
SEQUENCE {
  maxTFCI-Field2Value              MaxTFCI-Field2Value,
  spreadingFactor                   SF-PDSCH,
  codeNumber                        CodeNumberDSCH,
  multiCodeInfo                     MultiCodeInfo
}

DSCH-MappingList ::=
SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
DSCH-Mapping

DSCH-RadioLinkIdentifier ::=
INTEGER (0..511)

DurationTimeInfo ::=
INTEGER (1..4096)

-- TABULAR : value [Duration = infinite] is the value by default,
-- and is encoded by absence of the full sequence. If the sequence is present,
-- thefield is absent, the default is respectivelyinfinite. Presence of the
-- field absent should not be used, but shall be understood as if the
-- sequence was absent.

DynamicPersistenceLevel ::=
INTEGER (1..8)

DynamicPersistenceLevelList ::= SEQUENCE (SIZE (1..maxPRACH)) OF
DynamicPersistenceLevel

DynamicPersistenceLevelTF-List ::= SEQUENCE (SIZE (1..maxTF-CPCH)) OF
DynamicPersistenceLevel

FACH-PCH-Information ::=
SEQUENCE {
  transportFormatSet                TransportFormatSet,
  transportChannelIdentity           TransportChannelIdentity,
  ctch-Indicator                     BOOLEAN
}

FACH-PCH-InformationList ::= SEQUENCE (SIZE (1..maxFACH)) OF
FACH-PCH-Information

FrequencyInfo ::=
SEQUENCE {
  modeSpecificInfo                  CHOICE {

```

```

        fdd                FrequencyInfoFDD,
        tdd                FrequencyInfoTDD    }
    }

FrequencyInfoFDD ::=          SEQUENCE {
    uarfcn-UL                UARFCN          OPTIONAL,
    uarfcn-DL                UARFCN
}

FrequencyInfoTDD ::=         SEQUENCE {
    uarfcn-Nt                UARFCN
}

IndividualTimeslotInfo ::=   SEQUENCE {
    timeslotNumber           TimeslotNumber,
    tfci-Existence           BOOLEAN,
    midambleShiftAndBurstType MidambleShiftAndBurstType
}

IndividualTimeslotInfo-LCR ::= SEQUENCE {
    timeslotNumber           TimeslotNumber-LCR,
    tfci-Existence           BOOLEAN,
    midambleShiftAndBurstType MidambleShiftAndBurstType-LCR,
    modulation               ENUMERATED { mod_QPSK, mod_8PSK },
    ss-TPC-Symbols           ENUMERATED { zero, one, sixteenOverSF }
}

IndividualTimeslotLCR-Ext ::= SEQUENCE {
    -- timeslotNumber and tfci-Existence is taken from IndividualTimeslotInfo.
    -- midambleShiftAndBurstType in IndividualTimeslotInfo shall be ignored.
    midambleShiftAndBurstType MidambleShiftAndBurstType-LCR,
    modulation               ENUMERATED { mod_QPSK, mod_8PSK },
    ss-TPC-Symbols           ENUMERATED { zero, one, sixteenOverSF }
}

IndividualTS-Interference ::= SEQUENCE {
    timeslot                 TimeslotNumber,
    ul-TimeslotInterference  UL-Interference
}

IndividualTS-Interference-LCR ::= SEQUENCE {
    timeslot                 TimeslotNumber-LCR,
    ul-TimeslotInterference  UL-Interference
}

IndividualTS-InterferenceList ::= SEQUENCE (SIZE (1..maxTS)) OF
    IndividualTS-Interference

IndividualTS-InterferenceList-r4 ::= CHOICE {
    tdd384                   SEQUENCE (SIZE (1..maxTS)) OF
        IndividualTS-Interference,
    tdd128                   SEQUENCE (SIZE (1..maxTS-LCR)) OF
        IndividualTS-Interference-LCR
}

ITP ::=                     ENUMERATED {
    mode0, mode1 }

MaxAllowedUL-TX-Power ::=   INTEGER (-50..33)

MaxAvailablePCPCH-Number ::= INTEGER (1..64)

MaxTFCI-Field2Value ::=    INTEGER (1..1023)

MidambleConfiguration ::=   SEQUENCE {
    burstType1               BurstType1          DEFAULT ms8,
    -- TABULAR: The default value for BurstType2 has not been specified due to
    -- compactness reasons.
    burstType2               BurstType2
}

MidambleShiftAndBurstType ::= SEQUENCE {
    burstType                CHOICE {
        type1                SEQUENCE {
            midambleAllocationMode CHOICE {
                defaultMidamble  NULL,
                commonMidamble   NULL,
                ueSpecificMidamble SEQUENCE {
                    midambleShift MidambleShiftLong
                }
            }
        }
    }
}

```



```

    },
    type2
        midambleAllocationMode
        defaultMidamble
        commonMidamble
        ueSpecificMidamble
        midambleShift
    }
}
},
type3
    midambleAllocationMode
    defaultMidamble
    ueSpecificMidamble
    midambleShift
}
}
}
}
}

MidambleShiftAndBurstType-LCR ::= SEQUENCE {
    midambleAllocationMode CHOICE {
        defaultMidamble NULL,
        ueSpecificMidamble SEQUENCE {
            midambleShift INTEGER (0..15)
        }
    }
}

midambleConfiguration INTEGER (1..8) -- Actual value = IE value * 2
}

MidambleShiftLong ::= INTEGER (0..15)

MidambleShiftShort ::= INTEGER (0..5)

MinimumSpreadingFactor ::= ENUMERATED {
    sf4, sf8, sf16, sf32,
    sf64, sf128, sf256 }

MultiCodeInfo ::= INTEGER (1..16)

N-EOT ::= INTEGER (0..7)

N-GAP ::= ENUMERATED {
    f2, f4, f8 }

N-PCH ::= INTEGER (1..8)

N-StartMessage ::= INTEGER (1..8)

NB01 ::= INTEGER (0..50)

NF-Max ::= INTEGER (1..64)

NumberOfDPDCH ::= INTEGER (1..maxDPDCH-UL)

NumberOfFBI-Bits ::= INTEGER (1..2)

OpenLoopPowerControl-TDD ::= SEQUENCE {
    primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power,
    -- The following IEs shall be ignored in 1.28Mcps TDD mode.
    alpha Alpha OPTIONAL,
    prach-ConstantValue ConstantValue,
    dpch-ConstantValue ConstantValue,
    pusch-ConstantValue ConstantValue OPTIONAL
}

PagingIndicatorLength ::= ENUMERATED {
    pi4, pi8, pi16 }

PC-Preamble ::= ENUMERATED {
    pcp0, pcp15 }

-- For 1.28Mcps TDD, the following IE includes elements for the PCCPCH Info additional to those
-- in PrimaryCCPCH-Info
PCCPCH-LCR-Extensions ::= SEQUENCE {
    tstd-Indicator BOOLEAN
}

```

```

PCP-Length ::= ENUMERATED {
    as0, as8 }

PCPCH-ChannelInfo ::= SEQUENCE {
    pcpch-UL-ScramblingCode INTEGER (0..79),
    pcpch-DL-ChannelisationCode INTEGER (0..511),
    pcpch-DL-ScramblingCode SecondaryScramblingCode OPTIONAL,
    pcp-Length PCP-Length,
    ucsM-Info UCSM-Info OPTIONAL
}

PCPCH-ChannelInfoList ::= SEQUENCE (SIZE (1..maxPCPCHs)) OF
    PCPCH-ChannelInfo

PCPICH-UsageForChannelEst ::= ENUMERATED {
    mayBeUsed,
    shallNotBeUsed }

PDSCH-CapacityAllocationInfo ::= SEQUENCE {
    pdsch-PowerControlInfo PDSCH-PowerControlInfo OPTIONAL,
    pdsch-AllocationPeriodInfo AllocationPeriodInfo,
    tfcs-Identity TFCS-IdentityPlain OPTIONAL,
    configuration CHOICE {
        old-Configuration SEQUENCE {
            pdsch-Identity PDSCH-Identity
        },
        new-Configuration SEQUENCE {
            pdsch-Info PDSCH-Info,
            pdsch-Identity PDSCH-Identity OPTIONAL
        }
    }
}

PDSCH-CapacityAllocationInfo-r4 ::= SEQUENCE {
    pdsch-PowerControlInfo PDSCH-PowerControlInfo OPTIONAL,
    pdsch-AllocationPeriodInfo AllocationPeriodInfo,
    tfcs-Identity TFCS-IdentityPlain OPTIONAL,
    configuration CHOICE {
        old-Configuration SEQUENCE {
            pdsch-Identity PDSCH-Identity
        },
        new-Configuration SEQUENCE {
            pdsch-Info PDSCH-Info-r4,
            pdsch-Identity PDSCH-Identity OPTIONAL
        }
    }
}

PDSCH-CodeInfo ::= SEQUENCE {
    spreadingFactor SF-PDSCH,
    codeNumber CodeNumberDSCH,
    multiCodeInfo MultiCodeInfo
}

PDSCH-CodeInfoList ::= SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
    PDSCH-CodeInfo

PDSCH-CodeMap ::= SEQUENCE {
    spreadingFactor SF-PDSCH,
    multiCodeInfo MultiCodeInfo
}

PDSCH-CodeMapList ::= SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    PDSCH-CodeMap

PDSCH-CodeMapping ::= SEQUENCE {
    dl-ScramblingCode SecondaryScramblingCode OPTIONAL,
    signallingMethod CHOICE {
        codeRange CodeRange,
        dsch-MappingList DSCH-MappingList,
        pdsch-CodeInfoList PDSCH-CodeInfoList,
        replacedPDSCH-CodeInfoList ReplacedPDSCH-CodeInfoList
    }
}

PDSCH-Identity ::= INTEGER (1..hiPDSCHidentities)

PDSCH-Info ::= SEQUENCE {
    tfcs-Identity TFCS-IdentityPlain OPTIONAL,
    commonTimeslotInfo CommonTimeslotInfo OPTIONAL,
    pdsch-TimeslotsCodes DownlinkTimeslotsCodes OPTIONAL
}

```

```

}

PDSCH-Info-r4 ::=
SEQUENCE {
  tfcs-Identity          TFCS-IdentityPlain          OPTIONAL,
  commonTimeslotInfo    CommonTimeslotInfo          OPTIONAL,
  tddOption              CHOICE {
    tdd384                SEQUENCE {
      pdsch-TimeslotsCodes DownlinkTimeslotsCodes  OPTIONAL
    },
    tdd128                SEQUENCE {
      pdsch-TimeslotsCodes DownlinkTimeslotsCodes-LCR  OPTIONAL
    }
  }
}

PDSCH-Info-LCR ::=
SEQUENCE {
  tfcs-Identity          TFCS-IdentityPlain          OPTIONAL,
  commonTimeslotInfo    CommonTimeslotInfo          OPTIONAL,
  pdsch-TimeslotsCodes  DownlinkTimeslotsCodes-LCR  OPTIONAL
}

PDSCH-PowerControlInfo ::=
SEQUENCE {
  tpc-StepSizeTDD       TPC-StepSizeTDD            OPTIONAL,
  ul-CCTrChTPCList     UL-CCTrChTPCList            OPTIONAL
}

PDSCH-SHO-DCH-Info ::=
SEQUENCE {
  dsch-RadioLinkIdentifier DSCH-RadioLinkIdentifier,
  tfci-CombiningSet       TFCI-CombiningSet          OPTIONAL,
  rl-IdentifierList       RL-IdentifierList           OPTIONAL
}

PDSCH-SysInfo ::=
SEQUENCE {
  pdsch-Identity         PDSCH-Identity,
  pdsch-Info             PDSCH-Info,
  dsch-TFS               TransportFormatSet          OPTIONAL,
  dsch-TFCS              TFCS                        OPTIONAL
}

PDSCH-SysInfo-LCR ::=
SEQUENCE {
  pdsch-Identity         PDSCH-Identity,
  pdsch-Info             PDSCH-Info-LCR,
  dsch-TFS               TransportFormatSet          OPTIONAL,
  dsch-TFCS              TFCS                        OPTIONAL
}

PDSCH-SysInfoList ::=
SEQUENCE (SIZE (1..maxPDSCH)) OF
PDSCH-SysInfo

PDSCH-SysInfoList-SFN ::=
SEQUENCE (SIZE (1..maxPDSCH)) OF
SEQUENCE {
  pdsch-SysInfo         PDSCH-SysInfo,
  sfn-TimeInfo          SFN-TimeInfo                OPTIONAL
}

PDSCH-SysInfoList-SFN-LCR ::=
SEQUENCE (SIZE (1..maxPDSCH)) OF
SEQUENCE {
  pdsch-SysInfo         PDSCH-SysInfo-LCR,
  sfn-TimeInfo          SFN-TimeInfo                OPTIONAL
}

PersistenceScalingFactor ::=
ENUMERATED {
  psf0-9, psf0-8, psf0-7, psf0-6,
  psf0-5, psf0-4, psf0-3, psf0-2 }

PersistenceScalingFactorList ::=
SEQUENCE (SIZE (1..maxASCPersist)) OF
PersistenceScalingFactor

PI-CountPerFrame ::=
ENUMERATED {
  e18, e36, e72, e144 }

PICH-Info ::=
CHOICE {
  fdd                SEQUENCE {
    channelisationCode256 ChannelisationCode256,
    pi-CountPerFrame     PI-CountPerFrame,
    sttd-Indicator       BOOLEAN
  },
  tdd                SEQUENCE {
    channelisationCode    TDD-PICH-CCode          OPTIONAL,
    timeslot              TimeslotNumber          OPTIONAL,
    burstType             CHOICE {
      type-1              MidambleShiftLong,
    }
  }
}

```

```

        type-2
    }
    repetitionPeriodLengthOffset      RepPerLengthOffset-PICH      OPTIONAL,
    pagingIndicatorLength              PagingIndicatorLength        OPTIONAL,
    n-GAP                              N-GAP                      DEFAULT pi4,
    n-PCH                              N-PCH                      DEFAULT f4,
    n-PCH                              N-PCH                      DEFAULT 2
}
}

PICH-Info-LCR ::= CHOICE {
    timeslot                TimeslotNumber-LCR                OPTIONAL,
    midambleShiftAndBurstType MidambleShiftAndBurstType-LCR,
    repetitionPeriodLengthOffset RepPerLengthOffset-PICH      OPTIONAL,
    pagingIndicatorLength    PagingIndicatorLength            DEFAULT pi4,
    n-GAP                    N-GAP                          DEFAULT f4,
    n-PCH                    N-PCH                          DEFAULT 2
}

PICH-PowerOffset ::= INTEGER (-10..5)

PilotBits128 ::= ENUMERATED {
    pb4, pb8 }

PilotBits256 ::= ENUMERATED {
    pb2, pb4, pb8 }

PositionFixedOrFlexible ::= ENUMERATED {
    fixed,
    flexible }

PowerControlAlgorithm ::= CHOICE {
    algorithm1      TPC-StepSizeFDD,
    algorithm2      NULL
}

PowerRampStep ::= INTEGER (1..8)

PRACH-Midamble ::= ENUMERATED {
    direct,
    direct-Inverted }

PRACH-Partitioning ::= CHOICE {
    fdd                SEQUENCE (SIZE (1..maxASC)) OF
                       ASCSetting,
    tdd                SEQUENCE (SIZE (1..maxASC)) OF
                       ASC
}

PRACH-PowerOffset ::= SEQUENCE {
    powerRampStep      PowerRampStep,
    preambleRetransMax PreambleRetransMax
}

PRACH-RACH-Info ::= SEQUENCE {
    modeSpecificInfo  CHOICE {
        fdd                SEQUENCE {
            availableSignatures AvailableSignatures,
            availableSF       SF-PRACH,
            preambleScramblingCodeWordNumber PreambleScramblingCodeWordNumber,
            puncturingLimit   PuncturingLimit,
            availableSubChannelNumbers AvailableSubChannelNumbers
        },
        tdd                SEQUENCE {
            timeslot        TimeslotNumber,
            channelisationCode TDD-PRACH-CCodeList,
            prach-Midamble  PRACH-Midamble                OPTIONAL
        }
    }
}

PRACH-SystemInformation ::= SEQUENCE {
    prach-RACH-Info      PRACH-RACH-Info,
    transportChannelIdentity TransportChannelIdentity,
    rach-TransportFormatSet TransportFormatSet                OPTIONAL,
    rach-TFCS            TFCS                            OPTIONAL,
    prach-Partitioning  PRACH-Partitioning                OPTIONAL,
    persistenceScalingFactorList PersistenceScalingFactorList OPTIONAL,
    ac-To-ASC-MappingTable AC-To-ASC-MappingTable    OPTIONAL,
    modeSpecificInfo    CHOICE {
        fdd                SEQUENCE {
            primaryCPICH-TX-Power PrimaryCPICH-TX-Power    OPTIONAL,
            constantValue      ConstantValue                OPTIONAL
        }
    }
}

```

```

        prach-PowerOffset          PRACH-PowerOffset          OPTIONAL,
        rach-TransmissionParameters RACH-TransmissionParameters OPTIONAL,
        aich-Info                  AICH-Info                OPTIONAL
    },
    tdd                            NULL
}
}

PRACH-SystemInformationList ::= SEQUENCE (SIZE (1..maxPRACH)) OF
    PRACH-SystemInformation

PreambleRetransMax ::= INTEGER (1..64)

PreambleScramblingCodeWordNumber ::= INTEGER (0..15)

PreDefPhyChConfiguration ::= SEQUENCE {
    ul-DPCH-InfoPredef          UL-DPCH-InfoPredef,
    dl-CommonInformationPredef  DL-CommonInformationPredef OPTIONAL
}

PrimaryCCPCH-Info ::= CHOICE {
    fdd                         SEQUENCE {
        tx-DiversityIndicator    BOOLEAN
    },
    tdd                         SEQUENCE {
        -- syncCase should be absent for 1.28Mcps TDD mode
        syncCase                 CHOICE {
            syncCase1            SEQUENCE {
                timeslot         TimeslotNumber
            },
            syncCase2            SEQUENCE {
                timeslotSync2    TimeslotSync2
            }
        }
    }
    cellParametersID            CellParametersID          OPTIONAL,
    blockSTTD-Indicator         BOOLEAN                  OPTIONAL
}

PrimaryCCPCH-Info-r4 ::= CHOICE {
    fdd                         SEQUENCE {
        tx-DiversityIndicator    BOOLEAN
    },
    tdd                         SEQUENCE {
        tddOption                CHOICE {
            tdd384                SEQUENCE {
                syncCase          CHOICE {
                    syncCase1    SEQUENCE {
                        timeslot    TimeslotNumber
                    },
                    syncCase2    SEQUENCE {
                        timeslotSync2 TimeslotSync2
                    }
                }
            }
        }
    }
    cellParametersID            CellParametersID          OPTIONAL,
    blockSTTD-Indicator         BOOLEAN
}

PrimaryCCPCH-Info-LCR ::= SEQUENCE {
    tstd-Indicator              BOOLEAN
    cellParametersID            CellParametersID          OPTIONAL,
    blockSTTD-Indicator         BOOLEAN
}

PrimaryCCPCH-InfoPost ::= SEQUENCE {
    syncCase                    CHOICE {
        syncCase1              SEQUENCE {
            timeslot            TimeslotNumber
        },
        syncCase2              SEQUENCE {
            timeslotSync2      TimeslotSync2
        }
    },
    cellParametersID            CellParametersID,
    blockSTTD-Indicator         BOOLEAN
}

```

```

}
PrimaryCCPCH-InfoPostTDD-LCR ::= SEQUENCE {
  tstd-Indicator          BOOLEAN,
  cellParametersID      CellParametersID,
  blockSTD-Indicator     BOOLEAN
}
PrimaryCCPCH-TX-Power ::= INTEGER (6..43)
PrimaryCPICH-Info ::= SEQUENCE {
  primaryScramblingCode PrimaryScramblingCode
}
PrimaryCPICH-TX-Power ::= INTEGER (-10..50)
PrimaryScramblingCode ::= INTEGER (0..511)
PuncturingLimit ::= ENUMERATED {
  p10-40, p10-44, p10-48, p10-52, p10-56,
  p10-60, p10-64, p10-68, p10-72, p10-76,
  p10-80, p10-84, p10-88, p10-92, p10-96, p11 }
PUSCH-CapacityAllocationInfo ::= SEQUENCE {
  pusch-Allocation          CHOICE {
    pusch-AllocationPending NULL,
    pusch-AllocationAssignment SEQUENCE {
      pdsch-AllocationPeriodInfo AllocationPeriodInfo,
      pusch-PowerControlInfo      UL-TargetSIR          OPTIONAL,
      tfcs-Identity              TFCS-IdentityPlain    OPTIONAL,
      configuration              CHOICE {
        old-Configuration        SEQUENCE {
          pusch-Identity          PUSCH-Identity
        },
        new-Configuration        SEQUENCE {
          pusch-Info              PUSCH-Info,
          pusch-Identity          PUSCH-Identity    OPTIONAL
        }
      }
    }
  }
}
PUSCH-CapacityAllocationInfo-r4 ::= SEQUENCE {
  pusch-Allocation          CHOICE {
    pusch-AllocationPending NULL,
    pusch-AllocationAssignment SEQUENCE {
      pdsch-AllocationPeriodInfo AllocationPeriodInfo,
      pusch-PowerControlInfo      PUSCH-PowerControlInfo-r4 OPTIONAL,
      tfcs-Identity              TFCS-IdentityPlain    OPTIONAL,
      configuration              CHOICE {
        old-Configuration        SEQUENCE {
          pusch-Identity          PUSCH-Identity
        },
        new-Configuration        SEQUENCE {
          pusch-Info              PUSCH-Info-r4,
          pusch-Identity          PUSCH-Identity    OPTIONAL
        }
      }
    }
  }
}
PUSCH-Identity ::= INTEGER (1..hiPUSCHidentities)
PUSCH-Info ::= SEQUENCE {
  tfcs-Identity          TFCS-IdentityPlain          OPTIONAL,
  commonTimeslotInfo    CommonTimeslotInfo          OPTIONAL,
  pusch-TimeslotsCodes  UplinkTimeslotsCodes        OPTIONAL
}
PUSCH-Info-r4 ::= SEQUENCE {
  tfcs-Identity          TFCS-IdentityPlain          OPTIONAL,
  commonTimeslotInfo    CommonTimeslotInfo          OPTIONAL,
  tddOption             CHOICE {
    tdd384              SEQUENCE {
      pusch-TimeslotsCodes UplinkTimeslotsCodes    OPTIONAL
    },
    tdd128              SEQUENCE {
      pusch-TimeslotsCodes UplinkTimeslotsCodes-LCR OPTIONAL
    }
  }
}

```

```

}
}
PUSCH-Info-LCR ::= SEQUENCE {
    tfcs-Identity          TFCS-IdentityPlain          OPTIONAL,
    commonTimeslotInfo    CommonTimeslotInfo          OPTIONAL,
    pusch-TimeslotsCodes  UplinkTimeslotsCodes-LCR    OPTIONAL
}
PUSCH-PowerControlInfo-r4 ::= SEQUENCE {
    ul-TargetSIR          UL-TargetSIR,
    tddOption             CHOICE {
        tdd384            NULL,
        tdd128            SEQUENCE {
            tpc-StepSize  TPC-StepSizeTDD          OPTIONAL,
            dl-CCTrChTPCList  DL-CCTrChTPCList    OPTIONAL
        }
    }
}
PUSCH-SysInfo ::= SEQUENCE {
    pusch-Identity        PUSCH-Identity,
    pusch-Info            PUSCH-Info,
    usch-TFS              TransportFormatSet        OPTIONAL,
    usch-TFCS             TFCS                      OPTIONAL
}
PUSCH-SysInfo-LCR ::= SEQUENCE {
    pusch-Identity        PUSCH-Identity,
    pusch-Info            PUSCH-Info-LCR,
    usch-TFS              TransportFormatSet        OPTIONAL,
    usch-TFCS             TFCS                      OPTIONAL
}
PUSCH-SysInfoList ::= SEQUENCE (SIZE (1..maxPUSCH)) OF
    PUSCH-SysInfo
PUSCH-SysInfoList-SFN ::= SEQUENCE (SIZE (1..maxPDSCH)) OF
    SEQUENCE {
        pusch-SysInfo    PUSCH-SysInfo,
        sfn-TimeInfo     SFN-TimeInfo              OPTIONAL
    }
PUSCH-SysInfoList-SFN-LCR ::= SEQUENCE (SIZE (1..maxPDSCH)) OF
    SEQUENCE {
        pusch-SysInfo    PUSCH-SysInfo-LCR,
        sfn-TimeInfo     SFN-TimeInfo              OPTIONAL
    }
RACH-TransmissionParameters ::= SEQUENCE {
    mmax          INTEGER (1..32),
    nb01Min       NB01,
    nb01Max       NB01
}
ReducedScramblingCodeNumber ::= INTEGER (0..8191)
RepetitionPeriodAndLength ::= CHOICE {
    repetitionPeriod1    NULL,
    repetitionPeriod2    INTEGER (1..1),
    -- repetitionPeriod2 could just as well be NULL also.
    repetitionPeriod4    INTEGER (1..3),
    repetitionPeriod8    INTEGER (1..7),
    repetitionPeriod16   INTEGER (1..15),
    repetitionPeriod32   INTEGER (1..31),
    repetitionPeriod64   INTEGER (1..63)
}
RepetitionPeriodLengthAndOffset ::= CHOICE {
    repetitionPeriod1    NULL,
    repetitionPeriod2    SEQUENCE {
        length           NULL,
        offset           INTEGER (0..1)
    },
    repetitionPeriod4    SEQUENCE {
        length           INTEGER (1..3),
        offset           INTEGER (0..3)
    },
    repetitionPeriod8    SEQUENCE {
        length           INTEGER (1..7),
        offset           INTEGER (0..7)
    },
}

```

```

    repetitionPeriod16
      length
      offset
    },
    repetitionPeriod32
      length
      offset
    },
    repetitionPeriod64
      length
      offset
  }
}

ReplacedPDSCH-CodeInfo ::=
  tfci-Field2
  spreadingFactor
  codeNumber
  multiCodeInfo
}

ReplacedPDSCH-CodeInfoList ::=
  SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
  ReplacedPDSCH-CodeInfo

RepPerLengthOffset-PICH ::=
  rpp4-2
  rpp8-2
  rpp8-4
  rpp16-2
  rpp16-4
  rpp32-2
  rpp32-4
  rpp64-2
  rpp64-4
}

RestrictedTrCH ::=
  restrictedDL-TrCH-Identity
  allowedTFIList
}

RestrictedTrCH-InfoList ::=
  SEQUENCE (SIZE(1..maxTrCH)) OF
  RestrictedTrCH

RL-AdditionInformation ::=
  primaryCPICH-Info
  dl-DPCH-InfoPerRL
  tfci-CombiningIndicator
  sccpch-InfoForFACH
}

RL-AdditionInformationList ::=
  SEQUENCE (SIZE (1..maxRL)) OF
  RL-AdditionInformation

RL-IdentifilerList ::=
  SEQUENCE (SIZE (1..maxRL)) OF
  PrimaryCPICH-Info

RL-RemovalInformationList ::=
  SEQUENCE (SIZE (1..maxRL-1)) OF
  PrimaryCPICH-Info

RPP ::=
  ENUMERATED {
    mode0, mode1
  }

S-Field ::=
  ENUMERATED {
    e1bit, e2bits
  }

SCCPCH-ChannelisationCode ::=
  ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16
  }

SCCPCH-ChannelisationCodeList ::=
  SEQUENCE (SIZE (1..16)) OF
  SCCPCH-ChannelisationCode

SCCPCH-InfoForFACH ::=
  secondaryCCPCH-Info
  tfcs
  fach-PCH-InformationList
  sib-ReferenceListFACH
}

```



```

SCCPCH-LCR-Extensions          SEQUENCE {
  secondaryCCPCH-LCR-Extensions SecondaryCCPCH-LCR-Extensions,
  -- pich-Info in the SCCPCH-SystemInformation IE shall be absent, and instead the following used.
  pich-Info                     pich-Info-LCR                      OPTIONAL
}

-- The following list includes elements additional to those in
-- SCCPCH-SystemInformationList for the 1.28Mcps TDD. The order of the IEs
-- indicates which SCCPCH-LCR-Extensions IE extends which SCCPCH-SystemInformation IE.
SCCPCH-LCR-ExtensionsList ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
                               SCCPCH-LCR-Extensions

SCCPCH-SystemInformation ::= SEQUENCE {
  secondaryCCPCH-Info          SecondaryCCPCH-Info,
  tfcs                        TFCS                      OPTIONAL,
  fach-PCH-InformationList    FACH-PCH-InformationList  OPTIONAL,
  pich-Info                   PICH-Info                 OPTIONAL
}

SCCPCH-SystemInformationList ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
                                  SCCPCH-SystemInformation

ScramblingCodeChange ::= ENUMERATED {
  codeChange, noCodeChange }

ScramblingCodeType ::= ENUMERATED {
  shortSC,
  longSC }

SecondaryCCPCH-Info ::= SEQUENCE {
  modeSpecificInfo            CHOICE {
    fdd                       SEQUENCE {
      pCPICH-UsageForChannelEst PCPICH-UsageForChannelEst,
      secondaryCPICH-Info       SecondaryCPICH-Info          OPTIONAL,
      secondaryScramblingCode   SecondaryScramblingCode    OPTIONAL,
      sttd-Indicator            BOOLEAN,
      sf-AndCodeNumber          SF256-AndCodeNumber,
      pilotSymbolExistence      BOOLEAN,
      tfci-Existence            BOOLEAN,
      positionFixedOrFlexible    PositionFixedOrFlexible,
      timingOffset              TimingOffset                DEFAULT 0
    },
    tdd                       SEQUENCE {
      -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
      commonTimeslotInfo        CommonTimeslotInfoSCCPCH,
      individualTimeslotInfo     IndividualTimeslotInfo,
      channelisationCode        SCCPCH-ChannelisationCodeList
    }
  }
}

SecondaryCCPCH-Info-r4 ::= SEQUENCE {
  modeSpecificInfo            CHOICE {
    fdd                       SEQUENCE {
      pCPICH-UsageForChannelEst PCPICH-UsageForChannelEst,
      secondaryCPICH-Info       SecondaryCPICH-Info          OPTIONAL,
      secondaryScramblingCode   SecondaryScramblingCode    OPTIONAL,
      sttd-Indicator            BOOLEAN,
      sf-AndCodeNumber          SF256-AndCodeNumber,
      pilotSymbolExistence      BOOLEAN,
      tfci-Existence            BOOLEAN,
      positionFixedOrFlexible    PositionFixedOrFlexible,
      timingOffset              TimingOffset                DEFAULT 0
    },
    tdd                       SEQUENCE {
      -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
      commonTimeslotInfo        CommonTimeslotInfoSCCPCH,
      tddOption                 CHOICE {
        tdd384                  SEQUENCE {
          individualTimeslotInfo IndividualTimeslotInfo
        },
        tdd128                  SEQUENCE {
          individualTimeslotInfo IndividualTimeslotInfo-LCR
        }
      }
    }
  },
  channelisationCode          SCCPCH-ChannelisationCodeList
}

SecondaryCCPCH-LCR-Extensions ::= SEQUENCE {

```

```

individualTimeslotLCR-Ext          IndividualTimeslotLCR-Ext
}
SecondaryCPICH-Info ::=
  secondaryDL-ScramblingCode      SEQUENCE {
  channelisationCode              SecondaryScramblingCode          OPTIONAL,
                                ChannelisationCode256
  }
SecondaryScramblingCode ::=      INTEGER (1..15)
SecondInterleavingMode ::=      ENUMERATED {
                                frameRelated, timeslotRelated }
-- SF256-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF256-AndCodeNumber ::=         CHOICE {
  sf4                             INTEGER (0..3),
  sf8                             INTEGER (0..7),
  sf16                            INTEGER (0..15),
  sf32                            INTEGER (0..31),
  sf64                            INTEGER (0..63),
  sf128                           INTEGER (0..127),
  sf256                           INTEGER (0..255)
  }
-- SF512-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF512-AndCodeNumber ::=         CHOICE {
  sf4                             INTEGER (0..3),
  sf8                             INTEGER (0..7),
  sf16                            INTEGER (0..15),
  sf32                            INTEGER (0..31),
  sf64                            INTEGER (0..63),
  sf128                           INTEGER (0..127),
  sf256                           INTEGER (0..255),
  sf512                           INTEGER (0..511)
  }
-- SF512-AndPilot encodes both "Spreading factor" and "Number of bits for Pilot bits"
SF512-AndPilot ::=              CHOICE {
  sfd4                            NULL,
  sfd8                            NULL,
  sfd16                           NULL,
  sfd32                           NULL,
  sfd64                           NULL,
  sfd128                          PilotBits128,
  sfd256                          PilotBits256,
  sfd512                          NULL
  }
SF-PDSCH ::=                    ENUMERATED {
  sfp4, sfp8, sfp16, sfp32,
  sfp64, sfp128, sfp256 }
SF-PRACH ::=                    ENUMERATED {
  sfpr32, sfpr64, sfpr128, sfpr256 }
SFN-TimeInfo ::=                SEQUENCE {
  activationTimeSFN               INTEGER (0..4095),
  physChDuration                  DurationTimeInfo
  }
SpreadingFactor ::=             ENUMERATED {
  sf4, sf8, sf16, sf32,
  sf64, sf128, sf256 }
SSDT-CellIdentity ::=          ENUMERATED {
  ssdt-id-a, ssdt-id-b, ssdt-id-c,
  ssdt-id-d, ssdt-id-e, ssdt-id-f,
  ssdt-id-g, ssdt-id-h }
SSDT-Information ::=           SEQUENCE {
  s-Field                         S-Field,
  codeWordSet                     CodeWordSet
  }
SynchronisationParameters ::=  SEQUENCE {
  sync-UL-CodesBitmap             BIT STRING (SIZE (8))          OPTIONAL,
  fpach-Info                      FPACH-Info,
  sync-UL-Procedure               SYNC-UL-Procedure             OPTIONAL
  }
SYNC-UL-Procedure ::=          SEQUENCE {
  max-SYNC-UL-Transmissions       ENUMERATED { tr1, tr2, tr4, tr8 },
  powerRampingStep               INTEGER (0..3)
  }

```

```

}
TDD-PICH-CCode ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCode8 ::= ENUMERATED {
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8 }

TDD-PRACH-CCode16 ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCodeList ::= CHOICE {
    sf8 SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode8,
    sf16 SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode16
}

TFC-ControlDuration ::= ENUMERATED {
    tfc-cd1, tfc-cd2, tfc-cd4, tfc-cd8,
    tfc-cd16, tfc-cd24, tfc-cd32,
    tfc-cd48, tfc-cd64, tfc-cd128,
    tfc-cd192, tfc-cd256, tfc-cd512 }

TFCI-Coding ::= ENUMERATED {
    tfci-bits-4, tfci-bits-8,
    tfci-bits-16, tfci-bits-32 }

-- **TODO**, not defined
TFCI-CombiningSet ::= SEQUENCE {
}

TGCFN ::= INTEGER (0..255)

-- The value 270 represents "undefined" in the tabular description.
TGD ::= INTEGER (15..270)

TGL ::= INTEGER (1..14)

TGMP ::= ENUMERATED {
    tdd-Measurement, fdd-Measurement,
    gsm-CarrierRSSIMeasurement,
    gsm-initialBSICIdentification, gsmBSICReconfirmation }

TGP-Sequence ::= SEQUENCE {
    tgpsi TGPSI,
    tgps-StatusFlag TGPS-StatusFlag,
    tgcfn TGCFN,
    tgps-ConfigurationParams TGPS-ConfigurationParams OPTIONAL
}

TGP-SequenceList ::= SEQUENCE (SIZE (1..maxTGPS)) OF
    TGP-Sequence

TGP-SequenceShort ::= SEQUENCE {
    tgpsi TGPSI,
    tgps-StatusFlag TGPS-StatusFlag,
    tgcfn TGCFN
}

TGPL ::= INTEGER (1..144)

-- TABULAR: The value 0 represents "infinity" in the tabular description.
TGPRC ::= INTEGER (0..63)

TGPS-ConfigurationParams ::= SEQUENCE {
    tgmp TGMP,
    tgprc TGPRC,
    tgsn TGSN,
    tg11 TGL,
    tg12 TGL OPTIONAL,
    tgd TGD,
    tgpl1 TGPL,
    tgpl2 TGPL OPTIONAL,
    rpp RPP,
}

```

```

    itp                                ITP,
    ul-DL-Mode                          UL-DL-Mode,
    -- TABULAR: Compressed mode method is nested inside UL-DL-Mode
    dl-FrameType                        DL-FrameType,
    deltaSIR1                           DeltaSIR,
    deltaSIRAfter1                       DeltaSIR,
    deltaSIR2                           DeltaSIR                                OPTIONAL,
    deltaSIRAfter2                       DeltaSIR                                OPTIONAL
}

TGPS-StatusFlag ::=                     ENUMERATED {
    tgpsActive, tgpsInactive }

TGPSI ::=                               INTEGER (1..maxTGPS)

TGSN ::=                               INTEGER (0..14)

TimeInfo ::=                            SEQUENCE {
    activationTime                       ActivationTime                                OPTIONAL,
    durationTimeInfo                     DurationTimeInfo                                OPTIONAL
}

TimeslotList ::=                       SEQUENCE (SIZE (1..maxTS)) OF
    TimeslotNumber

TimeslotList-r4 ::=                    CHOICE {
    tdd384                               SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotNumber,
    tdd128                               SEQUENCE (SIZE (1..maxTS-LCR)) OF
        TimeslotNumber-LCR
}

-- If TimeslotNumber is included for a 1.28Mcps TDD description, it shall take values from 0..6
TimeslotNumber ::=                     INTEGER (0..14)

TimeslotNumber-LCR ::=                  INTEGER (0..6)

TimeslotSync2 ::=                      INTEGER (0..6)

-- Actual value = IE value * 256
TimingOffset ::=                       INTEGER (0..149)

TPC-CombinationIndex ::=               INTEGER (0..5)

TPC-StepSizeFDD ::=                    INTEGER (0..1)

TPC-StepSizeTDD ::=                    INTEGER (1..3)

TX-DiversityMode ::=                   ENUMERATED {
    noDiversity,
    sttd,
    closedLoopMode1,
    closedLoopMode2 }

UARFCN ::=                             INTEGER (0..16383)

UCSM-Info ::=                          SEQUENCE {
    minimumSpreadingFactor               MinimumSpreadingFactor,
    nf-Max                               NF-Max,
    channelReqParamsForUCSM              ChannelReqParamsForUCSM
}

UL-CCTrCH ::=                          SEQUENCE {
    tfcs-Identity                        TFCS-IdentityPlain                                OPTIONAL,
    timeInfo                              TimeInfo,
    commonTimeslotInfo                   CommonTimeslotInfo                                OPTIONAL,
    ul-CCTrCH-TimeslotsCodes             UplinkTimeslotsCodes                                OPTIONAL
}

UL-CCTrCH-r4 ::=                       SEQUENCE {
    tfcs-Identity                        TFCS-IdentityPlain                                OPTIONAL,
    timeInfo                              TimeInfo,
    commonTimeslotInfo                   CommonTimeslotInfo                                OPTIONAL,
    tddOption                            CHOICE {
        tdd384                           SEQUENCE {
            ul-CCTrCH-TimeslotsCodes       UplinkTimeslotsCodes                                OPTIONAL
        },
        tdd128                           SEQUENCE {
            ul-CCTrCH-TimeslotsCodes-LCR   UplinkTimeslotsCodes-LCR                                OPTIONAL
        }
    }
}

```

```

}
UL-CCTrCHList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
                   UL-CCTrCH
}
UL-CCTrCHList-r4 ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
                     UL-CCTrCH-r4
}
UL-CCTrChTPCList ::= SEQUENCE (SIZE (0..maxCCTrCH)) OF
                     TFCS-Identity
}
UL-ChannelRequirement ::= CHOICE {
    ul-DPCH-Info          UL-DPCH-Info,
    cpch-SetInfo         CPCH-SetInfo
}
}
UL-ChannelRequirement-r4 ::= CHOICE {
    ul-DPCH-Info          UL-DPCH-Info-r4,
    cpch-SetInfo         CPCH-SetInfo
}
}
UL-ChannelRequirementWithCPCH-SetID ::= CHOICE {
    ul-DPCH-Info          UL-DPCH-Info,
    cpch-SetInfo         CPCH-SetInfo,
    cpch-SetID           CPCH-SetID
}
}
UL-ChannelRequirementWithCPCH-SetID-r4 ::= CHOICE {
    ul-DPCH-Info          UL-DPCH-Info-r4,
    cpch-SetInfo         CPCH-SetInfo,
    cpch-SetID           CPCH-SetID
}
}
UL-CompressedModeMethod ::= ENUMERATED {
    sf-2,
    higherLayerScheduling }
}
UL-DL-Mode ::= CHOICE {
    ul          UL-CompressedModeMethod,
    dl          DL-CompressedModeMethod
}
}
UL-DPCCH-SlotFormat ::= ENUMERATED {
    slf0, slf1, slf2 }
}
UL-DPCH-Info ::= SEQUENCE {
    ul-DPCH-PowerControlInfo  UL-DPCH-PowerControlInfo  OPTIONAL,
    modeSpecificInfo          CHOICE {
        fdd SEQUENCE {
            scramblingCodeType  ScramblingCodeType,
            scramblingCode      UL-ScramblingCode,
            numberOfDPDCH       NumberOfDPDCH             DEFAULT 1,
            spreadingFactor     SpreadingFactor,
            tfci-Existence      BOOLEAN,
            numberOfFBI-Bits    NumberOfFBI-Bits         OPTIONAL,
            -- The IE above is conditional based on history
            puncturingLimit     PuncturingLimit
        },
        tdd SEQUENCE {
            ul-TimingAdvance     UL-TimingAdvanceControl  OPTIONAL,
            ul-CCTrCHList       UL-CCTrCHList
        }
    }
}
}
}
UL-DPCH-Info-r4 ::= SEQUENCE {
    ul-DPCH-PowerControlInfo  UL-DPCH-PowerControlInfo-r4  OPTIONAL,
    modeSpecificInfo          CHOICE {
        fdd SEQUENCE {
            scramblingCodeType  ScramblingCodeType,
            scramblingCode      UL-ScramblingCode,
            numberOfDPDCH       NumberOfDPDCH             DEFAULT 1,
            spreadingFactor     SpreadingFactor,
            tfci-Existence      BOOLEAN,
            numberOfFBI-Bits    NumberOfFBI-Bits         OPTIONAL,
            -- The IE above is conditional based on history
            puncturingLimit     PuncturingLimit
        },
        tdd SEQUENCE {
            ul-TimingAdvance     UL-TimingAdvanceControl-r4  OPTIONAL,
            ul-CCTrCHList       UL-CCTrCHList-r4
        }
    }
}
}
}

```

```

}
}
UL-DPCH-InfoPostFDD ::= SEQUENCE {
    ul-DPCH-PowerControlInfo      UL-DPCH-PowerControlInfoPostFDD,
    scramblingCodeType            ScramblingCodeType,
    reducedScramblingCodeNumber   ReducedScramblingCodeNumber,
    spreadingFactor               SpreadingFactor
}

UL-DPCH-InfoPostTDD ::= SEQUENCE {
    ul-DPCH-PowerControlInfo      UL-DPCH-PowerControlInfoPostTDD,
    ul-TimingAdvance              UL-TimingAdvanceControl          OPTIONAL,
    ul-CCTrCH-TimeslotsCodes     UplinkTimeslotsCodes
}

UL-DPCH-InfoPostTDD-LCR ::= SEQUENCE {
    ul-DPCH-PowerControlInfo      UL-DPCH-PowerControlInfoPostTDD-LCR,
    ul-TimingAdvance              UL-TimingAdvanceControl-LCR      OPTIONAL,
    ul-CCTrCH-TimeslotsCodes     UplinkTimeslotsCodes-LCR
}

UL-DPCH-InfoPredef ::= SEQUENCE {
    ul-DPCH-PowerControlInfo      UL-DPCH-PowerControlInfoPredef,
    modeSpecificInfo              CHOICE {
        fdd                       SEQUENCE {
            tfci-Existence        BOOLEAN,
            puncturingLimit       PuncturingLimit
        },
        tdd                       SEQUENCE {
            commonTimeslotInfo    CommonTimeslotInfo
        }
    }
}

UL-DPCH-PowerControlInfo ::= CHOICE {
    fdd                           SEQUENCE {
        dpch-PowerOffset          DPCH-PowerOffset,
        pc-Preamble               PC-Preamble,
        powerControlAlgorithm      PowerControlAlgorithm
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    },
    tdd                           SEQUENCE {
        ul-TargetSIR              UL-TargetSIR,
        ul-OL-PC-Signalling        CHOICE {
            broadcast-UL-OL-PC-info NULL,
            handoverGroup          SEQUENCE {
                individualTS-InterferenceList IndividualTS-InterferenceList,
                dpch-ConstantValue   ConstantValue,
                primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
            }
        }
    }
} OPTIONAL

UL-DPCH-PowerControlInfo-r4 ::= CHOICE {
    fdd                           SEQUENCE {
        dpch-PowerOffset          DPCH-PowerOffset,
        pc-Preamble               PC-Preamble,
        powerControlAlgorithm      PowerControlAlgorithm
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    },
    tdd                           SEQUENCE {
        ul-TargetSIR              UL-TargetSIR,
        ul-OL-PC-Signalling        CHOICE {
            broadcast-UL-OL-PC-info NULL,
            handoverGroup          SEQUENCE {
                tddOption           CHOICE {
                    tdd384          SEQUENCE {
                        individualTS-InterferenceList IndividualTS-InterferenceList,
                        dpch-ConstantValue   ConstantValue
                    }
                }
            }
        }
        tdd128                     SEQUENCE {
            tpc-StepSize           TPC-StepSizeTDD
        }
    },
    primaryCCPCH-TX-Power          PrimaryCCPCH-TX-Power
} OPTIONAL
}

```

```

}
}
UL-DPCH-PowerControlInfoPostFDD ::= SEQUENCE {
    powerControlAlgorithm      PowerControlAlgorithm
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
}

UL-DPCH-PowerControlInfoPostTDD ::= SEQUENCE {
    ul-TargetSIR              UL-TargetSIR,
    ul-TimeslotInterference    UL-Interference
}

UL-DPCH-PowerControlInfoPostTDD-LCR ::= SEQUENCE {
    ul-TargetSIR              UL-TargetSIR
}

UL-DPCH-PowerControlInfoPredef ::= CHOICE {
    fdd                       SEQUENCE {
        dpcch-PowerOffset      DPCCH-PowerOffset,
        pc-Preamble            PC-Preamble
    },
    tdd                       SEQUENCE {
        -- The following IE shall be ignored if in 1.28Mcps TDD mode.
        dpch-ConstantValue     ConstantValue
    }
}

UL-Interference ::= INTEGER (-110..-70)

UL-ScramblingCode ::= INTEGER (0..16777215)

UL-SynchronisationParameters ::= SEQUENCE {
    stepSize                  INTEGER (1..8),
    frequency                 INTEGER (1..8)
}

-- Actual value = (IE value * 0.5) - 11
UL-TargetSIR ::= INTEGER (0..62)

UL-TimingAdvance ::= INTEGER (0..63)

UL-TimingAdvanceControl ::= CHOICE {
    disabled                  NULL,
    enabled                   SEQUENCE {
        ul-TimingAdvance      UL-TimingAdvance          OPTIONAL,
        activationTime         ActivationTime            OPTIONAL
    }
}

UL-TimingAdvanceControl-r4 ::= CHOICE {
    disabled                  NULL,
    enabled                   SEQUENCE {
        tddOption             CHOICE {
            tdd384            SEQUENCE {
                ul-TimingAdvance      UL-TimingAdvance          OPTIONAL,
                activationTime         ActivationTime            OPTIONAL
            }
            tdd128            SEQUENCE {
                ul-SynchronisationParameters  UL-SynchronisationParameters  OPTIONAL,
                synchronisationParameters     SynchronisationParameters  OPTIONAL
            }
        }
    }
}

UL-TimingAdvanceControl-LCR ::= CHOICE {
    disabled                  NULL,
    enabled                   SEQUENCE {
        ul-SynchronisationParameters  UL-SynchronisationParameters  OPTIONAL,
        synchronisationParameters     SynchronisationParameters  OPTIONAL
    }
}

UL-TS-ChannelisationCode ::= ENUMERATED {
    cc1-1, cc2-1, cc2-2,
    cc4-1, cc4-2, cc4-3, cc4-4,
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8,
    cc16-1, cc16-2, cc16-3, cc16-4,
}

```

cc16-5, cc16-6, cc16-7, cc16-8,  
cc16-9, cc16-10, cc16-11, cc16-12,  
cc16-13, cc16-14, cc16-15, cc16-16 }

UL-TS-ChannelisationCodeList ::= SEQUENCE (SIZE (1..2)) OF  
UL-TS-ChannelisationCode

```
UplinkAdditionalTimeslots ::= SEQUENCE {
  parameters CHOICE {
    sameAsLast SEQUENCE {
      timeslotNumber TimeslotNumber
    },
    newParameters SEQUENCE {
      individualTimeslotInfo IndividualTimeslotInfo,
      ul-TS-ChannelisationCodeList UL-TS-ChannelisationCodeList
    }
  }
}
```

```
UplinkAdditionalTimeslots-LCR ::= SEQUENCE {
  parameters CHOICE {
    sameAsLast SEQUENCE {
      timeslotNumber TimeslotNumber
    },
    newParameters SEQUENCE {
      individualTimeslotInfo IndividualTimeslotInfo-LCR,
      ul-TS-ChannelisationCodeList UL-TS-ChannelisationCodeList
    }
  }
}
```

```
UplinkTimeslotsCodes ::= SEQUENCE {
  dynamicSFusage BOOLEAN,
  firstIndividualTimeslotInfo IndividualTimeslotInfo,
  ul-TS-ChannelisationCodeList UL-TS-ChannelisationCodeList,
  moreTimeslots CHOICE {
    noMore NULL,
    additionalTimeslots CHOICE {
      consecutive SEQUENCE {
        numAdditionalTimeslots INTEGER (1..maxTS-1)
      },
      timeslotList SEQUENCE (SIZE (1..maxTS-1)) OF
        UplinkAdditionalTimeslots
    }
  }
}
```

```
UplinkTimeslotsCodes-LCR ::= SEQUENCE {
  dynamicSFusage BOOLEAN,
  firstIndividualTimeslotInfo IndividualTimeslotInfo-LCR,
  ul-TS-ChannelisationCodeList UL-TS-ChannelisationCodeList,
  moreTimeslots CHOICE {
    noMore NULL,
    additionalTimeslots CHOICE {
      consecutive SEQUENCE {
        numAdditionalTimeslots INTEGER (1..maxTS-LCR-1)
      },
      timeslotList SEQUENCE (SIZE (1..maxTS-LCR-1)) OF
        UplinkAdditionalTimeslots-LCR
    }
  }
}
```

```
-- *****
--
-- MEASUREMENT INFORMATION ELEMENTS (10.3.7)
--
-- *****
```

```
AcquisitionSatInfo ::= SEQUENCE {
  satID SatID,
  doppler0thOrder INTEGER (-2048..2047),
  extraDopplerInfo ExtraDopplerInfo OPTIONAL,
  codePhase INTEGER (0..1022),
  integerCodePhase INTEGER (0..19),
  gps-BitNumber INTEGER (0..3),
  codePhaseSearchWindow CodePhaseSearchWindow,
  azimuthAndElevation AzimuthAndElevation OPTIONAL
}
```

```
AcquisitionSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
AcquisitionSatInfo
```



```

AdditionalAssistanceData ::=          OCTET STRING (SIZE (1..38))

AdditionalMeasurementID-List ::=      SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
                                      MeasurementIdentity

AlmanacSatInfo ::=                   SEQUENCE {
    satID                             SatID,
    e                                 BIT STRING (SIZE (16)),
    t-oa                              BIT STRING (SIZE (8)),
    deltaI                            BIT STRING (SIZE (16)),
    omegaDot                          BIT STRING (SIZE (16)),
    satHealth                         BIT STRING (SIZE (8)),
    a-Sqrt                            BIT STRING (SIZE (24)),
    omega0                            BIT STRING (SIZE (24)),
    m0                                BIT STRING (SIZE (24)),
    omega                             BIT STRING (SIZE (24)),
    af0                               BIT STRING (SIZE (11)),
    af1                               BIT STRING (SIZE (11))
}

AlmanacSatInfoList ::=               SEQUENCE (SIZE (1..maxSat)) OF
                                      AlmanacSatInfo

AverageRLC-BufferPayload ::=         ENUMERATED {
    pla0, pla4, pla8, pla16, pla32,
    pla64, pla128, pla256, pla512,
    pla1024, pla2k, pla4k, pla8k, pla16k,
    pla32k, pla64k, pla128k, pla256k,
    pla512k, pla1024k }

AzimuthAndElevation ::=             SEQUENCE {
    azimuth                           INTEGER (0..31),
    elevation                         INTEGER (0..7)
}

BadSatList ::=                       SEQUENCE (SIZE (1..maxSat)) OF
                                      INTEGER (0..63)

BCCH-ARFCN ::=                       INTEGER (0..1023)

BLER-MeasurementResults ::=          SEQUENCE {
    transportChannelIdentity          TransportChannelIdentity,
    dl-TransportChannelBLER           DL-TransportChannelBLER           OPTIONAL
}

BLER-MeasurementResultsList ::=      SEQUENCE (SIZE (1..maxTrCH)) OF
                                      BLER-MeasurementResults

BLER-TransChIdList ::=               SEQUENCE (SIZE (1..maxTrCH)) OF
                                      TransportChannelIdentity

BSIC-VerificationRequired ::=        ENUMERATED {
    required, notRequired }

BSICReported ::=                    CHOICE {
    verifiedBSIC                     INTEGER (0..maxCellMeas),
    nonVerifiedBSIC                  BCCH-ARFCN
}

BurstModeParameters ::=              SEQUENCE {
    burstStart                       INTEGER (0..15),
    burstLength                      INTEGER (10..25),
    burstFreq                        INTEGER (1..16)
}

CellDCH-ReportCriteria ::=           CHOICE {
    intraFreqReportingCriteria        IntraFreqReportingCriteria,
    periodicalReportingCriteria        PeriodicalReportingCriteria
}

CellDCH-ReportCriteria-LCR ::=       CHOICE {
    intraFreqReportingCriteria         IntraFreqReportingCriteria-LCR,
    periodicalReportingCriteria         PeriodicalReportingCriteria
}

-- Actual value = IE value * 0.5
CellIndividualOffset ::=             INTEGER (-20..20)

CellInfo ::=                         SEQUENCE {
    cellIndividualOffset              CellIndividualOffset              DEFAULT 0,

```

```

referenceTimeDifferenceToCell      ReferenceTimeDifferenceToCell      OPTIONAL,
modeSpecificInfo                  CHOICE {
  fdd                              SEQUENCE {
    primaryCPICH-Info              PrimaryCPICH-Info                  OPTIONAL,
    primaryCPICH-TX-Power          PrimaryCPICH-TX-Power             OPTIONAL,
    readSFN-Indicator              BOOLEAN,
    tx-DiversityIndicator          BOOLEAN
  },
  tdd                              SEQUENCE {
    primaryCCPCH-Info              PrimaryCCPCH-Info,
    primaryCCPCH-TX-Power          PrimaryCCPCH-TX-Power             OPTIONAL,
    timeslotInfoList              TimeslotInfoList                  OPTIONAL
  }
}
}

CellInfo-r4 ::= SEQUENCE {
  cellIndividualOffset             CellIndividualOffset               DEFAULT 0,
  referenceTimeDifferenceToCell    ReferenceTimeDifferenceToCell      OPTIONAL,
  modeSpecificInfo                 CHOICE {
    fdd                            SEQUENCE {
      primaryCPICH-Info            PrimaryCPICH-Info                  OPTIONAL,
      primaryCPICH-TX-Power        PrimaryCPICH-TX-Power             OPTIONAL,
      readSFN-Indicator            BOOLEAN,
      tx-DiversityIndicator        BOOLEAN
    },
    tdd                            SEQUENCE {
      primaryCCPCH-Info            PrimaryCCPCH-Info-r4,
      primaryCCPCH-TX-Power        PrimaryCCPCH-TX-Power             OPTIONAL,
      timeslotInfoList             TimeslotInfoList-r4              OPTIONAL
    }
  }
}

CellInfoSI-RSCP ::= SEQUENCE {
  cellIndividualOffset             CellIndividualOffset               DEFAULT 0,
  referenceTimeDifferenceToCell    ReferenceTimeDifferenceToCell      OPTIONAL,
  modeSpecificInfo                 CHOICE {
    fdd                            SEQUENCE {
      primaryCPICH-Info            PrimaryCPICH-Info                  OPTIONAL,
      primaryCPICH-TX-Power        PrimaryCPICH-TX-Power             OPTIONAL,
      readSFN-Indicator            BOOLEAN,
      tx-DiversityIndicator        BOOLEAN
    },
    tdd                            SEQUENCE {
      primaryCCPCH-Info            PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power        PrimaryCCPCH-TX-Power             OPTIONAL,
      timeslotInfoList             TimeslotInfoList                  OPTIONAL
    }
  },
  cellSelectionReselectionInfo     CellSelectReselectInfoSIB-11-12-RSCP  OPTIONAL
}

CellInfoSI-RSCP-LCR ::= SEQUENCE {
  cellIndividualOffset             CellIndividualOffset               DEFAULT 0,
  referenceTimeDifferenceToCell    ReferenceTimeDifferenceToCell      OPTIONAL,
  primaryCCPCH-Info               PrimaryCCPCH-Info-LCR,
  primaryCCPCH-TX-Power           PrimaryCCPCH-TX-Power             OPTIONAL,
  timeslotInfoList                TimeslotInfoList-LCR              OPTIONAL,
  cellSelectionReselectionInfo     CellSelectReselectInfoSIB-11-12-RSCP  OPTIONAL
}

CellInfoSI-ECN0 ::= SEQUENCE {
  cellIndividualOffset             CellIndividualOffset               DEFAULT 0,
  referenceTimeDifferenceToCell    ReferenceTimeDifferenceToCell      OPTIONAL,
  modeSpecificInfo                 CHOICE {
    fdd                            SEQUENCE {
      primaryCPICH-Info            PrimaryCPICH-Info                  OPTIONAL,
      primaryCPICH-TX-Power        PrimaryCPICH-TX-Power             OPTIONAL,
      readSFN-Indicator            BOOLEAN,
      tx-DiversityIndicator        BOOLEAN
    },
    tdd                            SEQUENCE {
      primaryCCPCH-Info            PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power        PrimaryCCPCH-TX-Power             OPTIONAL,
      timeslotInfoList             TimeslotInfoList                  OPTIONAL
    }
  },
  cellSelectionReselectionInfo     CellSelectReselectInfoSIB-11-12-ECN0  OPTIONAL
}

CellInfoSI-ECN0-LCR ::= SEQUENCE {

```

cellIndividualOffset	CellIndividualOffset	DEFAULT 0,
referenceTimeDifferenceToCell	ReferenceTimeDifferenceToCell	OPTIONAL,
primaryCCPCH-Info	PrimaryCCPCH-Info-LCR,	
primaryCCPCH-TX-Power	PrimaryCCPCH-TX-Power	OPTIONAL,
timeslotInfoList	TimeslotInfoList-LCR	OPTIONAL,
cellSelectionReselectionInfo	CellSelectReselectInfoSIB-11-12-ECN0	OPTIONAL

```

}
CellInfoSI-HCS-RSCP ::= SEQUENCE {
  cellIndividualOffset          CellIndividualOffset          DEFAULT 0,
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell  OPTIONAL,
  modeSpecificInfo             CHOICE {
    fdd                         SEQUENCE {
      primaryCPICH-Info        PrimaryCPICH-Info          OPTIONAL,
      primaryCPICH-TX-Power    PrimaryCPICH-TX-Power    OPTIONAL,
      readSFN-Indicator        BOOLEAN,
      tx-DiversityIndicator     BOOLEAN
    },
    tdd                         SEQUENCE {
      primaryCCPCH-Info        PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power    PrimaryCCPCH-TX-Power    OPTIONAL,
      timeslotInfoList         TimeslotInfoList         OPTIONAL
    }
  },
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-HCS-RSCP  OPTIONAL
}

```

cellIndividualOffset	CellIndividualOffset	DEFAULT 0,
referenceTimeDifferenceToCell	ReferenceTimeDifferenceToCell	OPTIONAL,
primaryCCPCH-Info	PrimaryCCPCH-Info-LCR,	
primaryCCPCH-TX-Power	PrimaryCCPCH-TX-Power	OPTIONAL,
timeslotInfoList	TimeslotInfoList-LCR	OPTIONAL,
cellSelectionReselectionInfo	CellSelectReselectInfoSIB-11-12-HCS-RSCP	OPTIONAL

```

}
CellInfoSI-HCS-ECN0 ::= SEQUENCE {
  cellIndividualOffset          CellIndividualOffset          DEFAULT 0,
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell  OPTIONAL,
  modeSpecificInfo             CHOICE {
    fdd                         SEQUENCE {
      primaryCPICH-Info        PrimaryCPICH-Info          OPTIONAL,
      primaryCPICH-TX-Power    PrimaryCPICH-TX-Power    OPTIONAL,
      readSFN-Indicator        BOOLEAN,
      tx-DiversityIndicator     BOOLEAN
    },
    tdd                         SEQUENCE {
      primaryCCPCH-Info        PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power    PrimaryCCPCH-TX-Power    OPTIONAL,
      timeslotInfoList         TimeslotInfoList         OPTIONAL
    }
  },
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-HCS-ECN0  OPTIONAL
}

```

cellIndividualOffset	CellIndividualOffset	DEFAULT 0,
referenceTimeDifferenceToCell	ReferenceTimeDifferenceToCell	OPTIONAL,
primaryCCPCH-Info	PrimaryCCPCH-Info-LCR,	
primaryCCPCH-TX-Power	PrimaryCCPCH-TX-Power	OPTIONAL,
timeslotInfoList	TimeslotInfoList-LCR	OPTIONAL,
cellSelectionReselectionInfo	CellSelectReselectInfoSIB-11-12-HCS-ECN0	OPTIONAL

```

}
CellMeasuredResults ::= SEQUENCE {
  cellIdentity                  CellIdentity                  OPTIONAL,
  sfn-SFN-ObsTimeDifference    SFN-SFN-ObsTimeDifference    OPTIONAL,
  cellSynchronisationInfo      CellSynchronisationInfo      OPTIONAL,
  modeSpecificInfo             CHOICE {
    fdd                         SEQUENCE {
      primaryCPICH-Info        PrimaryCPICH-Info,
      cpich-Ec-N0              CPICH-Ec-N0                OPTIONAL,
      cpich-RSCP               CPICH-RSCP                 OPTIONAL,
      pathloss                  Pathloss                    OPTIONAL
    },
    tdd                         SEQUENCE {
      cellParametersID         CellParametersID,
      proposedTGSN             TGSN                        OPTIONAL,
      primaryCCPCH-RSCP        PrimaryCCPCH-RSCP           OPTIONAL,
      timeslotISCP-List        TimeslotISCP-List          OPTIONAL
    }
  }
}

```

```

}
CellMeasurementEventResults ::= CHOICE {
  fdd SEQUENCE (SIZE (1..maxCellMeas)) OF
      PrimaryCPICH-Info,
  tdd SEQUENCE (SIZE (1..maxCellMeas)) OF
      PrimaryCCPCH-Info
}
CellMeasurementEventResults ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  PrimaryCCPCH-Info-LCR
}
CellPosition ::= SEQUENCE {
  relativeNorth INTEGER (-32767..32767),
  relativeEast  INTEGER (-32767..32767),
  relativeAltitude INTEGER (-4095..4095)
}
CellReportingQuantities ::= SEQUENCE {
  sfn-SFN-OTD-Type SFN-SFN-OTD-Type,
  cellIdentity-reportingIndicator BOOLEAN,
  cellSynchronisationInfoReportingIndicator BOOLEAN,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      cpich-Ec-N0-reportingIndicator BOOLEAN,
      cpich-RSCP-reportingIndicator  BOOLEAN,
      pathloss-reportingIndicator    BOOLEAN
    },
    tdd SEQUENCE {
      timeslotISCP-reportingIndicator BOOLEAN,
      proposedTGSN-ReportingRequired BOOLEAN,
      primaryCCPCH-RSCP-reportingIndicator BOOLEAN,
      pathloss-reportingIndicator      BOOLEAN
    }
  }
}
CellSelectReselectInfoSIB-11-12 ::= SEQUENCE {
  q-Offset1S-N Q-OffsetS-N DEFAULT 0,
  q-Offset2S-N Q-OffsetS-N OPTIONAL,
  maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
  hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
  OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      q-QualMin Q-QualMin OPTIONAL,
      q-RxlevMin Q-RxlevMin OPTIONAL
    },
    tdd SEQUENCE {
      q-RxlevMin Q-RxlevMin OPTIONAL
    },
    gsm SEQUENCE {
      q-RxlevMin Q-RxlevMin OPTIONAL
    }
  }
}
CellSelectReselectInfoSIB-11-12-RSCP ::= SEQUENCE {
  q-OffsetS-N Q-OffsetS-N DEFAULT 0,
  maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      q-QualMin Q-QualMin OPTIONAL,
      q-RxlevMin Q-RxlevMin OPTIONAL
    },
    tdd SEQUENCE {
      q-RxlevMin Q-RxlevMin OPTIONAL
    },
    gsm SEQUENCE {
      q-RxlevMin Q-RxlevMin OPTIONAL
    }
  }
}
CellSelectReselectInfoSIB-11-12-ECNO ::= SEQUENCE {
  q-Offset1S-N Q-OffsetS-N DEFAULT 0,
  q-Offset2S-N Q-OffsetS-N DEFAULT 0,
  maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      q-QualMin Q-QualMin OPTIONAL,

```

```

        q-RxlevMin                Q-RxlevMin                OPTIONAL
    },
    tdd                            SEQUENCE {
        q-RxlevMin                Q-RxlevMin                OPTIONAL
    },
    gsm                            SEQUENCE {
        q-RxlevMin                Q-RxlevMin                OPTIONAL
    }
}

CellSelectReselectInfoSIB-11-12-HCS-RSCP ::= SEQUENCE {
    q-OffsetS-N                    Q-OffsetS-N                    DEFAULT 0,
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            q-QualMin              Q-QualMin                OPTIONAL,
            q-RxlevMin            Q-RxlevMin            OPTIONAL
        },
        tdd                        SEQUENCE {
            q-RxlevMin            Q-RxlevMin            OPTIONAL
        },
        gsm                        SEQUENCE {
            q-RxlevMin            Q-RxlevMin            OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-ECNO ::= SEQUENCE {
    q-Offset1S-N                  Q-OffsetS-N                    DEFAULT 0,
    q-Offset2S-N                  Q-OffsetS-N                    DEFAULT 0,
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
    hcs-NeighbouringCellInformation-ECNO HCS-NeighbouringCellInformation-ECNO
    OPTIONAL,
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            q-QualMin              Q-QualMin                OPTIONAL,
            q-RxlevMin            Q-RxlevMin            OPTIONAL
        },
        tdd                        SEQUENCE {
            q-RxlevMin            Q-RxlevMin            OPTIONAL
        },
        gsm                        SEQUENCE {
            q-RxlevMin            Q-RxlevMin            OPTIONAL
        }
    }
}

CellSynchronisationInfo ::= SEQUENCE {
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            countC-SFN-Frame-difference CountC-SFN-Frame-difference OPTIONAL,
            tm                      INTEGER(0..38399)
        },
        tdd                        SEQUENCE {
            countC-SFN-Frame-difference CountC-SFN-Frame-difference
        }
    }
}

CellToMeasure ::= SEQUENCE {
    sfn-sfn-Drift                 INTEGER (0..30)                OPTIONAL,
    primaryCPICH-Info             PrimaryCPICH-Info,
    frequencyInfo                 FrequencyInfo                  OPTIONAL,
    sfn-SFN-ObservedTimeDifference SFN-SFN-ObsTimeDifferencel,
    fineSFN-SFN                  FineSFN-SFN,
    cellPosition                  CellPosition                   OPTIONAL
}

CellToMeasureInfoList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToMeasure

CellToReport ::= SEQUENCE {
    bsicReported                  BSICReported
}

CellToReportList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToReport

```

```

CodePhaseSearchWindow ::=
    ENUMERATED {
        w1023, w1, w2, w3, w4, w6, w8,
        w12, w16, w24, w32, w48, w64,
        w96, w128, w192 }

CountC-SFN-Frame-difference ::= SEQUENCE {
    countC-SFN-High    INTEGER(0..15),      -- Actual value = IE value * 256
    off                INTEGER(0..255)
}

CPICH-Ec-NO ::=
    INTEGER (-20..0)

-- IE value 0 = <-24 dB, 1 = between -24 and -23 and so on
CPICH-Ec-NO-OTDOA ::=
    INTEGER (0..26)

CPICH-RSCP ::=
    INTEGER (-115..-40)

DeltaPRC ::=
    INTEGER (-127..127)

DeltaRRC ::=
    INTEGER (-7..7)

DGPS-CorrectionSatInfo ::=
    SEQUENCE {
        satID          SatID,
        iode           BIT STRING (SIZE (8)),
        udre           UDRE,
        prc            PRC,
        rrc            RRC,
        deltaPRC2      DeltaPRC,
        deltaRRC2      DeltaRRC,
        deltaPRC3      DeltaPRC,
        deltaRRC3      DeltaRRC
    }

DGPS-CorrectionSatInfoList ::=
    SEQUENCE (SIZE (1..maxSat)) OF
        DGPS-CorrectionSatInfo

DGPS-Information ::=
    SEQUENCE {
        satID          SatID,
        iode           IODE,
        udre           UDRE,
        prc            PRC,
        rrc            RRC,
        deltaPRC2      DeltaPRC,
        deltaRRC2      DeltaRRC
    }

DGPS-InformationList ::=
    SEQUENCE (SIZE (1..maxSat)) OF
        DGPS-Information

DiffCorrectionStatus ::=
    ENUMERATED {
        udre-1-0, udre-0-75, udre-0-5, udre-0-3,
        udre-0-2, udre-0-1, noData, invalidData }

-- Actual value = IE value * 0.02
DL-PhysicalChannelBER ::=
    INTEGER (0..255)

DL-TransportChannelBLER ::=
    INTEGER (0..63)

DopplerUncertainty ::=
    ENUMERATED {
        hz12-5, hz25, hz50, hz100, hz200 }

EllipsoidPoint ::=
    OCTET STRING (SIZE (7))

EllipsoidPointAltitude ::=
    OCTET STRING (SIZE (9))

EllipsoidPointAltitudeEllipse ::=
    OCTET STRING (SIZE (14))

EllipsoidPointUncertCircle ::=
    OCTET STRING (SIZE (8))

EllipsoidPointUncertEllipse ::=
    OCTET STRING (SIZE (11))

EnvironmentCharacterisation ::=
    ENUMERATED {
        possibleHeavyMultipathNLOS,
        lightMultipathLOS,
        notDefined }

Eventla ::=
    SEQUENCE {
        triggeringCondition    TriggeringCondition2,
        reportingRange         ReportingRange,
        forbiddenAffectCellList ForbiddenAffectCellList
    }
    w, OPTIONAL,

```

```

reportDeactivationThreshold      ReportDeactivationThreshold,
reportingAmount                  ReportingAmount,
reportingInterval                ReportingInterval
}

Event1a-r4 ::= SEQUENCE {
|  |  |  |
| --- | --- | --- |
| triggeringCondition | TriggeringCondition2, |  |
| reportingRange | ReportingRange, |  |
| forbiddenAffectCellList | ForbiddenAffectCellList-r4 | OPTIONAL, |
| w | W, |  |
| reportDeactivationThreshold | ReportDeactivationThreshold, |  |
| reportingAmount | ReportingAmount, |  |
| reportingInterval | ReportingInterval |  |

}

Event1a-LCR ::= SEQUENCE {
| triggeringCondition | TriggeringCondition2, |  |
| reportingRange | ReportingRange, |  |
| forbiddenAffectCellList | ForbiddenAffectCellList-LCR | OPTIONAL, |
| w | W, |  |
| reportDeactivationThreshold | ReportDeactivationThreshold, |  |
| reportingAmount | ReportingAmount, |  |
| reportingInterval | ReportingInterval |  |

}

Event1b ::= SEQUENCE {
| triggeringCondition | TriggeringCondition1, |  |
| reportingRange | ReportingRange, |  |
| forbiddenAffectCellList | ForbiddenAffectCellList | OPTIONAL, |
| w | W |  |

}

Event1b-r4 ::= SEQUENCE {
| triggeringCondition | TriggeringCondition1, |  |
| reportingRange | ReportingRange, |  |
| forbiddenAffectCellList | ForbiddenAffectCellList-r4 | OPTIONAL, |
| w | W |  |

}

Event1b-r4 ::= SEQUENCE {
| triggeringCondition | TriggeringCondition1, |  |
| reportingRange | ReportingRange, |  |
| forbiddenAffectCellList | ForbiddenAffectCellList-LCR | OPTIONAL, |
| w | W |  |

}

Event1c ::= SEQUENCE {
| replacementActivationThreshold | ReplacementActivationThreshold, |  |
| reportingAmount | ReportingAmount, |  |
| reportingInterval | ReportingInterval |  |

}

Event1e ::= SEQUENCE {
| triggeringCondition | TriggeringCondition2, |  |
| thresholdUsedFrequency | ThresholdUsedFrequency |  |

}

Event1f ::= SEQUENCE {
| triggeringCondition | TriggeringCondition1, |  |
| thresholdUsedFrequency | ThresholdUsedFrequency |  |

}

Event2a ::= SEQUENCE {
| usedFreqThreshold | Threshold, |  |
| usedFreqW | W, |  |
| hysteresis | HysteresisInterFreq, |  |
| timeToTrigger | TimeToTrigger, |  |
| reportingCellStatus | ReportingCellStatus | OPTIONAL, |
| nonUsedFreqParameterList | NonUsedFreqParameterList | OPTIONAL |

}

Event2b ::= SEQUENCE {
| usedFreqThreshold | Threshold, |  |
| usedFreqW | W, |  |
| hysteresis | HysteresisInterFreq, |  |
| timeToTrigger | TimeToTrigger, |  |
| reportingCellStatus | ReportingCellStatus | OPTIONAL, |
| nonUsedFreqParameterList | NonUsedFreqParameterList | OPTIONAL |

}

Event2c ::= SEQUENCE {
| hysteresis | HysteresisInterFreq, |  |

```

timeToTrigger	TimeToTrigger,	OPTIONAL,
reportingCellStatus	ReportingCellStatus	OPTIONAL
nonUsedFreqParameterList	NonUsedFreqParameterList	
}		
Event2d ::=	SEQUENCE {	
usedFreqThreshold	Threshold,	
usedFreqW	W,	
hysteresis	HysteresisInterFreq,	
timeToTrigger	TimeToTrigger,	
reportingCellStatus	ReportingCellStatus	OPTIONAL
}		
Event2e ::=	SEQUENCE {	
hysteresis	HysteresisInterFreq,	
timeToTrigger	TimeToTrigger,	
reportingCellStatus	ReportingCellStatus	OPTIONAL,
nonUsedFreqParameterList	NonUsedFreqParameterList	OPTIONAL
}		
Event2f ::=	SEQUENCE {	
usedFreqThreshold	Threshold,	
usedFreqW	W,	
hysteresis	HysteresisInterFreq,	
timeToTrigger	TimeToTrigger,	
reportingCellStatus	ReportingCellStatus	OPTIONAL
}		
Event3a ::=	SEQUENCE {	
thresholdOwnSystem	Threshold,	
w	W,	
thresholdOtherSystem	Threshold,	
hysteresis	Hysteresis,	
timeToTrigger	TimeToTrigger,	
reportingCellStatus	ReportingCellStatus	OPTIONAL
}		
Event3b ::=	SEQUENCE {	
thresholdOtherSystem	Threshold,	
hysteresis	Hysteresis,	
timeToTrigger	TimeToTrigger,	
reportingCellStatus	ReportingCellStatus	OPTIONAL
}		
Event3c ::=	SEQUENCE {	
thresholdOtherSystem	Threshold,	
hysteresis	Hysteresis,	
timeToTrigger	TimeToTrigger,	
reportingCellStatus	ReportingCellStatus	OPTIONAL
}		
Event3d ::=	SEQUENCE {	
hysteresis	Hysteresis,	
timeToTrigger	TimeToTrigger,	
reportingCellStatus	ReportingCellStatus	OPTIONAL
}		
EventIDInterFreq ::=	ENUMERATED {	
	e2a, e2b, e2c, e2d, e2e, e2f }	
EventIDInterRAT ::=	ENUMERATED {	
	e3a, e3b, e3c, e3d }	
EventIDIntraFreq ::=	ENUMERATED {	
	e1a, e1b, e1c, e1d, e1e,	
	e1f, e1g, e1h, e1i }	
EventResults ::=	CHOICE {	
intraFreqEventResults	IntraFreqEventResults,	
interFreqEventResults	InterFreqEventResults,	
interRATEventResults	InterRATEventResults,	
trafficVolumeEventResults	TrafficVolumeEventResults,	
qualityEventResults	QualityEventResults,	
ue-InternalEventResults	UE-InternalEventResults,	
up-MeasurementEventResults	UP-MeasurementEventResults	
}		
ExtraDopplerInfo ::=	SEQUENCE {	
doppler1stOrder	INTEGER (-42..21),	
dopplerUncertainty	DopplerUncertainty	
}		



```

FACH-MeasurementOccasionInfo ::= SEQUENCE {
    fACH-meas-occasion-coeff      INTEGER (1..12)           OPTIONAL,
    inter-freq-FDD-meas-ind       BOOLEAN,
    inter-freq-TDD-meas-ind       BOOLEAN,
    inter-RAT-meas-ind            SEQUENCE (SIZE (1..maxOtherRAT)) OF
                                  RAT-Type                       OPTIONAL
}

FilterCoefficient ::= ENUMERATED {
    fc0, fc1, fc2, fc3, fc4, fc5,
    fc6, fc7, fc8, fc9, fc11, fc13,
    fc15, fc17, fc19, spare1 }

FineSFN-SFN ::= ENUMERATED {
    fs0, fs0-25, fs0-5, fs0-75 }

ForbiddenAffectCell ::= CHOICE {
    fdd      PrimaryCPICH-Info,
    tdd      PrimaryCCPCH-Info
}

ForbiddenAffectCell-r4 ::= CHOICE {
    fdd      PrimaryCPICH-Info,
    tdd      PrimaryCCPCH-Info-r4
}

ForbiddenAffectCell-LCR ::= SEQUENCE {
    tdd      PrimaryCCPCH-Info-LCR
}

ForbiddenAffectCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    ForbiddenAffectCell

ForbiddenAffectCellList-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    ForbiddenAffectCell-r4

ForbiddenAffectCellList-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    ForbiddenAffectCell-LCR

FreqQualityEstimateQuantity-FDD ::= ENUMERATED {
    cpich-EC-N0,
    cpich-RSCP }

FreqQualityEstimateQuantity-TDD ::= ENUMERATED {
    primaryCCPCH-RSCP }

GPS-MeasurementParam ::= SEQUENCE {
    satelliteID      INTEGER (0..63),
    c-N0             INTEGER (0..63),
    doppler          INTEGER (-32768..32768),
    wholeGPS-Chips   INTEGER (0..1023),
    fractionalGPS-Chips INTEGER (0..1023),
    multipathIndicator MultipathIndicator,
    pseudorangeRMS-Error INTEGER (0..63)
}

GPS-MeasurementParamList ::= SEQUENCE (SIZE (1..maxSat)) OF
    GPS-MeasurementParam

GSM-CarrierRSSI ::= BIT STRING (SIZE (6))

GSM-MeasuredResults ::= SEQUENCE {
    gsm-CarrierRSSI      GSM-CarrierRSSI           OPTIONAL,
    pathloss             Pathloss                   OPTIONAL,
    bsicReported         BSICReported,
    observedTimeDifferenceToGSM ObservedTimeDifferenceToGSM OPTIONAL
}

GSM-MeasuredResultsList ::= SEQUENCE (SIZE (1..maxReportedGSMCells)) OF
    GSM-MeasuredResults

-- **TODO**, not defined yet
GSM-OutputPower ::= SEQUENCE {
}

GPS-TOW-lmsec ::= INTEGER (0..604799999)

GPS-TOW-lusec ::= SEQUENCE {
    tow-lmsec
}

```

```

    tow-rem-usec                GPS-TOW-rem-usec
}

GPS-TOW-Assist ::=              SEQUENCE {
    satID                       SatID,
    tlm-Message                 BIT STRING (SIZE (14)),
    antiSpoof                   BOOLEAN,
    alert                       BOOLEAN,
    tlm-Reserved                BIT STRING (SIZE (2))
}

GPS-TOW-AssistList ::=         SEQUENCE (SIZE (1..maxSat)) OF
                               GPS-TOW-Assist

GPS-TOW-rem-usec ::=          INTEGER (0..999)

HCS-CellReselectInformation-RSCP ::= SEQUENCE {
    penaltyTime                 PenaltyTime-RSCP
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-CellReselectInformation-ECNO ::= SEQUENCE {
    penaltyTime                 PenaltyTime-ECNO
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-NeighbouringCellInformation-RSCP ::= SEQUENCE {
    hcs-PRIO                    HCS-PRIO                DEFAULT 0,
    q-HCS                       Q-HCS                  DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-RSCP
}

HCS-NeighbouringCellInformation-ECNO ::= SEQUENCE {
    hcs-PRIO                    HCS-PRIO                DEFAULT 0,
    q-HCS                       Q-HCS                  DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-ECNO
}

HCS-PRIO ::=                   INTEGER (0..7)

HCS-ServingCellInformation ::= SEQUENCE {
    hcs-PRIO                    HCS-PRIO                DEFAULT 0,
    q-HCS                       Q-HCS                  DEFAULT 0,
    t-CR-Max                    T-CR-Max                OPTIONAL
}

-- Actual value = IE value * 0.5
Hysteresis ::=                 INTEGER (0..15)

-- Actual value = IE value * 0.5
HysteresisInterFreq ::=       INTEGER (0..29)

InterFreqCell ::=              SEQUENCE {
    frequencyInfo               FrequencyInfo,
    nonFreqRelatedEventResults CellMeasurementEventResults
}

InterFreqCell-LCR ::=          SEQUENCE {
    frequencyInfo               FrequencyInfo,
    nonFreqRelatedEventResults CellMeasurementEventResults-LCR
}

InterFreqCellID ::=            INTEGER (0..maxCellMeas-1)

InterFreqCellInfoList ::=      SEQUENCE {
    removedInterFreqCellList    RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList        NewInterFreqCellList        OPTIONAL
}

InterFreqCellInfoList-r4 ::=   SEQUENCE {
    removedInterFreqCellList    RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList        NewInterFreqCellList-r4        OPTIONAL
}

InterFreqCellInfoSI-List-RSCP ::= SEQUENCE {
    removedInterFreqCellList    RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList        NewInterFreqCellSI-List-RSCP    OPTIONAL
}

InterFreqCellInfoSI-List-ECNO ::= SEQUENCE {
    removedInterFreqCellList    RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList        NewInterFreqCellSI-List-ECNO    OPTIONAL
}

```

```

}

InterFreqCellInfoSI-List-HCS-RSCP ::= SEQUENCE {
    removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
    newInterFreqCellList NewInterFreqCellSI-List-HCS-RSCP OPTIONAL
}

InterFreqCellInfoSI-List-HCS-ECN0 ::= SEQUENCE {
    removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
    newInterFreqCellList NewInterFreqCellSI-List-HCS-ECN0 OPTIONAL
}

InterFreqCellInfoSI-List-RSCP-LCR ::= SEQUENCE {
    removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
    newInterFreqCellList NewInterFreqCellSI-List-RSCP-LCR OPTIONAL
}

InterFreqCellInfoSI-List-ECN0-LCR ::= SEQUENCE {
    removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
    newInterFreqCellList NewInterFreqCellSI-List-ECN0-LCR OPTIONAL
}

InterFreqCellInfoSI-List-HCS-RSCP-LCR ::= SEQUENCE {
    removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
    newInterFreqCellList NewInterFreqCellSI-List-HCS-RSCP-LCR OPTIONAL
}

InterFreqCellInfoSI-List-HCS-ECN0-LCR ::= SEQUENCE {
    removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
    newInterFreqCellList NewInterFreqCellSI-List-HCS-ECN0-LCR OPTIONAL
}

InterFreqCellList ::= SEQUENCE (SIZE (1..maxFreq)) OF
    InterFreqCell

InterFreqCellList-LCR ::= SEQUENCE (SIZE (1..maxFreq)) OF
    InterFreqCell-LCR

InterFreqCellMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellMeasuredResults

InterFreqEvent ::= CHOICE {
    event2a Event2a,
    event2b Event2b,
    event2c Event2c,
    event2d Event2d,
    event2e Event2e,
    event2f Event2f
}

InterFreqEventList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    InterFreqEvent

InterFreqEventResults ::= SEQUENCE {
    eventID EventIDInterFreq,
    interFreqCellList InterFreqCellList OPTIONAL
}

InterFreqEventResults-LCR ::= SEQUENCE {
    eventID EventIDInterFreq,
    interFreqCellList InterFreqCellList-LCR OPTIONAL
}

InterFreqMeasQuantity ::= SEQUENCE {
    reportingCriteria CHOICE {
        intraFreqReportingCriteria SEQUENCE {
            intraFreqMeasQuantity IntraFreqMeasQuantity
        },
        interFreqReportingCriteria SEQUENCE {
            filterCoefficient FilterCoefficient DEFAULT fc0,
            modeSpecificInfo CHOICE {
                fdd SEQUENCE {
                    freqQualityEstimateQuantity-FDD FreqQualityEstimateQuantity-FDD
                },
                tdd SEQUENCE {
                    freqQualityEstimateQuantity-TDD FreqQualityEstimateQuantity-TDD
                }
            }
        }
    }
}

```

```

InterFreqMeasuredResults ::= SEQUENCE {
    frequencyInfo           FrequencyInfo           OPTIONAL,
    ultra-CarrierRSSI       UTRA-CarrierRSSI       OPTIONAL,
    interFreqCellMeasuredResultsList InterFreqCellMeasuredResultsList OPTIONAL
}

InterFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxFreq)) OF
    InterFreqMeasuredResults

InterFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-RSCP OPTIONAL
}

InterFreqMeasurementSysInfo-ECN0 ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-ECN0 OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-RSCP OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECN0 ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-ECN0 OPTIONAL
}

InterFreqMeasurementSysInfo-RSCP-LCR ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-RSCP-LCR OPTIONAL
}

InterFreqMeasurementSysInfo-ECN0-LCR ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-ECN0-LCR OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP-LCR ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-RSCP-LCR OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECN0-LCR ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-ECN0-LCR OPTIONAL
}

InterFreqReportCriteria ::= CHOICE {
    intraFreqReportingCriteria IntraFreqReportingCriteria,
    interFreqReportingCriteria InterFreqReportingCriteria,
    periodicalReportingCriteria PeriodicalWithReportingCellStatus,
    noReporting ReportingCellStatusOpt
}

InterFreqReportCriteria-r4 ::= CHOICE {
    intraFreqReportingCriteria IntraFreqReportingCriteria-r4,
    interFreqReportingCriteria InterFreqReportingCriteria,
    periodicalReportingCriteria PeriodicalWithReportingCellStatus,
    noReporting ReportingCellStatusOpt
}

InterFreqReportingCriteria ::= SEQUENCE {
    interFreqEventList InterFreqEventList OPTIONAL
}

InterFreqReportingQuantity ::= SEQUENCE {
    ultra-Carrier-RSSI BOOLEAN,
    frequencyQualityEstimate BOOLEAN,
    nonFreqRelatedQuantities CellReportingQuantities
}

InterFrequencyMeasurement ::= SEQUENCE {
    interFreqCellInfoList InterFreqCellInfoList,
    interFreqMeasQuantity InterFreqMeasQuantity OPTIONAL,
    interFreqReportingQuantity InterFreqReportingQuantity OPTIONAL,
    measurementValidity MeasurementValidity OPTIONAL,
    interFreqSetUpdate UE-AutonomousUpdateMode OPTIONAL,
    reportCriteria InterFreqReportCriteria
}

InterFrequencyMeasurement-r4 ::= SEQUENCE {
    interFreqCellInfoList InterFreqCellInfoList-r4,
    interFreqMeasQuantity InterFreqMeasQuantity OPTIONAL,
    interFreqReportingQuantity InterFreqReportingQuantity OPTIONAL,
    measurementValidity MeasurementValidity OPTIONAL,
    interFreqSetUpdate UE-AutonomousUpdateMode OPTIONAL,
}

```

```

reportCriteria                               InterFreqReportCriteria-r4
}

InterRAT-TargetCellDescription ::= SEQUENCE {
  technologySpecificInfo CHOICE {
    gsm SEQUENCE {
      bsic BSIC,
      bcch-ARFCN BCCH-ARFCN,
      ncMode NC-Mode OPTIONAL
    },
    is-2000 NULL,
    spare NULL
  }
}

InterRATCellID ::= INTEGER (0..maxCellMeas-1)

InterRATCellInfoList ::= SEQUENCE {
  removedInterRATCellList RemovedInterRATCellList,
  newInterRATCellList NewInterRATCellList
}

InterRATCellInfoList-HCS ::= SEQUENCE {
  removedInterRATCellList RemovedInterRATCellList,
  newInterRATCellList-HCS NewInterRATCellList-HCS
}

InterRATEvent ::= CHOICE {
  event3a Event3a,
  event3b Event3b,
  event3c Event3c,
  event3d Event3d
}

InterRATEventList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
  InterRATEvent

InterRATEventResults ::= SEQUENCE {
  eventID EventIDInterRAT,
  cellToReportList CellToReportList
}

InterRATInfo ::= ENUMERATED {
  gsm
}

InterRATMeasQuantity ::= SEQUENCE {
  measQuantityUTRAN-QualityEstimate IntraFreqMeasQuantity OPTIONAL,
  ratSpecificInfo CHOICE {
    gsm SEQUENCE {
      measurementQuantity MeasurementQuantityGSM,
      filterCoefficient FilterCoefficient DEFAULT fcl,
      bsic-VerificationRequired BSIC-VerificationRequired
    },
    is-2000 SEQUENCE {
      tadd-EcIo INTEGER (0..63),
      tcomp-EcIo INTEGER (0..15),
      softSlope INTEGER (0..63) OPTIONAL,
      addIntercept INTEGER (0..63) OPTIONAL
    }
  }
}

InterRATMeasuredResults ::= CHOICE {
  gsm GSM-MeasuredResultsList,
  spare NULL
}

InterRATMeasuredResultsList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
  InterRATMeasuredResults

InterRATMeasurement ::= SEQUENCE {
  interRATCellInfoList InterRATCellInfoList OPTIONAL,
  interRATMeasQuantity InterRATMeasQuantity OPTIONAL,
  interRATReportingQuantity InterRATReportingQuantity OPTIONAL,
  reportCriteria InterRATReportCriteria
}

InterRATMeasurementSysInfo ::= SEQUENCE {
  interRATCellInfoList InterRATCellInfoList OPTIONAL
}

```

```

InterRATMeasurementSysInfo-HCS ::= SEQUENCE {
    interRATCellInfoList          InterRATCellInfoList-HCS          OPTIONAL
}

InterRATReportCriteria ::= CHOICE {
    interRATReportingCriteria      InterRATReportingCriteria,
    periodicalReportingCriteria    PeriodicalWithReportingCellStatus,
    noReporting                    ReportingCellStatusOpt
}

InterRATReportingCriteria ::= SEQUENCE {
    interRATEventList             InterRATEventList          OPTIONAL
}

InterRATReportingQuantity ::= SEQUENCE {
    utran-EstimatedQuality         BOOLEAN,
    ratSpecificInfo               CHOICE {
        gsm                       SEQUENCE {
            pathloss               BOOLEAN,
            observedTimeDifferenceGSM  BOOLEAN,
            gsm-Carrier-RSSI       BOOLEAN
        }
    }
}

IntraFreqCellID ::= INTEGER (0..maxCellMeas-1)

IntraFreqCellInfoList ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellList          OPTIONAL
}

IntraFreqCellInfoList-r4 ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellList-r4          OPTIONAL
}

IntraFreqCellInfoSI-List-RSCP ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-RSCP
}

IntraFreqCellInfoSI-List-ECNO ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-ECNO
}

IntraFreqCellInfoSI-List-HCS-RSCP ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-RSCP
}

IntraFreqCellInfoSI-List-HCS-ECNO ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-ECNO
}

IntraFreqCellInfoSI-List-RSCP-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-RSCP-LCR
}

IntraFreqCellInfoSI-List-ECNO-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-ECNO-LCR
}

IntraFreqCellInfoSI-List-HCS-RSCP-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-RSCP-LCR
}

IntraFreqCellInfoSI-List-HCS-ECNO-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-ECNO-LCR
}

IntraFreqEvent ::= CHOICE {
    e1a                          Event1a,
    e1b                          Event1b,
    e1c                          Event1c,
    e1d                          NULL,
}

```

```

ele          Event1e,
elf          Event1f,
elg          NULL,
elh          ThresholdUsedFrequency,
eli          ThresholdUsedFrequency
}

```

```

IntraFreqEvent-r4 ::= CHOICE {
  ela          Event1a-r4,
  elb          Event1b-r4,
  elc          Event1c,
  eld          NULL,
  ele          Event1e,
  elf          Event1f,
  elg          NULL,
  elh          ThresholdUsedFrequency,
  eli          ThresholdUsedFrequency
}

```

```

IntraFreqEvent-LCR ::= CHOICE {
  ela          Event1a-LCR,
  elb          Event1b-LCR,
  elc          Event1c,
  eld          NULL,
  ele          Event1e,
  elf          Event1f,
  elg          NULL,
  elh          ThresholdUsedFrequency,
  eli          ThresholdUsedFrequency
}

```

```

IntraFreqEventCriteria ::= SEQUENCE {
  event          IntraFreqEvent,
  hysteresis     Hysteresis,
  timeToTrigger TimeToTrigger,
  reportingCellStatus ReportingCellStatus
}

```

OPTIONAL

```

IntraFreqEventCriteria-r4 ::= SEQUENCE {
  event          IntraFreqEvent-r4,
  hysteresis     Hysteresis,
  timeToTrigger TimeToTrigger,
  reportingCellStatus ReportingCellStatus
}

```

OPTIONAL

```

IntraFreqEventCriteria-LCR ::= SEQUENCE {
  event          IntraFreqEvent-LCR,
  hysteresis     Hysteresis,
  timeToTrigger TimeToTrigger,
  reportingCellStatus ReportingCellStatus
}

```

OPTIONAL

```

IntraFreqEventCriteriaList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
  IntraFreqEventCriteria

```

```

IntraFreqEventCriteriaList-r4 ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
  IntraFreqEventCriteria-r4

```

```

IntraFreqEventCriteriaList-LCR ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
  IntraFreqEventCriteria-LCR

```

```

IntraFreqEventResults ::= SEQUENCE {
  eventID          EventIDIntraFreq,
  cellMeasurementEventResults CellMeasurementEventResults
}

```

```

IntraFreqMeasQuantity ::= SEQUENCE {
  filterCoefficient FilterCoefficient
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      intraFreqMeasQuantity-FDD IntraFreqMeasQuantity-FDD
    },
    tdd SEQUENCE {
      intraFreqMeasQuantity-TDDList IntraFreqMeasQuantity-TDDList
    }
  }
}

```

DEFAULT fc1,

```

IntraFreqMeasQuantity-FDD ::= ENUMERATED {
  cpich-Ec-NO,
  cpich-RSCP,
  pathloss,
}

```

```

        ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDD ::=      ENUMERATED {
        primaryCCPCH-RSCP,
        pathloss,
        timeslotISCP,
        ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDDList ::= SEQUENCE (SIZE (1..4)) OF
        IntraFreqMeasQuantity-TDD

IntraFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
        CellMeasuredResults

IntraFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-RSCP  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqMeasurementSysInfo-ECNO ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-ECNO  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-RSCP  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECNO ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-ECNO  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqMeasurementSysInfo-RSCP-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-RSCP-LCR  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH-LCR        OPTIONAL
}

IntraFreqMeasurementSysInfo-ECNO-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-ECNO-LCR  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH-LCR        OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-RSCP-LCR  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH-LCR        OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECNO-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-ECNO-LCR  OPTIONAL,
        intraFreqMeasQuantity        IntraFreqMeasQuantity          OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH          OPTIONAL,
        reportingInfoForCellDCH      ReportingInfoForCellDCH-LCR        OPTIONAL
}

```



```

reportingInfoForCellDCH          ReportingInfoForCellDCH-LCR          OPTIONAL
}

IntraFreqReportCriteria ::=      CHOICE {
  intraFreqReportingCriteria      IntraFreqReportingCriteria,
  periodicalReportingCriteria      PeriodicalWithReportingCellStatus,
  noReporting                      ReportingCellStatusOpt
}

IntraFreqReportCriteria-r4 ::=    CHOICE {
  intraFreqReportingCriteria      IntraFreqReportingCriteria-r4,
  periodicalReportingCriteria      PeriodicalWithReportingCellStatus,
  noReporting                      ReportingCellStatusOpt
}

IntraFreqReportingCriteria ::=    SEQUENCE {
  eventCriteriaList                IntraFreqEventCriteriaList          OPTIONAL
}

IntraFreqReportingCriteria-r4 ::= SEQUENCE {
  eventCriteriaList                IntraFreqEventCriteriaList-r4    OPTIONAL
}

IntraFreqReportingCriteria-LCR ::= SEQUENCE {
  eventCriteriaList                IntraFreqEventCriteriaList-LCR  OPTIONAL
}

IntraFreqReportingQuantity ::=    SEQUENCE {
  activeSetReportingQuantities      CellReportingQuantities,
  monitoredSetReportingQuantities    CellReportingQuantities,
  detectedSetReportingQuantities     CellReportingQuantities          OPTIONAL
}

IntraFreqReportingQuantityForRACH ::= SEQUENCE {
  sfn-SFN-OTD-Type                 SFN-SFN-OTD-Type,
  modeSpecificInfo                  CHOICE {
    fdd                             SEQUENCE {
      intraFreqRepQuantityRACH-FDD   IntraFreqRepQuantityRACH-FDD
    },
    tdd                             SEQUENCE {
      intraFreqRepQuantityRACH-TDDList IntraFreqRepQuantityRACH-TDDList
    }
  }
}

IntraFreqRepQuantityRACH-FDD ::=  ENUMERATED {
  cpich-EcN0, cpich-RSCP,
  pathloss, noReport }

IntraFreqRepQuantityRACH-TDD ::=  ENUMERATED {
  timeslotISCP,
  primaryCCPCH-RSCP,
  noReport }

IntraFreqRepQuantityRACH-TDDList ::= SEQUENCE (SIZE (1..2)) OF
  IntraFreqRepQuantityRACH-TDD

IntraFrequencyMeasurement ::=     SEQUENCE {
  intraFreqCellInfoList            IntraFreqCellInfoList          OPTIONAL,
  intraFreqMeasQuantity             IntraFreqMeasQuantity          OPTIONAL,
  intraFreqReportingQuantity        IntraFreqReportingQuantity        OPTIONAL,
  measurementValidity               MeasurementValidity             OPTIONAL,
  reportCriteria                    IntraFreqReportCriteria          OPTIONAL
}

IntraFrequencyMeasurement-r4 ::=  SEQUENCE {
  intraFreqCellInfoList            IntraFreqCellInfoList-r4      OPTIONAL,
  intraFreqMeasQuantity            IntraFreqMeasQuantity-r4        OPTIONAL,
  intraFreqReportingQuantity        IntraFreqReportingQuantity-r4    OPTIONAL,
  measurementValidity              MeasurementValidity-r4          OPTIONAL,
  reportCriteria                   IntraFreqReportCriteria-r4      OPTIONAL
}

MODE ::=                          INTEGER (0..255)

IP-Length ::=                      ENUMERATED {
  ip15, ip110 }

IP-Spacing ::=                    ENUMERATED {
  e5, e7, e10, e15, e20,
  e30, e40, e50 }

```

```

IS-2000SpecificMeasInfo ::=          ENUMERATED {
                                        frequency, timeslot, colourcode,
                                        outputpower, pn-Offset }

MaxNumberOfReportingCellsType1 ::=   ENUMERATED {
                                        e1, e2, e3, e4, e5, e6}

MaxNumberOfReportingCellsType2 ::=   ENUMERATED {
                                        e1, e2, e3, e4, e5, e6, e7, e8, e9, e10, e11, e12}

MaxNumberOfReportingCellsType3 ::=   ENUMERATED {
                                        viactCellsPlus1,
                                        viactCellsPlus2,
                                        viactCellsPlus3,
                                        viactCellsPlus4,
                                        viactCellsPlus5,
                                        viactCellsPlus6 }

MaxReportedCellsOnRACH ::=           ENUMERATED {
                                        noReport,
                                        currentCell,
                                        currentAnd-1-BestNeighbour,
                                        currentAnd-2-BestNeighbour,
                                        currentAnd-3-BestNeighbour,
                                        currentAnd-4-BestNeighbour,
                                        currentAnd-5-BestNeighbour,
                                        currentAnd-6-BestNeighbour }

MeasuredResults ::=                   CHOICE {
    intraFreqMeasuredResultsList      IntraFreqMeasuredResultsList,
    interFreqMeasuredResultsList      InterFreqMeasuredResultsList,
    interRATMeasuredResultsList       InterRATMeasuredResultsList,
    trafficVolumeMeasuredResultsList  TrafficVolumeMeasuredResultsList,
    qualityMeasuredResults             QualityMeasuredResults,
    ue-InternalMeasuredResults        UE-InternalMeasuredResults,
    up-MeasuredResults                UP-MeasuredResults
}

MeasuredResultsList ::=               SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
                                        MeasuredResults

MeasuredResultsOnRACH ::=             SEQUENCE {
    currentCell                        SEQUENCE {
        modeSpecificInfo              CHOICE {
            fdd                        SEQUENCE {
                measurementQuantity    CHOICE {
                    cpich-Ec-N0        CPICH-Ec-N0,
                    cpich-RSCP         CPICH-RSCP,
                    pathloss           Pathloss
                }
            },
            tdd                        SEQUENCE {
                timeslotISCP            TimeslotISCP-List      OPTIONAL,
                primaryCCPCH-RSCP      PrimaryCCPCH-RSCP    OPTIONAL
            }
        },
        monitoredCells                MonitoredCellRACH-List  OPTIONAL
    }

MeasurementCommand ::=               CHOICE {
    setup                              MeasurementType,
    modify                              SEQUENCE {
        measurementType               MeasurementType      OPTIONAL
    },
    release                             NULL
}

MeasurementCommand-r4 ::=            CHOICE {
    setup                              MeasurementType-r4,
    modify                              SEQUENCE {
        measurementType               MeasurementType-r4  OPTIONAL
    },
    release                             NULL
}

MeasurementControlSysInfo ::=        SEQUENCE {
    use-of-HCS                          CHOICE {
        hcs-not-used                  SEQUENCE { {
            cellSelectQualityMeasure  CHOICE { {
                cpich-RSCP            SEQUENCE { {

```

```

OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-RSCP
               },
               interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-RSCP      OPTIONAL
               },
               cpich-Ec-No                      SEQUENCE      {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-ECNO
               },
               interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-ECNO      OPTIONAL
               },
               interRATMeasurementSysInfo      InterRATMeasurementSysInfo-HCS      OPTIONAL
               },
               hcs-used                        SEQUENCE      {
               cellSelectQualityMeasure        CHOICE      {
               cpich-RSCP                      SEQUENCE      {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-HCS-RSCP
               },
OPTIONAL      interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-HCS-RSCP
               },
               cpich-Ec-No                      SEQUENCE      {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-HCS-ECNO
               },
OPTIONAL      interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-HCS-ECNO
               },
               },
               interRATMeasurementSysInfo      InterRATMeasurementSysInfo      OPTIONAL
               },
               },
trafficVolumeMeasSysInfo      TrafficVolumeMeasSysInfo      OPTIONAL,
ue-InternalMeasurementSysInfo  UE-InternalMeasurementSysInfo  OPTIONAL
}
    
```

```

MeasurementControlSysInfo-LCR ::= SEQUENCE {
-- The following CHOICE shall have the same value as the use-of-HCS in MeasurementControlSysInfo
  use-of-HCS CHOICE {
    hcs-not-used SEQUENCE {
-- The following CHOICE shall have the same value as the cellSelectQualityMeasure in
-- MeasurementControlSysInfo
    cellSelectQualityMeasure CHOICE {
      cpich-RSCP SEQUENCE {
        intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-RSCP-LCR OPTIONAL,
        interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-RSCP-LCR OPTIONAL
      },
      cpich-Ec-No SEQUENCE {
        intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-ECNO-LCR OPTIONAL,
        interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-ECNO-LCR OPTIONAL
      }
    }
  },
  hcs-used SEQUENCE {
-- The following CHOICE shall have the same value as the cellSelectQualityMeasure in
-- MeasurementControlSysInfo
    cellSelectQualityMeasure CHOICE {
      cpich-RSCP SEQUENCE {
OPTIONAL,      intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-RSCP-LCR
               },
OPTIONAL      interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-RSCP-LCR      OPTIONAL
               },
      cpich-Ec-No SEQUENCE {
OPTIONAL,      intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-ECNO-LCR
               },
OPTIONAL      interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-ECNO-LCR      OPTIONAL
               }
    }
  }
}
    
```

```

MeasurementIdentity ::= INTEGER (1..16)

MeasurementQuantityGSM ::= ENUMERATED {
    gsm-CarrierRSSI,
    pathloss }

MeasurementReportingMode ::= SEQUENCE {
    measurementReportTransferMode TransferMode,
    periodicalOrEventTrigger PeriodicalOrEventTrigger
}

MeasurementType ::= CHOICE {
    
```

```

intraFrequencyMeasurement      IntraFrequencyMeasurement,
interFrequencyMeasurement      InterFrequencyMeasurement,
interRATMeasurement            InterRATMeasurement,
up-Measurement                  UP-Measurement,
trafficVolumeMeasurement       TrafficVolumeMeasurement,
qualityMeasurement             QualityMeasurement,
ue-InternalMeasurement         UE-InternalMeasurement
}

MeasurementType-r4 ::= CHOICE {
  intraFrequencyMeasurement      IntraFrequencyMeasurement-r4,
  interFrequencyMeasurement      InterFrequencyMeasurement-r4,
  interRATMeasurement            InterRATMeasurement,
  up-Measurement                  UP-Measurement,
  trafficVolumeMeasurement       TrafficVolumeMeasurement,
  qualityMeasurement             QualityMeasurement,
  ue-InternalMeasurement         UE-InternalMeasurement
}

MeasurementValidity ::= SEQUENCE {
  ue-State                       ENUMERATED {
    cell-DCH, all-But-Cell-DCH, all-States }
}

MonitoredCellRACH-List ::= SEQUENCE (SIZE (1..7)) OF
  MonitoredCellRACH-Result

MonitoredCellRACH-Result ::= SEQUENCE {
  sfn-SFN-ObsTimeDifference      SFN-SFN-ObsTimeDifference      OPTIONAL,
  modeSpecificInfo               CHOICE {
    fdd                           SEQUENCE {
      primaryCPICH-Info           PrimaryCPICH-Info,
      measurementQuantity         CHOICE {
        cpich-Ec-NO              CPICH-Ec-NO,
        cpich-RSCP               CPICH-RSCP,
        pathloss                  Pathloss
      }
    },
    tdd                           SEQUENCE {
      cellParametersID           CellParametersID,
      primaryCCPCH-RSCP          PrimaryCCPCH-RSCP
    }
  }
}

MultipathIndicator ::= ENUMERATED {
  nm,
  low,
  medium,
  high }

N-CR-T-CRMaxHyst ::= SEQUENCE {
  n-CR                           INTEGER (1..16)          DEFAULT 8,
  t-CRMaxHyst                    T-CRMaxHyst
}

NavigationModelSatInfo ::= SEQUENCE {
  satID                           SatID,
  satelliteStatus                  SatelliteStatus,
  navModel                         NavModel
}

NavigationModelSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
  NavigationModelSatInfo

NavModel ::= SEQUENCE {
  codeOnL2                        BIT STRING (SIZE (2)),
  uraIndex                        BIT STRING (SIZE (4)),
  satHealth                       BIT STRING (SIZE (6)),
  iodc                            BIT STRING (SIZE (10)),
  l2Pflag                         BIT STRING (SIZE (1)),
  sflRevd                         SubFrame1Reserved,
  t-GD                            BIT STRING (SIZE (8)),
  t-oc                            BIT STRING (SIZE (16)),
  af2                             BIT STRING (SIZE (8)),
  af1                             BIT STRING (SIZE (16)),
  af0                             BIT STRING (SIZE (22)),
  c-rs                            BIT STRING (SIZE (16)),
  delta-n                        BIT STRING (SIZE (16)),
  m0                             BIT STRING (SIZE (32)),
  c-uc                           BIT STRING (SIZE (16)),
  e                              BIT STRING (SIZE (32)),
}

```

```

c-us BIT STRING (SIZE (16)),
a-Sqrt BIT STRING (SIZE (32)),
t-oe BIT STRING (SIZE (16)),
fitInterval BIT STRING (SIZE (1)),
aodo BIT STRING (SIZE (5)),
c-ic BIT STRING (SIZE (16)),
omega0 BIT STRING (SIZE (32)),
c-is BIT STRING (SIZE (16)),
i0 BIT STRING (SIZE (32)),
c-rc BIT STRING (SIZE (16)),
omega BIT STRING (SIZE (32)),
omegaDot BIT STRING (SIZE (24)),
iDot BIT STRING (SIZE (14))
}
NC-Mode ::= BIT STRING (SIZE (3))

Neighbour ::= SEQUENCE {
    neighbourIdentity PrimaryCPICH-Info OPTIONAL,
    neighbourQuantity NeighbourQuantity,
    sfn-SFN-ObsTimeDifference2 SFN-SFN-ObsTimeDifference2
}

NeighbourList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    Neighbour

-- **TODO**, to be defined fully
NeighbourQuantity ::= SEQUENCE {
}

NewInterFreqCell ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfo
}

NewInterFreqCell-r4 ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfo-r4
}

NewInterFreqCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCell

NewInterFreqCellList-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCell-r4

NewInterFreqCellSI-RSCP ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-RSCP
}

NewInterFreqCellSI-ECN0 ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-ECN0
}

NewInterFreqCellSI-HCS-RSCP ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-HCS-RSCP
}

NewInterFreqCellSI-HCS-ECN0 ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-HCS-ECN0
}

NewInterFreqCellSI-RSCP-LCR ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-RSCP-LCR
}

NewInterFreqCellSI-ECN0-LCR ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-ECN0-LCR
}

```

```

NewInterFreqCellSI-HCS-RSCP-LCR ::= SEQUENCE {
  interFreqCellID      InterFreqCellID      OPTIONAL,
  frequencyInfo        FrequencyInfo         OPTIONAL,
  cellInfo             CellInfoSI-HCS-RSCP-LCR
}

NewInterFreqCellSI-HCS-ECN0-LCR ::= SEQUENCE {
  interFreqCellID      InterFreqCellID      OPTIONAL,
  frequencyInfo        FrequencyInfo         OPTIONAL,
  cellInfo             CellInfoSI-HCS-ECN0-LCR
}

NewInterFreqCellSI-List-ECN0 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-ECN0

NewInterFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-HCS-RSCP

NewInterFreqCellSI-List-HCS-ECN0 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-HCS-ECN0

NewInterFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-RSCP

NewInterFreqCellSI-List-ECN0-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-ECN0-LCR

NewInterFreqCellSI-List-HCS-RSCP-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-HCS-RSCP-LCR

NewInterFreqCellSI-List-HCS-ECN0-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-HCS-ECN0-LCR

NewInterFreqCellSI-List-RSCP-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCellSI-RSCP-LCR

NewInterRATCell ::= SEQUENCE {
  interRATCellID      InterRATCellID      OPTIONAL,
  technologySpecificInfo CHOICE {
    gsm SEQUENCE {
      cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12 OPTIONAL,
      bsic BSIC,
      bcch-ARFCN BCCH-ARFCN,
      gsm-OutputPower GSM-OutputPower OPTIONAL
    },
    is-2000 SEQUENCE {
      is-2000SpecificMeasInfo IS-2000SpecificMeasInfo
    },
    spare1 NULL,
    spare2 NULL
  }
}

NewInterRATCell-HCS ::= SEQUENCE {
  interRATCellID      InterRATCellID      OPTIONAL,
  technologySpecificInfo CHOICE {
    gsm SEQUENCE {
      cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12 OPTIONAL,
      bsic BSIC,
      bcch-ARFCN BCCH-ARFCN,
      gsm-OutputPower GSM-OutputPower OPTIONAL
    },
    is-2000 SEQUENCE {
      is-2000SpecificMeasInfo IS-2000SpecificMeasInfo
    },
    spare1 NULL,
    spare2 NULL
  }
}

NewInterRATCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterRATCell

NewInterRATCellList-HCS ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterRATCell-HCS

NewIntraFreqCell ::= SEQUENCE {
  intraFreqCellID      IntraFreqCellID      OPTIONAL,
  cellInfo             CellInfo
}

```

<u>NewIntraFreqCell-r4 ::=</u>	<u>SEQUENCE {</u>		
<u>intraFreqCellID</u>	<u>IntraFreqCellID</u>		<u>OPTIONAL,</u>
<u>cellInfo</u>	<u>CellInfo-r4</u>		
<u>}</u>			
NewIntraFreqCellList ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	NewIntraFreqCell	
<u>NewIntraFreqCellList-r4 ::=</u>	<u>SEQUENCE (SIZE (1..maxCellMeas)) OF</u>	<u>NewIntraFreqCell-r4</u>	
NewIntraFreqCellSI-RSCP ::=	SEQUENCE {		OPTIONAL,
intraFreqCellID	IntraFreqCellID		
cellInfo	CellInfoSI-RSCP		
}			
NewIntraFreqCellSI-ECN0 ::=	SEQUENCE {		OPTIONAL,
intraFreqCellID	IntraFreqCellID		
cellInfo	CellInfoSI-ECN0		
}			
NewIntraFreqCellSI-HCS-RSCP ::=	SEQUENCE {		OPTIONAL,
intraFreqCellID	IntraFreqCellID		
cellInfo	CellInfoSI-HCS-RSCP		
}			
NewIntraFreqCellSI-HCS-ECN0 ::=	SEQUENCE {		OPTIONAL,
intraFreqCellID	IntraFreqCellID		
cellInfo	CellInfoSI-HCS-ECN0		
}			
<u>NewIntraFreqCellSI-RSCP-LCR ::=</u>	<u>SEQUENCE {</u>		<u>OPTIONAL,</u>
<u>intraFreqCellID</u>	<u>IntraFreqCellID</u>		
<u>cellInfo</u>	<u>CellInfoSI-RSCP-LCR</u>		
<u>}</u>			
<u>NewIntraFreqCellSI-ECN0-LCR ::=</u>	<u>SEQUENCE {</u>		<u>OPTIONAL,</u>
<u>intraFreqCellID</u>	<u>IntraFreqCellID</u>		
<u>cellInfo</u>	<u>CellInfoSI-ECN0-LCR</u>		
<u>}</u>			
<u>NewIntraFreqCellSI-HCS-RSCP-LCR ::=</u>	<u>SEQUENCE {</u>		<u>OPTIONAL,</u>
<u>intraFreqCellID</u>	<u>IntraFreqCellID</u>		
<u>cellInfo</u>	<u>CellInfoSI-HCS-RSCP-LCR</u>		
<u>}</u>			
<u>NewIntraFreqCellSI-HCS-ECN0-LCR ::=</u>	<u>SEQUENCE {</u>		<u>OPTIONAL,</u>
<u>intraFreqCellID</u>	<u>IntraFreqCellID</u>		
<u>cellInfo</u>	<u>CellInfoSI-HCS-ECN0-LCR</u>		
<u>}</u>			
NewIntraFreqCellSI-List-RSCP ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	NewIntraFreqCellSI-RSCP	
NewIntraFreqCellSI-List-ECN0 ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	NewIntraFreqCellSI-ECN0	
NewIntraFreqCellSI-List-HCS-RSCP ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	NewIntraFreqCellSI-HCS-RSCP	
NewIntraFreqCellSI-List-HCS-ECN0 ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	NewIntraFreqCellSI-HCS-ECN0	
<u>NewIntraFreqCellSI-List-RSCP-LCR ::=</u>	<u>SEQUENCE (SIZE (1..maxCellMeas)) OF</u>	<u>NewIntraFreqCellSI-RSCP-LCR</u>	
<u>NewIntraFreqCellSI-List-ECN0-LCR ::=</u>	<u>SEQUENCE (SIZE (1..maxCellMeas)) OF</u>	<u>NewIntraFreqCellSI-ECN0-LCR</u>	
<u>NewIntraFreqCellSI-List-HCS-RSCP-LCR ::=</u>	<u>SEQUENCE (SIZE (1..maxCellMeas)) OF</u>	<u>NewIntraFreqCellSI-HCS-RSCP-LCR</u>	
<u>NewIntraFreqCellSI-List-HCS-ECN0-LCR ::=</u>	<u>SEQUENCE (SIZE (1..maxCellMeas)) OF</u>	<u>NewIntraFreqCellSI-HCS-ECN0-LCR</u>	
NodeB-ClockDrift ::=	INTEGER (0..15)		
NonUsedFreqParameter ::=	SEQUENCE {		
nonUsedFreqThreshold	Threshold,		
nonUsedFreqW	W		
}			
NonUsedFreqParameterList ::=	SEQUENCE (SIZE (1..maxFreq)) OF		

```

NonUsedFreqParameter

ObservedTimeDifferenceToGSM ::= INTEGER (0..4095)

OTDOA-SearchWindowSize ::= ENUMERATED {
    c10, c20, c30, c40, c50,
    c60, c70, moreThan70 }

Pathloss ::= INTEGER (46..158)

PenaltyTime-RSCP ::= CHOICE {
    notUsed          NULL,
    pt10             TemporaryOffset,
    pt20             TemporaryOffset,
    pt30             TemporaryOffset,
    pt40             TemporaryOffset,
    pt50             TemporaryOffset,
    pt60             TemporaryOffset
}

PenaltyTime-ECNO ::= CHOICE {
    notUsed          NULL,
    pt10             TemporaryOffsetList,
    pt20             TemporaryOffsetList,
    pt30             TemporaryOffsetList,
    pt40             TemporaryOffsetList,
    pt50             TemporaryOffsetList,
    pt60             TemporaryOffsetList
}

PendingTimeAfterTrigger ::= ENUMERATED {
    ptat0-25, ptat0-5, ptat1,
    ptat2, ptat4, ptat8, ptat16 }

PeriodicalOrEventTrigger ::= ENUMERATED {
    periodical,
    eventTrigger }

PeriodicalReportingCriteria ::= SEQUENCE {
    reportingAmount      ReportingAmount          DEFAULT ra-Infinity,
    reportingInterval    ReportingIntervalLong
}

PeriodicalWithReportingCellStatus ::= SEQUENCE {
    periodicalReportingCriteria    PeriodicalReportingCriteria,
    reportingCellStatus            ReportingCellStatus          OPTIONAL
}

PositionEstimate ::= CHOICE {
    ellipsoidPoint          EllipsoidPoint,
    ellipsoidPointUncertCircle    EllipsoidPointUncertCircle,
    ellipsoidPointUncertEllipse    EllipsoidPointUncertEllipse,
    ellipsoidPointAltitude    EllipsoidPointAltitude,
    ellipsoidPointAltitudeEllipse    EllipsoidPointAltitudeEllipse
}

PositioningMethod ::= ENUMERATED {
    otdoa,
    gps,
    otdoaOrGPS }

PRC ::= INTEGER (-2047..2047)

PrimaryCCPCH-RSCP ::= INTEGER (-115..-25)

Q-HCS ::= INTEGER (0..99)

Q-OffsetS-N ::= INTEGER (-50..50)

Q-QualMin ::= INTEGER (-20..0)

-- Actual value = (IE value * 2) + 1
Q-RxlevMin ::= INTEGER (-58..-13)

QualityEventResults ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

QualityMeasuredResults ::= SEQUENCE {
    blerMeasurementResultsList    BLER-MeasurementResultsList    OPTIONAL,
    modeSpecificInfo              CHOICE {
        fdd                      NULL,

```



```

        tdd
        sir-MeasurementResults          SEQUENCE {
        }                               SIR-MeasurementList          OPTIONAL
    }
}

QualityMeasurement ::=
    qualityReportingQuantity          SEQUENCE {
    reportCriteria                    QualityReportingQuantity          OPTIONAL,
    reportCriteria                    QualityReportCriteria
}

QualityReportCriteria ::=
    qualityReportingCriteria          CHOICE {
    periodicalReportingCriteria      QualityReportingCriteria,
    noReporting                       PeriodicalReportingCriteria,
}                                     NULL

QualityReportingCriteria ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
    QualityReportingCriteriaSingle

QualityReportingCriteriaSingle ::= SEQUENCE {
    transportChannelIdentity         TransportChannelIdentity,
    totalCRC                         INTEGER (1..512),
    badCRC                           INTEGER (1..512),
    pendingAfterTrigger              INTEGER (1..512)
}

QualityReportingQuantity ::=
    dl-TransChBLER                   SEQUENCE {
    bler-dl-TransChIdList            BOOLEAN,
    modeSpecificInfo                  BLER-TransChIdList          OPTIONAL,
    fdd                               CHOICE {
    tdd                               NULL,
    sir-TFCS-List                     SEQUENCE {
    }                                   SIR-TFCS-List          OPTIONAL
    }
}

QualityType ::=
    ENUMERATED {
    std-10, std-50, cpich-Ec-N0 }

RAT-Type ::=
    ENUMERATED {
    gsm, is2000 }

ReferenceCellPosition ::=
    ellipsoidPoint                    CHOICE {
    ellipsoidPointWithAltitude       EllipsoidPoint,
}                                     EllipsoidPointAltitude

ReferenceCellRelation ::=
    ENUMERATED {
    first-12-second-3,
    first-13-second-2,
    first-1-second-23 }

-- As defined in 23.032 (2D with 24bits for each coordinate)
ReferenceLocationforSIB ::=
    ellipsoidPoint                    SEQUENCE {
}                                     EllipsoidPoint

ReferenceQuality ::=
    ENUMERATED {
    m0-19, m20-39, m40-79,
    m80-159, m160-319, m320-639,
    m640-1319, m1320Plus }

-- Actual value = IE value * 10
ReferenceQuality10 ::=
    INTEGER (1..32)

-- Actual value = IE value * 50
ReferenceQuality50 ::=
    INTEGER (1..32)

ReferenceSFN ::=
    INTEGER (0..4095)

-- Actual value = IE value * 512
ReferenceTimeDifferenceToCell ::=
    CHOICE {
    -- Actual value = IE value * 40
    accuracy40                       INTEGER (0..960),
    -- Actual value = IE value * 256
    accuracy256                       INTEGER (0..150),
    -- Actual value = IE value * 2560
    accuracy2560                      INTEGER (0..15)
}

```

```

RemovedInterFreqCellList ::= CHOICE {
    removeAllInterFreqCells      NULL,
    removeSomeInterFreqCells     SEQUENCE (SIZE (1..maxCellMeas)) OF
                                   InterFreqCellID,
    removeNoInterFreqCells      NULL
}

RemovedInterRATCellList ::= CHOICE {
    removeAllInterRATCells      NULL,
    removeSomeInterRATCells     SEQUENCE (SIZE (1..maxCellMeas)) OF
                                   InterRATCellID,
    removeNoInterRATCells      NULL
}

RemovedIntraFreqCellList ::= CHOICE {
    removeAllIntraFreqCells     NULL,
    removeSomeIntraFreqCells    SEQUENCE (SIZE (1..maxCellMeas)) OF
                                   IntraFreqCellID,
    removeNoIntraFreqCells     NULL
}

ReplacementActivationThreshold ::= ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportDeactivationThreshold ::= ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportingAmount ::= ENUMERATED {
    ra1, ra2, ra4, ra8, ra16, ra32,
    ra64, ra-Infinity }

ReportingCellStatus ::= CHOICE{
    withinActiveSet              MaxNumberOfReportingCellsType1,
    withinMonitoredSetUsedFreq   MaxNumberOfReportingCellsType1,
    withinActiveAndOrMonitoredUsedFreq MaxNumberOfReportingCellsType1,
    withinDetectedSetUsedFreq    MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrDetectedUsedFreq
                                   MaxNumberOfReportingCellsType1,
    allActiveplusMonitoredSet    MaxNumberOfReportingCellsType3,
    allActivePlusDetectedSet     MaxNumberOfReportingCellsType3,
    allActivePlusMonitoredAndOrDetectedSet
                                   MaxNumberOfReportingCellsType3,
    withinVirtualActSet          MaxNumberOfReportingCellsType1,
    withinMonitoredSetNonUsedFreq MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrActiveSetNonUsedFreq
                                   MaxNumberOfReportingCellsType1,
    allVirtualActSetplusMonitoredSetNonUsedFreq
                                   MaxNumberOfReportingCellsType3,
    withinActSetOrVirtualActSet  MaxNumberOfReportingCellsType2,
    withinActSetAndOrMonitoredUsedFreqOrMonitoredNonUsedFreq
                                   MaxNumberOfReportingCellsType2
}

ReportingCellStatusOpt ::= SEQUENCE {
    reportingCellStatus          ReportingCellStatus          OPTIONAL
}

ReportingInfoForCellDCH ::= SEQUENCE {
    intraFreqReportingQuantity  IntraFreqReportingQuantity,
    measurementReportingMode    MeasurementReportingMode,
    reportCriteria              CellDCH-ReportCriteria
}

ReportingInfoForCellDCH-LCR ::= SEQUENCE {
    intraFreqReportingQuantity  IntraFreqReportingQuantity,
    measurementReportingMode    MeasurementReportingMode,
    reportCriteria              CellDCH-ReportCriteria-LCR
}

ReportingInterval ::= ENUMERATED {
    noPeriodicalreporting, ri0-25,
    ri0-5, ri1, ri2, ri4, ri8, ri16 }

ReportingIntervalLong ::= ENUMERATED {
    ril0, ril0-25, ril0-5, ril1,
    ril2, ril3, ril4, ril6, ril8,
    ril12, ril16, ril20, ril24,
    ril28, ril32, ril64 }

```

```

-- Actual value = IE value * 0.5
ReportingRange ::= INTEGER (0..29)

RL-AdditionInfoList ::= SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RL-InformationLists ::= SEQUENCE {
    rl-AdditionInfoList      RL-AdditionInfoList      OPTIONAL,
    rl-RemovalInfoList      RL-RemovalInfoList      OPTIONAL
}

RL-RemovalInfoList ::= SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RLC-BuffersPayload ::= ENUMERATED {
    pl0, pl4, pl8, pl16, pl32, pl64, pl128,
    pl256, pl512, pl1024, pl2k, pl4k,
    pl8k, pl16k, pl32k, pl64k, pl128k,
    pl256k, pl512k, pl1024k }

RRC ::= INTEGER (-127..127)

SatelliteStatus ::= ENUMERATED {
    ns-NN-U,
    es-SN,
    es-NN-U,
    es-NN-C }

SatID ::= INTEGER (0..63)

SFN-SFN-ObsTimeDifference ::= CHOICE {
    type1          SFN-SFN-ObsTimeDifference1,
    -- Actual value for type2 = IE value * 0.0625 - 1280
    type2          SFN-SFN-ObsTimeDifference2
}

SFN-SFN-ObsTimeDifference1 ::= INTEGER (0..9830399)

SFN-SFN-ObsTimeDifference2 ::= INTEGER (0..40961)

SFN-SFN-OTD-Type ::= ENUMERATED {
    noReport,
    type1,
    type2 }

SIR ::= INTEGER (-10..20)

SIR-MeasurementList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
    SIR-MeasurementResults

SIR-MeasurementResults ::= SEQUENCE {
    tfcs-ID          TFCS-IdentityPlain,
    sir-TimeslotList SIR-TimeslotList
}

SIR-TFCS ::= TFCS-IdentityPlain

SIR-TFCS-List ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
    SIR-TFCS

SIR-TimeslotList ::= SEQUENCE (SIZE (1..maxTS)) OF
    SIR

-- Reserved bits in subframe 1 of the GPS navigation message
SubFrame1Reserved ::= SEQUENCE {
    reserved1        BIT STRING (SIZE (23)),
    reserved2        BIT STRING (SIZE (24)),
    reserved3        BIT STRING (SIZE (24)),
    reserved4        BIT STRING (SIZE (16))
}

T-CRMax ::= CHOICE {
    notUsed          NULL,
    t30              N-CR-T-CRMaxHyst,
    t60              N-CR-T-CRMaxHyst,
    t120             N-CR-T-CRMaxHyst,
    t180             N-CR-T-CRMaxHyst,
    t240             N-CR-T-CRMaxHyst
}

```

```

}

T-CRMaxHyst ::= ENUMERATED {
    notUsed, t10, t20, t30,
    t40, t50, t60, t70 }

TemporaryOffset ::= ENUMERATED {
    to10, to20, to30, to40, to50,
    to60, to70, infinite }

TemporaryOffsetList ::= SEQUENCE {
    temporaryOffset1
    temporaryOffset2
}

Threshold ::= INTEGER (-115..0)

ThresholdPositionChange ::= ENUMERATED {
    pc10, pc20, pc30, pc40, pc50,
    pc100, pc200, pc300, pc500,
    pc1000, pc2000, pc5000, pc10000,
    pc20000, pc50000, pc100000 }

ThresholdSFN-GPS-TOW ::= ENUMERATED {
    ms1, ms2, ms3, ms5, ms10,
    ms20, ms50, ms100 }

ThresholdSFN-SFN-Change ::= ENUMERATED {
    c0-25, c0-5, c1, c2, c3, c4, c5,
    c10, c20, c50, c100, c200, c500,
    c1000, c2000, c5000 }

ThresholdUsedFrequency ::= INTEGER (-115..165)

-- Actual value = IE value * 20.
TimeInterval ::= INTEGER (1..13)

TimeslotInfo ::= SEQUENCE {
    timeslotNumber
    burstType
}

TimeslotInfo-LCR ::= SEQUENCE {
    timeslotNumber TimeslotNumber-LCR,
    burstType BurstType
}

TimeslotInfoList ::= SEQUENCE (SIZE (1..maxTS)) OF
    TimeslotInfo

TimeslotInfoList-LCR ::= SEQUENCE (SIZE (1..maxTS-LCR)) OF
    TimeslotInfo-LCR

TimeslotInfoList-r4 ::= CHOICE {
    tdd384 SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotInfo,
    tdd128 SEQUENCE (SIZE (1..maxTS-LCR)) OF
        TimeslotInfo-LCR
}

TimeslotISCP ::= INTEGER (-115..-25)

TimeslotISCP-List ::= SEQUENCE (SIZE (1..maxTS)) OF
    TimeslotISCP

TimeslotListWithISCP ::= SEQUENCE (SIZE (1..maxTS)) OF
    TimeslotWithISCP

TimeslotWithISCP ::= SEQUENCE {
    timeslot
    timeslotISCP
}

TimeToTrigger ::= ENUMERATED {
    ttt0, ttt10, ttt20, ttt40, ttt60,
    ttt80, ttt100, ttt120, ttt160,
    ttt200, ttt240, ttt320, ttt640,
    ttt1280, ttt2560, ttt5000 }

```

```

TrafficVolumeEventParam ::= SEQUENCE {
    eventID                TrafficVolumeEventType,
    reportingThreshold     TrafficVolumeThreshold,
    timeToTrigger          TimeToTrigger                OPTIONAL,
    pendingTimeAfterTrigger PendingTimeAfterTrigger    OPTIONAL,
    tx-InterruptionAfterTrigger TX-InterruptionAfterTrigger    OPTIONAL
}

TrafficVolumeEventResults ::= SEQUENCE {
    ul-transportChannelCausingEvent TransportChannelIdentity,
    trafficVolumeEventIdentity     TrafficVolumeEventType
}

TrafficVolumeEventType ::= ENUMERATED {
    e4a,
    e4b
}

TrafficVolumeMeasQuantity ::= CHOICE {
    rlc-BufferPayload          NULL,
    averageRLC-BufferPayload   TimeInterval,
    varianceOfRLC-BufferPayload TimeInterval
}

TrafficVolumeMeasSysInfo ::= SEQUENCE {
    trafficVolumeMeasurementID MeasurementIdentity          DEFAULT 4,
    trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
    trafficVolumeMeasQuantity     TrafficVolumeMeasQuantity     OPTIONAL,
    trafficVolumeReportingQuantity TrafficVolumeReportingQuantity   OPTIONAL,
    trafficVolumeMeasRepCriteria   TrafficVolumeReportingCriteria OPTIONAL,
    measurementValidity           MeasurementValidity           OPTIONAL,
    measurementReportingMode       MeasurementReportingMode,
    reportCriteriaSysInf          TrafficVolumeReportCriteriaSysInfo
}

TrafficVolumeMeasuredResults ::= SEQUENCE {
    rb-Identity              RB-Identity,
    rlc-BufferPayload        RLC-BufferPayload          OPTIONAL,
    averageRLC-BufferPayload AverageRLC-BufferPayload   OPTIONAL,
    varianceOfRLC-BufferPayload VarianceOfRLC-BufferPayload   OPTIONAL
}

TrafficVolumeMeasuredResultsList ::= SEQUENCE (SIZE (1..maxRB)) OF
    TrafficVolumeMeasuredResults

TrafficVolumeMeasurement ::= SEQUENCE {
    trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
    trafficVolumeMeasQuantity         TrafficVolumeMeasQuantity     OPTIONAL,
    trafficVolumeReportingQuantity     TrafficVolumeReportingQuantity OPTIONAL,
    measurementValidity               MeasurementValidity           OPTIONAL,
    reportCriteria                    TrafficVolumeReportCriteria
}

TrafficVolumeMeasurementObjectList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

TrafficVolumeReportCriteria ::= CHOICE {
    trafficVolumeReportingCriteria TrafficVolumeReportingCriteria,
    periodicalReportingCriteria    PeriodicalReportingCriteria,
    noReporting                    NULL
}

TrafficVolumeReportCriteriaSysInfo ::= CHOICE {
    trafficVolumeReportingCriteria TrafficVolumeReportingCriteria,
    periodicalReportingCriteria    PeriodicalReportingCriteria
}

TrafficVolumeReportingCriteria ::= SEQUENCE {
    transChCriteriaList TransChCriteriaList          OPTIONAL
}

TrafficVolumeReportingQuantity ::= SEQUENCE {
    rlc-RB-BufferPayload          BOOLEAN,
    rlc-RB-BufferPayloadAverage   BOOLEAN,
    rlc-RB-BufferPayloadVariance  BOOLEAN
}

TrafficVolumeThreshold ::= ENUMERATED {
    th8, th16, th32, th64, th128,
    th256, th512, th1024, th2k, th3k,
    th4k, th6k, th8k, th12k, th16k,

```

```

th24k, th32k, th48k, th64k, th96k,
th128k, th192k, th256k, th384k,
th512k, th768k }

TransChCriteria ::=
  ul-transportChannelID
  eventSpecificParameters
}
SEQUENCE {
  TransportChannelIdentity OPTIONAL,
  SEQUENCE (SIZE (1..maxMeasParEvent)) OF
  TrafficVolumeEventParam OPTIONAL
}

TransChCriteriaList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
  TransChCriteria

TransferMode ::= ENUMERATED {
  acknowledgedModeRLC,
  unacknowledgedModeRLC }

TransmittedPowerThreshold ::= INTEGER (-50..33)

TriggeringCondition1 ::= ENUMERATED {
  activeSetCellsOnly,
  monitoredSetCellsOnly,
  activeSetAndMonitoredSetCells }

TriggeringCondition2 ::= ENUMERATED {
  activeSetCellsOnly,
  monitoredSetCellsOnly,
  activeSetAndMonitoredSetCells,
  detectedSetCellsOnly,
  detectedSetAndMonitoredSetCells }

TX-InterruptionAfterTrigger ::= ENUMERATED {
  txiat0-25, txiat0-5, txiat1,
  txiat2, txiat4, txiat8, txiat16 }

UDRE ::= ENUMERATED {
  lessThan1,
  between1-and-4,
  between4-and-8,
  over8 }

UE-6AB-Event ::= SEQUENCE {
  timeToTrigger TimeToTrigger,
  transmittedPowerThreshold TransmittedPowerThreshold
}

UE-6FG-Event ::= SEQUENCE {
  timeToTrigger TimeToTrigger,
  ue-RX-TX-TimeDifferenceThreshold UE-RX-TX-TimeDifferenceThreshold
}

UE-AutonomousUpdateMode ::= CHOICE {
  on NULL,
  onWithNoReporting NULL,
  off RL-InformationLists
}

UE-InternalEventParam ::= CHOICE {
  event6a UE-6AB-Event,
  event6b UE-6AB-Event,
  event6c TimeToTrigger,
  event6d TimeToTrigger,
  event6e TimeToTrigger,
  event6f UE-6FG-Event,
  event6g UE-6FG-Event
}

UE-InternalEventParamList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
  UE-InternalEventParam

UE-InternalEventResults ::= CHOICE {
  event6a NULL,
  event6b NULL,
  event6c NULL,
  event6d NULL,
  event6e NULL,
  event6f PrimaryCPICH-Info,
  event6g PrimaryCPICH-Info
}

UE-InternalMeasQuantity ::= SEQUENCE {
  measurementQuantity UE-MeasurementQuantity,

```

```

    filterCoefficient          FilterCoefficient          DEFAULT fcl
}

UE-InternalMeasuredResults ::= SEQUENCE {
    modeSpecificInfo          CHOICE {
        fdd                    SEQUENCE {
            ue-TransmittedPowerFDD          UE-TransmittedPower          OPTIONAL,
            ue-RX-TX-ReportEntryList        UE-RX-TX-ReportEntryList    OPTIONAL
        },
        tdd                    SEQUENCE {
            ue-TransmittedPowerTDD-List      UE-TransmittedPowerTDD-List  OPTIONAL,
            appliedTA                      UL-TimingAdvance             OPTIONAL
        }
    }
}

UE-InternalMeasurement ::= SEQUENCE {
    ue-InternalMeasQuantity          UE-InternalMeasQuantity          OPTIONAL,
    ue-InternalReportingQuantity      UE-InternalReportingQuantity     OPTIONAL,
    reportCriteria                    UE-InternalReportCriteria
}

UE-InternalMeasurementSysInfo ::= SEQUENCE {
    ue-InternalMeasurementID          MeasurementIdentity              DEFAULT 5,
    ue-InternalMeasQuantity           UE-InternalMeasQuantity
}

UE-InternalReportCriteria ::= CHOICE {
    ue-InternalReportingCriteria      UE-InternalReportingCriteria,
    periodicalReportingCriteria       PeriodicalReportingCriteria,
    noReporting                       NULL
}

UE-InternalReportingCriteria ::= SEQUENCE {
    ue-InternalEventParamList         UE-InternalEventParamList       OPTIONAL
}

UE-InternalReportingQuantity ::= SEQUENCE {
    ue-TransmittedPower               BOOLEAN,
    modeSpecificInfo                  CHOICE {
        fdd                    SEQUENCE {
            ue-RX-TX-TimeDifferece        BOOLEAN
        },
        tdd                    SEQUENCE {
            appliedTA                      BOOLEAN
        }
    }
}

-- TABULAR: For TDD only the first two values are used.
UE-MeasurementQuantity ::= ENUMERATED {
    ue-TransmittedPower,
    ultra-Carrier-RSSI,
    ue-RX-TX-TimeDifference }

UE-RX-TX-ReportEntry ::= SEQUENCE {
    primaryCPICH-Info                PrimaryCPICH-Info,
    ue-RX-TX-TimeDifferenceType1      UE-RX-TX-TimeDifferenceType1
}

UE-RX-TX-ReportEntryList ::= SEQUENCE (SIZE (1..maxRL)) OF
    UE-RX-TX-ReportEntry

UE-RX-TX-TimeDifferenceType1 ::= INTEGER (768..1280)

-- Actual value = IE value * 0.0625 + 768
UE-RX-TX-TimeDifferenceType2 ::= INTEGER (0..8191)

UE-RX-TX-TimeDifferenceThreshold ::= INTEGER (768..1280)

UE-TransmittedPower ::= INTEGER (-50..33)

UE-TransmittedPowerTDD-List ::= SEQUENCE (SIZE (1..maxTS)) OF
    UE-TransmittedPower

UP-Accuracy ::= BIT STRING (SIZE (7))

-- For sfID=0 (sf4), pageNo=18, and sfID=0 & sfID=1 (sf4 & sf5), pageNo=25,
-- the IE fields for word3 - word110 are the same as UP-GPS-IonosphericModel
-- and UP-GPS-UTC-Model. For the rest of the pages, they are the same as
-- UP-GPS-Almanac.
UP-Alma-SIB-Data ::= SEQUENCE {

```

```

sfID                INTEGER (0..1),
dataID              INTEGER (0..3),
pageNo             INTEGER (0..63),
word3              BIT STRING (SIZE (16)),
word4              BIT STRING (SIZE (24)),
word5              BIT STRING (SIZE (24)),
word6              BIT STRING (SIZE (24)),
word7              BIT STRING (SIZE (24)),
word8              BIT STRING (SIZE (24)),
word9              BIT STRING (SIZE (24)),
word10             BIT STRING (SIZE (22))
}

UP-Alma-SIB-DataList ::=          SEQUENCE (SIZE (1..3)) OF
                                   UP-Alma-SIB-Data

UP-CipherParameters ::=          SEQUENCE {
  cipheringKeyFlag          BIT STRING (SIZE (1)),
  cipheringSerialNumber     INTEGER (0..65535)
}

UP-DGPS-SIB-Data ::=            SEQUENCE {
  nodeBClockDrift          NodeB-ClockDrift                OPTIONAL,
  referenceLocationforSIB ReferenceLocationforSIB,          OPTIONAL,
  referenceSFN              ReferenceSFN
  referenceGPS-TOW          GPS-TOW-lusec,
  statusHealth              DiffCorrectionStatus,
  dgps-InformationList      DGPS-InformationList
}

UP-Ephe-SIB-Data ::=           SEQUENCE {
  transmissionTOW          INTEGER (0..1048575),
  satID                    SatID,
  tlmMessage               BIT STRING (SIZE (14)),
  tlmRevd                  BIT STRING (SIZE (2)),
  how                      BIT STRING (SIZE (22)),
  wn                       BIT STRING (SIZE (10)),
  navModel                 NavModel
}

UP-Error ::=                   SEQUENCE {
  errorReason              UP-ErrorCause,
  additionalAssistanceData AdditionalAssistanceData
}

UP-ErrorCause ::=              ENUMERATED {
  notEnoughOTDOA-Cells,
  notEnoughGPS-Satellites,
  assistanceDataMissing,
  methodNotSupported,
  undefinedError,
  requestDeniedByUser,
  notProcessedAndTimeout }

UP-EventID ::=                 ENUMERATED {
  e7a, e7b, e7c }

UP-EventParam ::=              SEQUENCE {
  reportingAmount          ReportingAmount,
  reportFirstFix           BOOLEAN,
  measurementInterval      UP-MeasurementInterval,
  eventSpecificInfo        UP-EventSpecificInfo
}

UP-EventParamList ::=          SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                   UP-EventParam

UP-EventSpecificInfo ::=       CHOICE {
  e7a                      ThresholdPositionChange,
  e7b                      ThresholdSFN-SFN-Change,
  e7c                      ThresholdSFN-GPS-TOW
}

UP-GPS-AcquisitionAssistance ::= SEQUENCE {
  referenceTime            CHOICE {
    utran-ReferenceTime    UTRAN-ReferenceTime,
    gps-ReferenceTimeOnly  INTEGER (0..604799999)
  },
  satelliteInformationList AcquisitionSatInfoList
}

UP-GPS-Almanac ::=             SEQUENCE {
  wn-a                     BIT STRING (SIZE (8)),

```



```

    almanacSatInfoList          AlmanacSatInfoList
}

UP-GPS-AssistanceData ::=
    up-GPS-ReferenceTime      UP-GPS-ReferenceTime          OPTIONAL,
    up-GPS-ReferenceLocation  EllipsoidPointAltitude    OPTIONAL,
    up-GPS-DGPS-Corrections   UP-GPS-DGPS-Corrections      OPTIONAL,
    up-GPS-NavigationModel    UP-GPS-NavigationModel    OPTIONAL,
    up-GPS-IonosphericModel   UP-GPS-IonosphericModel   OPTIONAL,
    up-GPS-UTC-Model          UP-GPS-UTC-Model            OPTIONAL,
    up-GPS-Almanac            UP-GPS-Almanac              OPTIONAL,
    up-GPS-AcquisitionAssistance UP-GPS-AcquisitionAssistance OPTIONAL,
    up-GPS-Real-timeIntegrity BadSatList                OPTIONAL
}

UP-Cipher-GPS-Data-Indicator ::=
    up-CipherParameters      UP-CipherParameters      OPTIONAL
}

UP-GPS-DGPS-Corrections ::=
    gps-TOW                  INTEGER (0..604799),
    statusHealth             DiffCorrectionStatus,
    dgps-CorrectionSatInfoList DGPS-CorrectionSatInfoList
}

UP-GPS-IonosphericModel ::=
    alfa0                    BIT STRING (SIZE (8)),
    alfa1                    BIT STRING (SIZE (8)),
    alfa2                    BIT STRING (SIZE (8)),
    alfa3                    BIT STRING (SIZE (8)),
    beta0                    BIT STRING (SIZE (8)),
    beta1                    BIT STRING (SIZE (8)),
    beta2                    BIT STRING (SIZE (8)),
    beta3                    BIT STRING (SIZE (8))
}

UP-GPS-Measurement ::=
    referenceSFN             ReferenceSFN                OPTIONAL,
    gps-TOW-lmsec           GPS-TOW-lmsec,
    gps-TOW-rem-usec       GPS-TOW-rem-usec            OPTIONAL,
    gps-MeasurementParamList GPS-MeasurementParamList
}

UP-GPS-NavigationModel ::=
    n-SAT                   INTEGER (1..16),
    navigationModelSatInfoList NavigationModelSatInfoList
}

UP-GPS-ReferenceTime ::=
    gps-Week                INTEGER (0..1023),
    gps-TOW                 GPS-TOW-lusec,
    sfn                     INTEGER (0..4095),
    gps-TOW-AssistList      GPS-TOW-AssistList          OPTIONAL
}

UP-GPS-UTC-Model ::=
    al                      BIT STRING (SIZE (24)),
    a0                      BIT STRING (SIZE (32)),
    t-ot                    BIT STRING (SIZE (8)),
    wn-t                    BIT STRING (SIZE (8)),
    delta-t-LS              BIT STRING (SIZE (8)),
    wn-lsf                  BIT STRING (SIZE (8)),
    dn                      BIT STRING (SIZE (8)),
    delta-t-LSF             BIT STRING (SIZE (8))
}

UP-IPDL-Parameters ::=
    ip-Spacing              IP-Spacing,
    ip-Length               IP-Length,
    ip-Offset               INTEGER (0..9),
    seed                    INTEGER (0..63),
    burstModeParameters     BurstModeParameters
}

UP-MeasuredResults ::=
    up-MultipleSets         UP-MultipleSets          OPTIONAL,
    up-ReferenceCellIdentity PrimaryCPICH-Info          OPTIONAL,
    up-OTDOA-Measurement   UP-OTDOA-Measurement        OPTIONAL,
    up-Position            UP-Position                 OPTIONAL,
    up-GPS-Measurement     UP-GPS-Measurement          OPTIONAL,
    up-Error               UP-Error                    OPTIONAL

```

```

}

UP-Measurement ::=
  up-ReportingQuantity
  reportCriteria
  up-OTDOA-AssistanceData
  up-GPS-AssistanceData
SEQUENCE {
  UP-ReportingQuantity,
  UP-ReportCriteria,
  UP-OTDOA-AssistanceData OPTIONAL,
  UP-GPS-AssistanceData OPTIONAL
}

UP-MeasurementEventResults ::=
  event7a
  event7b
  event7c
CHOICE {
  UP-Position,
  UP-OTDOA-Measurement,
  UP-GPS-Measurement
}

UP-MeasurementInterval ::=
ENUMERATED {
  e5, e15, e60, e300,
  e900, e1800, e3600, e7200 }

UP-MethodType ::=
ENUMERATED {
  ue-Assisted,
  ue-Based,
  ue-BasedPreferred,
  ue-AssistedPreferred }

UP-MultipleSets ::=
  numberOfOTDOA-IPDL-GPS-Sets
  numberOfReferenceCells
  referenceCellRelation
SEQUENCE {
  INTEGER (2..3),
  INTEGER (1..3),
  ReferenceCellRelation
}

UP-OTDOA-AssistanceData ::=
  up-OTDOA-ReferenceCell
  up-OTDOA-MeasurementAssistDataList
  up-IPDL-Parameters
SEQUENCE {
  UP-OTDOA-ReferenceCell OPTIONAL,
  UP-OTDOA-MeasurementAssistDataList OPTIONAL,
  UP-IPDL-Parameters OPTIONAL
}

UP-OTDOA-AssistanceSIB ::=
  up-CipherParameters
  searchWindowSize
  referenceCellPosition
  up-IPDL-Parameters
  cellToMeasureInfoList
SEQUENCE {
  UP-CipherParameters OPTIONAL,
  OTDOA-SearchWindowSize,
  ReferenceCellPosition,
  UP-IPDL-Parameters OPTIONAL,
  CellToMeasureInfoList
}

UP-OTDOA-Measurement ::=
  sfn
  ue-RX-TX-TimeDifferenceType2
  qualityChoice
  std-10
  std-50
  cpich-EcN0
  defaultQuality
  },
  neighbourList
SEQUENCE {
  INTEGER (0..4095),
  UE-RX-TX-TimeDifferenceType2,
  CHOICE {
    ReferenceQuality10,
    ReferenceQuality50,
    CPICH-Ec-N0-OTDOA,
    ReferenceQuality
  },
  NeighbourList OPTIONAL
}

UP-OTDOA-MeasurementAssistData ::= SEQUENCE {
  primaryCPICH-Info
  frequencyInfo
  sfn-SFN-ObsTimeDifference
  fineSFN-SFN
  searchWindowSize
  relativeNorth
  relativeEast
  relativeAltitude
  PrimaryCPICH-Info,
  FrequencyInfo OPTIONAL,
  SFN-SFN-ObsTimeDifference1,
  FineSFN-SFN OPTIONAL,
  OTDOA-SearchWindowSize,
  INTEGER (-20000..20000) OPTIONAL,
  INTEGER (-20000..20000) OPTIONAL,
  INTEGER (-4000..4000) OPTIONAL
}

UP-OTDOA-MeasurementAssistDataList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  UP-OTDOA-MeasurementAssistData

UP-OTDOA-ReferenceCell ::=
  primaryCPICH-Info
  frequencyInfo
  cellPosition
SEQUENCE {
  PrimaryCPICH-Info,
  FrequencyInfo OPTIONAL,
  ReferenceCellPosition OPTIONAL
}

UP-Position ::=
  referenceSFN
  gps-TOW
  positionEstimate
SEQUENCE {
  ReferenceSFN,
  GPS-TOW-lusec,
  PositionEstimate
}

```

```

UP-ReportCriteria ::=
  up-ReportingCriteria
  periodicalReportingCriteria
  noReporting
}
CHOICE {
  UP-EventParamList,
  PeriodicalReportingCriteria,
  NULL
}

UP-ReportingQuantity ::=
  methodType
  positioningMethod
  responseTime
  accuracy
  gps-TimingOfCellWanted
  multipleSets
  environmentCharacterisation
}
SEQUENCE {
  UP-MethodType,
  PositioningMethod,
  UP-ResponseTime,
  UP-Accuracy
  BOOLEAN,
  BOOLEAN,
  EnvironmentCharacterisation
}
OPTIONAL,
OPTIONAL

UP-ResponseTime ::=
  ENUMERATED {
    s1, s2, s4, s8, s16,
    s32, s64, s128 }

UTRA-CarrierRSSI ::=
  INTEGER (-95..-30)

UTRAN-ReferenceTime ::=
  gps-TOW
  sfn
}
SEQUENCE {
  GPS-TOW-lusec,
  INTEGER (0..4095)
}

VarianceOfRLC-BufferPayload ::=
  ENUMERATED {
    plv0, plv4, plv8, plv16, plv32, plv64,
    plv128, plv256, plv512, plv1024,
    plv2k, plv4k, plv8k, plv16k }

-- Actual value = IE value * 0.1
W ::=
  INTEGER (0..20)

-- *****
--
-- OTHER INFORMATION ELEMENTS (10.3.8)
--
-- *****

BCC ::=
  INTEGER (0..7)

BCCH-ModificationInfo ::=
  mib-ValueTag
  bcch-ModificationTime
}
SEQUENCE {
  MIB-ValueTag,
  BCCH-ModificationTime
}
OPTIONAL

-- Actual value = IE value * 8
BCCH-ModificationTime ::=
  INTEGER (0..511)

BSIC ::=
  ncc
  bcc
}
SEQUENCE {
  NCC,
  BCC
}

CBS-DRX-LevellInformation ::=
  ctch-AllocationPeriod
  cbs-FrameOffset
}
SEQUENCE {
  INTEGER (1..256),
  INTEGER (0..255)
}

CDMA2000-Message ::=
  msg-Type
  payload
}
SEQUENCE {
  BIT STRING (SIZE (8)),
  BIT STRING (SIZE (1..512))
}

CDMA2000-MessageList ::=
  SEQUENCE (SIZE (1..maxInterSysMessages)) OF
  CDMA2000-Message

CDMA2000-UMTS-Frequency-List ::=
  SEQUENCE (SIZE (1..maxNumCDMA2000Freqs)) OF
  FrequencyInfoCDMA2000

CellValueTag ::=
  INTEGER (1..4)

--Actual value = 2^(IE value)
ExpirationTimerFactor ::=
  INTEGER (1..8)

FDD-UMTS-Frequency-List ::=
  SEQUENCE (SIZE (1..maxNumFDDFreqs)) OF
  FrequencyInfoFDD

```

```

FrequencyInfoCDMA2000 ::= SEQUENCE {
    band-Class      BIT STRING (SIZE (5)),
    cdma-Freq       BIT STRING (SIZE(11))
}

GSM-BA-Range ::= SEQUENCE {
    gsmLowRangeUARFCN  UARFCN,
    gsmUpRangeUARFCN   UARFCN
}

GSM-BA-Range-List ::= SEQUENCE (SIZE (1..maxNumGSMFreqRanges)) OF
    GSM-BA-Range

GSM-Classmark2 ::= OCTET STRING (SIZE (5))

GSM-Classmark3 ::= OCTET STRING

GSM-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    BIT STRING (SIZE (1..512))

IdentificationOfReveivedMessage ::= SEQUENCE {
    rrc-TransactionIdentifier  RRC-TransactionIdentifier,
    receivedMessageType        ReceivedMessageType
}

InterRAT-ChangeFailureCause ::= CHOICE {
    configurationUnacceptable  NULL,
    physicalChannelFailure     NULL,
    protocolError              ProtocolErrorInformation,
    unspecified                NULL,
    spare1                     NULL,
    spare2                     NULL,
    spare3                     NULL
}

InterRAT-UE-RadioAccessCapability ::= CHOICE {
    gsm SEQUENCE {
        gsm-Classmark2  GSM-Classmark2,
        gsm-Classmark3  GSM-Classmark3
    },
    cdma2000 SEQUENCE {
        cdma2000-MessageList  CDMA2000-MessageList
    }
}

InterRAT-UE-RadioAccessCapabilityList ::= SEQUENCE (SIZE(1..maxInterSysMessages)) OF
    InterRAT-UE-RadioAccessCapability

InterRAT-HO-Failure ::= SEQUENCE {
    interRAT-HO-FailureCause  InterRAT-HO-FailureCause  OPTIONAL,
    interRATMessage           InterRATMessage           OPTIONAL
}

InterRAT-HO-FailureCause ::= CHOICE {
    configurationUnacceptable  NULL,
    physicalChannelFailure     NULL,
    protocolError              ProtocolErrorInformation,
    interRAT-ProtocolError     NULL,
    unspecified                NULL,
    spare1                     NULL,
    spare2                     NULL,
    spare3                     NULL,
    spare4                     NULL
}

InterRATMessage ::= CHOICE {
    gsm SEQUENCE {
        gsm-MessageList  GSM-MessageList
    },
    cdma2000 SEQUENCE {
        cdma2000-MessageList  CDMA2000-MessageList
    }
}

InterRATMessageList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    InterRATMessage

MasterInformationBlock ::= SEQUENCE {
    mib-ValueTag  MIB-ValueTag,
    plmn-Type     PLMN-Type,
    -- TABULAR: The PLMN identity and ANSI-41 core network information
    -- are included in PLMN-Type.
}

```

```

        sibSb-ReferenceList          SIBSb-ReferenceList,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {}                                OPTIONAL
    }

MIB-ValueTag ::=                    INTEGER (1..8)

NCC ::=                              INTEGER (0..7)

PLMN-ValueTag ::=                   INTEGER (1..256)

PredefinedConfigIdentityAndValueTag ::= SEQUENCE {
    predefinedConfigIdentity          PredefinedConfigIdentity,
    predefinedConfigValueTag          PredefinedConfigValueTag    OPTIONAL
}

ProtocolErrorInformation ::=         SEQUENCE {
    diagnosticsType                   CHOICE {
        type1                          SEQUENCE {
            protocolErrorCause          ProtocolErrorCause
        },
        spare                            NULL
    }
}

ReceivedMessageType ::=              ENUMERATED {
    activeSetUpdate,
    cellUpdateConfirm,
    counterCheck,
    downlinkDirectTransfer,
    interRATHandoverCommand,
    measurementControl,
    pagingType2,
    physicalChannelReconfiguration,
    physicalSharedChannelAllocation,
    radioBearerReconfiguration,
    radioBearerRelease,
    radioBearerSetup,
    rrcConnectionRelease,
    rrcConnectionReject,
    rrcConnectionSetup,
    securityModeCommand,
    signallingConnectionRelease,
    transportChannelReconfiguration,
    transportFormatCombinationControl,
    ueCapabilityEnquiry,
    ueCapabilityInformationConfirm,
    uplinkPhysicalChannelControl,
    uraUpdateConfirm,
    utranMobilityInformation,
    spare1, spare2, spare3, spare4,
    spare5, spare6, spare7
}

Rplmn-Information ::=               SEQUENCE {
    gsm-BA-Range-List                 GSM-BA-Range-List    OPTIONAL,
    fdd-UMTS-Frequency-List           FDD-UMTS-Frequency-List
    OPTIONAL,
    tdd-UMTS-Frequency-List           FDD-UMTS-Frequency-List
    OPTIONAL,
    cdma2000-UMTS-Frequency-List      CDMA2000-UMTS-Frequency-
List    OPTIONAL
}

Rplmn-Information-r4 ::=            SEQUENCE {
    gsm-BA-Range-List                 GSM-BA-Range-List    OPTIONAL,
    fdd-UMTS-Frequency-List           FDD-UMTS-Frequency-List    OPTIONAL,
    tdd384-UMTS-Frequency-List        TDD-UMTS-Frequency-List    OPTIONAL,
    tdd128-UMTS-Frequency-List        TDD-UMTS-Frequency-List    OPTIONAL,
    cdma2000-UMTS-Frequency-List      CDMA2000-UMTS-Frequency-List    OPTIONAL
}

SchedulingInformation ::=           SEQUENCE {
    scheduling                          SEQUENCE {
        segCount                        SegCount                DEFAULT 1,
        sib-Pos                          CHOICE {
            -- The element name indicates the repetition period and the value
            -- (multiplied by two) indicates the position of the first segment.
            rep4                          INTEGER (0..1),
            rep8                          INTEGER (0..3),
            rep16                         INTEGER (0..7),
        }
    }
}

```

```

        rep32                INTEGER (0..15),
        rep64                INTEGER (0..31),
        rep128               INTEGER (0..63),
        rep256               INTEGER (0..127),
        rep512               INTEGER (0..255),
        rep1024              INTEGER (0..511),
        rep2048              INTEGER (0..1023),
        rep4096              INTEGER (0..2047)
    },
    sib-PosOffsetInfo        SibOFF-List                OPTIONAL
}
}

SchedulingInformationSIB ::=
    sib-Type
    scheduling
}

SchedulingInformationSIBSb ::=
    sibSb-Type
    scheduling
}

SegCount ::=
    INTEGER (1..16)

SegmentIndex ::=
    INTEGER (1..15)

-- Actual value = 2 * IE value
SFN-Prime ::=
    INTEGER (0..2047)

SIB-Data-fixed ::=
    BIT STRING (SIZE (222))

SIB-Data-variable ::=
    BIT STRING (SIZE (1..214))

SIB-ReferenceList ::=
    SEQUENCE (SIZE (1..maxSIB)) OF
        SchedulingInformationSIB

SIBSb-ReferenceList ::=
    SEQUENCE (SIZE (1..maxSIB)) OF
        SchedulingInformationSIBSb

SIB-ReferenceListFACH ::=
    SEQUENCE (SIZE (1..maxSIB-FACH)) OF
        SchedulingInformationSIB

SIB-Type ::=
    ENUMERATED {
        masterInformationBlock,
        systemInformationBlockType1,
        systemInformationBlockType2,
        systemInformationBlockType3,
        systemInformationBlockType4,
        systemInformationBlockType5,
        systemInformationBlockType6,
        systemInformationBlockType7,
        systemInformationBlockType8,
        systemInformationBlockType9,
        systemInformationBlockType10,
        systemInformationBlockType11,
        systemInformationBlockType12,
        systemInformationBlockType13,
        systemInformationBlockType13-1,
        systemInformationBlockType13-2,
        systemInformationBlockType13-3,
        systemInformationBlockType13-4,
        systemInformationBlockType14,
        systemInformationBlockType15,
        systemInformationBlockType15-1,
        systemInformationBlockType15-2,
        systemInformationBlockType15-3,
        systemInformationBlockType16,
        systemInformationBlockType17,
        spare1, spare2, spare3, spare4,
        spare5, spare6, spare7 }

SIB-TypeAndTag ::=
    sysInfoType1
    sysInfoType2
    sysInfoType3
    sysInfoType4
    sysInfoType5
    sysInfoType6
    CHOICE {
        PLMN-ValueTag,
        PLMN-ValueTag,
        CellValueTag,
        CellValueTag,
        CellValueTag,
        CellValueTag
    }

```

```

sysInfoType7          NULL,
sysInfoType8          CellValueTag,
sysInfoType9          NULL,
sysInfoType10         NULL,
sysInfoType11         CellValueTag,
sysInfoType12         CellValueTag,
sysInfoType13         CellValueTag,
sysInfoType13-1       CellValueTag,
sysInfoType13-2       CellValueTag,
sysInfoType13-3       CellValueTag,
sysInfoType13-4       CellValueTag,
sysInfoType14         NULL,
sysInfoType15         CellValueTag,
sysInfoType16         PredefinedConfigIdentityAndValueTag,
sysInfoType17         NULL
}

SIBSb-TypeAndTag ::= CHOICE {
  sysInfoType1        PLMN-ValueTag,
  sysInfoType2        PLMN-ValueTag,
  sysInfoType3        CellValueTag,
  sysInfoType4        CellValueTag,
  sysInfoType5        CellValueTag,
  sysInfoType6        CellValueTag,
  sysInfoType7        NULL,
  sysInfoType8        CellValueTag,
  sysInfoType9        NULL,
  sysInfoType10       NULL,
  sysInfoType11       CellValueTag,
  sysInfoType12       CellValueTag,
  sysInfoType13       CellValueTag,
  sysInfoType13-1     CellValueTag,
  sysInfoType13-2     CellValueTag,
  sysInfoType13-3     CellValueTag,
  sysInfoType13-4     CellValueTag,
  sysInfoType14       NULL,
  sysInfoType15       CellValueTag,
  sysInfoType16       PredefinedConfigIdentityAndValueTag,
  sysInfoType17       NULL,
  sysInfoTypeSB1      CellValueTag,
  sysInfoTypeSB2      CellValueTag
}

SibOFF ::= ENUMERATED {
  so2, so4, so6, so8, so10,
  so12, so14, so16, so18,
  so20, so22, so24, so26,
  so28, so30, so32 }

SibOFF-List ::= SEQUENCE (SIZE (1..15)) OF
  SibOFF

SysInfoType1 ::= SEQUENCE {
  -- Core network IEs
  cn-CommonGSM-MAP-NAS-SysInfo  NAS-SystemInformationGSM-MAP,
  cn-DomainSysInfoList          CN-DomainSysInfoList,
  -- User equipment IEs
  ue-ConnTimersAndConstants      UE-ConnTimersAndConstants,
  ue-IdleTimersAndConstants      UE-IdleTimersAndConstants,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} _____ OPTIONAL
}

SysInfoType2 ::= SEQUENCE {
  -- UTRAN mobility IEs
  ura-IdentityList              URA-IdentityList,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} _____ OPTIONAL
}

SysInfoType3 ::= SEQUENCE {
  sib4indicator                 BOOLEAN,
  -- UTRAN mobility IEs
  cellIdentity                  CellIdentity,
  cellSelectReselectInfo        CellSelectReselectInfoSIB-3-4,
  cellAccessRestriction         CellAccessRestriction,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} _____ OPTIONAL
}

SysInfoType4 ::= SEQUENCE {
  -- UTRAN mobility IEs

```

```

cellIdentity                CellIdentity,
cellSelectReselectInfo      CellSelectReselectInfoSIB-3-4,
cellAccessRestriction       CellAccessRestriction,
-- Extension mechanism for non- release99 information
nonCriticalExtensions        SEQUENCE {} _____ OPTIONAL
}

SysInfoType5 ::=
    SEQUENCE {
        sib6indicator         BOOLEAN,
        -- Physical channel IEs
        pich-PowerOffset       PICH-PowerOffset,
        modeSpecificInfo       CHOICE {
            fdd                 SEQUENCE {
                aich-PowerOffset AICH-PowerOffset
            },
            tdd                 SEQUENCE {
                -- If PDSCH/PUSCH is configured for 1.28Mcps TDD, the following IEs should be absent
                -- and the info included in the tdd128SpecificInfo instead.
                pusch-SysInfoList-SFN PUSCH-SysInfoList-SFN OPTIONAL,
                pdsch-SysInfoList-SFN PDSCH-SysInfoList-SFN OPTIONAL,
                midambleConfiguration MidambleConfiguration OPTIONAL,
                openLoopPowerControl-TDD OpenLoopPowerControl-TDD
            }
        },
        primaryCCPCH-Info      PrimaryCCPCH-Info OPTIONAL,
        prach-SystemInformationList PRACH-SystemInformationList,
        sCCPCH-SystemInformationList SCCPCH-SystemInformationList,
        cbs-DRX-Level1Information CBS-DRX-Level1Information OPTIONAL,
        -- Conditional on any of the CTCH indicator IEs in
        -- sCCPCH-SystemInformationList
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions   SEQUENCE {
            tdd128SpecificInfo SEQUENCE {
                pusch-SysInfoList-SFN LCR PUSCH-SysInfoList-SFN-LCR OPTIONAL,
                pdsch-SysInfoList-SFN LCR PDSCH-SysInfoList-SFN-LCR OPTIONAL,
                pCCPCH-LCR-Extensions PCCPCH-LCR-Extensions OPTIONAL,
                sCCPCH-LCR-ExtensionsList SCCPCH-LCR-ExtensionsList,
                nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
            }
        }
    }
}

SysInfoType6 ::=
    SEQUENCE {
        -- Physical channel IEs
        pich-PowerOffset       PICH-PowerOffset,
        modeSpecificInfo       CHOICE {
            fdd                 SEQUENCE {
                aich-PowerOffset AICH-PowerOffset,
                csich-PowerOffset CSICH-PowerOffset OPTIONAL
            },
            tdd                 SEQUENCE {
                -- If PDSCH/PUSCH is configured for 1.28Mcps TDD, the following IEs should be absent
                -- and the info included in the tdd128SpecificInfo instead.
                pusch-SysInfoList-SFN PUSCH-SysInfoList-SFN OPTIONAL,
                pdsch-SysInfoList-SFN PDSCH-SysInfoList-SFN OPTIONAL,
                midambleConfiguration MidambleConfiguration OPTIONAL,
                openLoopPowerControl-TDD OpenLoopPowerControl-TDD
            }
        },
        primaryCCPCH-Info      PrimaryCCPCH-Info OPTIONAL,
        prach-SystemInformationList PRACH-SystemInformationList OPTIONAL,
        sCCPCH-SystemInformationList SCCPCH-SystemInformationList OPTIONAL,
        cbs-DRX-Level1Information CBS-DRX-Level1Information OPTIONAL,
        -- Conditional on any of the CTCH indicator IEs in
        -- sCCPCH-SystemInformationList
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions   SEQUENCE {
            tdd128SpecificInfo SEQUENCE {
                pusch-SysInfoList-SFN LCR PUSCH-SysInfoList-SFN-LCR OPTIONAL,
                pdsch-SysInfoList-SFN LCR PDSCH-SysInfoList-SFN-LCR OPTIONAL,
                pCCPCH-LCR-Extensions PCCPCH-LCR-Extensions OPTIONAL,
                sCCPCH-LCR-ExtensionsList SCCPCH-LCR-ExtensionsList OPTIONAL,
                nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
            }
        }
    }
}

SysInfoType7 ::=
    SEQUENCE {
        -- Physical channel IEs
        modeSpecificInfo       CHOICE {
            fdd                 SEQUENCE {
                ul-Interference UL-Interference
            }
        }
    }
}

```



```

        },
        tdd
    },
    prach-Information-SIB5-List      DynamicPersistenceLevelList,
    prach-Information-SIB6-List      DynamicPersistenceLevelList      OPTIONAL,
    expirationTimeFactor            ExpirationTimerFactor          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions            SEQUENCE {} _____ OPTIONAL
}

SysInfoType8 ::=
    SEQUENCE {
        -- User equipment IEs
        cpch-Parameters              CPCH-Parameters,
        -- Physical channel IEs
        cpch-SetInfoList             CPCH-SetInfoList,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {} _____ OPTIONAL
    }

SysInfoType9 ::=
    SEQUENCE {
        -- Physical channel IEs
        cpch-PersistenceLevelsList   CPCH-PersistenceLevelsList,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {} _____ OPTIONAL
    }

SysInfoType10 ::=
    SEQUENCE {
        -- User equipment IEs
        drac-SysInfoList             DRAC-SysInfoList,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {} _____ OPTIONAL
    }

SysInfoType11 ::=
    SEQUENCE {
        sib12indicator              BOOLEAN,
        -- Measurement IEs
        fach-MeasurementOccasionInfo FACH-MeasurementOccasionInfo    OPTIONAL,
        measurementControlSysInfo    MeasurementControlSysInfo,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {
            measurementControlSysInfo-LCR MeasurementControlSysInfo-LCR
            nonCriticalExtensions      SEQUENCE {} _____ OPTIONAL
        } _____ OPTIONAL
    }

SysInfoType12 ::=
    SEQUENCE {
        -- Measurement IEs
        fach-MeasurementOccasionInfo FACH-MeasurementOccasionInfo    OPTIONAL,
        measurementControlSysInfo    MeasurementControlSysInfo,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {
            measurementControlSysInfo-LCR MeasurementControlSysInfo-LCR
            nonCriticalExtensions      SEQUENCE {} _____ OPTIONAL
        } _____ OPTIONAL
    }

SysInfoType13 ::=
    SEQUENCE {
        -- Core network IEs
        cn-DomainSysInfoList         CN-DomainSysInfoList,
        -- User equipment IEs
        ue-IdleTimersAndConstants     UE-IdleTimersAndConstants    OPTIONAL,
        capabilityUpdateRequirement   CapabilityUpdateRequirement  OPTIONAL,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {} _____ OPTIONAL
    }

SysInfoType13-1 ::=
    SEQUENCE {
        -- ANSI-41 IEs
        ansi-41-RAND-Information      ANSI-41-RAND-Information,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {} _____ OPTIONAL
    }

SysInfoType13-2 ::=
    SEQUENCE {
        -- ANSI-41 IEs
        ansi-41-UserZoneID-Information ANSI-41-UserZoneID-Information,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions        SEQUENCE {} _____ OPTIONAL
    }

SysInfoType13-3 ::=
    SEQUENCE {

```

```

-- ANSI-41 IEs
ansi-41-PrivateNeighbourListInfo ANSI-41-PrivateNeighbourListInfo,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType13-4 ::= SEQUENCE {
-- ANSI-41 IEs
ansi-41-GlobalServiceRedirectInfo
ANSI-41-GlobalServiceRedirectInfo,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType14 ::= SEQUENCE {
-- Physical channel IEs
individualTS-InterferenceList IndividualTS-InterferenceList,
expirationTimeFactor ExpirationTimerFactor OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType15 ::= SEQUENCE {
-- Measurement IEs
up-GPS-Assistance UP-Cipher-GPS-Data-Indicator OPTIONAL,
up-OTDOA-Assistance UP-OTDOA-AssistanceSIB OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType15-1 ::= SEQUENCE {
-- DGPS corrections
up-DGPS-SIB-Data UP-DGPS-SIB-Data
}

SysInfoType15-2 ::= SEQUENCE {
-- Ephemeris and clock corrections
up-Ephe-SIB-Data UP-Ephe-SIB-Data
}

SysInfoType15-3 ::= SEQUENCE {
-- Almanac and other data
transmissionTOW INTEGER (0..1048575),
satMask BIT STRING (SIZE (1..32)),
lsbTOW BIT STRING (SIZE (8)),
up-Alma-SIB-DataList UP-Alma-SIB-DataList
}

SysInfoType16 ::= SEQUENCE {
-- Radio bearer IEs
preDefinedRadioConfiguration PreDefRadioConfiguration,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType17 ::= SEQUENCE {
-- Physical channel IEs
-- If PDSCH/PUSCH is configured for 1.28Mcps TDD, the following IEs should be absent
-- and the info included in the tdd128SpecificInfo instead.
pusch-SysInfoList PUSCH-SysInfoList OPTIONAL,
pdsch-SysInfoList PDSCH-SysInfoList OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {
tdd128SpecificInfo SEQUENCE {
pusch-SysInfoList PUSCH-SysInfoList-LCR OPTIONAL,
pdsch-SysInfoList PDSCH-SysInfoList-LCR OPTIONAL,
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}
} _____ OPTIONAL
}

SysInfoTypeSB1 ::= SEQUENCE {
-- Other IEs
sib-ReferenceList SIB-ReferenceList OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoTypeSB2 ::= SEQUENCE {
-- Other IEs
sib-ReferenceList SIB-ReferenceList OPTIONAL,

```

```

-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}
TDD-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumTDDFreqs)) OF
FrequencyInfoTDD

-- *****
--
-- ANSI-41 INFORMATION ELEMENTS (10.3.9)
--
-- *****

ANSI-41-GlobalServiceRedirectInfo ::= ANSI-41-NAS-Parameter
ANSI-41-PrivateNeighbourListInfo ::= ANSI-41-NAS-Parameter
ANSI-41-RAND-Information ::= ANSI-41-NAS-Parameter
ANSI-41-UserZoneID-Information ::= ANSI-41-NAS-Parameter
ANSI-41-NAS-Parameter ::= BIT STRING (SIZE (1..2048))

Min-P-REV ::= BIT STRING (SIZE (8))

NAS-SystemInformationANSI-41 ::= ANSI-41-NAS-Parameter
NID ::= BIT STRING (SIZE (16))

P-REV ::= BIT STRING (SIZE (8))

SID ::= BIT STRING (SIZE (15))

END

```

## 11.4 Constant definitions

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```

hiPDSCHidentities INTEGER ::= 64
hiPUSCHidentities INTEGER ::= 64
hiRM INTEGER ::= 256
maxAC INTEGER ::= 16
maxAdditionalMeas INTEGER ::= 4
maxASC INTEGER ::= 8
maxASCmap INTEGER ::= 7
maxASCpersist INTEGER ::= 6
maxCCTrCH INTEGER ::= 8
maxCellMeas INTEGER ::= 32
maxCellMeas-1 INTEGER ::= 31
maxCNdomains INTEGER ::= 4
maxCPCHsets INTEGER ::= 16
maxDPCH-DLchan INTEGER ::= 8
maxDPCHcodesPerTS INTEGER ::= 16
-- **TODO**
maxDPDCH-UL INTEGER ::= 6
maxDRACclasses INTEGER ::= 8
-- **TODO**
maxFACH INTEGER ::= 8
maxFreq INTEGER ::= 8
maxFrequencybands INTEGER ::= 4
maxInterSysMessages INTEGER ::= 4
maxLoCHperRLC INTEGER ::= 2
maxMeasEvent INTEGER ::= 8
maxMeasIntervals INTEGER ::= 3
maxMeasParEvent INTEGER ::= 2
maxNumCDMA2000Freqs INTEGER ::= 8
maxNumGSMFreqRanges INTEGER ::= 32
maxNumFDDFreqs INTEGER ::= 8
maxNumTDDFreqs INTEGER ::= 8
maxNoOfMeas INTEGER ::= 16
maxOtherRAT INTEGER ::= 15
maxPage1 INTEGER ::= 8
maxPCPCH-APsig INTEGER ::= 16
maxPCPCH-APsubCh INTEGER ::= 12
maxPCPCH-CDsig INTEGER ::= 16
maxPCPCH-CDsubCh INTEGER ::= 12
maxPCPCH-SF INTEGER ::= 7
maxPCPCHs INTEGER ::= 64
maxPDCPAlgoType INTEGER ::= 8
maxPDSCH INTEGER ::= 8
maxPDSCH-TFCIgroups INTEGER ::= 256
maxPRACH INTEGER ::= 16
maxPredefConfig INTEGER ::= 16
maxPUSCH INTEGER ::= 8
maxRABsetup INTEGER ::= 16

```

```

maxRAT                INTEGER ::= 16
maxRB                 INTEGER ::= 32
maxRBallRABs         INTEGER ::= 27
maxRBMuxOptions       INTEGER ::= 8
maxRBperRAB          INTEGER ::= 8
maxReportedGSMCells  INTEGER ::= 6
maxRL                 INTEGER ::= 8
maxRL-1               INTEGER ::= 7
maxSat                INTEGER ::= 16
maxSCCPCH             INTEGER ::= 16
maxSIB                INTEGER ::= 32
-- **TODO**
maxSIB-FACH           INTEGER ::= 8
maxSIBperMsg          INTEGER ::= 16
maxSig                INTEGER ::= 16
maxSRBsetup           INTEGER ::= 8
maxSubCh              INTEGER ::= 12
maxSystemCapability  INTEGER ::= 16
maxTF                 INTEGER ::= 32
maxTF-CPCH            INTEGER ::= 16
maxTFC                INTEGER ::= 1024
maxTFCI-2-Combs      INTEGER ::= 512
maxTGPS               INTEGER ::= 6
maxTrCH               INTEGER ::= 32
maxTrCHpreconf       INTEGER ::= 16
maxTS                 INTEGER ::= 14
maxTS-1               INTEGER ::= 13
maxTS-LCR              INTEGER ::= 6
maxTS-LCR-1           INTEGER ::= 5
maxURA                INTEGER ::= 8

```

END

## 11.5 RRC information between network nodes

Internode-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS

```

    HandoverToUTRANCommand-r3,
    MeasurementReport,
    PhysicalChannelReconfiguration-r3,
    RadioBearerReconfiguration-r3,
    RadioBearerRelease-r3,
    RadioBearerSetup-r3,
    TransportChannelReconfiguration-r3,
    UECapabilityInformation

```

FROM PDU-definitions

```

-- Core Network IEs :
    CN-DomainInformationList,
    NAS-SystemInformationGSM-MAP,
-- UTRAN Mobility IEs :
    CellIdentity,
    URA-Identity,
-- User Equipment IEs :
    C-RNTI,
    RRC-MessageSequenceNumber,
    START-Value,
    STARTList,
    U-RNTI,
    UE-RadioAccessCapability,
-- Radio Bearer IEs :
    PDCP-InfoReconfig,
    PredefinedConfigValueTag,
    RAB-InformationSetupList,
    RB-Identity,
    RB-MappingInfo,
    RLC-Info,
    RLC-SequenceNumber,
    SRB-InformationSetupList,
-- Transport Channel IEs :
    CPCH-SetID,
    DL-CommonTransChInfo,
    DL-AddReconfTransChInfoList,
    DRAC-StaticInformationList,
    UL-CommonTransChInfo,
    UL-AddReconfTransChInfoList,
-- Measurement IEs :
    MeasurementIdentity,

```

```

    MeasurementReportingMode,
    MeasurementType,
    MeasurementType-r4,
    AdditionalMeasurementID-List,
-- Other IEs :
    InterRATMessage
FROM InformationElements

    maxNoOfMeas,
    maxPredefConfig,
    maxRABsetup,
    maxRB,
    maxSRBsetup,
    maxTrCH
FROM Constant-definitions;

-- RRC information transferred between network nodes,
-- per group of information transfers having same endpoint
-- Alike class definitions for RRC PDUs

-- *****
--
-- RRC information, to target RNC
--
-- *****

-- *****
--
-- RRC information, target RNC to source RNC
--
-- *****

T-RNC-ToSRNC-Container ::= SEQUENCE {
    message          T-RNC-ToSRNC-ContainerType
}

T-RNC-ToSRNC-ContainerType ::= CHOICE {
    radioBearerSetup          RadioBearerSetup-r3,
    radioBearerReconfiguration RadioBearerReconfiguration-r3,
    radioBearerRelease       RadioBearerRelease-r3,
    transportChannelReconfiguration TransportChannelReconfiguration-r3,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
    extension                 NULL
}

-- *****
--
-- RRC information, target RNC to source RAT
--
-- *****

-- Container definitions, alike PDU definitions
-- RRC Container definition, to target RNC

-- *****
--
-- SRNC Relocation information
--
-- *****

SRNC-RelocationInfo ::= SEQUENCE {
-- Non-RRC IEs
    stateOfRRC          StateOfRRC,
    stateOfRRC-Procedure StateOfRRC-Procedure,
    cipheringStatus     CipheringStatus,
    calculationTimeForCiphering CalculationTimeForCiphering OPTIONAL,
    cipheringInfoPerRB-List CipheringInfoPerRB-List OPTIONAL,
    integrityProtectionStatus IntegrityProtectionStatus,
    srb-SpecificIntegrityProtInfoList SRB-SpecificIntegrityProtInfoList,
    implementationSpecificParams ImplementationSpecificParams OPTIONAL,
-- User equipment IEs
    u-RNTI              U-RNTI,
    c-RNTI              C-RNTI OPTIONAL,
    ue-RadioAccessCapability UE-RadioAccessCapability,
-- Other IEs
    interRATMessage     InterRATMessage OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity        URA-Identity OPTIONAL,
-- Core network IEs
    cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP,
    cn-DomainInformationList CN-DomainInformationList OPTIONAL,

```

```

-- Measurement IEs
  ongoingMeasRepList          OngoingMeasRepList          OPTIONAL,
-- Radio bearer IEs
  preConfigStatusInfo        PreConfigStatusInfo,
  srb-InformationList         SRB-InformationSetupList,
  rab-InformationList         RAB-InformationSetupList         OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo       UL-CommonTransChInfo         OPTIONAL,
  ul-TransChInfoList         UL-AddReconfTransChInfoList   OPTIONAL,
  modeSpecificInfo           CHOICE {
    fdd                       SEQUENCE {
      cpch-SetID              CPCH-SetID              OPTIONAL,
      transChDRAC-Info       DRAC-StaticInformationList   OPTIONAL
    },
    tdd                       NULL
  },
  dl-CommonTransChInfo       DL-CommonTransChInfo         OPTIONAL,
  dl-TransChInfoList         DL-AddReconfTransChInfoList   OPTIONAL,
-- Measurement report
  measurementReport          MeasurementReport          OPTIONAL
}

```

```

SRNC-RelocationInfo-r4 ::= SEQUENCE {
-- Non-RRC IEs
  stateOfRRC                  StateOfRRC,
  stateOfRRC-Procedure        StateOfRRC-Procedure,
  cipheringStatus             CipheringStatus,
  calculationTimeForCiphering CalculationTimeForCiphering   OPTIONAL,
  cipheringInfoPerRB-List     CipheringInfoPerRB-List   OPTIONAL,
  integrityProtectionStatus    IntegrityProtectionStatus,
  srb-SpecificIntegrityProtInfo SRB-SpecificIntegrityProtInfoList,
  implementationSpecificParams ImplementationSpecificParams   OPTIONAL,
-- User equipment IEs
  u-RNTI                      U-RNTI,
  c-RNTI                      C-RNTI                      OPTIONAL,
  ue-RadioAccessCapability     UE-RadioAccessCapability,
-- Other IEs
  interRATMessage             InterRATMessage             OPTIONAL,
-- UTRAN mobility IEs
  ura-Identity                 URA-Identity                 OPTIONAL,
-- Core network IEs
  cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP,
  cn-DomainInformationList     CN-DomainInformationList     OPTIONAL,
-- Measurement IEs
  ongoingMeasRepList          OngoingMeasRepList-r4      OPTIONAL,
-- Radio bearer IEs
  preConfigStatusInfo        PreConfigStatusInfo,
  srb-InformationList         SRB-InformationSetupList,
  rab-InformationList         RAB-InformationSetupList         OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo       UL-CommonTransChInfo         OPTIONAL,
  ul-TransChInfoList         UL-AddReconfTransChInfoList   OPTIONAL,
  modeSpecificInfo           CHOICE {
    fdd                       SEQUENCE {
      cpch-SetID              CPCH-SetID              OPTIONAL,
      transChDRAC-Info       DRAC-StaticInformationList   OPTIONAL
    },
    tdd                       NULL
  },
  dl-CommonTransChInfo       DL-CommonTransChInfo         OPTIONAL,
  dl-TransChInfoList         DL-AddReconfTransChInfoList   OPTIONAL,
-- Measurement report
  measurementReport          MeasurementReport          OPTIONAL
}

```

```

-- RRC Container definition, target RNC to source RNC
-- Nothing new, only re-using RRC PDUs
--
-- RRC Container definition, target RNC to source system
-- Nothing new, re-using RRC PDUs (HandoverToUTRANCommand)

-- IE definitions

```

```

CalculationTimeForCiphering ::= SEQUENCE {
  cell-Id                     CellIdentity,
  sfn                         INTEGER (0..4095)
}

```

```

CipheringInfoPerRB ::= SEQUENCE {
  dl-START                    START-Value,
  ul-START                    START-Value
}

```

```

-- TABULAR: Multiplicity value numberOfRadioBearers has been replaced
-- with maxRB.
CipheringInfoPerRB-List ::=          SEQUENCE (SIZE (1..maxRB)) OF
                                       CipheringInfoPerRB

CipheringStatus ::=                  ENUMERATED {
                                       started, notStarted }

ImplementationSpecificParams ::=     BIT STRING (SIZE (1..512))

IntegrityProtectionStatus ::=       ENUMERATED {
                                       started, notStarted }

MeasurementCommandWithType ::=      CHOICE {
  setup                               MeasurementType,
  modify                              NULL,
  release                             NULL
}

MeasurementCommandWithType-r4 ::=   CHOICE {
  setup                               MeasurementType-r4,
  modify                              NULL,
  release                             NULL
}

OngoingMeasRep ::=                  SEQUENCE {
  measurementIdentity                 MeasurementIdentity,
  measurementCommandWithType          MeasurementCommandWithType,
  -- TABULAR: The CHOICE Measurement in the tabular description is included
  -- in the IE above.
  measurementReportingMode            MeasurementReportingMode          OPTIONAL,
  additionalMeasurementID-List        AdditionalMeasurementID-List      OPTIONAL
}

OngoingMeasRep-r4 ::=               SEQUENCE {
  measurementIdentity                 MeasurementIdentity,
  measurementCommandWithType          MeasurementCommandWithType-r4,
  -- TABULAR: The CHOICE Measurement in the tabular description is included
  -- in the IE above.
  measurementReportingMode            MeasurementReportingMode          OPTIONAL,
  additionalMeasurementID-List        AdditionalMeasurementID-List      OPTIONAL
}

OngoingMeasRepList ::=              SEQUENCE (SIZE (1..maxNoOfMeas)) OF
                                       OngoingMeasRep

OngoingMeasRepList-r4 ::=           SEQUENCE (SIZE (1..maxNoOfMeas)) OF
                                       OngoingMeasRep-r4

PreConfigStatusInfo ::=             SEQUENCE (SIZE (1..maxPredefConfig)) OF
                                       PredefinedConfigValueTag

SRB-SpecificIntegrityProtInfo ::=   SEQUENCE {
  rb-Identity                         RB-Identity                      OPTIONAL,
  ul-RRC-HFN                         BIT STRING (SIZE (28)),
  dl-RRC-HFN                         BIT STRING (SIZE (28)),
  ul-RRC-SequenceNumber              RRC-MessageSequenceNumber,
  dl-RRC-SequenceNumber              RRC-MessageSequenceNumber
}

SRB-SpecificIntegrityProtInfoList ::= SEQUENCE (SIZE (4..maxSRBsetup)) OF
                                       SRB-SpecificIntegrityProtInfo

StateOfRRC ::=                      ENUMERATED {
                                       cell-DCH, cell-FACH,
                                       cell-PCH, ura-PCH }

StateOfRRC-Procedure ::=            ENUMERATED {
                                       awaitNoRRC-Message,
                                       awaitRRC-ConnectionRe-establishmentComplete,
                                       awaitRB-SetupComplete,
                                       awaitRB-ReconfigurationComplete,
                                       awaitTransportCH-ReconfigurationComplete,
                                       awaitPhysicalCH-ReconfigurationComplete,
                                       awaitActiveSetUpdateComplete,
                                       awaitHandoverComplete,
                                       sendCellUpdateConfirm,
                                       sendUraUpdateConfirm,
                                       sendRrcConnectionReestablishment,
                                       otherStates }

```

END



## CHANGE REQUEST

⌘ **25.331** **CR 707** ⌘ rev **r2** ⌘ Current version: **3.5.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘	Changes to Measurement Related Signalling and Introduction of Cell (Re)selection Parameters for 1.28Mcps TDD		
<b>Source:</b>	⌘	TSG-RAN WG2		
<b>Work item code:</b>	⌘	LCRTDD-L23		<b>Date:</b> ⌘ 12 February, 2001
<b>Category:</b>	⌘	<b>B</b>		<b>Release:</b> ⌘ REL-4
		<i>Use <u>one</u> of the following categories:</i> <b>F</b> (essential correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (Addition of feature), <b>C</b> (Functional modification of feature) <b>D</b> (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		<i>Use <u>one</u> of the following releases:</i> <b>2</b> (GSM Phase 2) <b>R96</b> (Release 1996) <b>R97</b> (Release 1997) <b>R98</b> (Release 1998) <b>R99</b> (Release 1999) <b>REL-4</b> (Release 4) <b>REL-5</b> (Release 5)

<b>Reason for change:</b>	⌘	Addition of 1.28Mcps TDD option requires minor changes to measurement related signalling information elements and cell reselection parameters.		
<b>Summary of change:</b>	⌘	- Support of 1.28 Mcps TDD has been added in IEs "cell info", "FACH measurement occasion info", "mapping info", "UE internal reporting quantity", "UE internal measured results" and "Measured results on RACH".		
<b>Consequences if not approved:</b>	⌘			

<b>Clauses affected:</b>	⌘	10.3.2.5, 10.3.7.2, 10.3.7.8, 10.3.7.45, 10.3.7.76, 10.3.7.82, 10.3.7.x (new), 11		
<b>Other specs affected:</b>	⌘	<input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications		⌘
<b>Other comments:</b>	⌘			

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at:  
[http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.

- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 10.3.2.5 Mapping Info

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
Mapping List	MP	1 to <MaxRAT>			
>RAT	MP		Enumerated (UTRA FDD, UTRA TDD <u>3.84 Mcps</u> , UTRA TDD 1.28 Mcps, GSM, cdma2000)		<u>UTRA TDD 1.28 Mcps is included for REL-4.</u>
>Mapping Function Parameter List	MP	1 to <maxMeasIntervals>			
>> Function type	MP		Enumerated (linear, function type 2, function type 3, function type 4)	Type of the function within the interval.	
>>Map_parameter_1	MD		Integer (0..99)	Parameter describing the mapping function between the quality measurement and the representing quality value, see TS 25.304. Default value is zero for the first interval or otherwise the value of Map_parameter_2 of the interval before.	
>>Map_parameter_2	MP		Integer (0..99)	Parameter describing the mapping function between the quality measurement and the representing quality value, see TS 25.304.	

>>Upper_limit	CV - MaxInt		Integer (1..MaxMeas)	Upper limit of interval for which the Map_parameter_1 and Map_parameter_2 are valid. MaxMeas = 25 if RAT = UTRA FDD / CPICH Ec/N0, MaxMeas = 91 if RAT = UTRA TDD <u>3.84 Mcps</u> or if RAT = <u>UTRA TDD 1.28 Mcps</u> or if RAT = UTRA FDD/CPICH RSCP, MaxMeas = 63 if RAT = GSM.	
---------------	-------------	--	-------------------------	---	--

Condition	Explanation
<i>MaxInt</i>	This information is only sent if Mapping Function Parameter List has not reached maxMeasIntervals.

### 10.3.7.2 Cell info

Includes non-frequency related cell info used in the IE "inter-frequency cell info list" and "intra frequency cell info list".

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Cell individual offset	MD		Real(-10..10 by step of 0.5)	In dB Default value is 0 dB Used to offset measured quantity value	
Reference time difference to cell	OP		Reference time difference to cell 10.3.7.60	In chips. This IE is absent for serving cell.	
CHOICE <i>mode</i>	MP				
>FDD					
>>Primary CPICH info	OP		Primary CPICH info 10.3.6.60	This IE is absent only if measuring RSSI only (broadband measurement.)	
>>Primary CPICH Tx power	OP		Primary CPICH Tx power 10.3.6.61	Required if calculating pathloss.	
>>Read SFN indicator	MP		Boolean	TRUE indicates that read of SFN is requested for the target cell	
>>TX Diversity Indicator	MP		Boolean		
>TDD					
>>Primary CCPCH info	MP		Primary CCPCH info 10.3.6.57		
>>Primary CCPCH TX power	OP		Primary CCPCH TX power 10.3.6.59		
>> Timeslot list	OP	1 to <maxTS >		The UE shall report Timeslot ISCP values according the order of the listed Timeslot numbers	
>>>CHOICE TDD option	MP				REL-4
>>>>3.84 Mcps TDD					REL-4
>>>>>Timeslot number	MP		Integer (0...14)	Timeslot numbers, for which the UE shall report Timeslot ISCP	
>>>>>Burst Type	MD		Enumerated (Type1, Type2)	Use for Timeslot ISCP measurements only. Default value is "Type1"	
>>>>>1.28Mcps TDD					REL-4
>>>>>>Timeslot number	MP		Integer (1...6)	Timeslot numbers, for which the UE shall report Timeslot ISCP	REL-4
Cell Selection and Re-selection Info	CV-BCHopt		Cell Selection and Re-selection for SIB11/12 info 10.3.2.4	Only when sent in system information. This IE is absent for serving cell. For neighbouring cell, if HCS is not used and all the parameters in cell selection and re-selection info are default value, this IE is absent.	

10.3.7.8 FACH measurement occasion info

This IE is for FDD only.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
FACH Measurement occasion cycle length coefficient	OP		Integer(1..12)		
Inter-frequency FDD measurement indicator	MP		Boolean	TRUE means that measurements are required	
Inter-frequency TDD <u>3.84 Mcps</u> measurement indicator	MP		Boolean	TRUE means that measurements are required	
<u>Inter-frequency TDD 1.28 Mcps</u> measurement indicator	MP		<u>Boolean</u>	<u>TRUE means that measurements are required</u>	<u>REL-4</u>
Inter-RAT measurement indicators	OP	1 to <maxOther RAT>			
>RAT type	MP		Enumerated (GSM, IS2000)		

### 10.3.7.45 Measured results on RACH

Contains the measured results on RACH of the quantity indicated optionally by Reporting Quantity in the system information broadcast on BCH. The list should be in the order of the value of the measurement quality (the first cell should be the best cell). The "best" FDD cell has the largest value when the measurement quantity is "Ec/No" or "RSCP". On the other hand, the "best" cell has the smallest value when the measurement quantity is "Pathloss". The "best" TDD cell has the largest value when measurement quantity is "Primary CCPCH RSCP".

Information Element/group name	Need	Multi	Type and reference	Semantics description	Version
Measurement result for current cell					
CHOICE mode	MP				
>FDD					
>>CHOICE measurement quantity	MP				
>>>CPICH Ec/N0			Integer(-20..0)	In dB	
>>>CPICH RSCP			Integer(-115..-40)	In dBm	
>>>Pathloss			Integer(46..158)	In dB	
>TDD					
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Timeslot List	OP	1 to 14			
>>>>>Timeslot ISCP	MP		Timeslot ISCP info 10.3.7.65	The UE shall report the Timeslot ISCP in the same order as indicated in the cell info	
>>>1.28 Mcps TDD					REL-4
>>>>Timeslot List	OP	1 to 6			REL-4
>>>>>Timeslot ISCP	MP		Timeslot ISCP info 10.3.7.65	The UE shall report the Timeslot ISCP in the same order as indicated in the cell info	REL-4
>>Primary CCPCH RSCP	OP		Primary CCPCH RSCP info 10.3.7.54		
Measurement results for monitored cells	OP	1 to 7			
>SFN-SFN observed time difference	OP		SFN-SFN observed time difference 10.3.7.63	It is absent for current cell	
>CHOICE mode	MP				
>>FDD					
>>>Primary CPICH info	MP		Primary CPICH info 10.3.6.60		
>>>CHOICE measurement quantity	OP			It is absent for current cell	
>>>>CPICH Ec/N0			Integer(-20..0)	In dB	
>>>>CPICH RSCP			Integer(-115..-40)	In dBm	
>>>>Pathloss			Integer(46..158)	In dB	
>>TDD					
>>>Cell parameters Id	MP		Cell parameters Id 10.3.6.9		
>>>Primary CCPCH RSCP	MP		Primary CCPCH RSCP info 10.3.7.54		

NOTE 1: Monitored cells consist of current cell and neighbouring cells.



10.3.7.76 UE internal measured results

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE <i>mode</i>	MP				
>FDD					
>>UE Transmitted Power	OP		UE transmitted power info 10.3.7.85		
>>UE Rx-Tx report entries	OP	1 to <maxRL >			
>>>Primary CPICH info	MP		Primary CPICH info 10.3.6.60	Primary CPICH info for each cell included in the active set	
>>>UE Rx-Tx time difference type 1	MP		UE Rx-Tx time difference type 1 10.3.7.83	UE Rx-Tx time difference in chip for each RL included in the active set	
>TDD					
>>UE transmitted Power list	OP	1 to <maxTS >		UE transmitted power for each used uplink timeslot in ascending timeslot number order	
>>>UE transmitted power	MP		UE transmitted power info 10.3.7.85		
>>CHOICE TDD option	MP				REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Applied TA	OP		Uplink Timing Advance 10.3.6.95		
>>>1.28 Mcps TDD					REL-4
>>>> UpPCHADV	OP		UpPCHADV 10.3.7.x		REL-4

10.3.7.82 UE Internal reporting quantity

For all boolean types TRUE means inclusion in the report is requested.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
UE Transmitted Power	MP		Boolean		
CHOICE <i>mode</i>	MP				
>FDD					
>>UE Rx-Tx time difference	MP		Boolean		
>TDD					
>>CHOICE TDD option					REL-4
>>>3.84 Mcps TDD				(no data)	REL-4
>>>>Applied TA	MP		Boolean		
>>>1.28 Mcps TDD					REL-4
>>>> UpPCHADV	MP		Boolean		REL-4

10.3.7.x UpPCH<sub>ADV</sub>

NOTE: Only for 1.28Mcps TDD.

UpPCH<sub>ADV</sub> indicates the difference between the Rx timing and initial Tx timing of a UE.

<u>Information Element/group name</u>	<u>Need</u>	<u>Multi</u>	<u>Type and reference</u>	<u>Semantics description</u>	<u>Version</u>
<u>UpPCH<sub>ADV</sub></u>	<u>MP</u>		<u>Integer (0..352)</u>	<u>In chips</u>	<u>REL-4</u>

# 11 Message and Information element abstract syntax (with ASN.1)

This clause contains definitions for RRC PDUs and IEs using a subset of ASN.1 as specified in TR 25.921. PDU and IE definitions are grouped into separate ASN.1 modules.

## 11.1 General message structure

```
Class-definitions DEFINITIONS AUTOMATIC TAGS ::=
```

```
BEGIN
```

```
IMPORTS
```

```

ActiveSetUpdate-r3,
ActiveSetUpdateComplete,
ActiveSetUpdateFailure,
AssistanceDataDelivery-r3,
CellChangeOrderFromUTRAN-r3,
CellChangeFailureFromUTRAN,
CellUpdate,
CellUpdateConfirm-CCCH-r3,
CellUpdateConfirm-r3,
CounterCheck-r3,
CounterCheckResponse,
DownlinkDirectTransfer-r3,
HandoverToUTRANComplete,
InitialDirectTransfer,
HandoverFromUTRANCommand-GSM-r3,
HandoverFromUTRANCommand-CDMA2000-r3,
HandoverFromUTRANFailure,
MeasurementControl-r3,
MeasurementControl-r4,
MeasurementControlFailure,
MeasurementReport,
MeasurementReport-r4,
PagingType1,
PagingType2,
PhysicalChannelReconfiguration-r3,
PhysicalChannelReconfigurationComplete,
PhysicalChannelReconfigurationFailure,
PhysicalSharedChannelAllocation-r3,
PUSCHCapacityRequest,
RadioBearerReconfiguration-r3,
RadioBearerReconfigurationComplete,
RadioBearerReconfigurationFailure,
RadioBearerRelease-r3,
RadioBearerReleaseComplete,
RadioBearerReleaseFailure,
RadioBearerSetup-r3,
RadioBearerSetupComplete,
RadioBearerSetupFailure,
RRCConnectionReject-r3,
RRCConnectionRelease-r3,
RRCConnectionRelease-CCCH-r3,
RRCConnectionReleaseComplete,
RRCConnectionRequest,
RRCConnectionSetup-r3,
RRCConnectionSetupComplete,
RRCStatus,
SecurityModeCommand-r3,
SecurityModeComplete,
SecurityModeFailure,
SignallingConnectionRelease-r3,
SignallingConnectionReleaseRequest,
SystemInformation-BCH,
SystemInformation-FACH,
SystemInformationChangeIndication,
TransportChannelReconfiguration-r3,
TransportChannelReconfigurationComplete,
TransportChannelReconfigurationFailure,
TransportFormatCombinationControl,
TransportFormatCombinationControlFailure,
UECapabilityEnquiry-r3,
UECapabilityInformation,

```

```

UECapabilityInformationConfirm-r3,
UplinkDirectTransfer,
UplinkPhysicalChannelControl-r3,
URAUpdate,
URAUpdateConfirm-r3,
URAUpdateConfirm-CCCH-r3,
UTRANMobilityInformation,
UTRANMobilityInformationConfirm,
UTRANMobilityInformationFailure
FROM PDU-definitions

```

```

-- User Equipment IEs :
   IntegrityCheckInfo
FROM InformationElements;

```

```

--*****
--
-- Downlink DCCH messages
--
--*****

```

```

DL-DCCH-Message ::= SEQUENCE {
   integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
   message                 DL-DCCH-MessageType
}

```

```

DL-DCCH-MessageType ::= CHOICE {
   activeSetUpdate           ActiveSetUpdate-r3,
   assistanceDataDelivery   AssistanceDataDelivery-r3,
   cellChangeOrderFromUTRAN CellChangeOrderFromUTRAN-r3,
   cellUpdateConfirm        CellUpdateConfirm-r3,
   counterCheck             CounterCheck-r3,
   downlinkDirectTransfer   DownlinkDirectTransfer-r3,
   handoverFromUTRANCommand-GSM HandoverFromUTRANCommand-GSM-r3,
   handoverFromUTRANCommand-CDMA2000 HandoverFromUTRANCommand-CDMA2000-r3,
   measurementControl       MeasurementControl-r3,
   pagingType2              PagingType2,
   physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
   physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
   radioBearerReconfiguration RadioBearerReconfiguration-r3,
   radioBearerRelease       RadioBearerRelease-r3,
   radioBearerSetup         RadioBearerSetup-r3,
   rrcConnectionRelease     RRCConnectionRelease-r3,
   securityModeCommand      SecurityModeCommand-r3,
   signallingConnectionRelease SignallingConnectionRelease-r3,
   transportChannelReconfiguration TransportChannelReconfiguration-r3,
   transportFormatCombinationControl TransportFormatCombinationControl,
   ueCapabilityEnquiry      UECapabilityEnquiry-r3,
   ueCapabilityInformationConfirm UECapabilityInformationConfirm-r3,
   uplinkPhysicalChannelControl UplinkPhysicalChannelControl-r3,
   uraUpdateConfirm         URAUpdateConfirm-r3,
   utranMobilityInformation UTRANMobilityInformation,
   extension                 NULL
}

```

```

DL-DCCH-MessageType-r4 ::= CHOICE {
   activeSetUpdate           ActiveSetUpdate-r3,
   assistanceDataDelivery   AssistanceDataDelivery-r3,
   cellChangeOrderFromUTRAN CellChangeOrderFromUTRAN-r3,
   cellUpdateConfirm        CellUpdateConfirm-r3,
   counterCheck             CounterCheck-r3,
   downlinkDirectTransfer   DownlinkDirectTransfer-r3,
   handoverFromUTRANCommand-GSM HandoverFromUTRANCommand-GSM-r3,
   handoverFromUTRANCommand-CDMA2000 HandoverFromUTRANCommand-CDMA2000-r3,
   measurementControl       MeasurementControl-r4,
   pagingType2              PagingType2,
   physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
   physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
   radioBearerReconfiguration RadioBearerReconfiguration-r3,
   radioBearerRelease       RadioBearerRelease-r3,
   radioBearerSetup         RadioBearerSetup-r3,
   rrcConnectionRelease     RRCConnectionRelease-r3,
   securityModeCommand      SecurityModeCommand-r3,
   signallingConnectionRelease SignallingConnectionRelease-r3,
   transportChannelReconfiguration TransportChannelReconfiguration-r3,
   transportFormatCombinationControl TransportFormatCombinationControl,
   ueCapabilityEnquiry      UECapabilityEnquiry-r3,
   ueCapabilityInformationConfirm UECapabilityInformationConfirm-r3,
   uplinkPhysicalChannelControl UplinkPhysicalChannelControl-r3,
   uraUpdateConfirm         URAUpdateConfirm-r3,
   utranMobilityInformation UTRANMobilityInformation,
   extension                 NULL
}

```

```

--*****
--
-- Uplink DCCH messages
--
--*****

UL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  UL-DCCH-MessageType
}

UL-DCCH-MessageType ::= CHOICE {
    activeSetUpdateComplete      ActiveSetUpdateComplete,
    activeSetUpdateFailure      ActiveSetUpdateFailure,
    cellChangeFailureFromUTRAN  CellChangeFailureFromUTRAN,
    counterCheckResponse        CounterCheckResponse,
    handoverToUTRANComplete     HandoverToUTRANComplete,
    initialDirectTransfer       InitialDirectTransfer,
    handoverFromUTRANFailure    HandoverFromUTRANFailure,
    measurementControlFailure   MeasurementControlFailure,
    measurementReport           MeasurementReport,
    physicalChannelReconfigurationComplete
                                PhysicalChannelReconfigurationComplete,
    physicalChannelReconfigurationFailure
                                PhysicalChannelReconfigurationFailure,
    radioBearerReconfigurationComplete
                                RadioBearerReconfigurationComplete,
    radioBearerReconfigurationFailure
                                RadioBearerReconfigurationFailure,
    radioBearerReleaseComplete  RadioBearerReleaseComplete,
    radioBearerReleaseFailure   RadioBearerReleaseFailure,
    radioBearerSetupComplete    RadioBearerSetupComplete,
    radioBearerSetupFailure     RadioBearerSetupFailure,
    rrcConnectionReleaseComplete
                                RRCConnectionReleaseComplete,
    rrcConnectionSetupComplete  RRCConnectionSetupComplete,
    rrcStatus                    RRCStatus,
    securityModeComplete        SecurityModeComplete,
    securityModeFailure         SecurityModeFailure,
    signallingConnectionReleaseRequest
                                SignallingConnectionReleaseRequest,
    transportChannelReconfigurationComplete
                                TransportChannelReconfigurationComplete,
    transportChannelReconfigurationFailure
                                TransportChannelReconfigurationFailure,
    transportFormatCombinationControlFailure
                                TransportFormatCombinationControlFailure,
    ueCapabilityInformation      UECapabilityInformation,
    uplinkDirectTransfer        UplinkDirectTransfer,
    utranMobilityInformationConfirm
                                UTRANMobilityInformationConfirm,
    utranMobilityInformationFailure
                                UTRANMobilityInformationFailure,
    extension                    NULL
}

UL-DCCH-MessageType-r4 ::= CHOICE {
activeSetUpdateComplete      ActiveSetUpdateComplete,
activeSetUpdateFailure      ActiveSetUpdateFailure,
cellChangeFailureFromUTRAN  CellChangeFailureFromUTRAN,
counterCheckResponse        CounterCheckResponse,
handoverToUTRANComplete     HandoverToUTRANComplete,
initialDirectTransfer       InitialDirectTransfer,
handoverFromUTRANFailure    HandoverFromUTRANFailure,
measurementControlFailure   MeasurementControlFailure,
measurementReport           MeasurementReport-r4,
physicalChannelReconfigurationComplete
                                PhysicalChannelReconfigurationComplete,
physicalChannelReconfigurationFailure
                                PhysicalChannelReconfigurationFailure,
radioBearerReconfigurationComplete
                                RadioBearerReconfigurationComplete,
radioBearerReconfigurationFailure
                                RadioBearerReconfigurationFailure,
radioBearerReleaseComplete  RadioBearerReleaseComplete,
radioBearerReleaseFailure   RadioBearerReleaseFailure,
radioBearerSetupComplete    RadioBearerSetupComplete,
radioBearerSetupFailure     RadioBearerSetupFailure,
rrcConnectionReleaseComplete
                                RRCConnectionReleaseComplete,
rrcConnectionSetupComplete  RRCConnectionSetupComplete,
rrcStatus                    RRCStatus,
securityModeComplete        SecurityModeComplete,
securityModeFailure         SecurityModeFailure,
signallingConnectionReleaseRequest
                                SignallingConnectionReleaseRequest,
transportChannelReconfigurationComplete
                                TransportChannelReconfigurationComplete,
transportChannelReconfigurationFailure
                                TransportChannelReconfigurationFailure,
transportFormatCombinationControlFailure
                                TransportFormatCombinationControlFailure,

```

ueCapabilityInformation	UECapabilityInformation,
uplinkDirectTransfer	UplinkDirectTransfer,
utranMobilityInformationConfirm	UTRANMobilityInformationConfirm,
utranMobilityInformationFailure	UTRANMobilityInformationFailure,
extension	NULL

}

```

--*****
--

```

```

-- Downlink CCCH messages
--

```

```

--*****

```

```

DL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  DL-CCCH-MessageType
}

```

```

DL-CCCH-MessageType ::= CHOICE {
    cellUpdateConfirm          CellUpdateConfirm-CCCH-r3,
    rrcConnectionReject       RRCConnectionReject-r3,
    rrcConnectionRelease      RRCConnectionRelease-CCCH-r3,
    rrcConnectionSetup        RRCConnectionSetup-r3,
    uraUpdateConfirm          URAUpdateConfirm-CCCH-r3,
    extension                  NULL
}

```

```

--*****
--

```

```

-- Uplink CCCH messages
--

```

```

--*****

```

```

UL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  UL-CCCH-MessageType
}

```

```

UL-CCCH-MessageType ::= CHOICE {
    cellUpdate                CellUpdate,
    rrcConnectionRequest     RRCConnectionRequest,
    uraUpdate                 URAUpdate,
    extension                  NULL
}

```

```

--*****
--

```

```

-- PCCH messages
--

```

```

--*****

```

```

PCCH-Message ::= SEQUENCE {
    message                  PCCH-MessageType
}

```

```

PCCH-MessageType ::= CHOICE {
    pagingType1              PagingType1,
    extension                 NULL
}

```

```

--*****
--

```

```

-- Downlink SHCCH messages
--

```

```

--*****

```

```

DL-SHCCH-Message ::= SEQUENCE {
    message                  DL-SHCCH-MessageType
}

```

```

DL-SHCCH-MessageType ::= CHOICE {
    physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
    extension                  NULL
}

```

```

--*****
--

```

```

-- Uplink SHCCH messages
--

```

```

--*****

```

```

UL-SHCCH-Message ::= SEQUENCE {
    message          UL-SHCCH-MessageType
}

UL-SHCCH-MessageType ::= CHOICE {
    puschCapacityRequest    PUSCHCapacityRequest,
    extension                NULL
}

--*****
--
-- BCCH messages sent on FACH
--
--*****

BCCH-FACH-Message ::= SEQUENCE {
    message          BCCH-FACH-MessageType
}

BCCH-FACH-MessageType ::= CHOICE {
    systemInformation          SystemInformation-FACH,
    systemInformationChangeIndication  SystemInformationChangeIndication,
    extension                NULL
}

--*****
--
-- BCCH messages sent on BCH
--
--*****

BCCH-BCH-Message ::= SEQUENCE {
    message          SystemInformation-BCH
}

END

```

## 11.2 PDU definitions

```

--*****
--
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--
--*****

PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--*****
--
-- IE parameter types from other modules
--
--*****

IMPORTS

-- Core Network IEs :
    CN-DomainIdentity,
    CN-InformationInfo,
    NAS-Message,
    PagingRecordTypeID,
-- UTRAN Mobility IEs :
    URA-Identity,
-- User Equipment IEs :
    ActivationTime,
    C-RNTI,
    CapabilityUpdateRequirement,
    CellUpdateCause,
    CipheringAlgorithm,
    CipheringModeInfo,
    EstablishmentCause,
    FailureCauseWithProtErr,
    FailureCauseWithProtErrTrId,
    InitialUE-Identity,
    IntegrityProtActivationInfo,
    IntegrityProtectionModeInfo,

```

```

N-308,
PagingCause,
PagingRecordList,
ProtocolErrorIndicator,
ProtocolErrorIndicatorWithMoreInfo,
Rb-timer-indicator,
Re-EstablishmentTimer,
RedirectionInfo,
RejectionCause,
ReleaseCause,
RRC-StateIndicator,
RRC-TransactionIdentifier,
SecurityCapability,
START-Value,
STARTList,
U-RNTI,
U-RNTI-Short,
UE-RadioAccessCapability,
UE-ConnTimersAndConstants,
URA-UpdateCause,
UTRAN-DRX-CycleLengthCoefficient,
WaitTime,
-- Radio Bearer IEs :
  PredefinedConfigIdentity,
  RAB-Info,
  RAB-Info-Post,
  RAB-InformationList,
  RAB-InformationReconfigList,
  RAB-InformationSetupList,
  RB-ActivationTimeInfo,
  RB-ActivationTimeInfoList,
  RB-COUNT-C-InformationList,
  RB-COUNT-C-MSB-InformationList,
  RB-IdentityList,
  RB-InformationAffectedList,
  RB-InformationReconfigList,
  RB-InformationReleaseList,
  RB-InformationSetupList,
  RB-WithPDCP-InfoList,
  SRB-InformationSetupList,
  SRB-InformationSetupList2,
-- Transport Channel IEs:
  CPCH-SetID,
  DL-AddReconfTransChInfo2List,
  DL-AddReconfTransChInfoList,
  DL-CommonTransChInfo,
  DL-DeletedTransChInfoList,
  DRAC-StaticInformationList,
  TFC-Subset,
  TFCS-Identity,
  UL-AddReconfTransChInfoList,
  UL-CommonTransChInfo,
  UL-DeletedTransChInfoList,
-- Physical Channel IEs :
  AllocationPeriodInfo,
  Alpha,
  CTrCH-PowerControlInfo,
  ConstantValue,
  CPCH-SetInfo,
  DL-CommonInformation,
  DL-CommonInformationPost,
  DL-InformationPerRL,
  DL-InformationPerRL-List,
  DL-InformationPerRL-ListPostFDD,
  DL-InformationPerRL-PostTDD,
  DL-DPCH-PowerControlInfo,
  DL-PDSCH-Information,
  DPCH-CompressedModeStatusInfo,
  FrequencyInfo,
  FrequencyInfoFDD,
  FrequencyInfoTDD,
  IndividualTS-InterferenceList,
  MaxAllowedUL-TX-Power,
  PDSCH-CapacityAllocationInfo,
  PDSCH-Identity,
  PDSCH-Info,
  PRACH-RACH-Info,
  PrimaryCCPCH-TX-Power,
  PUSCH-CapacityAllocationInfo,
  PUSCH-Identity,
  RL-AdditionInformationList,
  RL-RemovalInformationList,
  SSdT-Information,

```



```

TFC-ControlDuration,
TimeslotList,
TX-DiversityMode,
UL-ChannelRequirement,
UL-ChannelRequirementWithCPCH-SetID,
UL-DPCH-Info,
UL-DPCH-InfoPostFDD,
UL-DPCH-InfoPostTDD,
UL-TimingAdvance,
UL-TimingAdvanceControl,
-- Measurement IEs :
AdditionalMeasurementID-List,
EventResults,
InterRAT-TargetCellDescription,
MeasuredResults,
MeasuredResultsList,
MeasuredResultsOnRACH,
MeasurementCommand,
MeasurementIdentity,
MeasurementReportingMode,
PrimaryCCPCH-RSCP,
TimeslotListWithISCP,
TrafficVolumeMeasuredResultsList,
UP-GPS-AssistanceData,
UP-OTDOA-AssistanceData,
-- Other IEs :
BCCH-ModificationInfo,
CDMA2000-MessageList,
GSM-MessageList,
InterRAT-ChangeFailureCause,
InterRAT-HO-Failure,
InterRAT-UE-RadioAccessCapabilityList,
InterRATMessage,
IntraDomainNasNodeSelector,
ProtocolErrorInformation,
ProtocolErrorMoreInformation,
Rplmn-Information,
SegCount,
SegmentIndex,
SFN-Prime,
SIB-Data-fixed,
SIB-Data-variable,
SIB-Type
FROM InformationElements

maxSIBperMsg,
maxSystemCapability
FROM Constant-definitions;

-- *****
--
-- ACTIVE SET UPDATE (FDD only)
--
-- *****

ActiveSetUpdate-r3 ::= CHOICE {
    r3
        activeSetUpdate-r3          SEQUENCE {
            nonCriticalExtensions    SEQUENCE {} OPTIONAL
        },
        criticalExtensions          SEQUENCE {}
}

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    integrityProtectionModeInfo      IntegrityProtectionModeInfo    OPTIONAL,
    cipheringModeInfo                CipheringModeInfo                  OPTIONAL,
    activationTime                    ActivationTime                      OPTIONAL,
    newU-RNTI                         U-RNTI                          OPTIONAL,
    -- Core network IEs
    cn-InformationInfo                CN-InformationInfo              OPTIONAL,
    -- Radio bearer IEs
    rb-WithPDCP-InfoList              RB-WithPDCP-InfoList            OPTIONAL,
    -- Physical channel IEs
    maxAllowedUL-TX-Power              MaxAllowedUL-TX-Power            OPTIONAL,
    r1-AdditionInformationList         RL-AdditionInformationList       OPTIONAL,
    r1-RemovalInformationList          RL-RemovalInformationList        OPTIONAL,
    tx-DiversityMode                  TX-DiversityMode                 OPTIONAL,
    ssdt-Information                  SSDT-Information                 OPTIONAL
}

-- *****

```

```

--
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- *****
ActiveSetUpdateComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo      OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList      OPTIONAL,
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}
--
-- *****
-- ACTIVE SET UPDATE FAILURE (FDD only)
--
-- *****
ActiveSetUpdateFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}
--
-- *****
-- Assistance Data Delivery
--
-- *****
AssistanceDataDelivery-r3 ::= CHOICE {
  r3                             SEQUENCE {
    assistanceDataDelivery-r3    AssistanceDataDelivery-r3-IEs,
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}
AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
  --Assistance Data Information Elements
  up-GPS-AssistanceData         UP-GPS-AssistanceData          OPTIONAL,
  up-OTDOA-AssistanceData       UP-OTDOA-AssistanceData        OPTIONAL
}
--
-- *****
-- CELL CHANGE ORDER FROM UTRAN
--
-- *****
CellChangeOrderFromUTRAN-r3 ::= CHOICE {
  r3                             SEQUENCE {
    cellChangeOrderFromUTRAN-IEs CellChangeOrderFromUTRAN-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}
CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  integrityProtectionModeInfo    IntegrityProtectionModeInfo      OPTIONAL,
  activationTime                 ActivationTime                       OPTIONAL,
  rab-InformationList            RAB-InformationList              OPTIONAL,
  interRAT-TargetCellDescription InterRAT-TargetCellDescription
}
--
-- *****
-- CELL CHANGE FAILURE FROM UTRAN
--
-- *****
CellChangeFailureFromUTRAN ::= CHOICE {
  r3                             SEQUENCE {
    r3-IEs                       CellChangeFailureFromUTRAN-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  }
}

```

```

    },
    criticalExtensions          SEQUENCE {}
}

CellChangeFailureFromUTRAN-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
    interRAT-ChangeFailureCause    InterRAT-ChangeFailureCause
}

-- *****
--
-- CELL UPDATE
--
-- *****

CellUpdate ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI                        U-RNTI,
    startList                      STARTList,
    am-RLC-ErrorIndicationC-plane  BOOLEAN,
    am-RLC-ErrorIndicationU-plane  BOOLEAN,
    cellUpdateCause                CellUpdateCause,
    failureCause                   FailureCauseWithProtErrTrId    OPTIONAL,
    -- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
    rb-timer-indicator             Rb-timer-indicator,
    -- Measurement IEs
    measuredResultsOnRACH          MeasuredResultsOnRACH    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- CELL UPDATE CONFIRM
--
-- *****

CellUpdateConfirm-r3 ::= CHOICE {
    r3
        cellUpdateConfirm-r3      SEQUENCE {
            CellUpdateConfirm-r3-IEs,
            nonCriticalExtensions  SEQUENCE {} OPTIONAL
        },
    criticalExtensions          SEQUENCE {}
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
    cipheringModeInfo              CipheringModeInfo              OPTIONAL,
    activationTime                  ActivationTime                  OPTIONAL,
    new-U-RNTI                     U-RNTI                        OPTIONAL,
    new-C-RNTI                     C-RNTI                        OPTIONAL,
    rrc-StateIndicator              RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    rlc-ResetIndicatorC-Plane       BOOLEAN,
    rlc-ResetIndicatorU-Plane       BOOLEAN,
    -- CN information elements
    cn-InformationInfo              CN-InformationInfo            OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                    URA-Identity                  OPTIONAL,
    -- Radio bearer IEs
    rb-InformationReleaseList       RB-InformationReleaseList     OPTIONAL,
    rb-InformationReconfigList      RB-InformationReconfigList    OPTIONAL,
    rb-InformationAffectedList      RB-InformationAffectedList    OPTIONAL,
    rb-WithPDCP-InfoList           RB-WithPDCP-InfoList         OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo            UL-CommonTransChInfo          OPTIONAL,
    ul-deletedTransChInfoList       UL-DeletedTransChInfoList     OPTIONAL,
    ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList   OPTIONAL,
    modeSpecificTransChInfo         CHOICE {
        fdd
            cpch-SetID              CPCH-SetID                    OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList  OPTIONAL
        },
        tdd                          NULL
    },
    dl-CommonTransChInfo            DL-CommonTransChInfo          OPTIONAL,
    dl-DeletedTransChInfoList       DL-DeletedTransChInfoList     OPTIONAL,
    dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList   OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                   FrequencyInfo                  OPTIONAL,

```

```

maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
ul-ChannelRequirement          UL-ChannelRequirement    OPTIONAL,
modeSpecificPhysChInfo        CHOICE {
  fdd                          SEQUENCE {
    dl-PDSCH-Information        DL-PDSCH-Information    OPTIONAL
  },
  tdd                          NULL
},
dl-CommonInformation          DL-CommonInformation    OPTIONAL,
dl-InformationPerRL-List      DL-InformationPerRL-List  OPTIONAL
}

-- *****
--
-- CELL UPDATE CONFIRM for CCCH
--
-- *****

CellUpdateConfirm-CCCH-r3 ::= CHOICE {
  r3                          SEQUENCE {
    -- User equipment IES
    u-RNTI                    U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    cellUpdateConfirm-r3      CellUpdateConfirm-r3-IEs,
    nonCriticalExtensions      SEQUENCE {} OPTIONAL
  },
  criticalExtensions          SEQUENCE {}
}

-- *****
--
-- COUNTER CHECK
--
-- *****

CounterCheck-r3 ::= CHOICE {
  r3                          SEQUENCE {
    counterCheck-r3           CounterCheck-r3-IEs,
    nonCriticalExtensions      SEQUENCE {} OPTIONAL
  },
  criticalExtensions          SEQUENCE {}
}

CounterCheck-r3-IEs ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  -- Radio bearer IES
  rb-COUNT-C-MSB-InformationList  RB-COUNT-C-MSB-InformationList
}

-- *****
--
-- COUNTER CHECK RESPONSE
--
-- *****

CounterCheckResponse ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  -- Radio bearer IES
  rb-COUNT-C-InformationList    RB-COUNT-C-InformationList    OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions        SEQUENCE {} OPTIONAL
}

-- *****
--
-- DOWNLINK DIRECT TRANSFER
--
-- *****

DownlinkDirectTransfer-r3 ::= CHOICE {
  r3                          SEQUENCE {
    downlinkDirectTransfer-r3  DownlinkDirectTransfer-r3-IEs,
    nonCriticalExtensions      SEQUENCE {} OPTIONAL
  },
  criticalExtensions          SEQUENCE {}
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
  -- User equipment IES

```

```

    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
-- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity,
    nas-Message                    NAS-Message
}

-- *****
--
-- HANDBOVER TO UTRAN COMMAND
--
-- *****

HandoverToUTRANCommand-r3 ::= CHOICE {
    r3                             SEQUENCE {
        handoverToUTRANCommand-r3 HandoverToUTRANCommand-r3-IEs,
        nonCriticalExtensions       SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    new-U-RNTI                     U-RNTI-Short,
    activationTime                  ActivationTime                OPTIONAL,
    cipheringAlgorithm              CipheringAlgorithm            OPTIONAL,
-- Radio bearer IEs
    rab-Info                        RAB-Info-Post,
-- Specification mode information
    specificationMode               CHOICE {
        complete                    SEQUENCE {
            srb-InformationSetupList SRB-InformationSetupList,
            rab-InformationSetupList  RAB-InformationSetupList    OPTIONAL,
            ul-CommonTransChInfo     UL-CommonTransChInfo,
            ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
            dl-CommonTransChInfo     DL-CommonTransChInfo,
            dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
            ul-DPCH-Info              UL-DPCH-Info,
            modeSpecificInfo          CHOICE {
                fdd                  SEQUENCE {
                    dl-PDSCH-Information DL-PDSCH-Information OPTIONAL,
                    cpch-SetInfo        CPCH-SetInfo            OPTIONAL
                },
                tdd                  NULL
            },
            dl-CommonInformation      DL-CommonInformation,
            dl-InformationPerRL-List  DL-InformationPerRL-List,
            frequencyInfo              FrequencyInfo
        },
        preconfiguration              SEQUENCE {
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
            predefinedConfigIdentity  PredefinedConfigIdentity,
            rab-Info                  RAB-Info-Post            OPTIONAL,
            modeSpecificInfo           CHOICE {
                fdd                  SEQUENCE {
                    ul-DPCH-Info      UL-DPCH-InfoPostFDD,
                    dl-CommonInformationPost DL-CommonInformationPost,
                    dl-InformationPerRL-List DL-InformationPerRL-ListPostFDD,
                    frequencyInfo      FrequencyInfoFDD
                },
                tdd                  SEQUENCE {
                    ul-DPCH-Info      UL-DPCH-InfoPostTDD,
                    dl-InformationPerRL DL-InformationPerRL-PostTDD,
                    frequencyInfo      FrequencyInfoTDD,
                    primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
                }
            }
        }
    },
-- Physical channel IEs
    maxAllowedUL-TX-Power            MaxAllowedUL-TX-Power
}

-- *****
--
-- HANDBOVER TO UTRAN COMPLETE
--
-- *****

```

```

HandoverToUTRANComplete ::= SEQUENCE {
  --TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  -- TABULAR: the IE below is conditional on history.
  startList          STARTList          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {}     OPTIONAL
}

-- *****
--
-- INITIAL DIRECT TRANSFER
--
-- *****

InitialDirectTransfer ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity          CN-DomainIdentity,
  intraDomainNasNodeSelector IntraDomainNasNodeSelector,
  nas-Message                NAS-Message,
  -- Measurement IEs
  measuredResultsOnRACH      MeasuredResultsOnRACH OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions      SEQUENCE {}     OPTIONAL
}

-- *****
--
-- HANDOVER FROM UTRAN COMMAND
--
-- *****

HandoverFromUTRANCommand-GSM-r3 ::= CHOICE {
  r3 SEQUENCE {
    handoverFromUTRANCommand-GSM-r3
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

HandoverFromUTRANCommand-GSM-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  activationTime            ActivationTime          OPTIONAL,
  -- Radio bearer IEs
  remainingRAB-Info        RAB-Info              OPTIONAL,
  -- Other IEs
  message-and-extension    CHOICE {
    gsm-Message             SEQUENCE {},
    -- In this case, what follows the basic production is a variable length bit string
    -- with no length field, containing the GSM message including GSM padding up to end
    -- of container, to be analysed according to GSM specifications
    with-extension         SEQUENCE {
      messages              GSM-MessageList
    }
  }
}

HandoverFromUTRANCommand-CDMA2000-r3 ::= CHOICE {
  r3 SEQUENCE {
    handoverFromUTRANCommand-CDMA2000-r3
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  activationTime            ActivationTime          OPTIONAL,
  -- Radio bearer IEs
  remainingRAB-Info        RAB-Info              OPTIONAL,
  -- Other IEs
  cdma2000-MessageList     CDMA2000-MessageList
}

-- *****
--
-- HANDOVER FROM UTRAN FAILURE
--
-- *****

```

```

-- *****
HandoverFromUTRANFailure ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
-- Other IEs
  interRAT-HO-Failure           InterRAT-HO-Failure           OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- MEASUREMENT CONTROL
--
-- *****

MeasurementControl-r3 ::= CHOICE {
  r3                             SEQUENCE {
    measurementControl-r3        MeasurementControl-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}                  OPTIONAL
  },
  criticalExtensions             SEQUENCE {}
}

MeasurementControl-r4 ::= CHOICE {
  r3                             SEQUENCE {
    measurementControl-r3        MeasurementControl-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}                  OPTIONAL
  },
  criticalExtensions             CHOICE {
    r4                           SEQUENCE {
      measurementControl-r4      MeasurementControl-r4-IEs,
      nonCriticalExtensions      SEQUENCE {}                  OPTIONAL
    },
    criticalExtensions           SEQUENCE {}
  }
}

MeasurementControl-r3-IEs ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
-- Measurement IEs
  measurementIdentity           MeasurementIdentity,
  measurementCommand            MeasurementCommand,
-- TABULAR: The measurement type is included in MeasurementCommand.
  measurementReportingMode      MeasurementReportingMode      OPTIONAL,
  additionalMeasurementList      AdditionalMeasurementID-List  OPTIONAL,
-- Physical channel IEs
  dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo  OPTIONAL
}

MeasurementControl-r4-IEs ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
-- Measurement IEs
  measurementIdentity           MeasurementIdentity,
  measurementCommand            MeasurementCommand-r4,
-- TABULAR: The measurement type is included in MeasurementCommand.
  measurementReportingMode      MeasurementReportingMode      OPTIONAL,
  additionalMeasurementList      AdditionalMeasurementID-List  OPTIONAL,
-- Physical channel IEs
  dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo  OPTIONAL
}

-- *****
--
-- MEASUREMENT CONTROL FAILURE
--
-- *****

MeasurementControlFailure ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- MEASUREMENT REPORT

```

```

--
-- *****
MeasurementReport ::= SEQUENCE {
  -- Measurement IEs
  measurementIdentity      MeasurementIdentity,
  measuredResults           MeasuredResults           OPTIONAL,
  measuredResultsOnRACH    MeasuredResultsOnRACH     OPTIONAL,
  additionalMeasuredResults MeasuredResultsList      OPTIONAL,
  eventResults             EventResults              OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {}              OPTIONAL
}

MeasurementReport-r4 ::= SEQUENCE {
  -- Measurement IEs
  measurementIdentity      MeasurementIdentity,
  measuredResults           MeasuredResults           OPTIONAL,
  measuredResultsOnRACH    MeasuredResultsOnRACH     OPTIONAL,
  additionalMeasuredResults MeasuredResultsList      OPTIONAL,
  eventResults             EventResults              OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {}              OPTIONAL
  additionalMeasuredResults-LCR MeasuredResultsList-LCR OPTIONAL,
  nonCriticalExtensions    SEQUENCE {}              OPTIONAL
}

-- *****
--
-- PAGING TYPE 1
--
-- *****

PagingType1 ::= SEQUENCE {
  -- User equipment IEs
  pagingRecordList        PagingRecordList          OPTIONAL,
  -- Other IEs
  bcch-ModificationInfo  BCCH-ModificationInfo     OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {}              OPTIONAL
}

-- *****
--
-- PAGING TYPE 2
--
-- *****

PagingType2 ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  pagingCause              PagingCause,
  -- Core network IEs
  cn-DomainIdentity       CN-DomainIdentity,
  pagingRecordTypeID      PagingRecordTypeID,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {}              OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION
--
-- *****

PhysicalChannelReconfiguration-r3 ::= CHOICE {
  r3          SEQUENCE {
    physicalChannelReconfiguration-r3
    nonCriticalExtensions    SEQUENCE {} OPTIONAL
  },
  criticalExtensions    SEQUENCE {}
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo        CipheringModeInfo         OPTIONAL,
  activationTime           ActivationTime             OPTIONAL,
  new-U-RNTI              U-RNTI                    OPTIONAL,
}

```



```

    new-C-RNTI                C-RNTI                OPTIONAL,
    rrc-StateIndicator        RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
-- Core network IEs
    cn-InformationInfo        CN-InformationInfo        OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity              URA-Identity              OPTIONAL,
-- Radio bearer IEs
    rb-WithPDCP-InfoList     RB-WithPDCP-InfoList     OPTIONAL,
-- Physical channel IEs
    frequencyInfo            FrequencyInfo            OPTIONAL,
    maxAllowedUL-TX-Power     MaxAllowedUL-TX-Power     OPTIONAL,
    ul-ChannelRequirement     UL-ChannelRequirementWithCPCH-SetID  OPTIONAL,
-- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
-- between UL DPCH info, CPCH SET info and CPCH set ID.
    modeSpecificInfo         CHOICE {
        fdd                   SEQUENCE {
            dl-PDSCH-Information  DL-PDSCH-Information  OPTIONAL
        },
        tdd                   NULL
    },
    dl-CommonInformation     DL-CommonInformation     OPTIONAL,
    dl-InformationPerRL-List  DL-InformationPerRL-List  OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
--
-- *****

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier  RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo  IntegrityProtActivationInfo  OPTIONAL,
-- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance           UL-TimingAdvance             OPTIONAL,
-- Radio bearer IEs
    count-C-ActivationTime     ActivationTime                OPTIONAL,
    rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList    OPTIONAL,
    rb-WithPDCP-InfoList       RB-WithPDCP-InfoList         OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions       SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier  RRC-TransactionIdentifier    OPTIONAL,
    failureCause               FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions       SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
--
-- *****

PhysicalSharedChannelAllocation-r3 ::= CHOICE {
    r3                          SEQUENCE {
        physicalSharedChannelAllocation-r3
        nonCriticalExtensions    SEQUENCE {}                  OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

PhysicalSharedChannelAllocation-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
    c-RNTI                     C-RNTI                     OPTIONAL,
    rrc-TransactionIdentifier  RRC-TransactionIdentifier,
-- Physical channel IEs
    ul-TimingAdvance           UL-TimingAdvanceControl     OPTIONAL,
    pusch-CapacityAllocationInfo  PUSCH-CapacityAllocationInfo  OPTIONAL,
    pdsch-CapacityAllocationInfo  PDSCH-CapacityAllocationInfo  OPTIONAL,

```

```

confirmRequest          ENUMERATED {
                        confirmPDSCH, confirmPUSCH } OPTIONAL,
-- TABULAR: If the above value is not present, the default value "No Confirm"
-- shall be used as specified in 10.2.25.
iscpTimeslotList      TimeslotList          OPTIONAL
}
-- *****
--
-- PUSCH CAPACITY REQUEST (TDD only)
-- *****

PUSCHCapacityRequest ::= SEQUENCE {
-- User equipment IEs
  c-RNTI                C-RNTI              OPTIONAL,
-- Measurement IEs
  trafficVolumeMeasuredResultsList
                        TrafficVolumeMeasuredResultsList,
  timeslotListWithISCP TimeslotListWithISCP OPTIONAL,
  primaryCCPCH-RSCP     PrimaryCCPCH-RSCP   OPTIONAL,
  allocationConfirmation CHOICE {
    pdschConfirmation   PDSCH-Identity,
    puschConfirmation   PUSCH-Identity
  } OPTIONAL,
  protocolErrorIndicator ProtocolErrorIndicatorWithMoreInfo,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}
-- *****
--
-- RADIO BEARER RECONFIGURATION
-- *****

RadioBearerReconfiguration-r3 ::= CHOICE {
  r3 SEQUENCE {
    radioBearerReconfiguration-r3 RadioBearerReconfiguration-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo        CipheringModeInfo          OPTIONAL,
  activationTime            ActivationTime              OPTIONAL,
  new-U-RNTI                U-RNTI                    OPTIONAL,
  new-C-RNTI                C-RNTI                    OPTIONAL,
  rrc-StateIndicator        RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- Core network IEs
  cn-InformationInfo        CN-InformationInfo          OPTIONAL,
-- UTRAN mobility IEs
  ura-Identity              URA-Identity              OPTIONAL,
-- Radio bearer IEs
  rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,
  rb-InformationReconfigList  RB-InformationReconfigList,
  rb-InformationAffectedList  RB-InformationAffectedList          OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo      UL-CommonTransChInfo      OPTIONAL,
  ul-deletedTransChInfoList  UL-DeletedTransChInfoList          OPTIONAL,
  ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList          OPTIONAL,
  modeSpecificTransChInfo    CHOICE {
    fdd SEQUENCE {
      cpch-SetID CPCH-SetID          OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
    },
    tdd NULL
  }
  dl-CommonTransChInfo      DL-CommonTransChInfo      OPTIONAL,
  dl-DeletedTransChInfoList DL-DeletedTransChInfoList          OPTIONAL,
  dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List          OPTIONAL,
-- Physical channel IEs
  frequencyInfo             FrequencyInfo             OPTIONAL,
  maxAllowedUL-TX-Power     MaxAllowedUL-TX-Power     OPTIONAL,
  ul-ChannelRequirement     UL-ChannelRequirement     OPTIONAL,
  modeSpecificPhysChInfo    CHOICE {
    fdd SEQUENCE {

```

```

        dl-PDSCH-Information          DL-PDSCH-Information          OPTIONAL
    },
    tdd                               NULL
},
dl-CommonInformation                DL-CommonInformation          OPTIONAL,
dl-InformationPerRL-List            DL-InformationPerRL-List
}

-- *****
--
-- RADIO BEARER RECONFIGURATION COMPLETE
--
-- *****

RadioBearerReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo       IntegrityProtActivationInfo    OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance                 UL-TimingAdvance              OPTIONAL,
    -- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo     RB-ActivationTimeInfoList     OPTIONAL,
    rb-WithPDCP-InfoList             RB-WithPDCP-InfoList         OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions            SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RECONFIGURATION FAILURE
--
-- *****

RadioBearerReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    failureCause                     FailureCauseWithProtErr,
    -- Radio bearer IEs
    potentiallySuccessfulBearerList  RB-IdentityList              OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions            SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE
--
-- *****

RadioBearerRelease-r3 ::= CHOICE {
    r3                                SEQUENCE {
        radioBearerRelease-r3       RadioBearerRelease-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

RadioBearerRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    integrityProtectionModeInfo     IntegrityProtectionModeInfo    OPTIONAL,
    cipheringModeInfo               CipheringModeInfo              OPTIONAL,
    activationTime                   ActivationTime                  OPTIONAL,
    new-U-RNTI                       U-RNTI                        OPTIONAL,
    new-C-RNTI                       C-RNTI                        OPTIONAL,
    rrc-StateIndicator               RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff       UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo               CN-InformationInfo            OPTIONAL,
    signallingConnectionRelIndication CN-DomainIdentity            OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                     URA-Identity                 OPTIONAL,
    -- Radio bearer IEs
    rab-InformationReconfigList      RAB-InformationReconfigList   OPTIONAL,
    rb-InformationReleaseList        RB-InformationReleaseList     OPTIONAL,
    rb-InformationAffectedList       RB-InformationAffectedList    OPTIONAL,
    rb-WithPDCP-InfoList             RB-WithPDCP-InfoList         OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo             UL-CommonTransChInfo         OPTIONAL,
    ul-deletedTransChInfoList        UL-DeletedTransChInfoList     OPTIONAL,
    ul-AddReconfTransChInfoList      UL-AddReconfTransChInfoList   OPTIONAL,
    modeSpecificTransChInfo          CHOICE {
        fdd                         SEQUENCE {

```

```

        cpch-SetID                CPCH-SetID                OPTIONAL,
        addReconfTransChDRAC-Info  DRAC-StaticInformationList  OPTIONAL
    },
    tdd                            NULL
}
dl-CommonTransChInfo              DL-CommonTransChInfo              OPTIONAL,
dl-DeletedTransChInfoList         DL-DeletedTransChInfoList         OPTIONAL,
dl-AddReconfTransChInfoList       DL-AddReconfTransChInfo2List      OPTIONAL,
-- Physical channel IES
frequencyInfo                     FrequencyInfo                     OPTIONAL,
maxAllowedUL-TX-Power             MaxAllowedUL-TX-Power            OPTIONAL,
ul-ChannelRequirement             UL-ChannelRequirement            OPTIONAL,
modeSpecificPhysChInfo            CHOICE {
    fdd                            SEQUENCE {
        dl-PDSCH-Information        DL-PDSCH-Information            OPTIONAL
    },
    tdd                            NULL
},
dl-CommonInformation              DL-CommonInformation             OPTIONAL,
dl-InformationPerRL-List          DL-InformationPerRL-List         OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE COMPLETE
--
-- *****

RadioBearerReleaseComplete ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo       IntegrityProtActivationInfo       OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance                 UL-TimingAdvance                 OPTIONAL,
    -- Radio bearer IES
    rb-UL-CiphActivationTimeInfo     RB-ActivationTimeInfoList        OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions             SEQUENCE {}                      OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE FAILURE
--
-- *****

RadioBearerReleaseFailure ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    failureCause                     FailureCauseWithProtErr,
    -- Radio bearer IES
    potentiallySuccessfulBearerList  RB-IdentityList                  OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions             SEQUENCE {}                      OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP
--
-- *****

RadioBearerSetup-r3 ::= CHOICE {
    r3                                SEQUENCE {
        radioBearerSetup-r3          RadioBearerSetup-r3-IEs,
        nonCriticalExtensions         SEQUENCE {}                      OPTIONAL
    },
    criticalExtensions               SEQUENCE {}
}

RadioBearerSetup-r3-IEs ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    integrityProtectionModeInfo      IntegrityProtectionModeInfo       OPTIONAL,
    cipheringModeInfo                CipheringModeInfo                  OPTIONAL,
    activationTime                    ActivationTime                      OPTIONAL,
    new-U-RNTI                        U-RNTI                            OPTIONAL,
    new-C-RNTI                        C-RNTI                            OPTIONAL,
    rrc-StateIndicator                RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff        UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
    -- UTRAN mobility IES
    ura-Identity                      URA-Identity                      OPTIONAL,
}

```

```

-- Core network IEs
  cn-InformationInfo          CN-InformationInfo          OPTIONAL,
-- Radio bearer IEs
  srb-InformationSetupList    SRB-InformationSetupList    OPTIONAL,
  rab-InformationSetupList    RAB-InformationSetupList    OPTIONAL,
  rb-InformationAffectedList  RB-InformationAffectedList  OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo       UL-CommonTransChInfo       OPTIONAL,
  ul-deletedTransChInfoList  UL-DeletedTransChInfoList  OPTIONAL,
  ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
  modeSpecificTransChInfo    CHOICE {
    fdd
      cpch-SetID              CPCH-SetID              OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
    },
    tdd                        NULL
  }
  dl-CommonTransChInfo       DL-CommonTransChInfo       OPTIONAL,
  dl-DeletedTransChInfoList  DL-DeletedTransChInfoList  OPTIONAL,
  dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList OPTIONAL,
-- Physical channel IEs
  frequencyInfo              FrequencyInfo              OPTIONAL,
  maxAllowedUL-TX-Power      MaxAllowedUL-TX-Power      OPTIONAL,
  ul-ChannelRequirement      UL-ChannelRequirement      OPTIONAL,
  modeSpecificPhysChInfo    CHOICE {
    fdd
      dl-PDSCH-Information    DL-PDSCH-Information    OPTIONAL
    },
    tdd                        NULL
  },
  dl-CommonInformation       DL-CommonInformation       OPTIONAL,
  dl-InformationPerRL-List   DL-InformationPerRL-List   OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP COMPLETE
--
-- *****

RadioBearerSetupComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier   RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo  IntegrityProtActivationInfo  OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance           UL-TimingAdvance           OPTIONAL,
  start-Value                 START-Value                 OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime      ActivationTime              OPTIONAL,
  rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList  OPTIONAL,
  rb-WithPDCP-InfoList       RB-WithPDCP-InfoList       OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions       SEQUENCE {}              OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP FAILURE
--
-- *****

RadioBearerSetupFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier   RRC-TransactionIdentifier,
  failureCause                FailureCauseWithProtErr,
  -- Radio bearer IEs
  potentiallySuccessfulBearerList RB-IdentityList            OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions       SEQUENCE {}              OPTIONAL
}

-- *****
--
-- RRC CONNECTION REJECT
--
-- *****

RRCConnectionReject-r3 ::= CHOICE {
  r3
    rrcConnectionReject-r3    RRCConnectionReject-r3-IEs,
    nonCriticalExtensions      SEQUENCE {}              OPTIONAL
  },

```

```

    criticalExtensions          SEQUENCE {}
}

RRCConnectionReject-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity          InitialUE-Identity,
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    rejectionCause              RejectionCause,
    waitTime                    WaitTime,
    redirectionInfo             RedirectionInfo          OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE
--
-- *****

RRCConnectionRelease-r3 ::= CHOICE {
    r3                          SEQUENCE {
        rrcConnectionRelease-r3    RRCConnectionRelease-r3-IEs,
        nonCriticalExtensions       SEQUENCE {} OPTIONAL
    },
    criticalExtensions           SEQUENCE {}
}

RRCConnectionRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,          OPTIONAL,
    n-308                        N-308
    -- The IE above is conditional on the UE state.
    releaseCause                 ReleaseCause,
    rplmn-information            Rplmn-Information          OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE for CCCH
--
-- *****

RRCConnectionRelease-CCCH-r3 ::= CHOICE {
    r3                          SEQUENCE {
        rrcConnectionRelease-CCCH-r3 RRCConnectionRelease-CCCH-r3-IEs,
        nonCriticalExtensions       SEQUENCE {} OPTIONAL
    },
    criticalExtensions           SEQUENCE {}
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI                       U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    rrcConnectionRelease         RRCConnectionRelease-r3-IEs
}

-- *****
--
-- RRC CONNECTION RELEASE COMPLETE
--
-- *****

RRCConnectionReleaseComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    errorIndication              FailureCauseWithProtErr          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions       SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RRC CONNECTION REQUEST
--
-- *****

RRCConnectionRequest ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity          InitialUE-Identity,
    establishmentCause          EstablishmentCause,

```

```

        protocolErrorIndicator          ProtocolErrorIndicator,
        -- The IE above is MD, but for compactness reasons no default value
        -- has been assigned to it.
    -- Measurement IEs
    measuredResultsOnRACH                MeasuredResultsOnRACH                OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions                SEQUENCE {}                OPTIONAL
}

-- *****
--
-- RRC CONNECTION SETUP
--
-- *****

RRCConnectionSetup-r3 ::= CHOICE {
    r3                                   SEQUENCE {
        rrcConnectionSetup-r3          RRCConnectionSetup-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}                OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity                InitialUE-Identity,
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    activationTime                    ActivationTime                OPTIONAL,
    new-U-RNTI                        U-RNTI,
    new-c-RNTI                        C-RNTI                        OPTIONAL,
    rrc-StateIndicator                RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff        UTRAN-DRX-CycleLengthCoefficient,
    capabilityUpdateRequirement        CapabilityUpdateRequirement    OPTIONAL,
    -- TABULAR: If the IE is not present, the default value defined in 10.3.3.2 shall
    -- be used.
    -- Radio bearer IEs
    srb-InformationSetupList          SRB-InformationSetupList2,
    -- Transport channel IEs
    ul-CommonTransChInfo              UL-CommonTransChInfo        OPTIONAL,
    ul-AddReconfTransChInfoList      UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo              DL-CommonTransChInfo        OPTIONAL,
    dl-AddReconfTransChInfoList      DL-AddReconfTransChInfoList,
    -- Physical channel IEs
    frequencyInfo                     FrequencyInfo                OPTIONAL,
    maxAllowedUL-TX-Power              MaxAllowedUL-TX-Power      OPTIONAL,
    ul-ChannelRequirement              UL-ChannelRequirement      OPTIONAL,
    dl-CommonInformation              DL-CommonInformation        OPTIONAL,
    dl-InformationPerRL-List          DL-InformationPerRL-List    OPTIONAL
}

-- *****
--
-- RRC CONNECTION SETUP COMPLETE
--
-- *****

RRCConnectionSetupComplete ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    startList                          STARTList,
    ue-RadioAccessCapability          UE-RadioAccessCapability    OPTIONAL,
    -- Other IEs
    ue-RATSpecificCapability          InterRAT-UE-RadioAccessCapabilityList  OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions                SEQUENCE {}                OPTIONAL
}

-- *****
--
-- RRC STATUS
--
-- *****

RRCStatus ::= SEQUENCE {
    -- Other IEs
    protocolErrorInformation          ProtocolErrorMoreInformation,
    -- TABULAR: Identification of received message is nested in
    -- ProtocolErrorMoreInformation
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions                SEQUENCE {}                OPTIONAL
}

```

```

SecurityModeCommand-r3 ::= CHOICE {
  r3
    securityModeCommand-r3
    nonCriticalExtensions
  },
  criticalExtensions
}

-- *****
--
-- SECURITY MODE COMMAND
--
-- *****

SecurityModeCommand-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  securityCapability              SecurityCapability,
  cipheringModeInfo              CipheringModeInfo              OPTIONAL,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
  -- Core network IEs
  cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SECURITY MODE COMPLETE
--
-- *****

SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo      OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList      OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- *****
--
-- SECURITY MODE FAILURE
--
-- *****

SecurityModeFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE
--
-- *****

SignallingConnectionRelease-r3 ::= CHOICE {
  r3
    signallingConnectionRelease-r3
    nonCriticalExtensions
  },
  criticalExtensions
}

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Core network IEs
  cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE REQUEST

```



```

--
-- *****
SignallingConnectionReleaseRequest ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity          CN-DomainIdentity,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions     SEQUENCE {} OPTIONAL
}
-- *****
--
-- SYSTEM INFORMATION for BCH
--
-- *****

SystemInformation-BCH ::= SEQUENCE {
  -- Other information elements
  sfn-Prime                  SFN-Prime,
  payload                    CHOICE {
    noSegment                NULL,
    firstSegment             FirstSegment,
    subsequentSegment        SubsequentSegment,
    lastSegmentShort         LastSegmentShort,
    lastAndFirst             SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      firstSegment            FirstSegmentShort
    },
    lastAndComplete          SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List
    },
    lastAndCompleteAndFirst SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List,
      firstSegment            FirstSegmentShort
    },
    completeSIB-List         CompleteSIB-List,
    completeAndFirst         SEQUENCE {
      completeSIB-List       CompleteSIB-List,
      firstSegment            FirstSegmentShort
    },
    completeSIB              CompleteSIB,
    lastSegment              LastSegment
  }
}
-- *****
--
-- SYSTEM INFORMATION for FACH
--
-- *****

SystemInformation-FACH ::= SEQUENCE {
  -- Other information elements
  payload                    CHOICE {
    noSegment                NULL,
    firstSegment             FirstSegment,
    subsequentSegment        SubsequentSegment,
    lastSegmentShort         LastSegmentShort,
    lastAndFirst             SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      firstSegment            FirstSegmentShort
    },
    lastAndComplete          SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List
    },
    lastAndCompleteAndFirst SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List,
      firstSegment            FirstSegmentShort
    },
    completeSIB-List         CompleteSIB-List,
    completeAndFirst         SEQUENCE {
      completeSIB-List       CompleteSIB-List,
      firstSegment            FirstSegmentShort
    },
    completeSIB              CompleteSIB,
    lastSegment              LastSegment
  }
}

```

```

-- *****
--
-- First segment
-- *****

FirstSegment ::=
    -- Other information elements
    sib-Type          SIB-Type,
    seg-Count         SegCount,
    sib-Data-fixed    SIB-Data-fixed
}

-- *****
--
-- First segment (short)
-- *****

FirstSegmentShort ::=
    -- Other information elements
    sib-Type          SIB-Type,
    seg-Count         SegCount,
    sib-Data-variable SIB-Data-variable
}

-- *****
--
-- Subsequent segment
-- *****

SubsequentSegment ::=
    -- Other information elements
    sib-Type          SIB-Type,
    segmentIndex      SegmentIndex,
    sib-Data-fixed    SIB-Data-fixed
}

-- *****
--
-- Last segment
-- *****

LastSegment ::=
    -- Other information elements
    sib-Type          SIB-Type,
    segmentIndex      SegmentIndex,
    sib-Data-fixed    SIB-Data-fixed
    -- In case the SIB data is less than 222 bits, padding shall be used
    -- The same padding bits shall be used as defined in clause 12.1
}

LastSegmentShort ::=
    -- Other information elements
    sib-Type          SIB-Type,
    segmentIndex      SegmentIndex,
    sib-Data-variable SIB-Data-variable
}

-- *****
--
-- Complete SIB
-- *****

CompleteSIB-List ::=
    SEQUENCE (SIZE (1..maxSIBperMsg)) OF
    CompleteSIBshort

CompleteSIB ::=
    -- Other information elements
    sib-Type          SIB-Type,
    sib-Data-fixed    BIT STRING (SIZE (226))
    -- In case the SIB data is less than 226 bits, padding shall be used
    -- The same padding bits shall be used as defined in clause 12.1
}

CompleteSIBshort ::=
    -- Other information elements
    sib-Type          SIB-Type,

```

```

        sib-Data-variable                SIB-Data-variable
    }
-- *****
--
-- SYSTEM INFORMATION CHANGE INDICATION
--
-- *****

SystemInformationChangeIndication ::= SEQUENCE {
    -- Other IEs
    bcch-ModificationInfo                BCCH-ModificationInfo,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions                SEQUENCE {} OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION
--
-- *****

TransportChannelReconfiguration-r3 ::= CHOICE {
    r3                                    SEQUENCE {
        transportChannelReconfiguration-r3
        TransportChannelReconfiguration-r3-IEs,
        nonCriticalExtensions            SEQUENCE {} OPTIONAL
    },
    criticalExtensions                    SEQUENCE {}
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier            RRC-TransactionIdentifier,
    integrityProtectionModeInfo          IntegrityProtectionModeInfo        OPTIONAL,
    cipheringModeInfo                    CipheringModeInfo                OPTIONAL,
    activationTime                        ActivationTime                    OPTIONAL,
    new-U-RNTI                            U-RNTI                            OPTIONAL,
    new-C-RNTI                            C-RNTI                            OPTIONAL,
    rrc-StateIndicator                    RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff            UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    -- Core network IEs
    cn-InformationInfo                    CN-InformationInfo                OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                          URA-Identity                        OPTIONAL,
    -- Radio bearer IEs
    rb-WithPDCP-InfoList                  RB-WithPDCP-InfoList              OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo                  UL-CommonTransChInfo              OPTIONAL,
    ul-AddReconfTransChInfoList           UL-AddReconfTransChInfoList       OPTIONAL,
    modeSpecificTransChInfo               CHOICE {
        fdd                                SEQUENCE {
            cpch-SetID                      CPCH-SetID                        OPTIONAL,
            addReconfTransChDRAC-Info        DRAC-StaticInformationList        OPTIONAL
        },
        tdd                                NULL
    } OPTIONAL,
    dl-CommonTransChInfo                  DL-CommonTransChInfo              OPTIONAL,
    dl-AddReconfTransChInfoList           DL-AddReconfTransChInfoList       OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                          FrequencyInfo                        OPTIONAL,
    maxAllowedUL-TX-Power                  MaxAllowedUL-TX-Power              OPTIONAL,
    ul-ChannelRequirement                  UL-ChannelRequirement              OPTIONAL,
    modeSpecificPhysChInfo                CHOICE {
        fdd                                SEQUENCE {
            dl-PDSCH-Information            DL-PDSCH-Information              OPTIONAL
        },
        tdd                                NULL
    },
    dl-CommonInformation                  DL-CommonInformation              OPTIONAL,
    dl-InformationPerRL-List              DL-InformationPerRL-List           OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
--
-- *****

TransportChannelReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier            RRC-TransactionIdentifier,

```

```

        ul-IntegProtActivationInfo      IntegrityProtActivationInfo      OPTIONAL,
        -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
        ul-TimingAdvance                UL-TimingAdvance                    OPTIONAL,
    -- Radio bearer IEs
        count-C-ActivationTime          ActivationTime                    OPTIONAL,
        rb-UL-CiphActivationTimeInfo    RB-ActivationTimeInfoList        OPTIONAL,
        rb-WithPDCP-InfoList           RB-WithPDCP-InfoList            OPTIONAL,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                      OPTIONAL
    }

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
--
-- *****

TransportChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        failureCause                   FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                      OPTIONAL
    }

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL
--
-- *****

TransportFormatCombinationControl ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message when transmitting this
    message
    -- on the transparent mode signalling DCCH.
        rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
    -- The information element is not included when transmitting the message
    -- on the transparent mode signalling DCCH
    modeSpecificInfo                   CHOICE {
        fdd                            NULL,
        tdd                            SEQUENCE {
            tfcs-ID                    TFCS-Identity    OPTIONAL
        }
    },
    dpch-TFCS-InUplink                 TFC-Subset,
    tfc-ControlDuration                 TFC-ControlDuration          OPTIONAL,
    -- The information element is not included when transmitting the message
    -- on the transparent mode signalling DCCH and is optional otherwise
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                      OPTIONAL
    }

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
--
-- *****

TransportFormatCombinationControlFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        failureCause                   FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
        nonCriticalExtensions           SEQUENCE {}                      OPTIONAL
    }

-- *****
--
-- UE CAPABILITY ENQUIRY
--
-- *****

UECapabilityEnquiry-r3 ::= CHOICE {
    r3                                  SEQUENCE {
        ueCapabilityEnquiry-r3        UECapabilityEnquiry-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}                      OPTIONAL
    },
    criticalExtensions                 SEQUENCE {}
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
    -- User equipment IEs

```

```

        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        capabilityUpdateRequirement    CapabilityUpdateRequirement
    }
-- *****
--
-- UE CAPABILITY INFORMATION
--
-- *****

UECapabilityInformation ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
    ue-RadioAccessCapability        UE-RadioAccessCapability    OPTIONAL,
    -- Other IEs
    ue-RATSpecificCapability        InterRAT-UE-RadioAccessCapabilityList
    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions           SEQUENCE {}          OPTIONAL
}
-- *****
--
-- UE CAPABILITY INFORMATION CONFIRM
--
-- *****

UECapabilityInformationConfirm-r3 ::= CHOICE {
    r3                               SEQUENCE {
        ueCapabilityInformationConfirm-r3
        nonCriticalExtensions         SEQUENCE {}          OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

UECapabilityInformationConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier
}
-- *****
--
-- UPLINK DIRECT TRANSFER
--
-- *****

UplinkDirectTransfer ::= SEQUENCE {
    -- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity,
    nas-Message                     NAS-Message,
    -- Measurement IEs
    measuredResultsOnRACH           MeasuredResultsOnRACH          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions           SEQUENCE {}          OPTIONAL
}
-- *****
--
-- UPLINK PHYSICAL CHANNEL CONTROL
--
-- *****

UplinkPhysicalChannelControl-r3 ::= CHOICE {
    r3                               SEQUENCE {
        uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
        nonCriticalExtensions         SEQUENCE {}          OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

UplinkPhysicalChannelControl-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- Physical channel IEs
    ccTrCH-PowerControlInfo        CCTrCH-PowerControlInfo      OPTIONAL,
    timingAdvance                   UL-TimingAdvanceControl    OPTIONAL,
    alpha                            Alpha                        OPTIONAL,
    prach-ConstantValue             ConstantValue              OPTIONAL,
    pusoch-ConstantValue            ConstantValue              OPTIONAL
}

```

```

-- *****
--
-- URA UPDATE
--
-- *****

URAUUpdate ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                U-RNTI,
  ura-UpdateCause       URA-UpdateCause,
  protocolErrorIndicator ProtocolErrorIndicatorWithMoreInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- URA UPDATE CONFIRM
--
-- *****

URAUUpdateConfirm-r3 ::= CHOICE {
  r3 SEQUENCE {
    uraUpdateConfirm-r3 URAUpdateConfirm-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

URAUUpdateConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo        CipheringModeInfo OPTIONAL,
  new-U-RNTI                U-RNTI OPTIONAL,
  new-C-RNTI                C-RNTI OPTIONAL,
  rrc-StateIndicator        RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- CN information elements
  cn-InformationInfo        CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity              URA-Identity OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList      RB-WithPDCP-InfoList OPTIONAL
}

-- *****
--
-- URA UPDATE CONFIRM for CCCH
--
-- *****

URAUUpdateConfirm-CCCH-r3 ::= CHOICE {
  r3 SEQUENCE {
    uraUpdateConfirm-CCCH-r3 URAUpdateConfirm-CCCH-r3-IEs,
    nonCriticalExtensions     SEQUENCE {} OPTIONAL
  },
  criticalExtensions         SEQUENCE {}
}

URAUUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  uraUpdateConfirm      URAUpdateConfirm-r3-IEs
}

-- *****
--
-- UTRAN MOBILITY INFORMATION
--
-- *****

UTRANMobilityInformation ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo        CipheringModeInfo OPTIONAL,
  new-U-RNTI                U-RNTI OPTIONAL,
  new-C-RNTI                C-RNTI OPTIONAL,
}

```

```

        ue-ConnTimersAndConstants      UE-ConnTimersAndConstants      OPTIONAL,
-- CN information elements
  cn-InformationInfo                  CN-InformationInfo                OPTIONAL,
-- UTRAN mobility IEs
  ura-Identity                        URA-Identity                      OPTIONAL,
-- Radio bearer IEs
  count-C-ActivationTime              ActivationTime                     OPTIONAL,
  rb-WithPDCP-InfoList                RB-WithPDCP-InfoList             OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions                SEQUENCE {}                       OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION CONFIRM
--
-- *****

UTRANMobilityInformationConfirm ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier            RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo           IntegrityProtActivationInfo        OPTIONAL,
-- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo        RB-ActivationTimeInfoList         OPTIONAL,
  rb-WithPDCP-InfoList                RB-WithPDCP-InfoList             OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions                SEQUENCE {}                       OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION FAILURE
--
-- *****

UTRANMobilityInformationFailure ::= SEQUENCE {
-- UE information elements
  rrc-TransactionIdentifier            RRC-TransactionIdentifier,
  failureCause                         FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions                SEQUENCE {}                       OPTIONAL
}

END

```

## 11.3 Information element definitions

InformationElements DEFINITIONS AUTOMATIC TAGS ::=

```

-- *****
--
-- CORE NETWORK INFORMATION ELEMENTS (10.3.1)
--
-- *****

```

BEGIN

IMPORTS

```

  hiPDSCHidentities,
  hiPUSCHidentities,
  hiRM,
  maxAC,
  maxAdditionalMeas,
  maxASC,
  maxASCmap,
  maxASCpersist,
  maxCCTrCH,
  maxCellMeas,
  maxCellMeas-1,
  maxCNdomains,
  maxCPCHsets,
  maxDPCH-DLchan,
  maxDPCHcodesPerTS,
  maxDPDCH-UL,
  maxDRACclasses,
  maxFACH,
  maxFreq,
  maxFrequencybands,
  maxInterSysMessages,
  maxLoCHperRLC,
  maxMeasEvent,

```

```

maxMeasIntervals,
maxMeasParEvent,
maxNumCDMA2000Freqs,
maxNumFDDFreqs,
maxNumGSMFreqRanges,
maxNumTDDFreqs,
maxOtherRAT,
maxPage1,
maxPCPCH-APsig,
maxPCPCH-APsubCh,
maxPCPCH-CDsig,
maxPCPCH-CDSUBch,
maxPCPCH-SF,
maxPCPCHs,
maxPDCPAlgoType,
maxPDSCH,
maxPDSCH-TFCIgroups,
maxPRACH,
maxPUSCH,
maxRABsetup,
maxRAT,
maxRB,
maxRBallRABs,
maxRBMuxOptions,
maxRBperRAB,
maxReportedGSMCells,
maxSRBsetup,
maxRL,
maxRL-1,
maxSCCPCH,
maxSat,
maxSIB,
maxSIB-FACH,
maxSig,
maxSubCh,
maxSystemCapability,
maxTF,
maxTF-CPCH,
maxTFC,
maxTFCI-2-Combs,
maxTGPS,
maxTrCH,
maxTS,
maxTS-1,
maxURA
FROM Constant-definitions;

CN-DomainIdentity ::=          ENUMERATED {
                                cs-domain,
                                ps-domain }

CN-DomainInformation ::=      SEQUENCE {
                                cn-DomainIdentity,
                                cn-SystemInformationGSM-MAP
                                }

CN-DomainInformationList ::=  SEQUENCE (SIZE (1..maxCNdomains)) OF
                                CN-DomainInformation

CN-DomainSysInfo ::=         SEQUENCE {
                                cn-DomainIdentity,
                                CHOICE {
                                    gsm-MAP
                                        NAS-SystemInformationGSM-MAP,
                                    ansi-41
                                        NAS-SystemInformationANSI-41
                                },
                                cn-DRX-CycleLengthCoeff
                                CN-DRX-CycleLengthCoefficient
                                }

CN-DomainSysInfoList ::=     SEQUENCE (SIZE (1..maxCNdomains)) OF
                                CN-DomainSysInfo

CN-InformationInfo ::=       SEQUENCE {
                                plmn-Identity
                                    PLMN-Identity
                                    OPTIONAL,
                                cn-CommonGSM-MAP-NAS-SysInfo
                                    NAS-SystemInformationGSM-MAP
                                    OPTIONAL,
                                cn-DomainInformationList
                                    CN-DomainInformationList
                                    OPTIONAL
                                }

Digit ::=                    INTEGER (0..9)

IMEI ::=                      SEQUENCE (SIZE (15)) OF
                                IMEI-Digit

IMEI-Digit ::=               INTEGER (0..15)

```



```

IMSI-GSM-MAP ::= SEQUENCE (SIZE (6..15)) OF
                  Digit
IntraDomainNasNodeSelector ::= BIT STRING (SIZE (16))

LAI ::= SEQUENCE {
  plmn-Identity
  lac
}

MCC ::= SEQUENCE (SIZE (3)) OF
        Digit

MNC ::= SEQUENCE (SIZE (2..3)) OF
        Digit

NAS-Message ::= OCTET STRING (SIZE (1..4095))

NAS-Synchronisation-Indicator ::= BIT STRING(SIZE(4))

NAS-SystemInformationGSM-MAP ::= OCTET STRING (SIZE (1..8))

P-TMSI-GSM-MAP ::= BIT STRING (SIZE (32))

PagingRecordTypeID ::= ENUMERATED {
  imsi-GSM-MAP,
  tmsi-GSM-MAP-P-TMSI,
  imsi-DS-41,
  tmsi-DS-41 }

PLMN-Identity ::= SEQUENCE {
  mcc
  mnc
}

PLMN-Type ::= CHOICE {
  gsm-MAP
    plmn-Identity
  },
  ansi-41
    p-REV
    min-P-REV
    sid
    nid
  },
  gsm-MAP-and-ANSI-41
    plmn-Identity
    p-REV
    min-P-REV
    sid
    nid
}

RAB-Identity ::= CHOICE {
  gsm-MAP-RAB-Identity
  ansi-41-RAB-Identity
}

RAI ::= SEQUENCE {
  lai
  rac
}

RoutingAreaCode ::= BIT STRING (SIZE (8))

TMSI-GSM-MAP ::= BIT STRING (SIZE (32))

-- *****
--
--   UTRAN MOBILITY INFORMATION ELEMENTS (10.3.2)
--
-- *****

AccessClassBarred ::= ENUMERATED {
  barred, notBarred }

AccessClassBarredList ::= SEQUENCE (SIZE (maxAC)) OF
  AccessClassBarred

AllowedIndicator ::= ENUMERATED {
  allowed, notAllowed }

```

```

CellAccessRestriction ::= SEQUENCE {
    cellBarred CellBarred,
    cellReservedForOperatorUse ReservedIndicator,
    cellReservedForSOLSA ReservedIndicator,
    accessClassBarredList AccessClassBarredList OPTIONAL
}

CellBarred ::= CHOICE {
    barred SEQUENCE {
        intraFreqCellReselectionInd AllowedIndicator,
        t-Barred T-Barred
    },
    notBarred NULL
}

CellIdentity ::= BIT STRING (SIZE (28))

CellSelectReselectInfoSIB-3-4 ::= SEQUENCE {
    mappingInfo MappingInfo OPTIONAL,
    cellSelectQualityMeasure CHOICE {
        cpich-Ec-No SEQUENCE {
            q-HYST-2-S Q-Hyst-S OPTIONAL,
            -- Default value for q-HYST-2-S is q-HYST-1-S
        },
        cpich-RSCP NULL
    },
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            s-Intrasearch S-SearchQual OPTIONAL,
            s-Intersearch S-SearchQual OPTIONAL,
            s-SearchHCS S-SearchRXLEV OPTIONAL,
            rat-List RAT-FDD-InfoList OPTIONAL,
            q-QualMin Q-QualMin,
            q-RxlevMin Q-RxlevMin
        },
        tdd SEQUENCE {
            s-Intrasearch S-SearchRXLEV OPTIONAL,
            s-Intersearch S-SearchRXLEV OPTIONAL,
            s-SearchHCS S-SearchRXLEV OPTIONAL,
            rat-List RAT-TDD-InfoList OPTIONAL,
            q-RxlevMin Q-RxlevMin
        }
    },
    q-Hyst-1-S Q-Hyst-S,
    t-Reselection-S T-Reselection-S,
    hcs-ServingCellInformation HCS-ServingCellInformation OPTIONAL,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power
}

MapParameter ::= INTEGER (0..99)

Mapping ::= SEQUENCE {
    rat RAT,
    mappingFunctionParameterList MappingFunctionParameterList
}

Mapping-LCR ::= SEQUENCE {
    mappingFunctionParameterList MappingFunctionParameterList
}

MappingFunctionParameter ::= SEQUENCE {
    functionType MappingFunctionType,
    mapParameter1 MapParameter OPTIONAL,
    mapParameter2 MapParameter,
    upperLimit UpperLimit OPTIONAL,
    -- The parameter is conditional on the number of repetition
}

MappingFunctionParameterList ::= SEQUENCE (SIZE (1..maxMeasIntervals)) OF MappingFunctionParameter

MappingFunctionType ::= ENUMERATED {
    linear,
    functionType2,
    functionType3,
    functionType4 }

-- In this list, mapping for FDD and 3.84Mcps TDD is defined. For 1.28Mcps TDD, Mapping-LCR
-- is used instead.
MappingInfo ::= SEQUENCE (SIZE (1..maxRAT)) OF Mapping

```

```

-- Actual value = IE value * 2
Q-Hyst-S ::= INTEGER (0..20)

RAT ::= ENUMERATED {
    ultra-FDD,
    ultra-TDD,
    gsm,
    cdma2000 }

RAT-FDD-Info ::= SEQUENCE {
    rat-Identifier RAT-Identifier,
    s-SearchRAT S-SearchQual,
    s-HCS-RAT S-SearchRXLEV OPTIONAL,
    s-Limit-SearchRAT S-SearchQual
}

RAT-FDD-InfoList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
    RAT-FDD-Info

RAT-Identifier ::= ENUMERATED {
    gsm, cdma2000 }

RAT-TDD-Info ::= SEQUENCE {
    rat-Identifier RAT-Identifier,
    s-SearchRAT S-SearchRXLEV,
    s-HCS-RAT S-SearchRXLEV OPTIONAL,
    s-Limit-SearchRAT S-SearchRXLEV
}

RAT-TDD-InfoList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
    RAT-TDD-Info

ReservedIndicator ::= ENUMERATED {
    reserved,
    notReserved }

-- Actual value = IE value * 2
S-SearchQual ::= INTEGER (-16..10)

-- Actual value = (IE value * 2) + 1
S-SearchRXLEV ::= INTEGER (-53..45)

T-Barred ::= ENUMERATED {
    s10, s20, s40, s80,
    s160, s320, s640, s1280 }

T-Reselection-S ::= INTEGER (0..31)

-- The used range depends on the RAT used.
UpperLimit ::= INTEGER (1..91)

URA-Identity ::= BIT STRING (SIZE (16))

URA-IdentityList ::= SEQUENCE (SIZE (1..maxURA)) OF
    URA-Identity

-- *****
--
-- USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
--
-- *****

ActivationTime ::= INTEGER (0..255)
-- TABULAR : value 'now' always appear as default, and is encoded by absence of the field

BackoffControlParams ::= SEQUENCE {
    n-AP-RetransMax N-AP-RetransMax,
    n-AccessFails N-AccessFails,
    nf-BO-NoAICH NF-BO-NoAICH,
    ns-BO-Busy NS-BO-Busy,
    nf-BO-AllBusy NF-BO-AllBusy,
    nf-BO-Mismatch NF-BO-Mismatch,
    t-CPCH T-CPCH
}

C-RNTI ::= BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::= SEQUENCE {
    ue-RadioCapabilityUpdateRequirement BOOLEAN,
    systemSpecificCapUpdateReqList SystemSpecificCapUpdateReqList OPTIONAL
}

```

```

CellUpdateCause ::=
    ENUMERATED {
        cellReselection,
        periodicalCellUpdate,
        uplinkDataTransmission,
        utran-pagingResponse,
        re-enteredServiceArea,
        radiolinkFailure,
        rlc-unrecoverableError,
        spare1 }

ChipRateCapability ::=
    ENUMERATED {
        mcps3-84, mcps1-28 }

CipheringAlgorithm ::=
    ENUMERATED {
        uea0, uea1 }

CipheringModeCommand ::=
    CHOICE {
        startRestart
        stopCiphering
    }
    CipheringAlgorithm,
    NULL

CipheringModeInfo ::=
    SEQUENCE {
        cipheringModeCommand
        -- TABULAR: The ciphering algorithm is included in
        -- the CipheringModeCommand.
        activationTimeForDPCH
        rb-DL-CiphActivationTimeInfo
    }
    ActivationTime
    RB-ActivationTimeInfoList
    OPTIONAL,
    OPTIONAL

CN-DRX-CycleLengthCoefficient ::=
    INTEGER (6..9)

CN-PagedUE-Identity ::=
    CHOICE {
        imsi-GSM-MAP
        tmsi-GSM-MAP
        p-TMSI-GSM-MAP
        imsi-DS-41
        tmsi-DS-41
    }
    IMSI-GSM-MAP,
    TMSI-GSM-MAP,
    P-TMSI-GSM-MAP,
    IMSI-DS-41,
    TMSI-DS-41

CompressedModeMeasCapability ::=
    SEQUENCE {
        fdd-Measurements
        -- TABULAR: The IEs below are made optional since they are conditional based
        -- on another information element. Their absence corresponds to the case where
        -- the condition is not true.
        tdd-Measurements
        gsm-Measurements
        multiCarrierMeasurements
    }
    BOOLEAN
    BOOLEAN
    GSM-Measurements
    BOOLEAN
    OPTIONAL,
    OPTIONAL,
    OPTIONAL

CPCH-Parameters ::=
    SEQUENCE {
        initialPriorityDelayList
        backoffControlParams
        powerControlAlgorithm
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
        dl-DPCCH-BER
    }
    InitialPriorityDelayList
    BackoffControlParams,
    PowerControlAlgorithm,
    DL-DPCCH-BER
    OPTIONAL,

DL-DPCCH-BER ::=
    INTEGER (0..63)

DL-PhysChCapabilityFDD ::=
    SEQUENCE {
        maxNoDPCH-PDSCH-Codes
        maxNoPhysChBitsReceived
        supportForSF-512
        supportOfPDSCH
        simultaneousSCCPCH-DPCH-Reception
    }
    INTEGER (1..8),
    MaxNoPhysChBitsReceived,
    BOOLEAN,
    BOOLEAN,
    SimultaneousSCCPCH-DPCH-Reception

DL-PhysChCapabilityTDD ::=
    SEQUENCE {
        maxTS-PerFrame
        maxPhysChPerFrame
        minimumSF
        supportOfPDSCH
        maxPhysChPerTS
    }
    MaxTS-PerFrame,
    MaxPhysChPerFrame,
    MinimumSF-DL,
    BOOLEAN,
    MaxPhysChPerTS

DL-TransChCapability ::=
    SEQUENCE {
        maxNoBitsReceived
        maxConvCodeBitsReceived
        turboDecodingSupport
    }
    MaxNoBits,
    MaxNoBits,
    TurboSupport,

```

maxSimultaneousTransChs	MaxSimultaneousTransChsDL,
maxSimultaneousCCTrCH-Count	MaxSimultaneousCCTrCH-Count,
maxReceivedTransportBlocks	MaxTransportBlocksDL,
maxNumberOfTFC-InTFCS	MaxNumberOfTFC-InTFCS-DL,
maxNumberOfTF	MaxNumberOfTF
}	
DRAC-SysInfo ::=	SEQUENCE {
transmissionProbability	TransmissionProbability,
maximumBitRate	MaximumBitRate
}	
DRAC-SysInfoList ::=	SEQUENCE (SIZE (1..maxDRACclasses)) OF
	DRAC-SysInfo
ESN-DS-41 ::=	BIT STRING (SIZE (32))
EstablishmentCause ::=	ENUMERATED {
	originatingConversationalCall,
	originatingStreamingCall,
	originatingInteractiveCall,
	originatingBackgroundCall,
	originatingSubscribedTrafficCall,
	terminatingConversationalCall,
	terminatingStreamingCall,
	terminatingInteractiveCall,
	terminatingBackgroundCall,
	emergencyCall,
	interRAT-CellReselection,
	interRAT-CellChangeOrder,
	registration,
	detach,
	highPrioritySignalling,
	lowPrioritySignalling,
	callRe-establishment,
	spare1 }
FailureCauseWithProtErr ::=	CHOICE {
configurationUnsupported	NULL,
physicalChannelFailure	NULL,
incompatibleSimultaneousReconfiguration	NULL,
compressedModeRuntimeError	TGPSI,
protocolError	ProtocolErrorInformation,
cellReselection	NULL,
invalidConfiguration	NULL,
configurationIncomplete	NULL,
unsupportedMeasurement	NULL,
spare1	NULL,
spare2	NULL,
spare3	NULL,
spare4	NULL,
spare5	NULL,
spare6	NULL,
spare7	NULL
}	
FailureCauseWithProtErrTrId ::=	SEQUENCE {
rrc-TransactionIdentifier	RRC-TransactionIdentifier,
failureCause	FailureCauseWithProtErr
}	
GSM-Measurements ::=	SEQUENCE {
gsm900	BOOLEAN,
dcs1800	BOOLEAN,
gsm1900	BOOLEAN
}	
ICS-Version ::=	ENUMERATED {
	r99 }
IMSI-and-ESN-DS-41 ::=	SEQUENCE {
imsi-DS-41	IMSI-DS-41,
esn-DS-41	ESN-DS-41
}	
IMSI-DS-41 ::=	OCTET STRING (SIZE (5..7))
InitialPriorityDelayList ::=	SEQUENCE (SIZE (maxASC)) OF
	NS-IP

```

InitialUE-Identity ::= CHOICE {
    imsi                IMSI-GSM-MAP,
    tmsi-and-LAI        TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI      P-TMSI-and-RAI-GSM-MAP,
    imei                IMEI,
    esn-DS-41           ESN-DS-41,
    imsi-DS-41          IMSI-DS-41,
    imsi-and-ESN-DS-41 IMSI-and-ESN-DS-41,
    tmsi-DS-41          TMSI-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode MessageAuthenticationCode,
    rrc-MessageSequenceNumber RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList RRC-MessageSequenceNumberList
}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uial
}

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection SEQUENCE {
        integrityProtInitNumber IntegrityProtInitNumber
    },
    modify dl-IntegrityProtActivationInfo SEQUENCE {
        IntegrityProtActivationInfo
    }
}

IntegrityProtectionModeInfo ::= SEQUENCE {
    integrityProtectionModeCommand IntegrityProtectionModeCommand,
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionAlgorithm IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MaxHcContextSpace ::= ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192
}

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am32
}

-- Actual value = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600
}

MaxNoBits ::= ENUMERATED {
    b640, b1280, b2560, b3840, b5120,
    b6400, b7680, b8960, b10240,
    b20480, b40960, b81920, b163840
}

MaxNoPhysChBitsReceived ::= ENUMERATED {
    b600, b1200, b2400, b3600,
    b4800, b7200, b9600, b14400,
    b19200, b28800, b38400, b48000,
    b57600, b67200, b76800
}

MaxNoSCCPCH-RL ::= ENUMERATED {
    r11
}

MaxNumberOfTF ::= ENUMERATED {
    tf32, tf64, tf128, tf256,
    tf512, tf1024
}

MaxNumberOfTFC-InTFCS-DL ::= ENUMERATED {
    tfc16, tfc32, tfc48, tfc64, tfc96,

```

```

        tfc128, tfc256, tfc512, tfc1024 }

MaxNumberOfTFC-InTFCS-UL ::=      ENUMERATED {
        tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
        tfc96, tfc128, tfc256, tfc512, tfc1024 }

MaxPhysChPerFrame ::=            INTEGER (1..224)

MaxPhysChPerTimeslot ::=         ENUMERATED {
        ts1, ts2 }

MaxPhysChPerTS ::=               INTEGER (1..16)

MaxSimultaneousCCTrCH-Count ::=  INTEGER (1..8)

MaxSimultaneousTransChsDL ::=    ENUMERATED {
        e4, e8, e16, e32 }

MaxSimultaneousTransChsUL ::=    ENUMERATED {
        e2, e4, e8, e16, e32 }

MaxTransportBlocksDL ::=         ENUMERATED {
        tb4, tb8, tb16, tb32, tb48,
        tb64, tb96, tb128, tb256, tb512 }

MaxTransportBlocksUL ::=         ENUMERATED {
        tb2, tb4, tb8, tb16, tb32, tb48,
        tb64, tb96, tb128, tb256, tb512 }

MaxTS-PerFrame ::=               INTEGER (1..14)

-- TABULAR: This IE contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.
MeasurementCapability ::=        SEQUENCE {
        downlinkCompressedMode      CompressedModeMeasCapability,
        uplinkCompressedMode        CompressedModeMeasCapability
}

MessageAuthenticationCode ::=    BIT STRING (SIZE (32))

MinimumSF-DL ::=                 ENUMERATED {
        sf1, sf16 }

MinimumSF-UL ::=                 ENUMERATED {
        sf1, sf2, sf4, sf8, sf16 }

MultiModeCapability ::=          ENUMERATED {
        tdd, fdd, fdd-tdd }

MultiRAT-Capability ::=          SEQUENCE {
        supportOfGSM                BOOLEAN,
        supportOfMulticarrier        BOOLEAN
}

N-300 ::=                        INTEGER (0..7)

N-301 ::=                        INTEGER (0..7)

N-302 ::=                        INTEGER (0..7)

N-304 ::=                        INTEGER (0..7)

N-308 ::=                        INTEGER (1..8)

N-310 ::=                        INTEGER (0..7)

N-312 ::=                        ENUMERATED {
        s1, s50, s100, s200, s400,
        s600, s800, s1000 }

N-313 ::=                        ENUMERATED {
        s1, s2, s4, s10, s20,
        s50, s100, s200 }

N-315 ::=                        ENUMERATED {
        s1, s50, s100, s200, s400,
        s600, s800, s1000 }

N-AccessFails ::=               INTEGER (1..64)

N-AP-RetransMax ::=              INTEGER (1..64)

```

```

NetworkAssistedGPS-Supported ::=      ENUMERATED {
                                        networkBased,
                                        ue-Based,
                                        bothNetworkAndUE-Based,
                                        noNetworkAssistedGPS }

NF-BO-AllBusy ::=                      INTEGER (0..31)

NF-BO-NoAICH ::=                       INTEGER (0..31)

NF-BO-Mismatch ::=                    INTEGER (0..127)

NS-BO-Busy ::=                         INTEGER (0..63)

NS-IP ::=                              INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::=            SEQUENCE {
    p-TMSI                             P-TMSI-GSM-MAP,
    rai                                 RAI
}

PagingCause ::=                       ENUMERATED {
                                        terminatingConversationalCall,
                                        terminatingStreamingCall,
                                        terminatingInteractiveCall,
                                        terminatingBackgroundCall,
                                        highPrioritySignalling,
                                        lowPrioritySignalling
}

PagingRecord ::=                      CHOICE {
    cn-Identity                         SEQUENCE {
        pagingCause                    PagingCause,
        cn-DomainIdentity              CN-DomainIdentity,
        cn-pagedUE-Identity            CN-PagedUE-Identity
    },
    utran-Identity                      SEQUENCE {
        u-RNTI                         U-RNTI,
        cn-OriginatedPage-connectedMode-UE SEQUENCE {
            pagingCause                PagingCause,
            cn-DomainIdentity          CN-DomainIdentity,
            pagingRecordTypeID         PagingRecordTypeID
        }
    }
}
OPTIONAL

PagingRecordList ::=                 SEQUENCE (SIZE (1..maxPage1)) OF
                                        PagingRecord

PDCP-Capability ::=                 SEQUENCE {
    losslessSRNS-RelocationSupport     BOOLEAN,
    supportForRfc2507                  CHOICE {
        notSupported                   NULL,
        supported                      MaxHcContextSpace
    }
}

PhysicalChannelCapability ::=        SEQUENCE {
    fddPhysChCapability                SEQUENCE {
        downlinkPhysChCapability       DL-PhysChCapabilityFDD,
        uplinkPhysChCapability         UL-PhysChCapabilityFDD
    }
    OPTIONAL,
    tddPhysChCapability                SEQUENCE {
        downlinkPhysChCapability       DL-PhysChCapabilityTDD,
        uplinkPhysChCapability         UL-PhysChCapabilityTDD
    }
    OPTIONAL
}

ProtocolErrorCause ::=              ENUMERATED {
                                        asnl-ViolationOrEncodingError,
                                        messageTypeNonexistent,
                                        messageNotCompatibleWithReceiverState,
                                        ie-ValueNotComprehended,
                                        conditionalInformationElementError,
                                        messageExtensionNotComprehended,
                                        spare1, spare2 }

ProtocolErrorIndicator ::=           ENUMERATED {
                                        noError, errorOccurred }

ProtocolErrorIndicatorWithMoreInfo ::=

```



```

noError                                CHOICE {
errorOccurred                           NULL,
rrc-TransactionIdentifier                SEQUENCE {
protocolErrorInformation                 RRC-TransactionIdentifier,
                                         ProtocolErrorInformation
}
}

ProtocolErrorMoreInformation ::= SEQUENCE {
diagnosticsType                          CHOICE {
type1                                    CHOICE {
asn1-ViolationOrEncodingError           NULL,
messageTypeNonexistent                  NULL,
messageNotCompatibleWithReceiverState   IdentificationOfReceivedMessage,
ie-ValueNotComprehended                  IdentificationOfReceivedMessage,
conditionalInformationElementError       IdentificationOfReceivedMessage,
messageExtensionNotComprehended          IdentificationOfReceivedMessage,
spare1                                    NULL,
spare2                                    NULL
},
spare                                     NULL
}
}

RadioFrequencyBand ::= ENUMERATED {
a, b, c, ab, ac, bc, abc }

Rb-timer-indicator ::= SEQUENCE {
t314-expired                             BOOLEAN,
t315-expired                             BOOLEAN }

Re-EstablishmentTimer ::= ENUMERATED {
useT314, useT315
}

RedirectionInfo ::= CHOICE {
frequencyInfo                             FrequencyInfo,
interRATInfo                               InterRATInfo
}

RejectionCause ::= ENUMERATED {
congestion,
unspecified }

ReleaseCause ::= ENUMERATED {
normalEvent,
unspecified,
pre-emptiveRelease,
congestion,
re-establishmentReject,
directedsignallingconnectionre-establishment,
userInactivity }

RF-Capability ::= SEQUENCE {
fddRF-Capability                          SEQUENCE {
ue-PowerClass                            UE-PowerClass,
txRxFrequencySeparation                  TxRxFrequencySeparation
}
OPTIONAL,
tddRF-Capability                          SEQUENCE {
ue-PowerClass                            UE-PowerClass,
radioFrequencyBandList                   RadioFrequencyBand,
chipRateCapability                       ChipRateCapability
}
OPTIONAL
}

RLC-Capability ::= SEQUENCE {
totalRLC-AM-BufferSize                    TotalRLC-AM-BufferSize,
maximumRLC-WindowSize                    MaximumRLC-WindowSize,
maximumAM-EntityNumber                    MaximumAM-EntityNumberRLC-Cap
}

RRC-MessageSequenceNumber ::= INTEGER (0..15)

RRC-MessageSequenceNumberList ::= SEQUENCE (SIZE (4..5)) OF
RRC-MessageSequenceNumber

RRC-StateIndicator ::= ENUMERATED {
cell-DCH, cell-FACH, cell-PCH, ura-PCH }

```

```

RRC-TransactionIdentifier ::=      INTEGER (0..3)

S-RNTI ::=                        BIT STRING (SIZE (20))

S-RNTI-2 ::=                       BIT STRING (SIZE (10))

SecurityCapability ::=             SEQUENCE {
    cipheringAlgorithmCap          BIT STRING (SIZE (16)),
    integrityProtectionAlgorithmCap BIT STRING (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported                   NULL,
    supported                       SEQUENCE {
        maxNoSCCPCH-RL            MaxNoSCCPCH-RL,
        simultaneousSCCPCH-DPCH-DPDCH-Reception
                                   BOOLEAN
        -- The IE above is applicable only if IE Support of PDSCH = TRUE
    }
}

SRNC-Identity ::=                 BIT STRING (SIZE (12))

START-Value ::=                   BIT STRING (SIZE (20))

STARTList ::=                      SEQUENCE (SIZE (1..maxCNdomains)) OF
    STARTSingle

STARTSingle ::=                   SEQUENCE {
    cn-DomainIdentity              CN-DomainIdentity,
    start-Value                     START-Value
}

SystemSpecificCapUpdateReq ::=    ENUMERATED {
    gsm }

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    SystemSpecificCapUpdateReq

T-300 ::=                          ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000 }

T-301 ::=                          ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000 }

T-302 ::=                          ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000 }

T-304 ::=                          ENUMERATED {
    ms100, ms200, ms400,
    ms1000, ms2000 }

T-305 ::=                          ENUMERATED {
    noUpdate, m5, m10, m30,
    m60, m120, m360, m720 }

T-307 ::=                          ENUMERATED {
    s5, s10, s15, s20,
    s30, s40, s50 }

T-308 ::=                          ENUMERATED {
    ms40, ms80, ms160, ms320 }

T-309 ::=                          INTEGER (1..8)

T-310 ::=                          ENUMERATED {
    ms40, ms80, ms120, ms160,
    ms200, ms240, ms280, ms320 }

T-311 ::=                          ENUMERATED {
    ms250, ms500, ms750, ms1000,
    ms1250, ms1500, ms1750, ms2000 }

```

```

T-312 ::= INTEGER (0..15)
T-313 ::= INTEGER (0..15)
T-314 ::= ENUMERATED {
    s0, s2, s4, s6, s8,
    s12, s16, s20 }
T-315 ::= ENUMERATED {
    s0, s10, s30, s60, s180,
    s600, s1200, s1800 }
T-316 ::= ENUMERATED {
    s0, s10, s20, s30, s40,
    s50, s-inf }
T-317 ::= ENUMERATED {
    s0, s10, s30, s60, s180,
    s600, s1200, s1800 }
T-CPCH ::= ENUMERATED {
    ct0, ct1 }
TMSI-and-LAI-GSM-MAP ::= SEQUENCE {
    tmsi TMSI-GSM-MAP,
    lai LAI
}
TMSI-DS-41 ::= OCTET STRING (SIZE (2..12))
TotalRLC-AM-BufferSize ::= ENUMERATED {
    kb2, kb10, kb50, kb100,
    kb150, kb500, kb1000 }
-- Actual value = IE value * 0.125
TransmissionProbability ::= INTEGER (1..8)
TransportChannelCapability ::= SEQUENCE {
    dl-TransChCapability DL-TransChCapability,
    ul-TransChCapability UL-TransChCapability
}
TurboSupport ::= CHOICE {
    notSupported NULL,
    supported MaxNoBits
}
TxRxFrequencySeparation ::= ENUMERATED {
    mhz190, mhz174-8-205-2,
    mhz134-8-245-2 }
U-RNTI ::= SEQUENCE {
    srnc-Identity SRNC-Identity,
    s-RNTI S-RNTI
}
U-RNTI-Short ::= SEQUENCE {
    srnc-Identity SRNC-Identity,
    s-RNTI-2 S-RNTI-2
}
UE-ConnTimersAndConstants ::= SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
    t-301 T-301 DEFAULT ms2000,
    n-301 N-301 DEFAULT 2,
    t-302 T-302 DEFAULT ms4000,
    n-302 N-302 DEFAULT 3,
    t-304 T-304 OPTIONAL,
    n-304 N-304 OPTIONAL,
    t-305 T-305 DEFAULT m30,
    t-307 T-307 DEFAULT s30,
    t-308 T-308 OPTIONAL,
    t-309 T-309 OPTIONAL,
    t-310 T-310 DEFAULT ms160,
    n-310 N-310 DEFAULT 4,
    t-311 T-311 DEFAULT ms2000,
    t-312 T-312 DEFAULT 1,
    n-312 N-312 DEFAULT s1,
    t-313 T-313 OPTIONAL,
    n-313 N-313 OPTIONAL,

```

```

t-314          T-314          OPTIONAL,
t-315          T-315          OPTIONAL,
n-315          N-315          OPTIONAL,
t-316          T-316          OPTIONAL,
t-317          T-317          OPTIONAL
}

UE-IdleTimersAndConstants ::= SEQUENCE {
  t-300          T-300,
  n-300          N-300,
  t-312          T-312,
  n-312          N-312
}

UE-MultiModeRAT-Capability ::= SEQUENCE {
  multiRAT-CapabilityList MultiRAT-Capability,
  multiModeCapability      MultiModeCapability
}

UE-PowerClass ::= INTEGER (1..4)

UE-RadioAccessCapability ::= SEQUENCE {
  ics-Version          ICS-Version,
  pdcp-Capability      PDCP-Capability,
  rlc-Capability        RLC-Capability,
  transportChannelCapability TransportChannelCapability,
  rf-Capability         RF-Capability,
  physicalChannelCapability PhysicalChannelCapability,
  ue-MultiModeRAT-Capability UE-MultiModeRAT-Capability,
  securityCapability    SecurityCapability,
  up-Capability         UP-Capability,
  measurementCapability MeasurementCapability OPTIONAL
}

UL-PhysChCapabilityFDD ::= SEQUENCE {
  maxNoDPDCH-BitsTransmitted MaxNoDPDCH-BitsTransmitted,
  supportOfPCPCH              BOOLEAN
}

UL-PhysChCapabilityTDD ::= SEQUENCE {
  maxTS-PerFrame          MaxTS-PerFrame,
  maxPhysChPerTimeslot    MaxPhysChPerTimeslot,
  minimumSF                MinimumSF-UL,
  supportOfPUSCH          BOOLEAN
}

UL-TransChCapability ::= SEQUENCE {
  maxNoBitsTransmitted      MaxNoBits,
  maxConvCodeBitsTransmitted MaxNoBits,
  turboDecodingSupport      TurboSupport,
  maxSimultaneousTransChs    MaxSimultaneousTransChsUL,
  modeSpecificInfo          CHOICE {
    fdd                      NULL,
    tdd                      SEQUENCE {
      maxSimultaneousCCTrCH-Count MaxSimultaneousCCTrCH-Count
    }
  },
  maxTransmittedBlocks      MaxTransportBlocksUL,
  maxNumberOfTFC-InTFCS     MaxNumberOfTFC-InTFCS-UL,
  maxNumberOfTF              MaxNumberOfTF
}

UP-Capability ::= SEQUENCE {
  standaloneLocMethodsSupported BOOLEAN,
  ue-BasedOTDOA-Supported       BOOLEAN,
  networkAssistedGPS-Supported  NetworkAssistedGPS-Supported,
  gps-ReferenceTimeCapable      BOOLEAN,
  supportForIDL                  BOOLEAN
}

URA-UpdateCause ::= ENUMERATED {
  changeOfURA,
  periodicURAUpdate,
  re-enteredServiceArea,
  spare1 }

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::= INTEGER (0..15)

-- *****
--

```

```

--      RADIO BEARER INFORMATION ELEMENTS (10.3.4)
--
-- *****

AlgorithmSpecificInfo ::=          CHOICE {
    rfc2507-Info                    RFC2507-Info
}

-- Upper limit is 2^32 - 1
COUNT-C ::=                      INTEGER (0..4294967295)

-- Upper limit is 2^25 - 1
COUNT-C-MSB ::=                 INTEGER (0..33554431)

DL-AM-RLC-Mode ::=              SEQUENCE {
    inSequenceDelivery              BOOLEAN,
    receivingWindowSize            ReceivingWindowSize,
    dl-RLC-StatusInfo              DL-RLC-StatusInfo
}

DL-LogicalChannelMapping ::=     SEQUENCE {
    -- TABULAR: DL-TransportChannelType contains TransportChannelIdentity as well.
    dl-TransportChannelType        DL-TransportChannelType,
    logicalChannelIdentity          LogicalChannelIdentity           OPTIONAL
}

DL-LogicalChannelMappingList ::= SEQUENCE (SIZE (1..maxLoCHperRLC)) OF
    DL-LogicalChannelMapping

DL-RLC-Mode ::=                 CHOICE {
    dl-AM-RLC-Mode                 DL-AM-RLC-Mode,
    dl-UM-RLC-Mode                 NULL,
    dl-TM-RLC-Mode                 DL-TM-RLC-Mode
}

DL-RLC-StatusInfo ::=          SEQUENCE {
    timerStatusProhibit            TimerStatusProhibit           OPTIONAL,
    timerEPC                       TimerEPC                       OPTIONAL,
    missingPU-Indicator             BOOLEAN,
    timerStatusPeriodic            TimerStatusPeriodic           OPTIONAL
}

DL-TM-RLC-Mode ::=             SEQUENCE {
    segmentationIndication         BOOLEAN
}

DL-TransportChannelType ::=     CHOICE {
    dch                             TransportChannelIdentity,
    fach                             NULL,
    dsch                             TransportChannelIdentity
}

ExpectReordering ::=           ENUMERATED {
    reorderingNotExpected,
    reorderingExpected }

ExplicitDiscard ::=            SEQUENCE {
    timerMRW                        TimerMRW,
    timerDiscard                    TimerDiscard,
    maxMRW                          MaxMRW
}

HeaderCompressionInfo ::=      SEQUENCE {
    algorithmSpecificInfo           AlgorithmSpecificInfo
}

HeaderCompressionInfoList ::=  SEQUENCE (SIZE (1..maxPDCPALgoType)) OF
    HeaderCompressionInfo

LogicalChannelIdentity ::=      INTEGER (1..15)

LosslessSRNS-RelocSupport ::=  CHOICE {
    supported                       MaxPDCP-SN-WindowSize,
    notSupported                     NULL
}

MAC-LogicalChannelPriority ::=  INTEGER (1..8)

MaxDAT ::=                     ENUMERATED {
    dat1, dat2, dat3, dat4, dat5, dat6,
    dat7, dat8, dat9, dat10, dat15, dat20,
}

```

```

        dat25, dat30, dat35, dat40 }

MaxDAT-Retransmissions ::=
    maxDAT
    timerMRW
    maxMRW
}

MaxMRW ::=
    ENUMERATED {
        mm1, mm4, mm6, mm8, mm12, mm16,
        mm24, mm32 }

MaxPDCP-SN-WindowSize ::=
    ENUMERATED {
        sn255, sn65535 }

MaxRST ::=
    ENUMERATED {
        rst1, rst4, rst6, rst8, rst12,
        rst16, rst24, rst32 }

NoExplicitDiscard ::=
    ENUMERATED {
        dt10, dt20, dt30, dt40, dt50,
        dt60, dt70, dt80, dt90, dt100 }

PDCP-Info ::=
    losslessSRNS-RelocSupport      LosslessSRNS-RelocSupport      OPTIONAL,
    pdcp-PDU-Header                PDCP-PDU-Header,
    -- TABULAR: The IE above is MD in the tabular format and it can be encoded
    -- in one bit, so the OPTIONAL is removed for compactness.
    headerCompressionInfoList      HeaderCompressionInfoList      OPTIONAL
}

PDCP-InfoReconfig ::=
    pdcp-Info
    pdcp-SN-Info
}

PDCP-PDU-Header ::=
    ENUMERATED {
        present, absent }

PDCP-SN-Info ::=
    INTEGER (0..65535)

Poll-PU ::=
    ENUMERATED {
        pu1, pu2, pu4, pu8, pu16,
        pu32, pu64, pu128 }

Poll-SDU ::=
    ENUMERATED {
        sdu1, sdu4, sdu16, sdu64 }

PollingInfo ::=
    timerPollProhibit              TimerPollProhibit              OPTIONAL,
    timerPoll                      TimerPoll                      OPTIONAL,
    poll-PU                        Poll-PU                        OPTIONAL,
    poll-SDU                       Poll-SDU                       OPTIONAL,
    lastTransmissionPU-Poll        BOOLEAN,
    lastRetransmissionPU-Poll      BOOLEAN,
    pollWindow                     PollWindow                     OPTIONAL,
    timerPollPeriodic              TimerPollPeriodic              OPTIONAL
}

PollWindow ::=
    ENUMERATED {
        pw50, pw60, pw70, pw80, pw85,
        pw90, pw95, pw99 }

PredefinedConfigIdentity ::=
    INTEGER (0..15)

PredefinedConfigValueTag ::=
    INTEGER (0..15)

PredefinedRB-Configuration ::=
    srb-InformationList            SRB-InformationSetupList,
    rb-InformationList             RB-InformationSetupList
}

PreDefRadioConfiguration ::=
    -- User equipment IEs
    re-EstablishmentTimer         Re-EstablishmentTimer,
    -- Radio bearer IEs
    predefinedRB-Configuration     PredefinedRB-Configuration,
    -- Transport channel IEs
    preDefTransChConfiguration     PreDefTransChConfiguration,
    -- Physical channel IEs
    preDefPhyChConfiguration       PreDefPhyChConfiguration
}

```

```

RAB-Info ::=
  rab-Identity
  cn-DomainIdentity
  nas-Synchronisation-Indicator
  re-EstablishmentTimer
}
SEQUENCE {
  RAB-Identity,
  CN-DomainIdentity,
  NAS-Synchronisation-Indicator OPTIONAL,
  Re-EstablishmentTimer
}

RAB-InformationList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
  RAB-Info

RAB-InformationReconfigList ::= SEQUENCE (SIZE (1.. maxRABsetup)) OF
  RAB-InformationReconfig

RAB-InformationReconfig ::= SEQUENCE {
  rab-Identity
  cn-DomainIdentity
  nas-Synchronisation-Indicator
}
SEQUENCE {
  RAB-Identity,
  CN-DomainIdentity,
  NAS-Synchronisation-Indicator
}

RAB-Info-Post ::= SEQUENCE {
  rab-Identity
  cn-DomainIdentity
  nas-Synchronisation-Indicator
}
SEQUENCE {
  RAB-Identity,
  CN-DomainIdentity,
  NAS-Synchronisation-Indicator OPTIONAL
}

RAB-InformationSetup ::= SEQUENCE {
  rab-Info
  rb-InformationSetupList
}
SEQUENCE {
  RAB-Info,
  RB-InformationSetupList
}

RAB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
  RAB-InformationSetup

RB-ActivationTimeInfo ::= SEQUENCE {
  rb-Identity
  rlc-SequenceNumber
}
SEQUENCE {
  RB-Identity,
  RLC-SequenceNumber
}

RB-ActivationTimeInfoList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-ActivationTimeInfo

RB-COUNT-C-Information ::= SEQUENCE {
  rb-Identity
  count-C-UL
  count-C-DL
}
SEQUENCE {
  RB-Identity,
  COUNT-C,
  COUNT-C
}

RB-COUNT-C-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
  RB-COUNT-C-Information

RB-COUNT-C-MSB-Information ::= SEQUENCE {
  rb-Identity
  count-C-MSB-UL
  count-C-MSB-DL
}
SEQUENCE {
  RB-Identity,
  COUNT-C-MSB,
  COUNT-C-MSB
}

RB-COUNT-C-MSB-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
  RB-COUNT-C-MSB-Information

RB-Identity ::= INTEGER (1..32)

RB-IdentityList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-Identity

RB-InformationAffected ::= SEQUENCE {
  rb-Identity
  rb-MappingInfo
}
SEQUENCE {
  RB-Identity,
  RB-MappingInfo
}

RB-InformationAffectedList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-InformationAffected

RB-InformationReconfig ::= SEQUENCE {
  rb-Identity
  pdcp-Info
  rlc-Info
  rb-MappingInfo
  rb-StopContinue
}
SEQUENCE {
  RB-Identity,
  PDCP-InfoReconfig
  RLC-Info
  RB-MappingInfo
  RB-StopContinue
}
OPTIONAL,
OPTIONAL,
OPTIONAL,
OPTIONAL

RB-InformationReconfigList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-InformationReconfig

```

```

RB-InformationReleaseList ::= SEQUENCE (SIZE (1..maxRB)) OF
    RB-Identity

RB-InformationSetup ::= SEQUENCE {
    rb-Identity RB-Identity,
    pdcp-Info PDCP-Info OPTIONAL,
    rlc-Info RLC-Info,
    rb-MappingInfo RB-MappingInfo
}

RB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRBperRAB)) OF
    RB-InformationSetup

RB-MappingInfo ::= SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
    RB-MappingOption

RB-MappingOption ::= SEQUENCE {
    ul-LogicalChannelMappings UL-LogicalChannelMappings OPTIONAL,
    dl-LogicalChannelMappingList DL-LogicalChannelMappingList OPTIONAL
}

RB-StopContinue ::= ENUMERATED {
    stopRB, continueRB }

RB-WithPDCP-Info ::= SEQUENCE {
    rb-Identity RB-Identity,
    pdcp-SN-Info PDCP-SN-Info
}

RB-WithPDCP-InfoList ::= SEQUENCE (SIZE (1..maxRBperRABs)) OF
    RB-WithPDCP-Info

ReceivingWindowSize ::= ENUMERATED {
    rw1, rw8, rw16, rw32, rw64, rw128, rw256,
    rw512, rw768, rw1024, rw1536, rw2047,
    rw2560, rw3072, rw3584, rw4095 }

RFC2507-Info ::= SEQUENCE {
    f-MAX-PERIOD INTEGER (1..65535) DEFAULT 256,
    f-MAX-TIME INTEGER (1..255) DEFAULT 5,
    max-HEADER INTEGER (60..65535) DEFAULT 168,
    tcp-SPACE INTEGER (3..255) DEFAULT 15,
    non-TCP-SPACE INTEGER (3..65535) DEFAULT 15,
    expectReordering ExpectReordering
    -- TABULAR: The IE above has only two possible values, so using Optional or Default
    -- would be wasteful
}

RLC-Info ::= SEQUENCE {
    ul-RLC-Mode UL-RLC-Mode OPTIONAL,
    dl-RLC-Mode DL-RLC-Mode OPTIONAL
}

RLC-SequenceNumber ::= INTEGER (0..4095)

RLC-SizeInfo ::= SEQUENCE {
    rlc-SizeIndex INTEGER (1..maxTF)
}

RLC-SizeExplicitList ::= SEQUENCE (SIZE (1..maxTF)) OF
    RLC-SizeInfo

SRB-InformationSetup ::= SEQUENCE {
    rb-Identity RB-Identity OPTIONAL,
    -- The default value for the IE above is the smallest value not used yet.
    rlc-Info RLC-Info,
    rb-MappingInfo RB-MappingInfo
}

SRB-InformationSetupList ::= SEQUENCE (SIZE (1..maxSRBsetup)) OF
    SRB-InformationSetup

SRB-InformationSetupList2 ::= SEQUENCE (SIZE (3..4)) OF
    SRB-InformationSetup

TimerDiscard ::= ENUMERATED {
    td0-1, td0-25, td0-5, td0-75,
    td1, td1-25, td1-5, td1-75,
    td2, td2-5, td3, td3-5, td4,
    td4-5, td5, td7-5 }

TimerEPC ::= ENUMERATED {
    te50, te60, te70, te80, te90,

```



```

te100, te120, te140, te160, te180,
te200, te300, te400, te500, te700,
te900 }

TimerMRW ::=
ENUMERATED {
te50, te60, te70, te80, te90, te100,
te120, te140, te160, te180, te200,
te300, te400, te500, te700, te900 }

TimerPoll ::=
ENUMERATED {
tp10, tp20, tp30, tp40, tp50,
tp60, tp70, tp80, tp90, tp100,
tp110, tp120, tp130, tp140, tp150,
tp160, tp170, tp180, tp190, tp200,
tp210, tp220, tp230, tp240, tp250,
tp260, tp270, tp280, tp290, tp300,
tp310, tp320, tp330, tp340, tp350,
tp360, tp370, tp380, tp390, tp400,
tp410, tp420, tp430, tp440, tp450,
tp460, tp470, tp480, tp490, tp500,
tp510, tp520, tp530, tp540, tp550,
tp600, tp650, tp700, tp750, tp800,
tp850, tp900, tp950, tp1000 }

TimerPollPeriodic ::=
ENUMERATED {
tper100, tper200, tper300, tper400,
tper500, tper750, tper1000, tper2000 }

TimerPollProhibit ::=
ENUMERATED {
tpp10, tpp20, tpp30, tpp40, tpp50,
tpp60, tpp70, tpp80, tpp90, tpp100,
tpp110, tpp120, tpp130, tpp140, tpp150,
tpp160, tpp170, tpp180, tpp190, tpp200,
tpp210, tpp220, tpp230, tpp240, tpp250,
tpp260, tpp270, tpp280, tpp290, tpp300,
tpp310, tpp320, tpp330, tpp340, tpp350,
tpp360, tpp370, tpp380, tpp390, tpp400,
tpp410, tpp420, tpp430, tpp440, tpp450,
tpp460, tpp470, tpp480, tpp490, tpp500,
tpp510, tpp520, tpp530, tpp540, tpp550,
tpp600, tpp650, tpp700, tpp750, tpp800,
tpp850, tpp900, tpp950, tpp1000 }

TimerRST ::=
ENUMERATED {
tr50, tr100, tr150, tr200, tr250, tr300,
tr350, tr400, tr450, tr500, tr550,
tr600, tr700, tr800, tr900, tr1000 }

TimerStatusPeriodic ::=
ENUMERATED {
tsp100, tsp200, tsp300, tsp400, tsp500,
tsp750, tsp1000, tsp2000 }

TimerStatusProhibit ::=
ENUMERATED {
tsp10, tsp20, tsp30, tsp40, tsp50,
tsp60, tsp70, tsp80, tsp90, tsp100,
tsp110, tsp120, tsp130, tsp140, tsp150,
tsp160, tsp170, tsp180, tsp190, tsp200,
tsp210, tsp220, tsp230, tsp240, tsp250,
tsp260, tsp270, tsp280, tsp290, tsp300,
tsp310, tsp320, tsp330, tsp340, tsp350,
tsp360, tsp370, tsp380, tsp390, tsp400,
tsp410, tsp420, tsp430, tsp440, tsp450,
tsp460, tsp470, tsp480, tsp490, tsp500,
tsp510, tsp520, tsp530, tsp540, tsp550,
tsp600, tsp650, tsp700, tsp750, tsp800,
tsp850, tsp900, tsp950, tsp1000 }

TransmissionRLC-Discard ::=
timerBasedExplicit
timerBasedNoExplicit
maxDAT-Retransmissions
noDiscard
}

TransmissionWindowSize ::=
ENUMERATED {
tw1, tw8, tw16, tw32, tw64, tw128, tw256,
tw512, tw768, tw1024, tw1536, tw2047,
tw2560, tw3072, tw3584, tw4095 }

UL-AM-RLC-Mode ::=
transmissionRLC-Discard
transmissionWindowSize
timerRST
SEQUENCE {
TransmissionRLC-Discard,
TransmissionWindowSize,
TimerRST,

```

```

    max-RST                               MaxRST,
    pollingInfo                             PollingInfo
}

UL-LogicalChannelMapping ::=             SEQUENCE {
    -- TABULAR: UL-TransportChannelType contains TransportChannelIdentity as well.
    ul-TransportChannelType                UL-TransportChannelType,
    logicalChannelIdentity                  LogicalChannelIdentity           OPTIONAL,
    rlc-SizeList                            CHOICE {
        allSizes                            NULL,
        configured                          NULL,
        explicitList                         RLC-SizeExplicitList
    },
    mac-LogicalChannelPriority              MAC-LogicalChannelPriority
}

UL-LogicalChannelMappingList ::=         SEQUENCE {
    rlc-LogicalChannelMappingIndicator     BOOLEAN,
    ul-LogicalChannelMapping               SEQUENCE (SIZE (maxLoChperRLC)) OF
                                           UL-LogicalChannelMapping
}

UL-LogicalChannelMappings ::=           CHOICE {
    oneLogicalChannel                       UL-LogicalChannelMapping,
    twoLogicalChannels                       UL-LogicalChannelMappingList
}

UL-RLC-Mode ::=                          CHOICE {
    ul-AM-RLC-Mode                          UL-AM-RLC-Mode,
    ul-UM-RLC-Mode                          UL-UM-RLC-Mode,
    ul-TM-RLC-Mode                          UL-TM-RLC-Mode,
    spare                                    NULL
}

UL-TM-RLC-Mode ::=                       SEQUENCE {
    transmissionRLC-Discard                 TransmissionRLC-Discard           OPTIONAL,
    segmentationIndication                  BOOLEAN
}

UL-UM-RLC-Mode ::=                       SEQUENCE {
    transmissionRLC-Discard                 TransmissionRLC-Discard           OPTIONAL
}

UL-TransportChannelType ::=             CHOICE {
    dch                                       TransportChannelIdentity,
    rach                                     NULL,
    cpch                                     NULL,
    usch                                     NULL
}

-- *****
--
--     TRANSPORT CHANNEL INFORMATION ELEMENTS (10.3.5)
--
-- *****

AllowedTFC-List ::=                      SEQUENCE (SIZE (1..maxTFC)) OF
                                           TFC-Value

AllowedTFI-List ::=                      SEQUENCE (SIZE (1..maxTF)) OF
                                           INTEGER (0..31)

BitModeRLC-SizeInfo ::=                  CHOICE {
    sizeType1                               INTEGER (1..127),
    sizeType2                               SEQUENCE {
        part1                               INTEGER (0..15),
        part2                               INTEGER (1..7)           OPTIONAL
        -- Actual size = (part1 * 8) + 128 + part2
    },
    sizeType3                               SEQUENCE {
        part1                               INTEGER (0..47),
        part2                               INTEGER (1..15)           OPTIONAL
        -- Actual size = (part1 * 16) + 256 + part2
    },
    sizeType4                               SEQUENCE {
        part1                               INTEGER (0..62),
        part2                               INTEGER (1..63)           OPTIONAL
        -- Actual size = (part1 * 64) + 1024 + part2
    }
}
-- Actual value = IE value * 0.1

```

```

BLER-QualityValue ::= INTEGER (-63..0)

ChannelCodingType ::= CHOICE {
    noCoding          NULL,
    convolutional     CodingRate,
    turbo             NULL
}

CodingRate ::= ENUMERATED {
    half,
    third }

CommonDynamicTF-Info ::= SEQUENCE {
    rlc-Size          CHOICE {
        fdd           SEQUENCE {
            octetModeRLC-SizeInfoType2  OctetModeRLC-SizeInfoType2
        },
        tdd           SEQUENCE {
            commonTDD-Choice             CHOICE {
                bitModeRLC-SizeInfo      BitModeRLC-SizeInfo,
                octetModeRLC-SizeInfoType1 OctetModeRLC-SizeInfoType1
            }
        }
    },
    numberOfTbSizeList SEQUENCE (SIZE (1..maxTF)) OF
        NumberOfTransportBlocks,
    logicalChannelList LogicalChannelList
}

CommonDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    commonTDD-Choice CHOICE {
        bitModeRLC-SizeInfo      BitModeRLC-SizeInfo,
        octetModeRLC-SizeInfoType1 OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeAndTTIList     NumberOfTbSizeAndTTIList,
    logicalChannelList           LogicalChannelList
}

CommonDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
    CommonDynamicTF-Info

CommonDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    CommonDynamicTF-Info-DynamicTTI

CommonTransChTFS ::= SEQUENCE {
    tti CHOICE {
        tti10      CommonDynamicTF-InfoList,
        tti20      CommonDynamicTF-InfoList,
        tti40      CommonDynamicTF-InfoList,
        tti80      CommonDynamicTF-InfoList,
        dynamic     CommonDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information SemistaticTF-Information
}

CPCH-SetID ::= INTEGER (1..maxCPCHsets)

CRC-Size ::= ENUMERATED {
    crc0, crc8, crc12, crc16, crc24 }

DedicatedDynamicTF-Info ::= SEQUENCE {
    rlc-Size          CHOICE {
        bitMode      BitModeRLC-SizeInfo,
        octetModeType1 OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeList SEQUENCE (SIZE (1..maxTF)) OF
        NumberOfTransportBlocks,
    logicalChannelList LogicalChannelList
}

DedicatedDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    rlc-Size          CHOICE {
        bitMode      BitModeRLC-SizeInfo,
        octetModeType1 OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeAndTTIList     NumberOfTbSizeAndTTIList,
    logicalChannelList           LogicalChannelList
}

DedicatedDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info

```

```

DedicatedDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info-DynamicTTI

DedicatedTransChTFIS ::= SEQUENCE {
    tti CHOICE {
        tti10 DedicatedDynamicTF-InfoList,
        tti20 DedicatedDynamicTF-InfoList,
        tti40 DedicatedDynamicTF-InfoList,
        tti80 DedicatedDynamicTF-InfoList,
        dynamic DedicatedDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information SemistaticTF-Information
}

DL-AddReconfTransChInfo2List ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation2

DL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of messages other than: Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation ::= SEQUENCE {
    dl-transportChannelIdentity TransportChannelIdentity,
    tfs-SignallingMode CHOICE {
        explicit TransportFormatSet,
        sameAsULTrCH TransportChannelIdentity
    },
    dch-QualityTarget QualityTarget OPTIONAL,
    tm-SignallingInfo TM-SignallingInfo OPTIONAL
}

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation2 ::= SEQUENCE {
    transportChannelIdentity TransportChannelIdentity,
    tfs-SignallingMode CHOICE {
        explicit TransportFormatSet,
        sameAsULTrCH TransportChannelIdentity
    },
    qualityTarget QualityTarget OPTIONAL
}

DL-CommonTransChInfo ::= SEQUENCE {
    sccpch-TFCS TFCS OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            tfcs-SignallingMode CHOICE {
                explicit TFCS,
                sameAsUL NULL
            } OPTIONAL,
            tdd SEQUENCE {
                individualDL-CCTrCH-InfoList IndividualDL-CCTrCH-InfoList OPTIONAL
            }
        }
    }
}

DL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

DRAC-ClassIdentity ::= INTEGER (1..maxDRACclasses)

DRAC-StaticInformation ::= SEQUENCE {
    transmissionTimeValidity TransmissionTimeValidity,
    timeDurationBeforeRetry TimeDurationBeforeRetry,
    drac-ClassIdentity DRAC-ClassIdentity
}

DRAC-StaticInformationList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DRAC-StaticInformation

ExplicitTFCS-Configuration ::= CHOICE {
    complete TFCS-ReconfAdd,
    addition TFCS-ReconfAdd,
    removal TFCS-RemovalList,
    replacement SEQUENCE {
        tfcsRemoval TFCS-RemovalList,

```

```

        tfcsAdd
    }
}

GainFactor ::=
    INTEGER (0..15)

GainFactorInformation ::=
    CHOICE {
        signalledGainFactors
        computedGainFactors
    }

IndividualDL-CCTrCH-Info ::=
    SEQUENCE {
        dl-TFCS-Identity
        tfcs-SignallingMode
        explicit
        sameAsUL
    }
}

IndividualDL-CCTrCH-InfoList ::=
    SEQUENCE (SIZE (1..maxCCTrCH)) OF
        IndividualDL-CCTrCH-Info

IndividualUL-CCTrCH-Info ::=
    SEQUENCE {
        ul-TFCS-Identity
        ul-TFCS
    }
}

IndividualUL-CCTrCH-InfoList ::=
    SEQUENCE (SIZE (1..maxCCTrCH)) OF
        IndividualUL-CCTrCH-Info

LogicalChannelByRB ::=
    SEQUENCE {
        rb-Identity
        logChOfRb
    }
}

LogicalChannelList ::=
    CHOICE {
        allSizes
        configured
        explicitList
    }

NumberOfTbSizeAndTTIList ::=
    SEQUENCE (SIZE (1..maxTF)) OF SEQUENCE {
        numberOfTransportBlocks
        transmissionTimeInterval
    }
}

MessType ::=
    ENUMERATED {
        transportFormatCombinationControl
    }

Non-allowedTFC-List ::=
    SEQUENCE (SIZE (1..maxTFC)) OF
        TFC-Value

NumberOfTransportBlocks ::=
    CHOICE {
        zero
        one
        small
        large
    }

OctetModeRLC-SizeInfoType1 ::=
    CHOICE {
        sizeType1
            INTEGER (0..31),
            -- Actual size = (8 * sizeType1) + 16
        sizeType2
            SEQUENCE {
                part1
                    INTEGER (0..23),
                part2
                    INTEGER (1..3)
            },
            -- Actual size = (32 * part1) + 272 + (part2 * 8)
        sizeType3
            SEQUENCE {
                part1
                    INTEGER (0..61),
                part2
                    INTEGER (1..7)
            },
            -- Actual size = (64 * part1) + 1040 + (part2 * 8)
    }
}

OctetModeRLC-SizeInfoType2 ::=
    CHOICE {
        sizeType1
            INTEGER (0..31),
            -- Actual size = (sizeType1 * 8) + 48
        sizeType2
            INTEGER (0..63),
            -- Actual size = (sizeType2 * 16) + 312
        sizeType3
            INTEGER (0..56)
    }
}

```

```

-- Actual size = (sizeType3 *64) + 1384
}

PowerOffsetInformation ::=          SEQUENCE {
    gainFactorInformation            GainFactorInformation,
    -- PowerOffsetPp-m is always absent in TDD
    powerOffsetPp-m                 PowerOffsetPp-m                OPTIONAL
}

PowerOffsetPp-m ::=                INTEGER (-5..10)

PreDefTransChConfiguration ::=     SEQUENCE {
    ul-CommonTransChInfo            UL-CommonTransChInfo,
    ul-AddReconfTrChInfoList        UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo            DL-CommonTransChInfo,
    dl-TrChInfoList                 DL-AddReconfTransChInfoList
}

QualityTarget ::=                  SEQUENCE {
    bler-QualityValue                BLER-QualityValue
}

RateMatchingAttribute ::=          INTEGER (1..hiRM)

ReferenceTFC-ID ::=                INTEGER (0..3)

RestrictedTrChInfo ::=              SEQUENCE {
    restrictedTrChIdentity            TransportChannelIdentity,
    allowedTFI-List                  AllowedTFI-List                OPTIONAL
}

RestrictedTrChInfoList ::=          SEQUENCE (SIZE (1..maxTrCH)) OF
    RestrictedTrChInfo

SemistaticTF-Information ::=        SEQUENCE {
    -- TABULAR: Transmission time interval has been included in the IE CommonTransChTFS.
    channelCodingType                ChannelCodingType,
    rateMatchingAttribute             RateMatchingAttribute,
    crc-Size                          CRC-Size
}

SignalledGainFactors ::=            SEQUENCE {
    modeSpecificInfo                 CHOICE {
        fdd                           SEQUENCE {
            gainFactorBetaC            GainFactor
        },
        tdd                            NULL
    },
    gainFactorBetaD                   GainFactor,
    referenceTFC-ID                   ReferenceTFC-ID                OPTIONAL
}

SplitTFI-Signalling ::=             SEQUENCE {
    splitType                          SplitType                OPTIONAL,
    tfci-Field2-Length                INTEGER (1..10)           OPTIONAL,
    tfci-Field1-Information            ExplicitTFCS-Configuration OPTIONAL,
    tfci-Field2-Information            TFCI-Field2-Information  OPTIONAL
}

SplitType ::=                       ENUMERATED {
    hardSplit, logicalSplit }

TFC-Subset ::=                      CHOICE {
    minimumAllowedTFC-Number          TFC-Value,
    allowedTFC-List                   AllowedTFC-List,
    non-allowedTFC-List               Non-allowedTFC-List,
    restrictedTrChInfoList            RestrictedTrChInfoList,
    fullTFCS                           NULL
}

TFC-Value ::=                       INTEGER (0..1023)

TFCI-Field2-Information ::=          CHOICE {
    tfci-Range                         TFCI-RangeList,
    explicit                           ExplicitTFCS-Configuration
}

TFCI-Range ::=                      SEQUENCE {
    maxTFCIField2Value                INTEGER (1..1023),
    tfcs-InfoForDSCH                  TFCI-InfoForDSCH
}

```

```

}

TFCSI-RangeList ::=
    SEQUENCE (SIZE (1..maxPDSCH-TFCSIGroups)) OF
        TFCSI-Range

TFCS ::=
    CHOICE {
        normalTFCSI-Signalling
        splitTFCSI-Signalling
    }

TFCS-Identity ::=
    SEQUENCE {
        tfcs-ID                INTEGER (1..8)                DEFAULT 1,
        sharedChannelIndicator BOOLEAN
    }

TFCS-IdentityPlain ::=
    INTEGER (1..8)

TFCS-InfoForDSCH ::=
    CHOICE {
        ctfc2bit                INTEGER (0..3),
        ctfc4bit                INTEGER (0..15),
        ctfc6bit                INTEGER (0..63),
        ctfc8bit                INTEGER (0..255),
        ctfc12bit               INTEGER (0..4095),
        ctfc16bit               INTEGER (0..65535),
        ctfc24bit               INTEGER (0..16777215)
    }

TFCS-ReconfAdd ::=
    SEQUENCE{
        CHOICE{
            ctfc2Bit            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
                ctfc2          INTEGER (0..3),
                gainFactorInformation    OPTIONAL
            },
            ctfc4Bit            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
                ctfc4          INTEGER (0..15),
                gainFactorInformation    OPTIONAL
            },
            ctfc6Bit            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
                ctfc6          INTEGER (0..63),
                gainFactorInformation    OPTIONAL
            },
            ctfc8Bit            SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
                ctfc8          INTEGER (0..255),
                gainFactorInformation    OPTIONAL
            },
            ctfc12Bit           SEQUENCE (SIZE(1..maxTFC)) OF SEQUENCE {
                ctfc12         INTEGER (0..4095),
                gainFactorInformation    OPTIONAL
            },
            ctfc16Bit           SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
                ctfc16         INTEGER(0..65535),
                gainFactorInformation    OPTIONAL
            },
            ctfc24Bit           SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
                ctfc24         INTEGER(0..16777215),
                gainFactorInformation    OPTIONAL
            }
        }
    }

TFCS-Removal ::=
    SEQUENCE {
        tfci                    INTEGER (0..1023)
    }

TFCS-RemovalList ::=
    SEQUENCE (SIZE (1..maxTFC)) OF
        TFCS-Removal

TimeDurationBeforeRetry ::=
    INTEGER (1..256)

TM-SignallingInfo ::=
    SEQUENCE {
        messType                MessType,
        tm-SignallingMode       CHOICE {
            mode1                NULL,
            mode2                SEQUENCE {
                ul-controlledTrChList    UL-ControlledTrChList
            }
        }
    }

TransmissionTimeInterval ::=
    ENUMERATED {

```

```

tti10, tti20, tti40, tti80 }

TransmissionTimeValidity ::= INTEGER (1..256)

TransportChannelIdentity ::= INTEGER (1..32)

TransportFormatSet ::= CHOICE {
    dedicatedTransChTFS    DedicatedTransChTFS,
    commonTransChTFS      CommonTransChTFS
}

UL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    UL-AddReconfTransChInformation

UL-AddReconfTransChInformation ::= SEQUENCE {
    transportChannelIdentity    TransportChannelIdentity,
    transportFormatSet          TransportFormatSet
}

UL-CommonTransChInfo ::= SEQUENCE {
    tfc-Subset                  TFC-Subset                OPTIONAL,
    prach-TFCS                  TFCS                    OPTIONAL,
    modeSpecificInfo           CHOICE {
        fdd                     SEQUENCE {
            ul-TFCS              TFCS
        },
        tdd                     SEQUENCE {
            individualUL-CCTrCH-InfoList    IndividualUL-CCTrCH-InfoList    OPTIONAL,
            ul-TFCS                        TFCS
        }
    }
}

UL-ControlledTrChList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

UL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

-- *****
--
--     PHYSICAL CHANNEL INFORMATION ELEMENTS (10.3.6)
--
-- *****

AC-To-ASC-Mapping ::= INTEGER (0..7)

AC-To-ASC-MappingTable ::= SEQUENCE (SIZE (maxASCmap)) OF
    AC-To-ASC-Mapping

AccessServiceClass ::= SEQUENCE {
    availableSignatureStartIndex    INTEGER (0..15),
    availableSignatureEndIndex      INTEGER (0..15),
    assignedSubChannelNumber        BIT STRING (SIZE(4))
}

AccessServiceClassIndex ::= INTEGER (1..8)

AICH-Info ::= SEQUENCE {
    channelisationCode256          ChannelisationCode256,
    sttd-Indicator                 BOOLEAN,
    aich-TransmissionTiming        AICH-TransmissionTiming
}

AICH-PowerOffset ::= INTEGER (-22..5)

AICH-TransmissionTiming ::= ENUMERATED {
    e0, e1
}

AllocationPeriodInfo ::= SEQUENCE {
    allocationActivationTime        INTEGER (1..256),
    allocationDuration              INTEGER (1..256)
}

Alpha ::= INTEGER (0..8)

AP-AICH-ChannelisationCode ::= INTEGER (0..255)

AP-PreambleScramblingCode ::= INTEGER (0..79)

```



```

AP-Signature ::= INTEGER (0..15)

AP-Signature-VCAM ::= SEQUENCE {
    ap-Signature AP-Signature,
    availableAP-SubchannelList AvailableAP-SubchannelList OPTIONAL
}

AP-Subchannel ::= INTEGER (0..11)

ASC ::= SEQUENCE {
    accessServiceClass AccessServiceClassIndex,
    repetitionPeriodAndOffset ASC-RepetitionPeriodAndOffset OPTIONAL
    -- TABULAR: The offset is nested in the repetition period
}

ASC-RepetitionPeriodAndOffset ::= CHOICE {
    rp1 NULL,
    rp2 INTEGER (0..1),
    rp4 INTEGER (0..3),
    rp8 INTEGER (0..7)
}

ASCSetting ::= SEQUENCE {
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available signature and sub-channels
    accessServiceClass AccessServiceClass OPTIONAL
}

AvailableAP-Signature-VCAMList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
    AP-Signature-VCAM

AvailableAP-SignatureList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
    AP-Signature

AvailableAP-SubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-APsubCh)) OF
    AP-Subchannel

AvailableMinimumSF-ListVCAM ::= SEQUENCE (SIZE (1..maxPCPCH-SF)) OF
    AvailableMinimumSF-VCAM

AvailableMinimumSF-VCAM ::= SEQUENCE {
    minimumSpreadingFactor MinimumSpreadingFactor,
    nf-Max NF-Max,
    maxAvailablePCPCH-Number MaxAvailablePCPCH-Number,
    availableAP-Signature-VCAMList AvailableAP-Signature-VCAMList
}

AvailableSignatures ::= BIT STRING(SIZE(16))

AvailableSubChannelNumbers ::= BIT STRING(SIZE(12))

BurstType ::= ENUMERATED {
    short1, long2 }

BurstType1 ::= ENUMERATED { ms4, ms8, ms16 }

BurstType2 ::= ENUMERATED { ms3, ms6 }

CCTrCH-PowerControlInfo ::= SEQUENCE {
    tfcs-Identity TFCS-Identity OPTIONAL,
    ul-DPCH-PowerControlInfo UL-DPCH-PowerControlInfo
}

CD-AccessSlotSubchannel ::= INTEGER (0..11)

CD-AccessSlotSubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsubCh)) OF
    CD-AccessSlotSubchannel

CD-CA-ICH-ChannelisationCode ::= INTEGER (0..255)

CD-PreambleScramblingCode ::= INTEGER (0..79)

CD-SignatureCode ::= INTEGER (0..15)

CD-SignatureCodeList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsig)) OF
    CD-SignatureCode

CellParametersID ::= INTEGER (0..127)

```

```

Cfntargetsfnsframeoffset ::=                INTEGER(0..255)

ChannelAssignmentActive ::=                CHOICE {
  notActive                               NULL,
  isActive                               AvailableMinimumSF-ListVCAM
}

ChannelisationCode256 ::=                INTEGER (0..255)

ChannelReqParamsForUCSM ::=                SEQUENCE {
  availableAP-SignatureList              AvailableAP-SignatureList,
  availableAP-SubchannelList              AvailableAP-SubchannelList           OPTIONAL
}

ClosedLoopTimingAdjMode ::=                ENUMERATED {
  slot1, slot2 }

CodeNumberDSCH ::=                        INTEGER (0..255)

CodeRange ::=                              SEQUENCE {
  pdsch-CodeMapList                      PDSCH-CodeMapList,
  codeNumberStart                          CodeNumberDSCH,
  codeNumberStop                            CodeNumberDSCH
}

CodeWordSet ::=                            ENUMERATED {
  longCWS,
  mediumCWS,
  shortCWS,
  ssdtOff }

CommonTimeslotInfo ::=                    SEQUENCE {
  -- TABULAR: The IE below is MD, but since it can be encoded in a single
  -- bit it is not defined as OPTIONAL.
  secondInterleavingMode                  SecondInterleavingMode,
  tfci-Coding                              TFCI-Coding                               OPTIONAL,
  puncturingLimit                          PuncturingLimit,
  repetitionPeriodAndLength                RepetitionPeriodAndLength                 OPTIONAL
}

CommonTimeslotInfoSCCPCH ::=              SEQUENCE {
  -- TABULAR: The IE below is MD, but since it can be encoded in a single
  -- bit it is not defined as OPTIONAL.
  secondInterleavingMode                  SecondInterleavingMode,
  tfci-Coding                              TFCI-Coding                               OPTIONAL,
  puncturingLimit                          PuncturingLimit,
  repetitionPeriodLengthAndOffset          RepetitionPeriodLengthAndOffset           OPTIONAL
}

ConstantValue ::=                          INTEGER (-35..10)

CPCH-PersistenceLevels ::=                SEQUENCE {
  cpch-SetID                               CPCH-SetID,
  dynamicPersistenceLevelTF-List           DynamicPersistenceLevelTF-List
}

CPCH-PersistenceLevelsList ::=            SEQUENCE (SIZE (1..maxCPCHsets)) OF
  CPCH-PersistenceLevels

CPCH-SetInfo ::=                           SEQUENCE {
  cpch-SetID                               CPCH-SetID,
  transportFormatSet                       TransportFormatSet,
  tfcs                                      TFCS,
  ap-PreambleScramblingCode                AP-PreambleScramblingCode,
  ap-AICH-ChannelisationCode                AP-AICH-ChannelisationCode,
  cd-PreambleScramblingCode                CD-PreambleScramblingCode,
  cd-CA-ICH-ChannelisationCode              CD-CA-ICH-ChannelisationCode,
  cd-AccessSlotSubchannelList               CD-AccessSlotSubchannelList              OPTIONAL,
  cd-SignatureCodeList                      CD-SignatureCodeList                     OPTIONAL,
  deltaPp-m                                DeltaPp-m,
  ul-DPCCH-SlotFormat                       UL-DPCCH-SlotFormat,
  n-StartMessage                            N-StartMessage,
  n-EOT                                      N-EOT,
  channelAssignmentActive                   ChannelAssignmentActive,
  -- TABULAR: VCAM info has been nested inside ChannelAssignmentActive,
  -- which in turn is mandatory since it's only a binary choice.
  cpch-StatusIndicationMode                CPCH-StatusIndicationMode,
  pcpch-ChannelInfoList                     PCPCH-ChannelInfoList
}

CPCH-SetInfoList ::=                      SEQUENCE (SIZE (1..maxCPCHsets)) OF
  CPCH-SetInfo

```

```

CPCH-StatusIndicationMode ::=      ENUMERATED {
                                     pa-mode,
                                     pamsf-mode }

CSICH-PowerOffset ::=              INTEGER (-10..5)

-- DefaultDPCH-OffsetValueFDD and DefaultDPCH-OffsetValueTDD corresponds to
-- IE "Default DPCH Offset Value" depending on the mode.
-- Actual value = IE value * 512
DefaultDPCH-OffsetValueFDD ::=      INTEGER (0..599)

DefaultDPCH-OffsetValueTDD ::=      INTEGER (0..7)

DeltaPp-m ::=                      INTEGER (-10..10)

-- Actual value = IE value * 0.1
DeltaSIR ::=                       INTEGER (0..30)

DL-CCTrCh ::=                      SEQUENCE {
    tfcs-Identity                    TFCS-IdentityPlain           OPTIONAL,
    timeInfo                          TimeInfo,
    dl-CCTrCH-TimeslotsCodes          DownlinkTimeslotsCodes     OPTIONAL,
    ul-CCTrChTPCList                 UL-CCTrChTPCList           OPTIONAL
}

DL-CCTrChList ::=                  SEQUENCE (SIZE (1..maxCCTrCH)) OF
    DL-CCTrCh

DL-ChannelisationCode ::=          SEQUENCE {
    secondaryScramblingCode           SecondaryScramblingCode     OPTIONAL,
    sf-AndCodeNumber                 SF512-AndCodeNumber,
    scramblingCodeChange              ScramblingCodeChange       OPTIONAL
}

DL-ChannelisationCodeList ::=      SEQUENCE (SIZE (1..maxDPCH-DLchan)) OF
    DL-ChannelisationCode

DL-CommonInformation ::=           SEQUENCE {
    dl-DPCH-InfoCommon               DL-DPCH-InfoCommon        OPTIONAL,
    modeSpecificInfo                 CHOICE {
        fdd                          SEQUENCE {
            defaultDPCH-OffsetValue   DefaultDPCH-OffsetValueFDD  OPTIONAL,
            dpch-CompressedModeInfo   DPCH-CompressedModeInfo    OPTIONAL,
            tx-DiversityMode          TX-DiversityMode          OPTIONAL,
            ssdt-Information          SSDT-Information          OPTIONAL
        },
        tdd                          SEQUENCE {
            defaultDPCH-OffsetValue   DefaultDPCH-OffsetValueTDD  OPTIONAL
        }
    }
}

DL-CommonInformationPost ::=       SEQUENCE {
    dl-DPCH-InfoCommonPost           DL-DPCH-InfoCommonPost
}

DL-CommonInformationPredef ::=     SEQUENCE {
    dl-DPCH-InfoCommonPredef         DL-DPCH-InfoCommonPredef  OPTIONAL,
    modeSpecificInfo                 CHOICE {
        fdd                          SEQUENCE {
            defaultDPCH-OffsetValue   DefaultDPCH-OffsetValueFDD
        },
        tdd                          SEQUENCE {
            defaultDPCH-OffsetValue   DefaultDPCH-OffsetValueTDD
        }
    }
}

DL-CompressedModeMethod ::=        ENUMERATED {
    puncturing, sf-2,
    higherLayerScheduling }

DL-DPCH-InfoCommon ::=            SEQUENCE {
    cfnHandling                      CHOICE {
        maintain                      NULL,
        initialise                     SEQUENCE {
            cfnTargetsInframeoffset   CfnTargetsInframeoffset    OPTIONAL
        }
    },
    modeSpecificInfo                 CHOICE {

```

```

    fdd
        dl-DPCH-PowerControlInfo
        dl-rate-matching-restriction
        spreadingFactorAndPilot
    -- TABULAR: The number of pilot bits is nested inside the spreading factor.
        positionFixedOrFlexible
        tfci-Existence
    },
    tdd
        commonTimeslotInfo
    }
}

DL-DPCH-InfoCommonPost ::=
    dl-DPCH-PowerControlInfo
}

DL-DPCH-InfoCommonPredef ::=
    modeSpecificInfo
    fdd
        spreadingFactorAndPilot
    -- TABULAR: The number of pilot bits is nested inside the spreading factor.
        positionFixedOrFlexible
        tfci-Existence
    },
    tdd
        commonTimeslotInfo
    }
}

DL-DPCH-InfoPerRL ::=
    fdd
        pCPICH-UsageForChannelEst
        dcph-FrameOffset
        secondaryCPICH-Info
        dl-ChannelisationCodeList
        tpc-CombinationIndex
        ssdt-CellIdentity
        closedLoopTimingAdjMode
    },
    tdd
        DL-CCTrChList
}

DL-DPCH-InfoPerRL-PostFDD ::=
    pCPICH-UsageForChannelEst
    dl-ChannelisationCode
    tpc-CombinationIndex
}

DL-DPCH-InfoPerRL-PostTDD ::=
    dl-CCTrCH-TimeslotsCodes
}

DL-DPCH-PowerControlInfo ::=
    modeSpecificInfo
    fdd
        dpc-Mode
    },
    tdd
        tpc-StepSizeTDD
    }
}

DL-FrameType ::=
    ENUMERATED {
        dl-FrameTypeA, dl-FrameTypeB
    }

DL-InformationPerRL ::=
    modeSpecificInfo
    fdd
        primaryCPICH-Info
        pdsch-SHO-DCH-Info
        pdsch-CodeMapping
    },
    tdd
        PrimaryCCPCH-Info
    },
    dl-DPCH-InfoPerRL
    secondaryCCPCH-Info
}

```

```

DL-InformationPerRL-List ::= SEQUENCE (SIZE (1..maxRL)) OF
                             DL-InformationPerRL

DL-InformationPerRL-ListPostFDD ::= SEQUENCE (SIZE (1..maxRL)) OF
                                     DL-InformationPerRL-PostFDD

DL-InformationPerRL-PostFDD ::= SEQUENCE {
    primaryCPICH-Info          PrimaryCPICH-Info,
    dl-DPCH-InfoPerRL         DL-DPCH-InfoPerRL-PostFDD
}

DL-InformationPerRL-PostTDD ::= SEQUENCE {
    primaryCCPCH-Info          PrimaryCCPCH-InfoPost,
    dl-DPCH-InfoPerRL         DL-DPCH-InfoPerRL-PostTDD
}

DL-PDSCH-Information ::= SEQUENCE {
    pdsch-SHO-DCH-Info        PDSCH-SHO-DCH-Info          OPTIONAL,
    pdsch-CodeMapping         PDSCH-CodeMapping           OPTIONAL
}

DL-rate-matching-restriction ::= SEQUENCE {
    restrictedTrCH-InfoList    RestrictedTrCH-InfoList      OPTIONAL
}

DL-TS-ChannelisationCode ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

DL-TS-ChannelisationCodesShort ::= SEQUENCE {
    codesRepresentation        CHOICE {
        consecutive            SEQUENCE {
            firstChannelisationCode DL-TS-ChannelisationCode,
            lastChannelisationCode  DL-TS-ChannelisationCode
        },
        bitmap                 BIT STRING (SIZE (16))
    }
}

DownlinkAdditionalTimeslots ::= SEQUENCE {
    parameters                 CHOICE {
        sameAsLast             SEQUENCE {
            timeslotNumber      TimeslotNumber
        },
        newParameters           SEQUENCE {
            individualTimeslotInfo IndividualTimeslotInfo,
            dl-TS-ChannelisationCodesShort DL-TS-ChannelisationCodesShort
        }
    }
}

DownlinkTimeslotsCodes ::= SEQUENCE {
    firstIndividualTimeslotInfo IndividualTimeslotInfo,
    dl-TS-ChannelisationCodesShort DL-TS-ChannelisationCodesShort,
    moreTimeslots              CHOICE {
        noMore                 NULL,
        additionalTimeslots    CHOICE {
            consecutive        INTEGER (1..maxTS-1),
            timeslotList       SEQUENCE (SIZE (1..maxTS-1)) OF
                DownlinkAdditionalTimeslots
        }
    }
}

DPC-Mode ::= ENUMERATED {
    singleTPC,
    tpcTripletInSoft }

-- The actual value of DPCCH power offset is the value of this IE * 2.
DPCCH-PowerOffset ::= INTEGER (-82..-3)

DPCH-CompressedModeInfo ::= SEQUENCE {
    tgp-SequenceList        TGP-SequenceList
}

DPCH-CompressedModeStatusInfo ::= SEQUENCE (SIZE (1..maxTGPS)) OF
    TGP-SequenceShort

```

```

-- TABULAR: Actual value = IE value * 256
DPCH-FrameOffset ::= INTEGER (0..149)

DSCH-Mapping ::= SEQUENCE {
    maxTFCI-Field2Value      MaxTFCI-Field2Value,
    spreadingFactor          SF-PDSCH,
    codeNumber                CodeNumberDSCH,
    multiCodeInfo             MultiCodeInfo
}

DSCH-MappingList ::= SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    DSCH-Mapping

DSCH-RadioLinkIdentifier ::= INTEGER (0..511)

DurationTimeInfo ::= INTEGER (1..4096)

-- TABULAR : value [Duration = infinite] is the value by default,
-- and is encoded by absence of the full sequence. If the sequence is present,
-- thefield is absent, the default is respectivelyinfinite. Presence of the
-- field absent should not be used, but shall be understood as if the
-- sequence was absent.

DynamicPersistenceLevel ::= INTEGER (1..8)

DynamicPersistenceLevelList ::= SEQUENCE (SIZE (1..maxPRACH)) OF
    DynamicPersistenceLevel

DynamicPersistenceLevelTF-List ::= SEQUENCE (SIZE (1..maxTF-CPCH)) OF
    DynamicPersistenceLevel

FACH-PCH-Information ::= SEQUENCE {
    transportFormatSet      TransportFormatSet,
    transportChannelIdentity TransportChannelIdentity,
    ctch-Indicator          BOOLEAN
}

FACH-PCH-InformationList ::= SEQUENCE (SIZE (1..maxFACH)) OF
    FACH-PCH-Information

FrequencyInfo ::= SEQUENCE {
    modeSpecificInfo        CHOICE {
        fdd                  FrequencyInfoFDD,
        tdd                  FrequencyInfoTDD
    }
}

FrequencyInfoFDD ::= SEQUENCE {
    uarfcn-UL               UARFCN           OPTIONAL,
    uarfcn-DL               UARFCN
}

FrequencyInfoTDD ::= SEQUENCE {
    uarfcn-Nt               UARFCN
}

IndividualTimeslotInfo ::= SEQUENCE {
    timeslotNumber          TimeslotNumber,
    tfci-Existence          BOOLEAN,
    midambleShiftAndBurstType MidambleShiftAndBurstType
}

IndividualTS-Interference ::= SEQUENCE {
    timeslot                TimeslotNumber,
    ul-TimeslotInterference UL-Interference
}

IndividualTS-InterferenceList ::= SEQUENCE (SIZE (1..maxTS)) OF
    IndividualTS-Interference

ITP ::= ENUMERATED {
    mode0, mode1
}

MaxAllowedUL-TX-Power ::= INTEGER (-50..33)

MaxAvailablePCPCH-Number ::= INTEGER (1..64)

MaxTFCI-Field2Value ::= INTEGER (1..1023)

MidambleConfiguration ::= SEQUENCE {
    burstType1              BurstType1           DEFAULT ms8,
    -- TABULAR: The default value for BurstType2 has not been specified due to

```

```

-- compactness reasons.
burstType2
}

MidambleShiftAndBurstType ::=
  burstType
  type1
    midambleAllocationMode
    defaultMidamble
    commonMidamble
    ueSpecificMidamble
    midambleShift
  },
  type2
    midambleAllocationMode
    defaultMidamble
    commonMidamble
    ueSpecificMidamble
    midambleShift
  },
  type3
    midambleAllocationMode
    defaultMidamble
    ueSpecificMidamble
    midambleShift
}

MidambleShiftLong ::=
  INTEGER (0..15)

MidambleShiftShort ::=
  INTEGER (0..5)

MinimumSpreadingFactor ::=
  ENUMERATED {
    sf4, sf8, sf16, sf32,
    sf64, sf128, sf256 }

MultiCodeInfo ::=
  INTEGER (1..16)

N-EOT ::=
  INTEGER (0..7)

N-GAP ::=
  ENUMERATED {
    f2, f4, f8 }

N-PCH ::=
  INTEGER (1..8)

N-StartMessage ::=
  INTEGER (1..8)

NB01 ::=
  INTEGER (0..50)

NF-Max ::=
  INTEGER (1..64)

NumberOfDPDCH ::=
  INTEGER (1..maxDPDCH-UL)

NumberOfFBI-Bits ::=
  INTEGER (1..2)

OpenLoopPowerControl-TDD ::=
  primaryCCPCH-TX-Power
  alpha
  prach-ConstantValue
  dpch-ConstantValue
  pusch-ConstantValue
}

PagingIndicatorLength ::=
  ENUMERATED {
    pi4, pi8, pi16 }

PC-Preamble ::=
  ENUMERATED {
    pcp0, pcp15 }

PCP-Length ::=
  ENUMERATED {
    as0, as8 }

PCPCH-ChannelInfo ::=
  pcpch-UL-ScramblingCode
  INTEGER (0..79),

```

pcpch-DL-ChannelisationCode	INTEGER (0..511),	
pcpch-DL-ScramblingCode	SecondaryScramblingCode	OPTIONAL,
pcp-Length	PCP-Length,	
ucsm-Info	UCSM-Info	OPTIONAL
}		
PCPCH-ChannelInfoList ::=	SEQUENCE (SIZE (1..maxPCPCHs)) OF PCPCH-ChannelInfo	
PCPICH-UsageForChannelEst ::=	ENUMERATED { mayBeUsed, shallNotBeUsed }	
PDSCH-CapacityAllocationInfo ::=	SEQUENCE {	
pdsch-PowerControlInfo	PDSCH-PowerControlInfo	OPTIONAL,
pdsch-AllocationPeriodInfo	AllocationPeriodInfo,	
tfcs-Identity	TFCS-IdentityPlain	OPTIONAL,
configuration	CHOICE {	
old-Configuration	SEQUENCE {	
pdsch-Identity	PDSCH-Identity	
},		
new-Configuration	SEQUENCE {	
pdsch-Info	PDSCH-Info,	
pdsch-Identity	PDSCH-Identity	OPTIONAL
}		
}		
PDSCH-CodeInfo ::=	SEQUENCE {	
spreadingFactor	SF-PDSCH,	
codeNumber	CodeNumberDSCH,	
multiCodeInfo	MultiCodeInfo	
}		
PDSCH-CodeInfoList ::=	SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF PDSCH-CodeInfo	
PDSCH-CodeMap ::=	SEQUENCE {	
spreadingFactor	SF-PDSCH,	
multiCodeInfo	MultiCodeInfo	
}		
PDSCH-CodeMapList ::=	SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF PDSCH-CodeMap	
PDSCH-CodeMapping ::=	SEQUENCE {	
dl-ScramblingCode	SecondaryScramblingCode	OPTIONAL,
signallingMethod	CHOICE {	
codeRange	CodeRange,	
tfci-Range	DSCH-MappingList,	
explicit	PDSCH-CodeInfoList,	
replace	ReplacedPDSCH-CodeInfoList	
}		
}		
PDSCH-Identity ::=	INTEGER (1..hiPDSCHidentities)	
PDSCH-Info ::=	SEQUENCE {	
tfcs-Identity	TFCS-IdentityPlain	OPTIONAL,
commonTimeslotInfo	CommonTimeslotInfo	OPTIONAL,
pdsch-TimeslotsCodes	DownlinkTimeslotsCodes	OPTIONAL
}		
PDSCH-PowerControlInfo ::=	SEQUENCE {	
tpc-StepSizeTDD	TPC-StepSizeTDD	OPTIONAL,
ul-CCTrChTPCList	UL-CCTrChTPCList	OPTIONAL
}		
PDSCH-SHO-DCH-Info ::=	SEQUENCE {	
dsch-RadioLinkIdentifier	DSCH-RadioLinkIdentifier,	
tfci-CombiningSet	TFCI-CombiningSet	OPTIONAL,
rl-IdentifierList	RL-IdentifierList	OPTIONAL
}		
PDSCH-SysInfo ::=	SEQUENCE {	
pdsch-Identity	PDSCH-Identity,	
pdsch-Info	PDSCH-Info,	
dsch-TFS	TransportFormatSet	OPTIONAL,
dsch-TFCS	TFCS	OPTIONAL
}		



PDSCH-SysInfoList ::=	SEQUENCE (SIZE (1..maxPDSCH)) OF PDSCH-SysInfo		
PDSCH-SysInfoList-SFN ::=	SEQUENCE (SIZE (1..maxPDSCH)) OF SEQUENCE { PDSCH-SysInfo, SFN-TimeInfo	OPTIONAL	
PersistenceScalingFactor ::=	ENUMERATED { psf0-9, psf0-8, psf0-7, psf0-6, psf0-5, psf0-4, psf0-3, psf0-2 }		
PersistenceScalingFactorList ::=	SEQUENCE (SIZE (1..maxASCpersist)) OF PersistenceScalingFactor		
PI-CountPerFrame ::=	ENUMERATED { e18, e36, e72, e144 }		
PICH-Info ::=	CHOICE { fdd channelisationCode256 pi-CountPerFrame sttd-Indicator }, tdd channelisationCode timeslot burstType type-1 type-2 } repetitionPeriodLengthOffset pagingIndicatorLength n-GAP n-PCH	ChannelisationCode256, PI-CountPerFrame, BOOLEAN  TDD-PICH-CCode TimeslotNumber CHOICE { MidambleShiftLong, MidambleShiftShort  RepPerLengthOffset-PICH PagingIndicatorLength N-GAP N-PCH	OPTIONAL, OPTIONAL, OPTIONAL, DEFAULT pi4, DEFAULT f4, DEFAULT 2
PICH-PowerOffset ::=	INTEGER (-10..5)		
PilotBits128 ::=	ENUMERATED { pb4, pb8 }		
PilotBits256 ::=	ENUMERATED { pb2, pb4, pb8 }		
PositionFixedOrFlexible ::=	ENUMERATED { fixed, flexible }		
PowerControlAlgorithm ::=	CHOICE { algorithm1 algorithm2 }	TPC-StepSizeFDD, NULL	
PowerRampStep ::=	INTEGER (1..8)		
PRACH-Midamble ::=	ENUMERATED { direct, direct-Inverted }		
PRACH-Partitioning ::=	CHOICE { fdd tdd	SEQUENCE (SIZE (1..maxASC)) OF ASCSetting, SEQUENCE (SIZE (1..maxASC)) OF ASC	
PRACH-PowerOffset ::=	SEQUENCE { powerRampStep preambleRetransMax	PowerRampStep, PreambleRetransMax	
PRACH-RACH-Info ::=	SEQUENCE { modeSpecificInfo fdd availableSignatures availableSF preambleScramblingCodeWordNumber puncturingLimit	CHOICE { SEQUENCE { AvailableSignatures, SF-PRACH, PreambleScramblingCodeWordNumber, PuncturingLimit,	

```

        availableSubChannelNumbers      AvailableSubChannelNumbers
    },
    tdd                                  SEQUENCE {
        timeslot                          TimeslotNumber,
        channelisationCode                TDD-PRACH-CCodeList,
        prach-Midamble                     PRACH-Midamble                                OPTIONAL
    }
}

PRACH-SystemInformation ::=          SEQUENCE {
    prach-RACH-Info                    PRACH-RACH-Info,
    transportChannelIdentity            TransportChannelIdentity,
    rach-TransportFormatSet             TransportFormatSet                                OPTIONAL,
    rach-TFCS                           TFCS                                              OPTIONAL,
    prach-Partitioning                  PRACH-Partitioning                             OPTIONAL,
    persistenceScalingFactorList        PersistenceScalingFactorList                    OPTIONAL,
    ac-To-ASC-MappingTable              AC-To-ASC-MappingTable                        OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                               SEQUENCE {
            primaryCPICH-TX-Power          PrimaryCPICH-TX-Power                          OPTIONAL,
            constantValue                  ConstantValue                                  OPTIONAL,
            prach-PowerOffset              PRACH-PowerOffset                             OPTIONAL,
            rach-TransmissionParameters    RACH-TransmissionParameters                  OPTIONAL,
            aich-Info                      AICH-Info                                      OPTIONAL
        },
        tdd                               NULL
    }
}

PRACH-SystemInformationList ::=      SEQUENCE (SIZE (1..maxPRACH)) OF
                                        PRACH-SystemInformation

PreambleRetransMax ::=               INTEGER (1..64)

PreambleScramblingCodeWordNumber ::= INTEGER (0..15)

PreDefPhyChConfiguration ::=        SEQUENCE {
    ul-DPCH-InfoPredef                 UL-DPCH-InfoPredef,
    dl-CommonInformationPredef          DL-CommonInformationPredef                    OPTIONAL
}

PrimaryCCPCH-Info ::=                CHOICE {
    fdd                                  SEQUENCE {
        tx-DiversityIndicator            BOOLEAN
    },
    tdd                                  SEQUENCE {
        syncCase                          CHOICE {
            syncCase1                     SEQUENCE {
                timeslot                   TimeslotNumber
            },
            syncCase2                     SEQUENCE {
                timeslotSync2              TimeslotSync2
            }
        }
        cellParametersID                 CellParametersID                                OPTIONAL,
        blockSTTD-Indicator              BOOLEAN                                           OPTIONAL
    }
}

PrimaryCCPCH-InfoPost ::=            SEQUENCE {
    syncCase                              CHOICE {
        syncCase1                         SEQUENCE {
            timeslot                       TimeslotNumber
        },
        syncCase2                         SEQUENCE {
            timeslotSync2                  TimeslotSync2
        }
    },
    cellParametersID                     CellParametersID,
    blockSTTD-Indicator                  BOOLEAN
}

PrimaryCCPCH-TX-Power ::=            INTEGER (6..43)

PrimaryCPICH-Info ::=                SEQUENCE {
    primaryScramblingCode                PrimaryScramblingCode
}

PrimaryCPICH-TX-Power ::=            INTEGER (-10..50)

PrimaryScramblingCode ::=            INTEGER (0..511)

```

```

PuncturingLimit ::=
    ENUMERATED {
        p10-40, p10-44, p10-48, p10-52, p10-56,
        p10-60, p10-64, p10-68, p10-72, p10-76,
        p10-80, p10-84, p10-88, p10-92, p10-96, p11 }

PUSCH-CapacityAllocationInfo ::= SEQUENCE {
    pusch-Allocation
        CHOICE {
            pusch-AllocationPending
                NULL,
            pusch-AllocationAssignment
                SEQUENCE {
                    pdsch-AllocationPeriodInfo
                        AllocationPeriodInfo,
                    pusch-PowerControlInfo
                        UL-TargetSIR
                        OPTIONAL,
                    tfcs-Identity
                        TFCS-IdentityPlain
                        OPTIONAL,
                    configuration
                        CHOICE {
                            old-Configuration
                                SEQUENCE {
                                    pusch-Identity
                                        PUSCH-Identity
                                },
                            new-Configuration
                                SEQUENCE {
                                    pusch-Info
                                        PUSCH-Info,
                                    pusch-Identity
                                        PUSCH-Identity
                                        OPTIONAL
                                }
                        }
                }
    }
}

PUSCH-Identity ::= INTEGER (1..hiPUSCHidentities)

PUSCH-Info ::= SEQUENCE {
    tfcs-Identity
        TFCS-IdentityPlain
        OPTIONAL,
    commonTimeslotInfo
        CommonTimeslotInfo
        OPTIONAL,
    pusch-TimeslotsCodes
        UplinkTimeslotsCodes
        OPTIONAL
}

PUSCH-SysInfo ::= SEQUENCE {
    pusch-Identity
        PUSCH-Identity,
    pusch-Info
        PUSCH-Info,
    usch-TFS
        TransportFormatSet
        OPTIONAL,
    usch-TFCS
        TFCS
        OPTIONAL
}

PUSCH-SysInfoList ::= SEQUENCE (SIZE (1..maxPUSCH)) OF
    PUSCH-SysInfo

PUSCH-SysInfoList-SFN ::= SEQUENCE (SIZE (1..maxPDSCH)) OF
    SEQUENCE {
        pusch-SysInfo
            PUSCH-SysInfo,
        sfN-TimeInfo
            SFN-TimeInfo
            OPTIONAL
    }

RACH-TransmissionParameters ::= SEQUENCE {
    mmax
        INTEGER (1..32),
    nb01Min
        NB01,
    nb01Max
        NB01
}

ReducedScramblingCodeNumber ::= INTEGER (0..8191)

RepetitionPeriodAndLength ::= CHOICE {
    repetitionPeriod1
        NULL,
    repetitionPeriod2
        INTEGER (1..1),
    -- repetitionPeriod2 could just as well be NULL also.
    repetitionPeriod4
        INTEGER (1..3),
    repetitionPeriod8
        INTEGER (1..7),
    repetitionPeriod16
        INTEGER (1..15),
    repetitionPeriod32
        INTEGER (1..31),
    repetitionPeriod64
        INTEGER (1..63)
}

RepetitionPeriodLengthAndOffset ::= CHOICE {
    repetitionPeriod1
        NULL,
    repetitionPeriod2
        SEQUENCE {
            length
                NULL,
            offset
                INTEGER (0..1)
        },
    repetitionPeriod4
        SEQUENCE {
            length
                INTEGER (1..3),
            offset
                INTEGER (0..3)
        },
    repetitionPeriod8
        SEQUENCE {
            length
                INTEGER (1..7),
            offset
                INTEGER (0..7)
        }
}

```

```

    },
    repetitionPeriod16
        length
        offset
    },
    repetitionPeriod32
        length
        offset
    },
    repetitionPeriod64
        length
        offset
    }
}

ReplacedPDSCH-CodeInfo ::=
    tfci-Field2
    spreadingFactor
    codeNumber
    multiCodeInfo
}

ReplacedPDSCH-CodeInfoList ::=
    SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
    ReplacedPDSCH-CodeInfo

RepPerLengthOffset-PICH ::=
    rpp4-2
    rpp8-2
    rpp8-4
    rpp16-2
    rpp16-4
    rpp32-2
    rpp32-4
    rpp64-2
    rpp64-4
}

RestrictedTrCH ::=
    restrictedDL-TrCH-Identity
    allowedTFIList
}

RestrictedTrCH-InfoList ::=
    SEQUENCE (SIZE(1..maxTrCH)) OF
    RestrictedTrCH

RL-AdditionInformation ::=
    primaryCPICH-Info
    dl-DPCH-InfoPerRL
    tfci-CombiningIndicator
    sccpch-InfoForFACH
}

RL-AdditionInformationList ::=
    SEQUENCE (SIZE (1..maxRL)) OF
    RL-AdditionInformation

RL-IdentifierList ::=
    SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RL-RemovalInformationList ::=
    SEQUENCE (SIZE (1..maxRL-1)) OF
    PrimaryCPICH-Info

RPP ::=
    ENUMERATED {
        mode0, mode1
    }

S-Field ::=
    ENUMERATED {
        e1bit, e2bits
    }

SCCPCH-ChannelisationCode ::=
    ENUMERATED {
        cc16-1, cc16-2, cc16-3, cc16-4,
        cc16-5, cc16-6, cc16-7, cc16-8,
        cc16-9, cc16-10, cc16-11, cc16-12,
        cc16-13, cc16-14, cc16-15, cc16-16
    }

SCCPCH-ChannelisationCodeList ::=
    SEQUENCE (SIZE (1..16)) OF
    SCCPCH-ChannelisationCode

SCCPCH-InfoForFACH ::=
    secondaryCCPCH-Info
    tfcs
    fach-PCH-InformationList
    sib-ReferenceListFACH
}

```

```

SCCPCH-SystemInformation ::= SEQUENCE {
    secondaryCCPCH-Info      SecondaryCCPCH-Info,
    tfcs                     TFCS                                OPTIONAL,
    fach-PCH-InformationList FACH-PCH-InformationList          OPTIONAL,
    pich-Info                PICH-Info                          OPTIONAL
}

SCCPCH-SystemInformationList ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
    SCCPCH-SystemInformation

ScramblingCodeChange ::= ENUMERATED {
    codeChange, noCodeChange }

ScramblingCodeType ::= ENUMERATED {
    shortSC,
    longSC }

SecondaryCCPCH-Info ::= SEQUENCE {
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            pCPICH-UsageForChannelEst PCPICH-UsageForChannelEst,
            secondaryCPICH-Info        SecondaryCPICH-Info          OPTIONAL,
            secondaryScramblingCode    SecondaryScramblingCode      OPTIONAL,
            sttd-Indicator              BOOLEAN,
            sf-AndCodeNumber            SF256-AndCodeNumber,
            pilotSymbolExistence        BOOLEAN,
            tfci-Existence              BOOLEAN,
            positionFixedOrFlexible     PositionFixedOrFlexible,
            timingOffset                TimingOffset                DEFAULT 0
        },
        tdd SEQUENCE {
            -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
            commonTimeslotInfo          CommonTimeslotInfoSCCPCH,
            individualTimeslotInfo      IndividualTimeslotInfo,
            channelisationCode          SCCPCH-ChannelisationCodeList
        }
    }
}

SecondaryCPICH-Info ::= SEQUENCE {
    secondaryDL-ScramblingCode SecondaryScramblingCode          OPTIONAL,
    channelisationCode          ChannelisationCode256
}

SecondaryScramblingCode ::= INTEGER (1..15)

SecondInterleavingMode ::= ENUMERATED {
    frameRelated, timeslotRelated }

-- SF256-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF256-AndCodeNumber ::= CHOICE {
    sf4      INTEGER (0..3),
    sf8      INTEGER (0..7),
    sf16     INTEGER (0..15),
    sf32     INTEGER (0..31),
    sf64     INTEGER (0..63),
    sf128    INTEGER (0..127),
    sf256    INTEGER (0..255)
}

-- SF512-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF512-AndCodeNumber ::= CHOICE {
    sf4      INTEGER (0..3),
    sf8      INTEGER (0..7),
    sf16     INTEGER (0..15),
    sf32     INTEGER (0..31),
    sf64     INTEGER (0..63),
    sf128    INTEGER (0..127),
    sf256    INTEGER (0..255),
    sf512    INTEGER (0..511)
}

-- SF512-AndPilot encodes both "Spreading factor" and "Number of bits for Pilot bits"
SF512-AndPilot ::= CHOICE {
    sfd4     NULL,
    sfd8     NULL,
    sfd16    NULL,
    sfd32    NULL,
    sfd64    NULL,
    sfd128   PilotBits128,
    sfd256   PilotBits256,
}

```

```

    sfd512                NULL
}
SF-PDSCH ::=
    ENUMERATED {
        sfp4, sfp8, sfp16, sfp32,
        sfp64, sfp128, sfp256 }

SF-PRACH ::=
    ENUMERATED {
        sfpr32, sfpr64, sfpr128, sfpr256 }

SFN-TimeInfo ::=
    activationTimeSFN
    physChDuration
}
SEQUENCE {
    INTEGER (0..4095),
    DurationTimeInfo
}

SpreadingFactor ::=
    ENUMERATED {
        sf4, sf8, sf16, sf32,
        sf64, sf128, sf256 }

SSDT-CellIdentity ::=
    ENUMERATED {
        ssdt-id-a, ssdt-id-b, ssdt-id-c,
        ssdt-id-d, ssdt-id-e, ssdt-id-f,
        ssdt-id-g, ssdt-id-h }

SSDT-Information ::=
    s-Field
    codeWordSet
}
SEQUENCE {
    S-Field,
    CodeWordSet
}

TDD-PICH-CCode ::=
    ENUMERATED {
        cc16-1, cc16-2, cc16-3, cc16-4,
        cc16-5, cc16-6, cc16-7, cc16-8,
        cc16-9, cc16-10, cc16-11, cc16-12,
        cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCode8 ::=
    ENUMERATED {
        cc8-1, cc8-2, cc8-3, cc8-4,
        cc8-5, cc8-6, cc8-7, cc8-8 }

TDD-PRACH-CCode16 ::=
    ENUMERATED {
        cc16-1, cc16-2, cc16-3, cc16-4,
        cc16-5, cc16-6, cc16-7, cc16-8,
        cc16-9, cc16-10, cc16-11, cc16-12,
        cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCodeList ::=
    sf8
    sf16
}
CHOICE {
    SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode8,
    SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode16
}

TFC-ControlDuration ::=
    ENUMERATED {
        tfc-cd1, tfc-cd2, tfc-cd4, tfc-cd8,
        tfc-cd16, tfc-cd24, tfc-cd32,
        tfc-cd48, tfc-cd64, tfc-cd128,
        tfc-cd192, tfc-cd256, tfc-cd512 }

TFCI-Coding ::=
    ENUMERATED {
        tfci-bits-4, tfci-bits-8,
        tfci-bits-16, tfci-bits-32 }

-- **TODO**, not defined
TFCI-CombiningSet ::=
}
SEQUENCE {

}

TGCFN ::=
    INTEGER (0..255)

-- The value 270 represents "undefined" in the tabular description.
TGD ::=
    INTEGER (15..270)

TGL ::=
    INTEGER (1..14)

TGMP ::=
    ENUMERATED {
        tdd-Measurement, fdd-Measurement,
        gsm-CarrierRSSIMeasurement,
        gsm-initialBSICIdentification, gsmBSICReconfirmation }

TGP-Sequence ::=
    tgpsi
    tgps-StatusFlag
    tgcfn
    tgps-ConfigurationParams
}
SEQUENCE {
    TGPSI,
    TGPS-StatusFlag,
    TGCFN,
    TGPS-ConfigurationParams
}
OPTIONAL

```

```

}

TGP-SequenceList ::=                SEQUENCE (SIZE (1..maxTGPS)) OF
                                     TGP-Sequence

TGP-SequenceShort ::=              SEQUENCE {
    tgpsi                            TGPSI,
    tgps-StatusFlag                  TGPS-StatusFlag,
    tgcfn                            TGC FN
}

TGPL ::=                            INTEGER (1..144)

-- TABULAR: The value 0 represents "infinity" in the tabular description.
TGPRC ::=                            INTEGER (0..63)

TGPS-ConfigurationParams ::=        SEQUENCE {
    tgm p                            TGMP,
    tgprc                            TGPRC,
    tgsn                            TGSN,
    tgl1                             TGL,
    tgl2                             TGL                                OPTIONAL,
    tgd                             TGD,
    tgpl1                            TGPL,
    tgpl2                            TGPL                                OPTIONAL,
    rpp                             RPP,
    itp                             ITP,
    ul-DL-Mode                       UL-DL-Mode,
    -- TABULAR: Compressed mode method is nested inside UL-DL-Mode
    dl-FrameType                     DL-FrameType,
    deltaSIR1                         DeltaSIR,
    deltaSIRAfter1                   DeltaSIR,
    deltaSIR2                         DeltaSIR                                OPTIONAL,
    deltaSIRAfter2                   DeltaSIR                                OPTIONAL
}

TGPS-StatusFlag ::=                ENUMERATED {
    tgpsActive, tgpsInactive }

TGPSI ::=                            INTEGER (1..maxTGPS)

TGSN ::=                            INTEGER (0..14)

TimeInfo ::=                        SEQUENCE {
    activationTime                    ActivationTime                                OPTIONAL,
    durationTimeInfo                 DurationTimeInfo                                OPTIONAL
}

TimeslotList ::=                   SEQUENCE (SIZE (1..maxTS)) OF
                                     TimeslotNumber

TimeslotNumber ::=                 INTEGER (0..14)

TimeslotSync2 ::=                  INTEGER (0..6)

-- Actual value = IE value * 256
TimingOffset ::=                   INTEGER (0..149)

TPC-CombinationIndex ::=           INTEGER (0..5)

TPC-StepSizeFDD ::=                INTEGER (0..1)

TPC-StepSizeTDD ::=                INTEGER (1..3)

TX-DiversityMode ::=               ENUMERATED {
    noDiversity,
    sttd,
    closedLoopModel1,
    closedLoopMode2 }

UARFCN ::=                          INTEGER (0..16383)

UCSM-Info ::=                       SEQUENCE {
    minimumSpreadingFactor            MinimumSpreadingFactor,
    nf-Max                            NF-Max,
    channelReqParamsForUCSM          ChannelReqParamsForUCSM
}

UL-CCTrCH ::=                       SEQUENCE {
    tfcs-Identity                    TFCS-IdentityPlain                                OPTIONAL,
    timeInfo                          TimeInfo,
    commonTimeslotInfo                CommonTimeslotInfo                                OPTIONAL,

```

```

    ul-CCTrCH-TimeslotsCodes          UplinkTimeslotsCodes          OPTIONAL
}
UL-CCTrCHList ::=                     SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                        UL-CCTrCH
UL-CCTrChTPCList ::=                 SEQUENCE (SIZE (0..maxCCTrCH)) OF
                                        TFCS-Identity
UL-ChannelRequirement ::=            CHOICE {
    ul-DPCH-Info                       UL-DPCH-Info,
    cpch-SetInfo                         CPCH-SetInfo
}
UL-ChannelRequirementWithCPCH-SetID ::= CHOICE {
    ul-DPCH-Info                       UL-DPCH-Info,
    cpch-SetInfo                         CPCH-SetInfo,
    cpch-SetID                           CPCH-SetID
}
UL-CompressedModeMethod ::=          ENUMERATED {
    sf-2,
    higherLayerScheduling }
UL-DL-Mode ::=                       CHOICE {
    ul                                    UL-CompressedModeMethod,
    dl                                    DL-CompressedModeMethod
}
UL-DPCCH-SlotFormat ::=             ENUMERATED {
    slf0, slf1, slf2 }
UL-DPCH-Info ::=                    SEQUENCE {
    ul-DPCH-PowerControlInfo            UL-DPCH-PowerControlInfo            OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                               SEQUENCE {
            scramblingCodeType            ScramblingCodeType,
            scramblingCode                 UL-ScramblingCode,
            numberOfDPDCH                  NumberOfDPDCH                        DEFAULT 1,
            spreadingFactor                 SpreadingFactor,
            tfci-Existence                 BOOLEAN,
            numberOfFBI-Bits               NumberOfFBI-Bits                     OPTIONAL,
            -- The IE above is conditional based on history
            puncturingLimit                 PuncturingLimit
        },
        tdd                               SEQUENCE {
            ul-TimingAdvance               UL-TimingAdvanceControl            OPTIONAL,
            ul-CCTrCHList                   UL-CCTrCHList
        }
    }
}
UL-DPCH-InfoPostFDD ::=              SEQUENCE {
    ul-DPCH-PowerControlInfoPostFDD     UL-DPCH-PowerControlInfoPostFDD,
    scramblingCodeType                   ScramblingCodeType,
    reducedScramblingCodeNumber           ReducedScramblingCodeNumber,
    spreadingFactor                       SpreadingFactor
}
UL-DPCH-InfoPostTDD ::=              SEQUENCE {
    ul-DPCH-PowerControlInfoPostTDD     UL-DPCH-PowerControlInfoPostTDD,
    ul-TimingAdvanceControl               UL-TimingAdvanceControl            OPTIONAL,
    ul-CCTrCH-TimeslotsCodes             UplinkTimeslotsCodes
}
UL-DPCH-InfoPredef ::=               SEQUENCE {
    ul-DPCH-PowerControlInfoPredef       UL-DPCH-PowerControlInfoPredef,
    modeSpecificInfoPredef               CHOICE {
        fdd                               SEQUENCE {
            tfci-Existence                 BOOLEAN,
            puncturingLimit                 PuncturingLimit
        },
        tdd                               SEQUENCE {
            commonTimeslotInfo             CommonTimeslotInfo
        }
    }
}
UL-DPCH-PowerControlInfo ::=         CHOICE {
    fdd                                   SEQUENCE {
        dpch-PowerOffset                   DPCH-PowerOffset,

```





```

ul-TS-ChannelisationCodeList      UL-TS-ChannelisationCodeList,
moreTimeslots                      CHOICE {
  noMore                            NULL,
  additionalTimeslots                CHOICE {
    consecutive                      SEQUENCE {
      numAdditionalTimeslots         INTEGER (1..maxTS-1)
    },
    timeslotList                     SEQUENCE (SIZE (1..maxTS-1)) OF
                                      UplinkAdditionalTimeslots
  }
}
}

-- *****
--
--      MEASUREMENT INFORMATION ELEMENTS (10.3.7)
--
-- *****

AcquisitionSatInfo ::=              SEQUENCE {
  satID                             SatID,
  doppler0thOrder                    INTEGER (-2048..2047),
  extraDopplerInfo                    ExtraDopplerInfo                OPTIONAL,
  codePhase                          INTEGER (0..1022),
  integerCodePhase                    INTEGER (0..19),
  gps-BitNumber                       INTEGER (0..3),
  codePhaseSearchWindow               CodePhaseSearchWindow,
  azimuthAndElevation                 AzimuthAndElevation            OPTIONAL
}

AcquisitionSatInfoList ::=          SEQUENCE (SIZE (1..maxSat)) OF
                                      AcquisitionSatInfo

AdditionalAssistanceData ::=         OCTET STRING (SIZE (1..38))

AdditionalMeasurementID-List ::=     SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
                                      MeasurementIdentity

AlmanacSatInfo ::=                  SEQUENCE {
  satID                               SatID,
  e                                   BIT STRING (SIZE (16)),
  t-0a                                BIT STRING (SIZE (8)),
  deltaI                              BIT STRING (SIZE (16)),
  omegaDot                            BIT STRING (SIZE (16)),
  satHealth                           BIT STRING (SIZE (8)),
  a-Sqrt                              BIT STRING (SIZE (24)),
  omega0                              BIT STRING (SIZE (24)),
  m0                                  BIT STRING (SIZE (24)),
  omega                               BIT STRING (SIZE (24)),
  af0                                  BIT STRING (SIZE (11)),
  af1                                  BIT STRING (SIZE (11))
}

AlmanacSatInfoList ::=              SEQUENCE (SIZE (1..maxSat)) OF
                                      AlmanacSatInfo

AverageRLC-BufferPayload ::=        ENUMERATED {
  pla0, pla4, pla8, pla16, pla32,
  pla64, pla128, pla256, pla512,
  pla1024, pla2k, pla4k, pla8k, pla16k,
  pla32k, pla64k, pla128k, pla256k,
  pla512k, pla1024k }

AzimuthAndElevation ::=             SEQUENCE {
  azimuth                             INTEGER (0..31),
  elevation                           INTEGER (0..7)
}

BadSatList ::=                      SEQUENCE (SIZE (1..maxSat)) OF
                                      INTEGER (0..63)

BCCH-ARFCN ::=                      INTEGER (0..1023)

BLER-MeasurementResults ::=          SEQUENCE {
  transportChannelIdentity             TransportChannelIdentity,
  dl-TransportChannelBLER              DL-TransportChannelBLER        OPTIONAL
}

BLER-MeasurementResultsList ::=      SEQUENCE (SIZE (1..maxTrCH)) OF
                                      BLER-MeasurementResults

BLER-TransChIdList ::=              SEQUENCE (SIZE (1..maxTrCH)) OF
                                      TransportChannelIdentity

```

```

BSIC-VerificationRequired ::=      ENUMERATED {
                                     required, notRequired }

BSICReported ::=
  verifiedBSIC
  nonVerifiedBSIC
}

BurstModeParameters ::=
  burstStart
  burstLength
  burstFreq
}

CellDCH-ReportCriteria ::=
  intraFreqReportingCriteria
  periodicalReportingCriteria
}

-- Actual value = IE value * 0.5
CellIndividualOffset ::=          INTEGER (-20..20)

CellInfo ::=
  cellIndividualOffset
  referenceTimeDifferenceToCell
  modeSpecificInfo
  fdd
    primaryCPICH-Info
    primaryCPICH-TX-Power
    readSFN-Indicator
    tx-DiversityIndicator
  },
  tdd
    primaryCCPCH-Info
    primaryCCPCH-TX-Power
    timeslotInfoList
}
}

CellInfo-r4 ::=                  SEQUENCE {
  cellIndividualOffset           CellIndividualOffset           DEFAULT 0,
  referenceTimeDifferenceToCell   ReferenceTimeDifferenceToCell   OPTIONAL,
  modeSpecificInfo               CHOICE {
    fdd                          SEQUENCE {
      primaryCPICH-Info          PrimaryCPICH-Info           OPTIONAL,
      primaryCPICH-TX-Power      PrimaryCPICH-TX-Power      OPTIONAL,
      readSFN-Indicator          BOOLEAN,
      tx-DiversityIndicator      BOOLEAN
    }
    tdd                          SEQUENCE {
      primaryCCPCH-Info          PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power      PrimaryCCPCH-TX-Power      OPTIONAL,
      timeslotInfoList           TimeslotInfoList           OPTIONAL
    }
  }
}

CellInfoSI-RSCP ::=              SEQUENCE {
  cellIndividualOffset           CellIndividualOffset           DEFAULT 0,
  referenceTimeDifferenceToCell   ReferenceTimeDifferenceToCell   OPTIONAL,
  modeSpecificInfo               CHOICE {
    fdd                          SEQUENCE {
      primaryCPICH-Info          PrimaryCPICH-Info           OPTIONAL,
      primaryCPICH-TX-Power      PrimaryCPICH-TX-Power      OPTIONAL,
      readSFN-Indicator          BOOLEAN,
      tx-DiversityIndicator      BOOLEAN
    }
    tdd                          SEQUENCE {
      primaryCCPCH-Info          PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power      PrimaryCCPCH-TX-Power      OPTIONAL,
      timeslotInfoList           TimeslotInfoList           OPTIONAL
    }
  },
  cellSelectionReselectionInfo   CellSelectReselectInfoSIB-11-12-RSCP  OPTIONAL
}

CellInfoSI-RSCP-LCR ::=          SEQUENCE {
  cellIndividualOffset           CellIndividualOffset           DEFAULT 0,
  referenceTimeDifferenceToCell   ReferenceTimeDifferenceToCell   OPTIONAL,

```

<u>primaryCCPCH-Info</u>	<u>PrimaryCCPCH-Info,</u>	
<u>primaryCCPCH-TX-Power</u>	<u>PrimaryCCPCH-TX-Power</u>	OPTIONAL,
<u>timeslotInfoList</u>	<u>TimeslotInfoList-LCR</u>	OPTIONAL,
<u>cellSelectionReselectionInfo</u>	<u>CellSelectReselectInfoSIB-11-12-RSCP</u>	OPTIONAL

}  
CellInfoSI-ECN0 ::= SEQUENCE {  
  cellIndividualOffset CellIndividualOffset DEFAULT 0,  
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,  
  modeSpecificInfo CHOICE {  
    fdd SEQUENCE {  
      primaryCPICH-Info PrimaryCPICH-Info OPTIONAL,  
      primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,  
      readSFN-Indicator BOOLEAN,  
      tx-DiversityIndicator BOOLEAN  
    },  
    tdd SEQUENCE {  
      primaryCCPCH-Info PrimaryCCPCH-Info,  
      primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,  
      timeslotInfoList TimeslotInfoList OPTIONAL  
    }  
  },  
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-ECN0 OPTIONAL  
}  
CellInfoSI-ECN0-LCR ::= SEQUENCE {  
  cellIndividualOffset CellIndividualOffset DEFAULT 0,  
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,  
  primaryCCPCH-Info PrimaryCCPCH-Info,  
  primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,  
  timeslotInfoList TimeslotInfoList-LCR OPTIONAL,  
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-ECN0 OPTIONAL  
}  
CellInfoSI-HCS-RSCP ::= SEQUENCE {  
  cellIndividualOffset CellIndividualOffset DEFAULT 0,  
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,  
  modeSpecificInfo CHOICE {  
    fdd SEQUENCE {  
      primaryCPICH-Info PrimaryCPICH-Info OPTIONAL,  
      primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,  
      readSFN-Indicator BOOLEAN,  
      tx-DiversityIndicator BOOLEAN  
    },  
    tdd SEQUENCE {  
      primaryCCPCH-Info PrimaryCCPCH-Info,  
      primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,  
      timeslotInfoList TimeslotInfoList OPTIONAL  
    }  
  },  
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-HCS-RSCP OPTIONAL  
}  
CellInfoSI-HCS-RSCP-LCR ::= SEQUENCE {  
  cellIndividualOffset CellIndividualOffset DEFAULT 0,  
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,  
  primaryCCPCH-Info PrimaryCCPCH-Info,  
  primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,  
  timeslotInfoList TimeslotInfoList-LCR OPTIONAL,  
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-HCS-RSCP OPTIONAL  
}  
CellInfoSI-HCS-ECN0 ::= SEQUENCE {  
  cellIndividualOffset CellIndividualOffset DEFAULT 0,  
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,  
  modeSpecificInfo CHOICE {  
    fdd SEQUENCE {  
      primaryCPICH-Info PrimaryCPICH-Info OPTIONAL,  
      primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,  
      readSFN-Indicator BOOLEAN,  
      tx-DiversityIndicator BOOLEAN  
    },  
    tdd SEQUENCE {  
      primaryCCPCH-Info PrimaryCCPCH-Info,  
      primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,  
      timeslotInfoList TimeslotInfoList OPTIONAL  
    }  
  },  
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-HCS-ECN0 OPTIONAL  
}  
CellInfoSI-HCS-ECN0-LCR ::= SEQUENCE {

```

cellIndividualOffset          CellIndividualOffset          DEFAULT 0,
referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,
primaryCCPCH-Info            PrimaryCCPCH-Info,
primaryCCPCH-TX-Power        PrimaryCCPCH-TX-Power          OPTIONAL,
timeslotInfoList             TimeslotInfoList-LCR           OPTIONAL,
cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-HCS-ECNO OPTIONAL
}

CellMeasuredResults ::=
cellIdentity                  CellIdentity                  OPTIONAL,
sfN-SFN-ObsTimeDifference    SFN-SFN-ObsTimeDifference     OPTIONAL,
cellSynchronisationInfo     CellSynchronisationInfo      OPTIONAL,
modeSpecificInfo             CHOICE {
  fdd                         SEQUENCE {
    primaryCPICH-Info         PrimaryCPICH-Info,
    cpich-Ec-N0               CPICH-Ec-N0                 OPTIONAL,
    cpich-RSCP                CPICH-RSCP                   OPTIONAL,
    pathloss                  Pathloss                     OPTIONAL
  },
  tdd                         SEQUENCE {
    cellParametersID         CellParametersID,
    proposedTGSN             TGSN                         OPTIONAL,
    primaryCCPCH-RSCP        PrimaryCCPCH-RSCP            OPTIONAL,
    timeslotISCP-List        TimeslotISCP-List           OPTIONAL
  }
}

CellMeasurementEventResults ::= CHOICE {
  fdd                         SEQUENCE (SIZE (1..maxCellMeas)) OF
    PrimaryCPICH-Info,
  tdd                         SEQUENCE (SIZE (1..maxCellMeas)) OF
    PrimaryCCPCH-Info
}

CellPosition ::= SEQUENCE {
  relativeNorth              INTEGER (-32767..32767),
  relativeEast               INTEGER (-32767..32767),
  relativeAltitude           INTEGER (-4095..4095)
}

CellReportingQuantities ::= SEQUENCE {
  sfN-SFN-OTD-Type          SFN-SFN-OTD-Type,
  cellIdentity-reportingIndicator BOOLEAN,
  cellSynchronisationInfoReportingIndicator BOOLEAN,
  modeSpecificInfo          CHOICE {
    fdd                      SEQUENCE {
      cpich-Ec-N0-reportingIndicator BOOLEAN,
      cpich-RSCP-reportingIndicator BOOLEAN,
      pathloss-reportingIndicator   BOOLEAN
    },
    tdd                      SEQUENCE {
      timeslotISCP-reportingIndicator BOOLEAN,
      proposedTGSN-ReportingRequired BOOLEAN,
      primaryCCPCH-RSCP-reportingIndicator BOOLEAN,
      pathloss-reportingIndicator   BOOLEAN
    }
  }
}

CellSelectReselectInfoSIB-11-12 ::= SEQUENCE {
  q-Offset1S-N              Q-OffsetS-N                  DEFAULT 0,
  q-Offset2S-N              Q-OffsetS-N                  OPTIONAL,
  maxAllowedUL-TX-Power     MaxAllowedUL-TX-Power      OPTIONAL,
  hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
  OPTIONAL,
  modeSpecificInfo          CHOICE {
    fdd                      SEQUENCE {
      q-QualMin               Q-QualMin                   OPTIONAL,
      q-RxlevMin              Q-RxlevMin                   OPTIONAL
    },
    tdd                      SEQUENCE {
      q-RxlevMin              Q-RxlevMin                   OPTIONAL
    },
    gsm                      SEQUENCE {
      q-RxlevMin              Q-RxlevMin                   OPTIONAL
    }
  }
}

CellSelectReselectInfoSIB-11-12-RSCP ::= SEQUENCE {
  q-OffsetS-N               Q-OffsetS-N                  DEFAULT 0,

```

```

maxAllowedUL-TX-Power      MaxAllowedUL-TX-Power      OPTIONAL,
modeSpecificInfo          CHOICE {
  fdd                      SEQUENCE {
    q-QualMin              Q-QualMin              OPTIONAL,
    q-RxlevMin             Q-RxlevMin             OPTIONAL
  },
  tdd                      SEQUENCE {
    q-RxlevMin             Q-RxlevMin             OPTIONAL
  },
  gsm                      SEQUENCE {
    q-RxlevMin             Q-RxlevMin             OPTIONAL
  }
}
}

CellSelectReselectInfoSIB-11-12-ECNO ::= SEQUENCE {
  q-Offset1S-N             Q-OffsetS-N             DEFAULT 0,
  q-Offset2S-N             Q-OffsetS-N             DEFAULT 0,
  maxAllowedUL-TX-Power    MaxAllowedUL-TX-Power    OPTIONAL,
  modeSpecificInfo        CHOICE {
    fdd                    SEQUENCE {
      q-QualMin            Q-QualMin            OPTIONAL,
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    },
    tdd                    SEQUENCE {
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    },
    gsm                    SEQUENCE {
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    }
  }
}

CellSelectReselectInfoSIB-11-12-HCS-RSCP ::= SEQUENCE {
  q-OffsetS-N              Q-OffsetS-N              DEFAULT 0,
  maxAllowedUL-TX-Power    MaxAllowedUL-TX-Power    OPTIONAL,
  hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
  OPTIONAL,
  modeSpecificInfo        CHOICE {
    fdd                    SEQUENCE {
      q-QualMin            Q-QualMin            OPTIONAL,
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    },
    tdd                    SEQUENCE {
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    },
    gsm                    SEQUENCE {
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    }
  }
}

CellSelectReselectInfoSIB-11-12-HCS-ECNO ::= SEQUENCE {
  q-Offset1S-N             Q-OffsetS-N             DEFAULT 0,
  q-Offset2S-N             Q-OffsetS-N             DEFAULT 0,
  maxAllowedUL-TX-Power    MaxAllowedUL-TX-Power    OPTIONAL,
  hcs-NeighbouringCellInformation-ECNO HCS-NeighbouringCellInformation-ECNO
  OPTIONAL,
  modeSpecificInfo        CHOICE {
    fdd                    SEQUENCE {
      q-QualMin            Q-QualMin            OPTIONAL,
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    },
    tdd                    SEQUENCE {
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    },
    gsm                    SEQUENCE {
      q-RxlevMin           Q-RxlevMin           OPTIONAL
    }
  }
}

CellSynchronisationInfo ::= SEQUENCE {
  modeSpecificInfo        CHOICE {
    fdd                    SEQUENCE {
      countC-SFN-Frame-difference CountC-SFN-Frame-difference OPTIONAL,
      tm                    INTEGER(0..38399)
    },
    tdd                    SEQUENCE {
      countC-SFN-Frame-difference CountC-SFN-Frame-difference
    }
  }
}

```

```

    }
}

CellToMeasure ::=
    sfm-sfm-Drift                INTEGER (0..30)                OPTIONAL,
    primaryCPICH-Info            PrimaryCPICH-Info,
    frequencyInfo                FrequencyInfo                OPTIONAL,
    sfm-SFM-ObservedTimeDifference SFM-SFM-ObsTimeDifference1,
    fineSFM-SFM                  FineSFM-SFM,
    cellPosition                  CellPosition                OPTIONAL
}

CellToMeasureInfoList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToMeasure

CellToReport ::= SEQUENCE {
    bsicReported                BSICReported
}

CellToReportList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToReport

CodePhaseSearchWindow ::= ENUMERATED {
    w1023, w1, w2, w3, w4, w6, w8,
    w12, w16, w24, w32, w48, w64,
    w96, w128, w192 }

CountC-SFM-Frame-difference ::= SEQUENCE {
    countC-SFM-High            INTEGER(0..15),                -- Actual value = IE value * 256
    off                        INTEGER(0..255)
}

CPICH-Ec-N0 ::= INTEGER (-20..0)

-- IE value 0 = <-24 dB, 1 = between -24 and -23 and so on
CPICH-Ec-N0-OTDOA ::= INTEGER (0..26)

CPICH-RSCP ::= INTEGER (-115..-40)

DeltaPRC ::= INTEGER (-127..127)

DeltaRRC ::= INTEGER (-7..7)

DGPS-CorrectionSatInfo ::= SEQUENCE {
    satID                      SatID,
    iode                       BIT STRING (SIZE (8)),
    udre                       UDRE,
    prc                        PRC,
    rrc                        RRC,
    deltaPRC2                  DeltaPRC,
    deltaRRC2                  DeltaRRC,
    deltaPRC3                  DeltaPRC,
    deltaRRC3                  DeltaRRC
}

DGPS-CorrectionSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
    DGPS-CorrectionSatInfo

DGPS-Information ::= SEQUENCE {
    satID                      SatID,
    iode                       IODE,
    udre                       UDRE,
    prc                        PRC,
    rrc                        RRC,
    deltaPRC2                  DeltaPRC,
    deltaRRC2                  DeltaRRC
}

DGPS-InformationList ::= SEQUENCE (SIZE (1..maxSat)) OF
    DGPS-Information

DiffCorrectionStatus ::= ENUMERATED {
    udre-1-0, udre-0-75, udre-0-5, udre-0-3,
    udre-0-2, udre-0-1, noData, invalidData }

-- Actual value = IE value * 0.02
DL-PhysicalChannelBER ::= INTEGER (0..255)

DL-TransportChannelBLER ::= INTEGER (0..63)

DopplerUncertainty ::= ENUMERATED {

```

```

                                hz12-5, hz25, hz50, hz100, hz200 }

EllipsoidPoint ::=                OCTET STRING (SIZE (7))

EllipsoidPointAltitude ::=        OCTET STRING (SIZE (9))

EllipsoidPointAltitudeEllipse ::= OCTET STRING (SIZE (14))

EllipsoidPointUncertCircle ::=    OCTET STRING (SIZE (8))

EllipsoidPointUncertEllipse ::=   OCTET STRING (SIZE (11))

EnvironmentCharacterisation ::=    ENUMERATED {
                                    possibleHeavyMultipathNLOS,
                                    lightMultipathLOS,
                                    notDefined }

Event1a ::=                        SEQUENCE {
    triggeringCondition              TriggeringCondition2,
    reportingRange                  ReportingRange,
    forbiddenAffectCellList         ForbiddenAffectCellList           OPTIONAL,
    w                                W,
    reportDeactivationThreshold     ReportDeactivationThreshold,
    reportingAmount                  ReportingAmount,
    reportingInterval                ReportingInterval
}

Event1b ::=                        SEQUENCE {
    triggeringCondition              TriggeringCondition1,
    reportingRange                  ReportingRange,
    forbiddenAffectCellList         ForbiddenAffectCellList           OPTIONAL,
    w                                W
}

Event1c ::=                        SEQUENCE {
    replacementActivationThreshold  ReplacementActivationThreshold,
    reportingAmount                  ReportingAmount,
    reportingInterval                ReportingInterval
}

Event1e ::=                        SEQUENCE {
    triggeringCondition              TriggeringCondition2,
    thresholdUsedFrequency           ThresholdUsedFrequency
}

Event1f ::=                        SEQUENCE {
    triggeringCondition              TriggeringCondition1,
    thresholdUsedFrequency           ThresholdUsedFrequency
}

Event2a ::=                        SEQUENCE {
    usedFreqThreshold                Threshold,
    usedFreqW                        W,
    hysteresis                       HysteresisInterFreq,
    timeToTrigger                    TimeToTrigger,
    reportingCellStatus              ReportingCellStatus           OPTIONAL,
    nonUsedFreqParameterList         NonUsedFreqParameterList       OPTIONAL
}

Event2b ::=                        SEQUENCE {
    usedFreqThreshold                Threshold,
    usedFreqW                        W,
    hysteresis                       HysteresisInterFreq,
    timeToTrigger                    TimeToTrigger,
    reportingCellStatus              ReportingCellStatus           OPTIONAL,
    nonUsedFreqParameterList         NonUsedFreqParameterList       OPTIONAL
}

Event2c ::=                        SEQUENCE {
    hysteresis                       HysteresisInterFreq,
    timeToTrigger                    TimeToTrigger,
    reportingCellStatus              ReportingCellStatus           OPTIONAL,
    nonUsedFreqParameterList         NonUsedFreqParameterList       OPTIONAL
}

Event2d ::=                        SEQUENCE {
    usedFreqThreshold                Threshold,
    usedFreqW                        W,
    hysteresis                       HysteresisInterFreq,
    timeToTrigger                    TimeToTrigger,
    reportingCellStatus              ReportingCellStatus           OPTIONAL
}

```



```

Event2e ::=
  hysteresis
  timeToTrigger
  reportingCellStatus
  nonUsedFreqParameterList
}
SEQUENCE {
  HysteresisInterFreq,
  TimeToTrigger,
  ReportingCellStatus
  NonUsedFreqParameterList
}
OPTIONAL,
OPTIONAL

Event2f ::=
  usedFreqThreshold
  usedFreqW
  hysteresis
  timeToTrigger
  reportingCellStatus
}
SEQUENCE {
  Threshold,
  W,
  HysteresisInterFreq,
  TimeToTrigger,
  ReportingCellStatus
}
OPTIONAL

Event3a ::=
  thresholdOwnSystem
  w
  thresholdOtherSystem
  hysteresis
  timeToTrigger
  reportingCellStatus
}
SEQUENCE {
  Threshold,
  W,
  Threshold,
  Hysteresis,
  TimeToTrigger,
  ReportingCellStatus
}
OPTIONAL

Event3b ::=
  thresholdOtherSystem
  hysteresis
  timeToTrigger
  reportingCellStatus
}
SEQUENCE {
  Threshold,
  Hysteresis,
  TimeToTrigger,
  ReportingCellStatus
}
OPTIONAL

Event3c ::=
  thresholdOtherSystem
  hysteresis
  timeToTrigger
  reportingCellStatus
}
SEQUENCE {
  Threshold,
  Hysteresis,
  TimeToTrigger,
  ReportingCellStatus
}
OPTIONAL

Event3d ::=
  hysteresis
  timeToTrigger
  reportingCellStatus
}
SEQUENCE {
  Hysteresis,
  TimeToTrigger,
  ReportingCellStatus
}
OPTIONAL

EventIDInterFreq ::=
ENUMERATED {
  e2a, e2b, e2c, e2d, e2e, e2f }

EventIDInterRAT ::=
ENUMERATED {
  e3a, e3b, e3c, e3d }

EventIDIntraFreq ::=
ENUMERATED {
  e1a, e1b, e1c, e1d, e1e,
  e1f, e1g, e1h, e1i }

EventResults ::=
  intraFreqEventResults
  interFreqEventResults
  interRATEventResults
  trafficVolumeEventResults
  qualityEventResults
  ue-InternalEventResults
  up-MeasurementEventResults
}
CHOICE {
  IntraFreqEventResults,
  InterFreqEventResults,
  InterRATEventResults,
  TrafficVolumeEventResults,
  QualityEventResults,
  UE-InternalEventResults,
  UP-MeasurementEventResults
}

ExtraDopplerInfo ::=
  doppler1stOrder
  dopplerUncertainty
}
SEQUENCE {
  INTEGER (-42..21),
  DopplerUncertainty
}

FACH-MeasurementOccasionInfo ::=
  FACH-meas-occasion-coeff
  inter-freq-FDD-meas-ind
  inter-freq-TDD-meas-ind
  inter-RAT-meas-ind
}
SEQUENCE {
  INTEGER (1..12)
  BOOLEAN,
  BOOLEAN,
  SEQUENCE (SIZE (1..maxOtherRAT)) OF
    RAT-Type
}
OPTIONAL,
OPTIONAL
OPTIONAL

FACH-MeasurementOccasionInfo-LCR-Ext ::=
  inter-freq-TDD128-meas-ind
}
SEQUENCE {
  BOOLEAN
}
OPTIONAL

```

```

}
FilterCoefficient ::= ENUMERATED {
    fc0, fc1, fc2, fc3, fc4, fc5,
    fc6, fc7, fc8, fc9, fc11, fc13,
    fc15, fc17, fc19, spare1 }

FineSFN-SFN ::= ENUMERATED {
    fs0, fs0-25, fs0-5, fs0-75 }

ForbiddenAffectCell ::= CHOICE {
    fdd PrimaryCPICH-Info,
    tdd PrimaryCCPCH-Info
}

ForbiddenAffectCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    ForbiddenAffectCell

FreqQualityEstimateQuantity-FDD ::= ENUMERATED {
    cpich-Ec-N0,
    cpich-RSCP }

FreqQualityEstimateQuantity-TDD ::= ENUMERATED {
    primaryCCPCH-RSCP }

GPS-MeasurementParam ::= SEQUENCE {
    satelliteID INTEGER (0..63),
    c-N0 INTEGER (0..63),
    doppler INTEGER (-32768..32768),
    wholeGPS-Chips INTEGER (0..1023),
    fractionalGPS-Chips INTEGER (0..1023),
    multipathIndicator MultipathIndicator,
    pseudorangeRMS-Error INTEGER (0..63)
}

GPS-MeasurementParamList ::= SEQUENCE (SIZE (1..maxSat)) OF
    GPS-MeasurementParam

GSM-CarrierRSSI ::= BIT STRING (SIZE (6))

GSM-MeasuredResults ::= SEQUENCE {
    gsm-CarrierRSSI GSM-CarrierRSSI OPTIONAL,
    pathloss Pathloss OPTIONAL,
    bsicReported BSICReported,
    observedTimeDifferenceToGSM ObservedTimeDifferenceToGSM OPTIONAL
}

GSM-MeasuredResultsList ::= SEQUENCE (SIZE (1..maxReportedGSMCells)) OF
    GSM-MeasuredResults

-- **TODO**, not defined yet
GSM-OutputPower ::= SEQUENCE {
}

GPS-TOW-1msec ::= INTEGER (0..604799999)

GPS-TOW-1usec ::= SEQUENCE {
    tow-1msec GPS-TOW-1msec,
    tow-rem-usec GPS-TOW-rem-usec
}

GPS-TOW-Assist ::= SEQUENCE {
    satID SatID,
    tlm-Message BIT STRING (SIZE (14)),
    antiSpoof BOOLEAN,
    alert BOOLEAN,
    tlm-Reserved BIT STRING (SIZE (2))
}

GPS-TOW-AssistList ::= SEQUENCE (SIZE (1..maxSat)) OF
    GPS-TOW-Assist

GPS-TOW-rem-usec ::= INTEGER (0..999)

HCS-CellReselectInformation-RSCP ::= SEQUENCE {
    penaltyTime PenaltyTime-RSCP
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-CellReselectInformation-ECNO ::= SEQUENCE {

```

```

    penaltyTime                PenaltyTime-ECNO
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-NeighbouringCellInformation-RSCP ::= SEQUENCE {
    hcs-PRIO                    HCS-PRIO                DEFAULT 0,
    q-HCS                       Q-HCS                 DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-RSCP
}

HCS-NeighbouringCellInformation-ECNO ::= SEQUENCE {
    hcs-PRIO                    HCS-PRIO                DEFAULT 0,
    q-HCS                       Q-HCS                 DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-ECNO
}

HCS-PRIO ::=
    INTEGER (0..7)

HCS-ServingCellInformation ::=
    SEQUENCE {
        hcs-PRIO                HCS-PRIO                DEFAULT 0,
        q-HCS                   Q-HCS                 DEFAULT 0,
        t-CR-Max                T-CR-Max                OPTIONAL
    }

-- Actual value = IE value * 0.5
Hysteresis ::=
    INTEGER (0..15)

-- Actual value = IE value * 0.5
HysteresisInterFreq ::=
    INTEGER (0..29)

InterFreqCell ::=
    SEQUENCE {
        frequencyInfo          FrequencyInfo,
        nonFreqRelatedEventResults CellMeasurementEventResults
    }

InterFreqCellID ::=
    INTEGER (0..maxCellMeas-1)

InterFreqCellInfoList ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellList       OPTIONAL
    }

InterFreqCellInfoList-r4 ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellList-r4   OPTIONAL
    }

InterFreqCellInfoSI-List-RSCP ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellSI-List-RSCP   OPTIONAL
    }

InterFreqCellInfoSI-List-ECNO ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellSI-List-ECNO   OPTIONAL
    }

InterFreqCellInfoSI-List-HCS-RSCP ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellSI-List-HCS-RSCP   OPTIONAL
    }

InterFreqCellInfoSI-List-HCS-ECNO ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellSI-List-HCS-ECNO   OPTIONAL
    }

InterFreqCellInfoSI-List-RSCP-LCR ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellSI-List-RSCP-LCR   OPTIONAL
    }

InterFreqCellInfoSI-List-ECNO-LCR ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellSI-List-ECNO-LCR   OPTIONAL
    }

InterFreqCellInfoSI-List-HCS-RSCP-LCR ::=
    SEQUENCE {
        removedInterFreqCellList   RemovedInterFreqCellList   OPTIONAL,
        newInterFreqCellList       NewInterFreqCellSI-List-HCS-RSCP-LCR   OPTIONAL
    }

InterFreqCellInfoSI-List-HCS-ECNO-LCR ::=
    SEQUENCE {

```

```

removedInterFreqCellList      RemovedInterFreqCellList      OPTIONAL,
newInterFreqCellList          NewInterFreqCellSI-List-HCS-ECN0-LCR      OPTIONAL
}

InterFreqCellList ::=          SEQUENCE (SIZE (1..maxFreq)) OF
                                InterFreqCell

InterFreqCellMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        CellMeasuredResults

InterFreqEvent ::=            CHOICE {
    event2a                      Event2a,
    event2b                      Event2b,
    event2c                      Event2c,
    event2d                      Event2d,
    event2e                      Event2e,
    event2f                      Event2f
}

InterFreqEventList ::=        SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                InterFreqEvent

InterFreqEventResults ::=      SEQUENCE {
    eventID                      EventIDInterFreq,
    interFreqCellList            InterFreqCellList      OPTIONAL
}

InterFreqMeasQuantity ::=      SEQUENCE {
    reportingCriteria             CHOICE {
        intraFreqReportingCriteria SEQUENCE {
            intraFreqMeasQuantity IntraFreqMeasQuantity
        },
        interFreqReportingCriteria SEQUENCE {
            filterCoefficient      FilterCoefficient      DEFAULT fc0,
            modeSpecificInfo        CHOICE {
                fdd                SEQUENCE {
                    freqQualityEstimateQuantity-FDD FreqQualityEstimateQuantity-FDD
                },
                tdd                SEQUENCE {
                    freqQualityEstimateQuantity-TDD FreqQualityEstimateQuantity-TDD
                }
            }
        }
    }
}

InterFreqMeasuredResults ::=    SEQUENCE {
    frequencyInfo                FrequencyInfo      OPTIONAL,
    ultra-CarrierRSSI            UTRA-CarrierRSSI    OPTIONAL,
    interFreqCellMeasuredResultsList InterFreqCellMeasuredResultsList OPTIONAL
}

InterFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxFreq)) OF
                                    InterFreqMeasuredResults

InterFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List      InterFreqCellInfoSI-List-RSCP      OPTIONAL
}

InterFreqMeasurementSysInfo-ECN0 ::= SEQUENCE {
    interFreqCellInfoSI-List      InterFreqCellInfoSI-List-ECN0      OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List      InterFreqCellInfoSI-List-HCS-RSCP      OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECN0 ::= SEQUENCE {
    interFreqCellInfoSI-List      InterFreqCellInfoSI-List-HCS-ECN0      OPTIONAL
}

InterFreqMeasurementSysInfo-RSCP-LCR ::= SEQUENCE {
    interFreqCellInfoSI-List      InterFreqCellInfoSI-List-RSCP-LCR      OPTIONAL
}

InterFreqMeasurementSysInfo-ECN0-LCR ::= SEQUENCE {
    interFreqCellInfoSI-List      InterFreqCellInfoSI-List-ECN0-LCR      OPTIONAL
}

```

```

InterFreqMeasurementSysInfo-HCS-RSCP-LCR ::= SEQUENCE {
  interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-RSCP-LCR OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECN0-LCR ::= SEQUENCE {
  interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-ECN0-LCR OPTIONAL
}

InterFreqReportCriteria ::= CHOICE {
  intraFreqReportingCriteria IntraFreqReportingCriteria,
  interFreqReportingCriteria InterFreqReportingCriteria,
  periodicalReportingCriteria PeriodicalWithReportingCellStatus,
  noReporting ReportingCellStatusOpt
}

InterFreqReportingCriteria ::= SEQUENCE {
  interFreqEventList InterFreqEventList OPTIONAL
}

InterFreqReportingQuantity ::= SEQUENCE {
  ultra-Carrier-RSSI BOOLEAN,
  frequencyQualityEstimate BOOLEAN,
  nonFreqRelatedQuantities CellReportingQuantities
}

InterFrequencyMeasurement ::= SEQUENCE {
  interFreqCellInfoList InterFreqCellInfoList,
  interFreqMeasQuantity InterFreqMeasQuantity OPTIONAL,
  interFreqReportingQuantity InterFreqReportingQuantity OPTIONAL,
  measurementValidity MeasurementValidity OPTIONAL,
  interFreqSetUpdate UE-AutonomousUpdateMode OPTIONAL,
  reportCriteria InterFreqReportCriteria
}

InterFrequencyMeasurement-r4 ::= SEQUENCE {
  interFreqCellInfoList InterFreqCellInfoList-r4,
  interFreqMeasQuantity InterFreqMeasQuantity OPTIONAL,
  interFreqReportingQuantity InterFreqReportingQuantity OPTIONAL,
  measurementValidity MeasurementValidity OPTIONAL,
  interFreqSetUpdate UE-AutonomousUpdateMode OPTIONAL,
  reportCriteria InterFreqReportCriteria
}

InterRAT-TargetCellDescription ::= SEQUENCE {
  technologySpecificInfo CHOICE {
    gsm SEQUENCE {
      bsic BSIC,
      bcch-ARFCN BCCH-ARFCN,
      ncMode NC-Mode OPTIONAL
    },
    is-2000 NULL,
    spare NULL
  }
}

InterRATCellID ::= INTEGER (0..maxCellMeas-1)

InterRATCellInfoList ::= SEQUENCE {
  removedInterRATCellList RemovedInterRATCellList,
  newInterRATCellList NewInterRATCellList
}

InterRATCellInfoList-HCS ::= SEQUENCE {
  removedInterRATCellList RemovedInterRATCellList,
  newInterRATCellList NewInterRATCellList-HCS
}

InterRATEvent ::= CHOICE {
  event3a Event3a,
  event3b Event3b,
  event3c Event3c,
  event3d Event3d
}

InterRATEventList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
  InterRATEvent

InterRATEventResults ::= SEQUENCE {
  eventID EventIDInterRAT,
  cellToReportList CellToReportList
}

```

```

}

InterRATInfo ::= ENUMERATED {
    gsm }

InterRATMeasQuantity ::= SEQUENCE {
    measQuantityUTRAN-QualityEstimate IntraFreqMeasQuantity OPTIONAL,
    ratSpecificInfo CHOICE {
        gsm SEQUENCE {
            measurementQuantity MeasurementQuantityGSM,
            filterCoefficient FilterCoefficient DEFAULT fc1,
            bsic-VerificationRequired BSIC-VerificationRequired
        },
        is-2000 SEQUENCE {
            tadd-EcIo INTEGER (0..63),
            tcomp-EcIo INTEGER (0..15),
            softSlope INTEGER (0..63) OPTIONAL,
            addIntercept INTEGER (0..63) OPTIONAL
        }
    }
}

InterRATMeasuredResults ::= CHOICE {
    gsm GSM-MeasuredResultsList,
    spare NULL
}

InterRATMeasuredResultsList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
    InterRATMeasuredResults

InterRATMeasurement ::= SEQUENCE {
    interRATCellInfoList InterRATCellInfoList OPTIONAL,
    interRATMeasQuantity InterRATMeasQuantity OPTIONAL,
    interRATReportingQuantity InterRATReportingQuantity OPTIONAL,
    reportCriteria InterRATReportCriteria
}

InterRATMeasurementSysInfo ::= SEQUENCE {
    interRATCellInfoList InterRATCellInfoList OPTIONAL
}

InterRATMeasurementSysInfo-HCS ::= SEQUENCE {
    interRATCellInfoList InterRATCellInfoList-HCS OPTIONAL
}

InterRATReportCriteria ::= CHOICE {
    interRATReportingCriteria InterRATReportingCriteria,
    periodicalReportingCriteria PeriodicalWithReportingCellStatus,
    noReporting ReportingCellStatusOpt
}

InterRATReportingCriteria ::= SEQUENCE {
    interRATEventList InterRATEventList OPTIONAL
}

InterRATReportingQuantity ::= SEQUENCE {
    utran-EstimatedQuality BOOLEAN,
    ratSpecificInfo CHOICE {
        gsm SEQUENCE {
            pathloss BOOLEAN,
            observedTimeDifferenceGSM BOOLEAN,
            gsm-Carrier-RSSI BOOLEAN
        }
    }
}

IntraFreqCellID ::= INTEGER (0..maxCellMeas-1)

IntraFreqCellInfoList ::= SEQUENCE {
    removedIntraFreqCellList RemovedIntraFreqCellList OPTIONAL,
    newIntraFreqCellList NewIntraFreqCellList OPTIONAL
}

IntraFreqCellInfoList-r4 ::= SEQUENCE {
    removedIntraFreqCellList RemovedIntraFreqCellList OPTIONAL,
    newIntraFreqCellList NewIntraFreqCellList-r4 OPTIONAL
}

IntraFreqCellInfoSI-List-RSCP ::= SEQUENCE {
    removedIntraFreqCellList RemovedIntraFreqCellList OPTIONAL,

```

```

    newIntraFreqCellList          NewIntraFreqCellSI-List-RSCP
}

IntraFreqCellInfoSI-List-ECNO ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList      OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-ECNO
}

IntraFreqCellInfoSI-List-HCS-RSCP ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList      OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-RSCP
}

IntraFreqCellInfoSI-List-HCS-ECNO ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList      OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-ECNO
}

IntraFreqCellInfoSI-List-RSCP-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList      OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-RSCP-LCR
}

IntraFreqCellInfoSI-List-ECNO-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList      OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-ECNO-LCR
}

IntraFreqCellInfoSI-List-HCS-RSCP-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList      OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-RSCP-LCR
}

IntraFreqCellInfoSI-List-HCS-ECNO-LCR ::= SEQUENCE {
    removedIntraFreqCellList      RemovedIntraFreqCellList      OPTIONAL,
    newIntraFreqCellList          NewIntraFreqCellSI-List-HCS-ECNO-LCR
}

IntraFreqEvent ::= CHOICE {
    e1a      Event1a,
    e1b      Event1b,
    e1c      Event1c,
    e1d      NULL,
    e1e      Event1e,
    e1f      Event1f,
    e1g      NULL,
    e1h      ThresholdUsedFrequency,
    e1i      ThresholdUsedFrequency
}

IntraFreqEventCriteria ::= SEQUENCE {
    event          IntraFreqEvent,
    hysteresis     Hysteresis,
    timeToTrigger TimeToTrigger,
    reportingCellStatus ReportingCellStatus      OPTIONAL
}

IntraFreqEventCriteriaList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    IntraFreqEventCriteria

IntraFreqEventResults ::= SEQUENCE {
    eventID      EventIDIntraFreq,
    cellMeasurementEventResults CellMeasurementEventResults
}

IntraFreqMeasQuantity ::= SEQUENCE {
    filterCoefficient      FilterCoefficient      DEFAULT fcl,
    modeSpecificInfo      CHOICE {
        fdd      SEQUENCE {
            intraFreqMeasQuantity-FDD      IntraFreqMeasQuantity-FDD
        },
        tdd      SEQUENCE {
            intraFreqMeasQuantity-TDDList      IntraFreqMeasQuantity-TDDList
        }
    }
}

IntraFreqMeasQuantity-FDD ::= ENUMERATED {
    cpich-Ec-NO,
    cpich-RSCP,
    pathloss,
}

```

```

        ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDD ::=      ENUMERATED {
        primaryCCPCH-RSCP,
        pathloss,
        timeslotISCP,
        ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDDList ::= SEQUENCE (SIZE (1..4)) OF
        IntraFreqMeasQuantity-TDD

IntraFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
        CellMeasuredResults

IntraFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-RSCP  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL,
        reportingInfoForCellDCH     ReportingInfoForCellDCH        OPTIONAL
}

IntraFreqMeasurementSysInfo-ECN0 ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-ECN0  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL,
        reportingInfoForCellDCH     ReportingInfoForCellDCH        OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-RSCP  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL,
        reportingInfoForCellDCH     ReportingInfoForCellDCH        OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECN0 ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-ECN0  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL,
        reportingInfoForCellDCH     ReportingInfoForCellDCH        OPTIONAL
}

IntraFreqMeasurementSysInfo-RSCP-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-RSCP-LCR  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL,
        reportingInfoForCellDCH     ReportingInfoForCellDCH-LCR      OPTIONAL
}

IntraFreqMeasurementSysInfo-ECN0-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-ECN0-LCR  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL,
        reportingInfoForCellDCH     ReportingInfoForCellDCH-LCR      OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-RSCP-LCR  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL,
        reportingInfoForCellDCH     ReportingInfoForCellDCH-LCR      OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECN0-LCR ::= SEQUENCE {
        intraFreqMeasurementID      MeasurementIdentity          DEFAULT 1,
        intraFreqCellInfoSI-List    IntraFreqCellInfoSI-List-HCS-ECN0-LCR  OPTIONAL,
        intraFreqMeasQuantity       IntraFreqMeasQuantity         OPTIONAL,
        intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
        maxReportedCellsOnRACH      MaxReportedCellsOnRACH        OPTIONAL
}

```



reportingInfoForCellDCH	ReportingInfoForCellDCH-LCR	OPTIONAL
}		
IntraFreqReportCriteria ::=	CHOICE {	
intraFreqReportingCriteria	IntraFreqReportingCriteria,	
periodicalReportingCriteria	PeriodicalWithReportingCellStatus,	
noReporting	ReportingCellStatusOpt	
}		
IntraFreqReportingCriteria ::=	SEQUENCE {	
eventCriteriaList	IntraFreqEventCriteriaList	OPTIONAL
}		
IntraFreqReportingQuantity ::=	SEQUENCE {	
activeSetReportingQuantities	CellReportingQuantities,	
monitoredSetReportingQuantities	CellReportingQuantities,	
detectedSetReportingQuantities	CellReportingQuantities	OPTIONAL
}		
IntraFreqReportingQuantityForRACH ::=	SEQUENCE {	
sfn-SFN-OTD-Type	SFN-SFN-OTD-Type,	
modeSpecificInfo	CHOICE {	
fdd	SEQUENCE {	
intraFreqRepQuantityRACH-FDD	IntraFreqRepQuantityRACH-FDD	
},		
tdd	SEQUENCE {	
intraFreqRepQuantityRACH-TDDList	IntraFreqRepQuantityRACH-TDDList	
}		
}		
IntraFreqRepQuantityRACH-FDD ::=	ENUMERATED {	
	cpich-EcN0, cpich-RSCP,	
	pathloss, noReport }	
IntraFreqRepQuantityRACH-TDD ::=	ENUMERATED {	
	timeslotISCP,	
	primaryCCPCH-RSCP,	
	noReport }	
IntraFreqRepQuantityRACH-TDDList ::=	SEQUENCE (SIZE (1..2)) OF	
	IntraFreqRepQuantityRACH-TDD	
IntraFrequencyMeasurement ::=	SEQUENCE {	
intraFreqCellInfoList	IntraFreqCellInfoList	OPTIONAL,
intraFreqMeasQuantity	IntraFreqMeasQuantity	OPTIONAL,
intraFreqReportingQuantity	IntraFreqReportingQuantity	OPTIONAL,
measurementValidity	MeasurementValidity	OPTIONAL,
reportCriteria	IntraFreqReportCriteria	OPTIONAL
}		
IntraFrequencyMeasurement-r4 ::=	SEQUENCE {	
intraFreqCellInfoList	IntraFreqCellInfoList-r4	OPTIONAL,
intraFreqMeasQuantity	IntraFreqMeasQuantity	OPTIONAL,
intraFreqReportingQuantity	IntraFreqReportingQuantity	OPTIONAL,
measurementValidity	MeasurementValidity	OPTIONAL,
reportCriteria	IntraFreqReportCriteria	OPTIONAL
}		
IODE ::=	INTEGER (0..255)	
IP-Length ::=	ENUMERATED {	
	ip15, ip110 }	
IP-Spacing ::=	ENUMERATED {	
	e5, e7, e10, e15, e20,	
	e30, e40, e50 }	
IS-2000SpecificMeasInfo ::=	ENUMERATED {	
	frequency, timeslot, colourcode,	
	outputpower, pn-Offset }	
MaxNumberOfReportingCellsType1 ::=	ENUMERATED {	
	e1, e2, e3, e4, e5, e6 }	
MaxNumberOfReportingCellsType2 ::=	ENUMERATED {	
	e1, e2, e3, e4, e5, e6, e7, e8, e9, e10, e11, e12 }	
MaxNumberOfReportingCellsType3 ::=	ENUMERATED {	
	viactCellsPlus1,	
	viactCellsPlus2,	
	viactCellsPlus3,	

```

viactCellsPlus4,
viactCellsPlus5,
viactCellsPlus6 }

MaxReportedCellsOnRACH ::=          ENUMERATED {
    noReport,
    currentCell,
    currentAnd-1-BestNeighbour,
    currentAnd-2-BestNeighbour,
    currentAnd-3-BestNeighbour,
    currentAnd-4-BestNeighbour,
    currentAnd-5-BestNeighbour,
    currentAnd-6-BestNeighbour }

MeasuredResults ::=                  CHOICE {
    intraFreqMeasuredResultsList      IntraFreqMeasuredResultsList,
    interFreqMeasuredResultsList      InterFreqMeasuredResultsList,
    interRATMeasuredResultsList        InterRATMeasuredResultsList,
    trafficVolumeMeasuredResultsList   TrafficVolumeMeasuredResultsList,
    qualityMeasuredResults              QualityMeasuredResults,
    ue-InternalMeasuredResults          UE-InternalMeasuredResults,
    up-MeasuredResults                  UP-MeasuredResults
}

MeasuredResults-LCR ::=              CHOICE {
    intraFreqMeasuredResultsList      IntraFreqMeasuredResultsList,
    interFreqMeasuredResultsList      InterFreqMeasuredResultsList,
    interRATMeasuredResultsList      InterRATMeasuredResultsList,
    trafficVolumeMeasuredResultsList TrafficVolumeMeasuredResultsList,
    qualityMeasuredResults            QualityMeasuredResults,
    ue-InternalMeasuredResults        UE-InternalMeasuredResults-LCR,
    up-MeasuredResults                UP-MeasuredResults
}

MeasuredResultsList ::=              SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
    MeasuredResults

MeasuredResultsList-LCR ::=          SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
    MeasuredResults-LCR

MeasuredResultsOnRACH ::=            SEQUENCE {
    currentCell                        SEQUENCE {
        modeSpecificInfo              CHOICE {
            fdd                        SEQUENCE {
                measurementQuantity    CHOICE {
                    cpich-Ec-N0        CPICH-Ec-N0,
                    cpich-RSCP          CPICH-RSCP,
                    pathloss            Pathloss
                }
            },
            tdd                        SEQUENCE {
                timeslotISCP            TimeslotISCP-List      OPTIONAL,
                primaryCCPCH-RSCP       PrimaryCCPCH-RSCP    OPTIONAL
            }
        }
    },
    monitoredCells                      MonitoredCellRACH-List    OPTIONAL
}

MeasurementCommand ::=              CHOICE {
    setup                               MeasurementType,
    modify                               SEQUENCE {
        measurementType                MeasurementType      OPTIONAL
    },
    release                              NULL
}

MeasurementCommand-r4 ::=           CHOICE {
    setup                               MeasurementType-r4,
    modify                               SEQUENCE {
        measurementType                 MeasurementType-r4      OPTIONAL
    },
    release                             NULL
}

MeasurementControlSysInfo ::=       SEQUENCE {
    use-of-HCS                          CHOICE {
        hcs-not-used                   SEQUENCE {
            cellSelectQualityMeasure    CHOICE {
                cpich-RSCP              SEQUENCE {

```

```

OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-RSCP
                },
                interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-RSCP      OPTIONAL
                },
                cpich-Ec-No      SEQUENCE      {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-ECNO
                interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-ECNO      OPTIONAL
                }
                },
                interRATMeasurementSysInfo      InterRATMeasurementSysInfo-HCS      OPTIONAL
                },
                hcs-used      SEQUENCE      {
                cellSelectQualityMeasure      CHOICE      {
                cpich-RSCP      SEQUENCE      {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-HCS-RSCP
OPTIONAL      interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-HCS-RSCP
                },
                cpich-Ec-No      SEQUENCE      {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-HCS-ECNO
OPTIONAL      interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-HCS-ECNO
                }
                },
                interRATMeasurementSysInfo      InterRATMeasurementSysInfo      OPTIONAL
                }
                },
                trafficVolumeMeasSysInfo      TrafficVolumeMeasSysInfo      OPTIONAL,
                ue-InternalMeasurementSysInfo      UE-InternalMeasurementSysInfo      OPTIONAL
}

```

```

MeasurementControlSysInfo-LCR ::= SEQUENCE {
-- The following CHOICE shall have the same value as the use-of-HCS in MeasurementControlSysInfo
  use-of-HCS      CHOICE {
    hcs-not-used      SEQUENCE {
-- The following CHOICE shall have the same value as the cellSelectQualityMeasure in
-- MeasurementControlSysInfo
    cellSelectQualityMeasure      CHOICE {
      cpich-RSCP      SEQUENCE {
        intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-RSCP-LCR      OPTIONAL,
        interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-RSCP-LCR      OPTIONAL
      },
      cpich-Ec-No      SEQUENCE {
        intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-ECNO-LCR      OPTIONAL,
        interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-ECNO-LCR      OPTIONAL
      }
    }
  },
  hcs-used      SEQUENCE {
-- The following CHOICE shall have the same value as the cellSelectQualityMeasure in
-- MeasurementControlSysInfo
    cellSelectQualityMeasure      CHOICE {
      cpich-RSCP      SEQUENCE {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-HCS-RSCP-LCR
OPTIONAL      interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-HCS-RSCP-LCR      OPTIONAL
                },
      cpich-Ec-No      SEQUENCE {
OPTIONAL,      intraFreqMeasurementSysInfo      IntraFreqMeasurementSysInfo-HCS-ECNO-LCR
OPTIONAL      interFreqMeasurementSysInfo      InterFreqMeasurementSysInfo-HCS-ECNO-LCR      OPTIONAL
                }
    }
  }
}

```

```

MeasurementIdentity ::= INTEGER (1..16)

MeasurementQuantityGSM ::= ENUMERATED {
  gsm-CarrierRSSI,
  pathloss }

MeasurementReportingMode ::= SEQUENCE {
  measurementReportTransferMode      TransferMode,
  periodicalOrEventTrigger      PeriodicalOrEventTrigger
}

MeasurementType ::= CHOICE {

```

```

    intraFrequencyMeasurement      IntraFrequencyMeasurement,
    interFrequencyMeasurement      InterFrequencyMeasurement,
    interRATMeasurement            InterRATMeasurement,
    up-Measurement                  UP-Measurement,
    trafficVolumeMeasurement        TrafficVolumeMeasurement,
    qualityMeasurement              QualityMeasurement,
    ue-InternalMeasurement          UE-InternalMeasurement
}

MeasurementType-r4 ::= CHOICE {
    intraFrequencyMeasurement      IntraFrequencyMeasurement-r4,
    interFrequencyMeasurement      InterFrequencyMeasurement-r4,
    interRATMeasurement            InterRATMeasurement,
    up-Measurement                  UP-Measurement,
    trafficVolumeMeasurement        TrafficVolumeMeasurement,
    qualityMeasurement              QualityMeasurement,
    ue-InternalMeasurement          UE-InternalMeasurement-r4
}

MeasurementValidity ::= SEQUENCE {
    ue-State                       ENUMERATED {
        cell-DCH, all-But-Cell-DCH, all-States }
}

MonitoredCellRACH-List ::= SEQUENCE (SIZE (1..7)) OF
    MonitoredCellRACH-Result

MonitoredCellRACH-Result ::= SEQUENCE {
    sfn-SFN-ObsTimeDifference      SFN-SFN-ObsTimeDifference      OPTIONAL,
    modeSpecificInfo               CHOICE {
        fdd                         SEQUENCE {
            primaryCPICH-Info        PrimaryCPICH-Info,
            measurementQuantity      CHOICE {
                cpich-Ec-NO          CPICH-Ec-NO,
                cpich-RSCP           CPICH-RSCP,
                pathloss              Pathloss
            }
        },
        tdd                         SEQUENCE {
            cellParametersID         CellParametersID,
            primaryCCPCH-RSCP        PrimaryCCPCH-RSCP
        }
    }
}

MultipathIndicator ::= ENUMERATED {
    nm,
    low,
    medium,
    high }

N-CR-T-CRMaxHyst ::= SEQUENCE {
    n-CR                            INTEGER (1..16)          DEFAULT 8,
    t-CRMaxHyst                      T-CRMaxHyst
}

NavigationModelSatInfo ::= SEQUENCE {
    satID                            SatID,
    satelliteStatus                  SatelliteStatus,
    navModel                          NavModel
}

NavigationModelSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
    NavigationModelSatInfo

NavModel ::= SEQUENCE {
    codeOnL2                         BIT STRING (SIZE (2)),
    uraIndex                          BIT STRING (SIZE (4)),
    satHealth                          BIT STRING (SIZE (6)),
    iodc                               BIT STRING (SIZE (10)),
    l2Pflag                            BIT STRING (SIZE (1)),
    sflRevd                            SubFrame1Reserved,
    t-GD                              BIT STRING (SIZE (8)),
    t-oc                              BIT STRING (SIZE (16)),
    af2                               BIT STRING (SIZE (8)),
    af1                               BIT STRING (SIZE (16)),
    af0                               BIT STRING (SIZE (22)),
    c-rs                              BIT STRING (SIZE (16)),
    delta-n                            BIT STRING (SIZE (16)),
    m0                                BIT STRING (SIZE (32)),
    c-uc                              BIT STRING (SIZE (16)),
    e                                 BIT STRING (SIZE (32)),
}

```

```

c-us          BIT STRING (SIZE (16)),
a-Sqrt       BIT STRING (SIZE (32)),
t-oe        BIT STRING (SIZE (16)),
fitInterval  BIT STRING (SIZE (1)),
aodo        BIT STRING (SIZE (5)),
c-ic        BIT STRING (SIZE (16)),
omega0      BIT STRING (SIZE (32)),
c-is        BIT STRING (SIZE (16)),
i0          BIT STRING (SIZE (32)),
c-rc        BIT STRING (SIZE (16)),
omega       BIT STRING (SIZE (32)),
omegaDot    BIT STRING (SIZE (24)),
iDot        BIT STRING (SIZE (14))
}
NC-Mode ::= BIT STRING (SIZE (3))

Neighbour ::= SEQUENCE {
  neighbourIdentity PrimaryCPICH-Info OPTIONAL,
  neighbourQuantity NeighbourQuantity,
  sfn-SFN-ObsTimeDifference2 SFN-SFN-ObsTimeDifference2
}

NeighbourList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  Neighbour

-- **TODO**, to be defined fully
NeighbourQuantity ::= SEQUENCE {
}

NewInterFreqCell ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfo
}

NewInterFreqCell-r4 ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfo-r4
}

NewInterFreqCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCell

NewInterFreqCellList-r4 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
  NewInterFreqCell-r4

NewInterFreqCellSI-RSCP ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfoSI-RSCP
}

NewInterFreqCellSI-ECN0 ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfoSI-ECN0
}

NewInterFreqCellSI-HCS-RSCP ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfoSI-HCS-RSCP
}

NewInterFreqCellSI-HCS-ECN0 ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfoSI-HCS-ECN0
}

NewInterFreqCellSI-RSCP-LCR ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfoSI-RSCP-LCR
}

NewInterFreqCellSI-ECN0-LCR ::= SEQUENCE {
  interFreqCellID InterFreqCellID OPTIONAL,
  frequencyInfo FrequencyInfo OPTIONAL,
  cellInfo CellInfoSI-ECN0-LCR
}

```

```

NewInterFreqCellSI-HCS-RSCP-LCR ::= SEQUENCE {
    interFreqCellID      InterFreqCellID      OPTIONAL,
    frequencyInfo        FrequencyInfo        OPTIONAL,
    cellInfo              CellInfoSI-HCS-RSCP-LCR
}

NewInterFreqCellSI-HCS-ECNO-LCR ::= SEQUENCE {
    interFreqCellID      InterFreqCellID      OPTIONAL,
    frequencyInfo        FrequencyInfo        OPTIONAL,
    cellInfo              CellInfoSI-HCS-ECNO-LCR
}

NewInterFreqCellSI-List-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-ECNO

NewInterFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-HCS-RSCP

NewInterFreqCellSI-List-HCS-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-HCS-ECNO

NewInterFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-RSCP

NewInterFreqCellSI-List-ECNO-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-ECNO-LCR

NewInterFreqCellSI-List-HCS-RSCP-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-HCS-RSCP-LCR

NewInterFreqCellSI-List-HCS-ECNO-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-HCS-ECNO-LCR

NewInterFreqCellSI-List-RSCP-LCR ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-RSCP-LCR

NewInterRATCell ::= SEQUENCE {
    interRATCellID      InterRATCellID      OPTIONAL,
    technologySpecificInfo CHOICE {
        gsm              SEQUENCE {
            cellSelectionReselectionInfo CellSelectReselectInfosIB-11-12 OPTIONAL,
            bsic           BSIC,
            bcch-ARFCN     BCCH-ARFCN,
            gsm-OutputPower GSM-OutputPower      OPTIONAL
        },
        is-2000          SEQUENCE {
            is-2000SpecificMeasInfo      IS-2000SpecificMeasInfo
        },
        spare1           NULL,
        spare2           NULL
    }
}

NewInterRATCell-HCS ::= SEQUENCE {
    interRATCellID      InterRATCellID      OPTIONAL,
    technologySpecificInfo CHOICE {
        gsm              SEQUENCE {
            cellSelectionReselectionInfo CellSelectReselectInfosIB-11-12 OPTIONAL,
            bsic           BSIC,
            bcch-ARFCN     BCCH-ARFCN,
            gsm-OutputPower GSM-OutputPower      OPTIONAL
        },
        is-2000          SEQUENCE {
            is-2000SpecificMeasInfo      IS-2000SpecificMeasInfo
        },
        spare1           NULL,
        spare2           NULL
    }
}

NewInterRATCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterRATCell

NewInterRATCellList-HCS ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterRATCell-HCS

NewIntraFreqCell ::= SEQUENCE {
    intraFreqCellID      IntraFreqCellID      OPTIONAL,
    cellInfo              CellInfo
}

```

<u>NewIntraFreqCell-r4 ::=</u>	SEQUENCE {	
<u>intraFreqCellID</u>	IntraFreqCellID	OPTIONAL,
<u>cellInfo</u>	CellInfo-r4	
}		
NewIntraFreqCellList ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	NewIntraFreqCell	
<u>NewIntraFreqCellList-r4 ::=</u>	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	<u>NewIntraFreqCell-r4</u>	
NewIntraFreqCellSI-RSCP ::=	SEQUENCE {	
intraFreqCellID	IntraFreqCellID	OPTIONAL,
cellInfo	CellInfoSI-RSCP	
}		
NewIntraFreqCellSI-ECNO ::=	SEQUENCE {	
intraFreqCellID	IntraFreqCellID	OPTIONAL,
cellInfo	CellInfoSI-ECNO	
}		
NewIntraFreqCellSI-HCS-RSCP ::=	SEQUENCE {	
intraFreqCellID	IntraFreqCellID	OPTIONAL,
cellInfo	CellInfoSI-HCS-RSCP	
}		
NewIntraFreqCellSI-HCS-ECNO ::=	SEQUENCE {	
intraFreqCellID	IntraFreqCellID	OPTIONAL,
cellInfo	CellInfoSI-HCS-ECNO	
}		
<u>NewIntraFreqCellSI-RSCP-LCR ::=</u>	SEQUENCE {	
<u>intraFreqCellID</u>	IntraFreqCellID	OPTIONAL,
<u>cellInfo</u>	CellInfoSI-RSCP-LCR	
}		
<u>NewIntraFreqCellSI-ECNO-LCR ::=</u>	SEQUENCE {	
<u>intraFreqCellID</u>	IntraFreqCellID	OPTIONAL,
<u>cellInfo</u>	CellInfoSI-ECNO-LCR	
}		
<u>NewIntraFreqCellSI-HCS-RSCP-LCR ::=</u>	SEQUENCE {	
<u>intraFreqCellID</u>	IntraFreqCellID	OPTIONAL,
<u>cellInfo</u>	CellInfoSI-HCS-RSCP-LCR	
}		
<u>NewIntraFreqCellSI-HCS-ECNO-LCR ::=</u>	SEQUENCE {	
<u>intraFreqCellID</u>	IntraFreqCellID	OPTIONAL,
<u>cellInfo</u>	CellInfoSI-HCS-ECNO-LCR	
}		
NewIntraFreqCellSI-List-RSCP ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	NewIntraFreqCellSI-RSCP	
NewIntraFreqCellSI-List-ECNO ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	NewIntraFreqCellSI-ECNO	
NewIntraFreqCellSI-List-HCS-RSCP ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	NewIntraFreqCellSI-HCS-RSCP	
NewIntraFreqCellSI-List-HCS-ECNO ::=	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	NewIntraFreqCellSI-HCS-ECNO	
<u>NewIntraFreqCellSI-List-RSCP-LCR ::=</u>	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	<u>NewIntraFreqCellSI-RSCP-LCR</u>	
<u>NewIntraFreqCellSI-List-ECNO-LCR ::=</u>	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	<u>NewIntraFreqCellSI-ECNO-LCR</u>	
<u>NewIntraFreqCellSI-List-HCS-RSCP-LCR ::=</u>	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	<u>NewIntraFreqCellSI-HCS-RSCP-LCR</u>	
<u>NewIntraFreqCellSI-List-HCS-ECNO-LCR ::=</u>	SEQUENCE (SIZE (1..maxCellMeas)) OF	
	<u>NewIntraFreqCellSI-HCS-ECNO-LCR</u>	
NodeB-ClockDrift ::=	INTEGER (0..15)	
NonUsedFreqParameter ::=	SEQUENCE {	
nonUsedFreqThreshold	Threshold,	
nonUsedFreqW	W	
}		

```

NonUsedFreqParameterList ::= SEQUENCE (SIZE (1..maxFreq)) OF
                               NonUsedFreqParameter

ObservedTimeDifferenceToGSM ::= INTEGER (0..4095)

OTDOA-SearchWindowSize ::= ENUMERATED {
                               c10, c20, c30, c40, c50,
                               c60, c70, moreThan70 }

Pathloss ::= INTEGER (46..158)

PenaltyTime-RSCP ::= CHOICE {
    notUsed
    pt10
    pt20
    pt30
    pt40
    pt50
    pt60
}

PenaltyTime-ECNO ::= CHOICE {
    notUsed
    pt10
    pt20
    pt30
    pt40
    pt50
    pt60
}

PendingTimeAfterTrigger ::= ENUMERATED {
    ptat0-25, ptat0-5, ptat1,
    ptat2, ptat4, ptat8, ptat16 }

PeriodicalOrEventTrigger ::= ENUMERATED {
    periodical,
    eventTrigger }

PeriodicalReportingCriteria ::= SEQUENCE {
    reportingAmount
    reportingInterval
}
                                                                    DEFAULT ra-Infinity,

PeriodicalWithReportingCellStatus ::= SEQUENCE {
    periodicalReportingCriteria
    reportingCellStatus
}
                                                                    OPTIONAL

PositionEstimate ::= CHOICE {
    ellipsoidPoint
    ellipsoidPointUncertCircle
    ellipsoidPointUncertEllipse
    ellipsoidPointAltitude
    ellipsoidPointAltitudeEllipse
}

PositioningMethod ::= ENUMERATED {
    otdoa,
    gps,
    otdoaOrGPS }

PRC ::= INTEGER (-2047..2047)

PrimaryCCPCH-RSCP ::= INTEGER (-115..-25)

Q-HCS ::= INTEGER (0..99)

Q-OffsetS-N ::= INTEGER (-50..50)

Q-QualMin ::= INTEGER (-20..0)

-- Actual value = (IE value * 2) + 1
Q-RxlevMin ::= INTEGER (-58..-13)

QualityEventResults ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

QualityMeasuredResults ::= SEQUENCE {
    blerMeasurementResultsList
    modeSpecificInfo
}
                                                                    OPTIONAL,
                                                                    CHOICE {

```



```

        fdd
        tdd
        sir-MeasurementResults
    }
}

QualityMeasurement ::=
    qualityReportingQuantity
    reportCriteria
}

QualityReportCriteria ::=
    qualityReportingCriteria
    periodicalReportingCriteria
    noReporting
}

QualityReportingCriteria ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
        QualityReportingCriteriaSingle

QualityReportingCriteriaSingle ::=
    SEQUENCE {
        transportChannelIdentity
        totalCRC
        badCRC
        pendingAfterTrigger
    }

QualityReportingQuantity ::=
    dl-TransChBLER
    bler-dl-TransChIdList
    modeSpecificInfo
    fdd
    tdd
    sir-TFCS-List
}

QualityType ::=
    ENUMERATED {
        std-10, std-50, cpich-Ec-N0 }

RAT-Type ::=
    ENUMERATED {
        gsm, is2000 }

ReferenceCellPosition ::=
    ellipsoidPoint
    ellipsoidPointWithAltitude
}

ReferenceCellRelation ::=
    ENUMERATED {
        first-12-second-3,
        first-13-second-2,
        first-1-second-23 }

-- As defined in 23.032 (2D with 24bits for each coordinate)
ReferenceLocationforSIB ::=
    ellipsoidPoint
}

ReferenceQuality ::=
    ENUMERATED {
        m0-19, m20-39, m40-79,
        m80-159, m160-319, m320-639,
        m640-1319, m1320Plus }

-- Actual value = IE value * 10
ReferenceQuality10 ::=
    INTEGER (1..32)

-- Actual value = IE value * 50
ReferenceQuality50 ::=
    INTEGER (1..32)

ReferenceSFN ::=
    INTEGER (0..4095)

-- Actual value = IE value * 512
ReferenceTimeDifferenceToCell ::=
    CHOICE {
        -- Actual value = IE value * 40
        accuracy40
        -- Actual value = IE value * 256
        accuracy256
        -- Actual value = IE value * 2560
        accuracy2560
    }
}

```

```

RemovedInterFreqCellList ::= CHOICE {
    removeAllInterFreqCells      NULL,
    removeSomeInterFreqCells     SEQUENCE (SIZE (1..maxCellMeas)) OF
        InterFreqCellID,
    removeNoInterFreqCells      NULL
}

RemovedInterRATCellList ::= CHOICE {
    removeAllInterRATCells      NULL,
    removeSomeInterRATCells     SEQUENCE (SIZE (1..maxCellMeas)) OF
        InterRATCellID,
    removeNoInterRATCells      NULL
}

RemovedIntraFreqCellList ::= CHOICE {
    removeAllIntraFreqCells     NULL,
    removeSomeIntraFreqCells    SEQUENCE (SIZE (1..maxCellMeas)) OF
        IntraFreqCellID,
    removeNoIntraFreqCells     NULL
}

ReplacementActivationThreshold ::= ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportDeactivationThreshold ::= ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportingAmount ::= ENUMERATED {
    ra1, ra2, ra4, ra8, ra16, ra32,
    ra64, ra-Infinity }

ReportingCellStatus ::= CHOICE{
    withinActiveSet              MaxNumberOfReportingCellsType1,
    withinMonitoredSetUsedFreq   MaxNumberOfReportingCellsType1,
    withinActiveAndOrMonitoredUsedFreq MaxNumberOfReportingCellsType1,
    withinDetectedSetUsedFreq   MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrDetectedUsedFreq
        MaxNumberOfReportingCellsType1,
    allActiveplusMonitoredSet    MaxNumberOfReportingCellsType3,
    allActivePlusDetectedSet     MaxNumberOfReportingCellsType3,
    allActivePlusMonitoredAndOrDetectedSet
        MaxNumberOfReportingCellsType3,
    withinVirtualActSet          MaxNumberOfReportingCellsType1,
    withinMonitoredSetNonUsedFreq MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrActiveSetNonUsedFreq
        MaxNumberOfReportingCellsType1,
    allVirtualActSetplusMonitoredSetNonUsedFreq
        MaxNumberOfReportingCellsType3,
    withinActSetOrVirtualActSet  MaxNumberOfReportingCellsType2,
    withinActSetAndOrMonitoredUsedFreqOrMonitoredNonUsedFreq
        MaxNumberOfReportingCellsType2
}

ReportingCellStatusOpt ::= SEQUENCE {
    reportingCellStatus          ReportingCellStatus          OPTIONAL
}

ReportingInfoForCellDCH ::= SEQUENCE {
    intraFreqReportingQuantity  IntraFreqReportingQuantity,
    measurementReportingMode     MeasurementReportingMode,
    reportCriteria               CellDCH-ReportCriteria
}

ReportingInterval ::= ENUMERATED {
    noPeriodicalreporting, ri0-25,
    ri0-5, ri1, ri2, ri4, ri8, ri16 }

ReportingIntervalLong ::= ENUMERATED {
    ril0, ril0-25, ril0-5, ril1,
    ril2, ril3, ril4, ril6, ril8,
    ril12, ril16, ril20, ril24,
    ril28, ril32, ril64 }

-- Actual value = IE value * 0.5
ReportingRange ::= INTEGER (0..29)

RL-AdditionInfoList ::= SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

```

```

RL-InformationLists ::=
    rl-AdditionInfoList
    rl-RemovalInfoList
}

RL-RemovalInfoList ::=
    SEQUENCE (SIZE (1..maxRL)) OF
        PrimaryCPICH-Info

RLC-BuffersPayload ::=
    ENUMERATED {
        pl0, pl4, pl8, pl16, pl32, pl64, pl128,
        pl256, pl512, pl1024, pl2k, pl4k,
        pl8k, pl16k, pl32k, pl64k, pl128k,
        pl256k, pl512k, pl1024k }

RRC ::=
    INTEGER (-127..127)

SatelliteStatus ::=
    ENUMERATED {
        ns-NN-U,
        es-SN,
        es-NN-U,
        es-NN-C }

SatID ::=
    INTEGER (0..63)

SFN-SFN-ObsTimeDifference ::=
    CHOICE {
        type1
            -- Actual value for type2 = IE value * 0.0625 - 1280
            SFN-SFN-ObsTimeDifference1,
        type2
            SFN-SFN-ObsTimeDifference2
    }

SFN-SFN-ObsTimeDifference1 ::=
    INTEGER (0..9830399)

SFN-SFN-ObsTimeDifference2 ::=
    INTEGER (0..40961)

SFN-SFN-OTD-Type ::=
    ENUMERATED {
        noReport,
        type1,
        type2 }

SIR ::=
    INTEGER (-10..20)

SIR-MeasurementList ::=
    SEQUENCE (SIZE (1..maxCCTrCH)) OF
        SIR-MeasurementResults

SIR-MeasurementResults ::=
    SEQUENCE {
        tfcs-ID
        sir-TimeslotList
    }

SIR-TFCS ::=
    TFCS-IdentityPlain

SIR-TFCS-List ::=
    SEQUENCE (SIZE (1..maxCCTrCH)) OF
        SIR-TFCS

SIR-TimeslotList ::=
    SEQUENCE (SIZE (1..maxTS)) OF
        SIR

-- Reserved bits in subframe 1 of the GPS navigation message
SubFrame1Reserved ::=
    SEQUENCE {
        reserved1
            BIT STRING (SIZE (23)),
        reserved2
            BIT STRING (SIZE (24)),
        reserved3
            BIT STRING (SIZE (24)),
        reserved4
            BIT STRING (SIZE (16))
    }

T-CRMax ::=
    CHOICE {
        notUsed
        t30
        t60
        t120
        t180
        t240
    }

T-CRMaxHyst ::=
    ENUMERATED {
        notUsed, t10, t20, t30,
        t40, t50, t60, t70 }

TemporaryOffset ::=
    ENUMERATED {

```

```

to10, to20, to30, to40, to50,
to60, to70, infinite }

TemporaryOffsetList ::=
    SEQUENCE {
        temporaryOffset1
        temporaryOffset2
    }

Threshold ::=
    INTEGER (-115..0)

ThresholdPositionChange ::=
    ENUMERATED {
        pc10, pc20, pc30, pc40, pc50,
        pc100, pc200, pc300, pc500,
        pc1000, pc2000, pc5000, pc10000,
        pc20000, pc50000, pc100000 }

ThresholdSFN-GPS-TOW ::=
    ENUMERATED {
        ms1, ms2, ms3, ms5, ms10,
        ms20, ms50, ms100 }

ThresholdSFN-SFN-Change ::=
    ENUMERATED {
        c0-25, c0-5, c1, c2, c3, c4, c5,
        c10, c20, c50, c100, c200, c500,
        c1000, c2000, c5000 }

ThresholdUsedFrequency ::=
    INTEGER (-115..165)

-- Actual value = IE value * 20.
TimeInterval ::=
    INTEGER (1..13)

TimeslotInfo ::=
    SEQUENCE {
        timeslotNumber
        burstType
    }

TimeslotInfo-LCR ::=
    SEQUENCE {
        timeslotNumber
        burstType
    }

TimeslotInfoList ::=
    SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotInfo

TimeslotInfoList-LCR ::=
    SEQUENCE (SIZE (1..maxTS-LCR)) OF
        TimeslotInfo-LCR

TimeslotInfoList-r4 ::=
    CHOICE {
        tdd384
            SEQUENCE (SIZE (1..maxTS)) OF
                TimeslotInfo,
        tdd128
            SEQUENCE (SIZE (1..maxTS-LCR)) OF
                TimeslotInfo-LCR
    }

TimeslotISCP ::=
    INTEGER (-115..-25)

-- The following list shall not include more than 6 elements in 1.28Mcps TDD mode.
TimeslotISCP-List ::=
    SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotISCP

TimeslotListWithISCP ::=
    SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotWithISCP

TimeslotWithISCP ::=
    SEQUENCE {
        timeslot
        timeslotISCP
    }

TimeToTrigger ::=
    ENUMERATED {
        ttt0, ttt10, ttt20, ttt40, ttt60,
        ttt80, ttt100, ttt120, ttt160,
        ttt200, ttt240, ttt320, ttt640,
        ttt1280, ttt2560, ttt5000 }

TrafficVolumeEventParam ::=
    SEQUENCE {
        eventID
        reportingThreshold
        timeToTrigger
        pendingTimeAfterTrigger
        tx-InterruptionAfterTrigger
    }
    TrafficVolumeEventType,
    TrafficVolumeThreshold,
    TimeToTrigger
    PendingTimeAfterTrigger
    TX-InterruptionAfterTrigger
    OPTIONAL,
    OPTIONAL,
    OPTIONAL

```

```

TrafficVolumeEventResults ::= SEQUENCE {
    ul-transportChannelCausingEvent TransportChannelIdentity,
    trafficVolumeEventIdentity      TrafficVolumeEventType
}

TrafficVolumeEventType ::= ENUMERATED {
    e4a,
    e4b }

TrafficVolumeMeasQuantity ::= CHOICE {
    rlc-BufferPayload          NULL,
    averageRLC-BufferPayload   TimeInterval,
    varianceOfRLC-BufferPayload TimeInterval
}

TrafficVolumeMeasSysInfo ::= SEQUENCE {
    trafficVolumeMeasurementID      MeasurementIdentity          DEFAULT 4,
    trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
    trafficVolumeMeasQuantity        TrafficVolumeMeasQuantity        OPTIONAL,
    trafficVolumeReportingQuantity   TrafficVolumeReportingQuantity   OPTIONAL,
    trafficVolumeMeasRepCriteria     TrafficVolumeReportingCriteria   OPTIONAL,
    measurementValidity              MeasurementValidity              OPTIONAL,
    measurementReportingMode         MeasurementReportingMode,
    reportCriteriaSysInf             TrafficVolumeReportCriteriaSysInfo
}

TrafficVolumeMeasuredResults ::= SEQUENCE {
    rb-Identity                RB-Identity,
    rlc-BuffersPayload          RLC-BuffersPayload              OPTIONAL,
    averageRLC-BufferPayload    AverageRLC-BufferPayload         OPTIONAL,
    varianceOfRLC-BufferPayload VarianceOfRLC-BufferPayload         OPTIONAL
}

TrafficVolumeMeasuredResultsList ::= SEQUENCE (SIZE (1..maxRB)) OF
    TrafficVolumeMeasuredResults

TrafficVolumeMeasurement ::= SEQUENCE {
    trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
    trafficVolumeMeasQuantity        TrafficVolumeMeasQuantity        OPTIONAL,
    trafficVolumeReportingQuantity   TrafficVolumeReportingQuantity   OPTIONAL,
    measurementValidity              MeasurementValidity              OPTIONAL,
    reportCriteria                   TrafficVolumeReportCriteria
}

TrafficVolumeMeasurementObjectList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

TrafficVolumeReportCriteria ::= CHOICE {
    trafficVolumeReportingCriteria   TrafficVolumeReportingCriteria,
    periodicalReportingCriteria     PeriodicalReportingCriteria,
    noReporting                      NULL
}

TrafficVolumeReportCriteriaSysInfo ::= CHOICE {
    trafficVolumeReportingCriteria   TrafficVolumeReportingCriteria,
    periodicalReportingCriteria     PeriodicalReportingCriteria
}

TrafficVolumeReportingCriteria ::= SEQUENCE {
    transChCriteriaList              TransChCriteriaList              OPTIONAL
}

TrafficVolumeReportingQuantity ::= SEQUENCE {
    rlc-RB-BufferPayload             BOOLEAN,
    rlc-RB-BufferPayloadAverage      BOOLEAN,
    rlc-RB-BufferPayloadVariance     BOOLEAN
}

TrafficVolumeThreshold ::= ENUMERATED {
    th8, th16, th32, th64, th128,
    th256, th512, th1024, th2k, th3k,
    th4k, th6k, th8k, th12k, th16k,
    th24k, th32k, th48k, th64k, th96k,
    th128k, th192k, th256k, th384k,
    th512k, th768k }

TransChCriteria ::= SEQUENCE {
    ul-transportChannelID            TransportChannelIdentity          OPTIONAL,
    eventSpecificParameters          SEQUENCE (SIZE (1..maxMeasParEvent)) OF
        TrafficVolumeEventParam      OPTIONAL
}

```

```

}
TransChCriteriaList ::=          SEQUENCE (SIZE (1..maxTrCH)) OF
                                TransChCriteria

TransferMode ::=                ENUMERATED {
                                acknowledgedModeRLC,
                                unacknowledgedModeRLC }

TransmittedPowerThreshold ::=   INTEGER (-50..33)

TriggeringCondition1 ::=       ENUMERATED {
                                activeSetCellsOnly,
                                monitoredSetCellsOnly,
                                activeSetAndMonitoredSetCells }

TriggeringCondition2 ::=       ENUMERATED {
                                activeSetCellsOnly,
                                monitoredSetCellsOnly,
                                activeSetAndMonitoredSetCells,
                                detectedSetCellsOnly,
                                detectedSetAndMonitoredSetCells }

TX-InterruptionAfterTrigger ::= ENUMERATED {
                                txiat0-25, txiat0-5, txiat1,
                                txiat2, txiat4, txiat8, txiat16 }

UDRE ::=                       ENUMERATED {
                                lessThan1,
                                between1-and-4,
                                between4-and-8,
                                over8 }

UE-6AB-Event ::=               SEQUENCE {
                                timeToTrigger          TimeToTrigger,
                                transmittedPowerThreshold TransmittedPowerThreshold
}

UE-6FG-Event ::=               SEQUENCE {
                                timeToTrigger          TimeToTrigger,
                                ue-RX-TX-TimeDifferenceThreshold UE-RX-TX-TimeDifferenceThreshold
}

UE-AutonomousUpdateMode ::=    CHOICE {
                                on                      NULL,
                                onWithNoReporting      NULL,
                                off                    RL-InformationLists
}

UE-InternalEventParam ::=      CHOICE {
                                event6a                UE-6AB-Event,
                                event6b                UE-6AB-Event,
                                event6c                TimeToTrigger,
                                event6d                TimeToTrigger,
                                event6e                TimeToTrigger,
                                event6f                UE-6FG-Event,
                                event6g                UE-6FG-Event
}

UE-InternalEventParamList ::=  SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                UE-InternalEventParam

UE-InternalEventResults ::=    CHOICE {
                                event6a                NULL,
                                event6b                NULL,
                                event6c                NULL,
                                event6d                NULL,
                                event6e                NULL,
                                event6f                PrimaryCPICH-Info,
                                event6g                PrimaryCPICH-Info
}

UE-InternalMeasQuantity ::=    SEQUENCE {
                                measurementQuantity    UE-MeasurementQuantity,
                                filterCoefficient      FilterCoefficient
}
                                                                    DEFAULT fcl

UE-InternalMeasuredResults ::= SEQUENCE {
                                modeSpecificInfo       CHOICE {
                                                                fdd                SEQUENCE {
                                                                    ue-TransmittedPowerFDD    UE-TransmittedPower          OPTIONAL,
                                                                    ue-RX-TX-ReportEntryList UE-RX-TX-ReportEntryList    OPTIONAL
                                                                }
}

```

```

    },
    tdd
        ue-TransmittedPowerTDD-List SEQUENCE {
            ue-TransmittedPowerTDD-List OPTIONAL,
            appliedTA UL-TimingAdvance OPTIONAL
        }
    }
}

```

```

UE-InternalMeasuredResults-LCR ::= SEQUENCE {
    ue-TransmittedPowerTDD-List UE-TransmittedPowerTDD-List OPTIONAL,
    upPCH-ADV INTEGER (0..352) OPTIONAL
}

```

```

UE-InternalMeasurement ::= SEQUENCE {
    ue-InternalMeasQuantity UE-InternalMeasQuantity OPTIONAL,
    ue-InternalReportingQuantity UE-InternalReportingQuantity OPTIONAL,
    reportCriteria UE-InternalReportCriteria
}

```

```

UE-InternalMeasurement-r4 ::= SEQUENCE {
    ue-InternalMeasQuantity UE-InternalMeasQuantity OPTIONAL,
    ue-InternalReportingQuantity UE-InternalReportingQuantity-r4 OPTIONAL,
    reportCriteria UE-InternalReportCriteria
}

```

```

UE-InternalMeasurementSysInfo ::= SEQUENCE {
    ue-InternalMeasurementID MeasurementIdentity DEFAULT 5,
    ue-InternalMeasQuantity UE-InternalMeasQuantity
}

```

```

UE-InternalReportCriteria ::= CHOICE {
    ue-InternalReportingCriteria UE-InternalReportingCriteria,
    periodicalReportingCriteria PeriodicalReportingCriteria,
    noReporting NULL
}

```

```

UE-InternalReportingCriteria ::= SEQUENCE {
    ue-InternalEventParamList UE-InternalEventParamList OPTIONAL
}

```

```

UE-InternalReportingQuantity ::= SEQUENCE {
    ue-TransmittedPower BOOLEAN,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            ue-RX-TX-TimeDifferece BOOLEAN
        },
        tdd SEQUENCE {
            appliedTA BOOLEAN
        }
    }
}

```

```

UE-InternalReportingQuantity-r4 ::= SEQUENCE {
    ue-TransmittedPower BOOLEAN,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            ue-RX-TX-TimeDifferece BOOLEAN
        },
        tdd SEQUENCE {
            tddOption CHOICE {
                tdd384 SEQUENCE {
                    appliedTA BOOLEAN
                },
                tdd128 SEQUENCE {
                    upPTS-ADV BOOLEAN
                }
            }
        }
    }
}

```

-- TABULAR: For TDD only the first two values are used.

```

UE-MeasurementQuantity ::= ENUMERATED {
    ue-TransmittedPower,
    ultra-Carrier-RSSI,
    ue-RX-TX-TimeDifference
}

```

```

UE-RX-TX-ReportEntry ::= SEQUENCE {
    primaryCPICH-Info PrimaryCPICH-Info,
    ue-RX-TX-TimeDifferenceType1 UE-RX-TX-TimeDifferenceType1
}

```

```

UE-RX-TX-ReportEntryList ::=          SEQUENCE (SIZE (1..maxRL)) OF
                                         UE-RX-TX-ReportEntry

UE-RX-TX-TimeDifferenceType1 ::=          INTEGER (768..1280)

-- Actual value = IE value * 0.0625 + 768
UE-RX-TX-TimeDifferenceType2 ::=          INTEGER (0..8191)

UE-RX-TX-TimeDifferenceThreshold ::=      INTEGER (768..1280)

UE-TransmittedPower ::=                  INTEGER (-50..33)

UE-TransmittedPowerTDD-List ::=          SEQUENCE (SIZE (1..maxTS)) OF
                                         UE-TransmittedPower

UP-Accuracy ::=                           BIT STRING (SIZE (7))

-- For sfID=0 (sf4), pageNo=18, and sfID=0 & sfID=1 (sf4 & sf5), pageNo=25,
-- the IE fields for word3 - word110 are the same as UP-GPS-IonosphericModel
-- and UP-GPS-UTC-Model. For the rest of the pages, they are the same as
-- UP-GPS-Almanac.
UP-Alma-SIB-Data ::=                      SEQUENCE {
  sfID                                     INTEGER (0..1),
  dataID                                   INTEGER (0..3),
  pageNo                                   INTEGER (0..63),
  word3                                    BIT STRING (SIZE (16)),
  word4                                    BIT STRING (SIZE (24)),
  word5                                    BIT STRING (SIZE (24)),
  word6                                    BIT STRING (SIZE (24)),
  word7                                    BIT STRING (SIZE (24)),
  word8                                    BIT STRING (SIZE (24)),
  word9                                    BIT STRING (SIZE (24)),
  word10                                   BIT STRING (SIZE (22))
}

UP-Alma-SIB-DataList ::=                  SEQUENCE (SIZE (1..3)) OF
                                         UP-Alma-SIB-Data

UP-CipherParameters ::=                   SEQUENCE {
  cipheringKeyFlag                         BIT STRING (SIZE (1)),
  cipheringSerialNumber                     INTEGER (0..65535)
}

UP-DGPS-SIB-Data ::=                      SEQUENCE {
  nodeBClockDrift                           NodeB-ClockDrift                OPTIONAL,
  referenceLocationforSIB ReferenceLocationforSIB,                OPTIONAL,
  referenceSFN                               GPS-TOW-lusec,
  referenceGPS-TOW                           DiffCorrectionStatus,
  statusHealth                               DGPS-InformationList
}

UP-Ephe-SIB-Data ::=                      SEQUENCE {
  transmissionTOW                             INTEGER (0..1048575),
  satID                                       SatID,
  tlmMessage                                 BIT STRING (SIZE (14)),
  tlmRevd                                    BIT STRING (SIZE (2)),
  how                                         BIT STRING (SIZE (22)),
  wn                                         BIT STRING (SIZE (10)),
  navModel                                   NavModel
}

UP-Error ::=                              SEQUENCE {
  errorReason                               UP-ErrorCause,
  additionalAssistanceData                   AdditionalAssistanceData
}

UP-ErrorCause ::=                         ENUMERATED {
  notEnoughOTDOA-Cells,
  notEnoughGPS-Satellites,
  assistanceDataMissing,
  methodNotSupported,
  undefinedError,
  requestDeniedByUser,
  notProcessedAndTimeout }

UP-EventID ::=                            ENUMERATED {
  e7a, e7b, e7c }

UP-EventParam ::=                         SEQUENCE {
  reportingAmount                             ReportingAmount,
  reportFirstFix                               BOOLEAN,

```



```

    measurementInterval          UP-MeasurementInterval,
    eventSpecificInfo            UP-EventSpecificInfo
}

UP-EventParamList ::=          SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                UP-EventParam

UP-EventSpecificInfo ::=      CHOICE {
    e7a                          ThresholdPositionChange,
    e7b                          ThresholdSFN-SFN-Change,
    e7c                          ThresholdSFN-GPS-TOW
}

UP-GPS-AcquisitionAssistance ::= SEQUENCE {
    referenceTime                CHOICE {
        utran-ReferenceTime      UTRAN-ReferenceTime,
        gps-ReferenceTimeOnly    INTEGER (0..604799999)
    },
    satelliteInformationList     AcquisitionSatInfoList
}

UP-GPS-Almanac ::=           SEQUENCE {
    wn-a                          BIT STRING (SIZE (8)),
    almanacSatInfoList           AlmanacSatInfoList
}

UP-GPS-AssistanceData ::=    SEQUENCE {
    up-GPS-ReferenceTime         UP-GPS-ReferenceTime                OPTIONAL,
    up-GPS-ReferenceLocation     EllipsoidPointAltitude             OPTIONAL,
    up-GPS-DGPS-Corrections      UP-GPS-DGPS-Corrections           OPTIONAL,
    up-GPS-NavigationModel       UP-GPS-NavigationModel          OPTIONAL,
    up-GPS-IonosphericModel      UP-GPS-IonosphericModel         OPTIONAL,
    up-GPS-UTC-Model             UP-GPS-UTC-Model                 OPTIONAL,
    up-GPS-Almanac               UP-GPS-Almanac                   OPTIONAL,
    up-GPS-AcquisitionAssistance UP-GPS-AcquisitionAssistance    OPTIONAL,
    up-GPS-Real-timeIntegrity    BadSatList                       OPTIONAL
}

UP-Cipher-GPS-Data-Indicator ::= SEQUENCE {
    up-CipherParameters          UP-CipherParameters                OPTIONAL
}

UP-GPS-DGPS-Corrections ::=  SEQUENCE {
    gps-TOW                      INTEGER (0..604799),
    statusHealth                 DiffCorrectionStatus,
    dgps-CorrectionSatInfoList  DGPS-CorrectionSatInfoList
}

UP-GPS-IonosphericModel ::=  SEQUENCE {
    alfa0                        BIT STRING (SIZE (8)),
    alfa1                        BIT STRING (SIZE (8)),
    alfa2                        BIT STRING (SIZE (8)),
    alfa3                        BIT STRING (SIZE (8)),
    beta0                        BIT STRING (SIZE (8)),
    beta1                        BIT STRING (SIZE (8)),
    beta2                        BIT STRING (SIZE (8)),
    beta3                        BIT STRING (SIZE (8))
}

UP-GPS-Measurement ::=       SEQUENCE {
    referenceSFN                 ReferenceSFN                        OPTIONAL,
    gps-TOW-lmsec               GPS-TOW-lmsec,
    gps-TOW-rem-usec            GPS-TOW-rem-usec                  OPTIONAL,
    gps-MeasurementParamList    GPS-MeasurementParamList
}

UP-GPS-NavigationModel ::=   SEQUENCE {
    n-SAT                       INTEGER (1..16),
    navigationModelSatInfoList  NavigationModelSatInfoList
}

UP-GPS-ReferenceTime ::=     SEQUENCE {
    gps-Week                    INTEGER (0..1023),
    gps-TOW                    GPS-TOW-lusec,
    sfn                        INTEGER (0..4095),
    gps-TOW-AssistList         GPS-TOW-AssistList                OPTIONAL
}

UP-GPS-UTC-Model ::=         SEQUENCE {
    a1                          BIT STRING (SIZE (24)),
    a0                          BIT STRING (SIZE (32)),
    t-ot                        BIT STRING (SIZE (8)),
}

```

```

    wn-t                BIT STRING (SIZE (8)),
    delta-t-LS          BIT STRING (SIZE (8)),
    wn-lsf              BIT STRING (SIZE (8)),
    dn                  BIT STRING (SIZE (8)),
    delta-t-LSF        BIT STRING (SIZE (8))
}

UP-IPDL-Parameters ::= SEQUENCE {
    ip-Spacing          IP-Spacing,
    ip-Length           IP-Length,
    ip-Offset           INTEGER (0..9),
    seed                INTEGER (0..63),
    burstModeParameters BurstModeParameters
}

UP-MeasuredResults ::= SEQUENCE {
    up-MultipleSets    UP-MultipleSets                OPTIONAL,
    up-ReferenceCellIdentity PrimaryCPICH-Info        OPTIONAL,
    up-OTDOA-Measurement UP-OTDOA-Measurement        OPTIONAL,
    up-Position        UP-Position                    OPTIONAL,
    up-GPS-Measurement UP-GPS-Measurement            OPTIONAL,
    up-Error           UP-Error                        OPTIONAL
}

UP-Measurement ::= SEQUENCE {
    up-ReportingQuantity UP-ReportingQuantity,
    reportCriteria       UP-ReportCriteria,
    up-OTDOA-AssistanceData UP-OTDOA-AssistanceData    OPTIONAL,
    up-GPS-AssistanceData UP-GPS-AssistanceData        OPTIONAL
}

UP-MeasurementEventResults ::= CHOICE {
    event7a    UP-Position,
    event7b    UP-OTDOA-Measurement,
    event7c    UP-GPS-Measurement
}

UP-MeasurementInterval ::= ENUMERATED {
    e5, e15, e60, e300,
    e900, e1800, e3600, e7200 }

UP-MethodType ::= ENUMERATED {
    ue-Assisted,
    ue-Based,
    ue-BasedPreferred,
    ue-AssistedPreferred }

UP-MultipleSets ::= SEQUENCE {
    numberOfOTDOA-IPDL-GPS-Sets INTEGER (2..3),
    numberOfReferenceCells      INTEGER (1..3),
    referenceCellRelation       ReferenceCellRelation
}

UP-OTDOA-AssistanceData ::= SEQUENCE {
    up-OTDOA-ReferenceCell UP-OTDOA-ReferenceCell        OPTIONAL,
    up-OTDOA-MeasurementAssistDataList UP-OTDOA-MeasurementAssistDataList OPTIONAL,
    up-IPDL-Parameters     UP-IPDL-Parameters            OPTIONAL
}

UP-OTDOA-AssistanceSIB ::= SEQUENCE {
    up-CipherParameters UP-CipherParameters                OPTIONAL,
    searchWindowSize    OTDOA-SearchWindowSize,
    referenceCellPosition ReferenceCellPosition,
    up-IPDL-Parameters UP-IPDL-Parameters                OPTIONAL,
    cellToMeasureInfoList CellToMeasureInfoList
}

UP-OTDOA-Measurement ::= SEQUENCE {
    sfn                INTEGER (0..4095),
    ue-RX-TX-TimeDifferenceType2 UE-RX-TX-TimeDifferenceType2,
    qualityChoice      CHOICE {
        std-10          ReferenceQuality10,
        std-50          ReferenceQuality50,
        cpich-EcN0      CPICH-Ec-N0-OTDOA,
        defaultQuality  ReferenceQuality
    },
    neighbourList      NeighbourList                        OPTIONAL
}

UP-OTDOA-MeasurementAssistData ::= SEQUENCE {
    primaryCPICH-Info PrimaryCPICH-Info,
    frequencyInfo     FrequencyInfo                        OPTIONAL,

```

```

    sfn-SFN-ObsTimeDifference          SFN-SFN-ObsTimeDifference1,
    fineSFN-SFN                       FineSFN-SFN                      OPTIONAL,
    searchWindowSize                   OTDOA-SearchWindowSize,
    relativeNorth                      INTEGER (-20000..20000)          OPTIONAL,
    relativeEast                      INTEGER (-20000..20000)          OPTIONAL,
    relativeAltitude                   INTEGER (-4000..4000)          OPTIONAL
}

UP-OTDOA-MeasurementAssistDataList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
                                        UP-OTDOA-MeasurementAssistData

UP-OTDOA-ReferenceCell ::=             SEQUENCE {
    primaryCPICH-Info                 PrimaryCPICH-Info,
    frequencyInfo                     FrequencyInfo                      OPTIONAL,
    cellPosition                      ReferenceCellPosition             OPTIONAL
}

UP-Position ::=                       SEQUENCE {
    referenceSFN                      ReferenceSFN,
    gps-TOW                           GPS-TOW-lusec,
    positionEstimate                  PositionEstimate
}

UP-ReportCriteria ::=                 CHOICE {
    up-ReportingCriteria              UP-EventParamList,
    periodicalReportingCriteria       PeriodicalReportingCriteria,
    noReporting                       NULL
}

UP-ReportingQuantity ::=              SEQUENCE {
    methodType                        UP-MethodType,
    positioningMethod                 PositioningMethod,
    responseTime                      UP-ResponseTime,
    accuracy                          UP-Accuracy                        OPTIONAL,
    gps-TimingOfCellWanted            BOOLEAN,
    multipleSets                      BOOLEAN,
    environmentCharacterisation        EnvironmentCharacterisation        OPTIONAL
}

UP-ResponseTime ::=                  ENUMERATED {
    s1, s2, s4, s8, s16,
    s32, s64, s128 }

UTRA-CarrierRSSI ::=                 INTEGER (-95..-30)

UTRAN-ReferenceTime ::=              SEQUENCE {
    gps-TOW                           GPS-TOW-lusec,
    sfn                               INTEGER (0..4095)
}

VarianceOfRLC-BufferPayload ::=      ENUMERATED {
    plv0, plv4, plv8, plv16, plv32, plv64,
    plv128, plv256, plv512, plv1024,
    plv2k, plv4k, plv8k, plv16k }

-- Actual value = IE value * 0.1
W ::=                                INTEGER (0..20)

-- *****
--
--   OTHER INFORMATION ELEMENTS (10.3.8)
--
-- *****

BCC ::=                              INTEGER (0..7)

BCCH-ModificationInfo ::=            SEQUENCE {
    mib-ValueTag                      MIB-ValueTag,
    bcch-ModificationTime             BCCH-ModificationTime          OPTIONAL
}

-- Actual value = IE value * 8
BCCH-ModificationTime ::=            INTEGER (0..511)

BSIC ::=                             SEQUENCE {
    ncc                                NCC,
    bcc                                BCC
}

CBS-DRX-Level1Information ::=        SEQUENCE {

```

```

    ctch-AllocationPeriod          INTEGER (1..256),
    cbs-FrameOffset                INTEGER (0..255)
}

CDMA2000-Message ::= SEQUENCE {
    msg-Type          BIT STRING (SIZE (8)),
    payload          BIT STRING (SIZE (1..512))
}

CDMA2000-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    CDMA2000-Message

CDMA2000-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumCDMA2000Freqs)) OF
    FrequencyInfoCDMA2000

CellValueTag ::= INTEGER (1..4)

--Actual value = 2^(IE value)
ExpirationTimerFactor ::= INTEGER (1..8)

FDD-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumFDDFreqs)) OF
    FrequencyInfoFDD

FrequencyInfoCDMA2000 ::= SEQUENCE {
    band-Class          BIT STRING (SIZE (5)),
    cdma-Freq          BIT STRING (SIZE(11))
}

GSM-BA-Range ::= SEQUENCE {
    gsmLowRangeUARFCN    UARFCN,
    gsmUpRangeUARFCN    UARFCN
}

GSM-BA-Range-List ::= SEQUENCE (SIZE (1..maxNumGSMFreqRanges)) OF
    GSM-BA-Range

GSM-Classmark2 ::= OCTET STRING (SIZE (5))

GSM-Classmark3 ::= OCTET STRING

GSM-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    BIT STRING (SIZE (1..512))

IdentificationOfReceivedMessage ::= SEQUENCE {
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    receivedMessageType          ReceivedMessageType
}

InterRAT-ChangeFailureCause ::= CHOICE {
    configurationUnacceptable    NULL,
    physicalChannelFailure      NULL,
    protocolError                ProtocolErrorInformation,
    unspecified                  NULL,
    spare1                       NULL,
    spare2                       NULL,
    spare3                       NULL
}

InterRAT-UE-RadioAccessCapability ::= CHOICE {
    gsm          SEQUENCE {
        gsm-Classmark2    GSM-Classmark2,
        gsm-Classmark3    GSM-Classmark3
    },
    cdma2000     SEQUENCE {
        cdma2000-MessageList    CDMA2000-MessageList
    }
}

InterRAT-UE-RadioAccessCapabilityList ::= SEQUENCE (SIZE(1..maxInterSysMessages)) OF
    InterRAT-UE-RadioAccessCapability

InterRAT-HO-Failure ::= SEQUENCE {
    interRAT-HO-FailureCause    InterRAT-HO-FailureCause    OPTIONAL,
    interRATMessage             InterRATMessage             OPTIONAL
}

InterRAT-HO-FailureCause ::= CHOICE {
    configurationUnacceptable    NULL,
    physicalChannelFailure      NULL,
    protocolError                ProtocolErrorInformation,
    interRAT-ProtocolError      NULL,
}

```

```

    unspecified                NULL,
    spare1                     NULL,
    spare2                     NULL,
    spare3                     NULL,
    spare4                     NULL
}

InterRATMessage ::=          CHOICE {
    gsm                        SEQUENCE {
        gsm-MessageList      GSM-MessageList
    },
    cdma2000                   SEQUENCE {
        cdma2000-MessageList CDMA2000-MessageList
    }
}

InterRATMessageList ::=     SEQUENCE (SIZE (1..maxSystemCapability)) OF
                             InterRATMessage

MasterInformationBlock ::=  SEQUENCE {
    mib-ValueTag              MIB-ValueTag,
    plmn-Type                 PLMN-Type,
    -- TABULAR: The PLMN identity and ANSI-41 core network information
    -- are included in PLMN-Type.
    sibSb-ReferenceList      SIBSb-ReferenceList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions    SEQUENCE {} OPTIONAL
}

MIB-ValueTag ::=           INTEGER (1..8)

NCC ::=                    INTEGER (0..7)

PLMN-ValueTag ::=         INTEGER (1..256)

PredefinedConfigIdentityAndValueTag ::= SEQUENCE {
    predefinedConfigIdentity  PredefinedConfigIdentity,
    predefinedConfigValueTag  PredefinedConfigValueTag OPTIONAL
}

ProtocolErrorInformation ::= SEQUENCE {
    diagnosticsType          CHOICE {
        type1                SEQUENCE {
            protocolErrorCause ProtocolErrorCause
        },
        spare                NULL
    }
}

ReceivedMessageType ::=     ENUMERATED {
    activeSetUpdate,
    cellUpdateConfirm,
    counterCheck,
    downlinkDirectTransfer,
    interRATHandoverCommand,
    measurementControl,
    pagingType2,
    physicalChannelReconfiguration,
    physicalSharedChannelAllocation,
    radioBearerReconfiguration,
    radioBearerRelease,
    radioBearerSetup,
    rrcConnectionRelease,
    rrcConnectionReject,
    rrcConnectionSetup,
    securityModeCommand,
    signallingConnectionRelease,
    transportChannelReconfiguration,
    transportFormatCombinationControl,
    ueCapabilityEnquiry,
    ueCapabilityInformationConfirm,
    uplinkPhysicalChannelControl,
    uraUpdateConfirm,
    utranMobilityInformation,
    spare1, spare2, spare3, spare4,
    spare5, spare6, spare7
}

Rplmn-Information ::=      SEQUENCE {
    gsm-BA-Range-List        GSM-BA-Range-List OPTIONAL,

```

```

OPTIONAL,
OPTIONAL,
List OPTIONAL
}

SchedulingInformation ::= SEQUENCE {
    scheduling SEQUENCE {
        segCount SegCount DEFAULT 1,
        sib-Pos CHOICE {
            -- The element name indicates the repetition period and the value
            -- (multiplied by two) indicates the position of the first segment.
            rep4 INTEGER (0..1),
            rep8 INTEGER (0..3),
            rep16 INTEGER (0..7),
            rep32 INTEGER (0..15),
            rep64 INTEGER (0..31),
            rep128 INTEGER (0..63),
            rep256 INTEGER (0..127),
            rep512 INTEGER (0..255),
            rep1024 INTEGER (0..511),
            rep2048 INTEGER (0..1023),
            rep4096 INTEGER (0..2047)
        },
        sib-PosOffsetInfo SibOFF-List OPTIONAL
    }
}

SchedulingInformationSIB ::= SEQUENCE {
    sib-Type SIB-TypeAndTag,
    scheduling SchedulingInformation
}

SchedulingInformationSIBSb ::= SEQUENCE {
    sibSb-Type SIBSb-TypeAndTag,
    scheduling SchedulingInformation
}

SegCount ::= INTEGER (1..16)

SegmentIndex ::= INTEGER (1..15)

-- Actual value = 2 * IE value
SFN-Prime ::= INTEGER (0..2047)

SIB-Data-fixed ::= BIT STRING (SIZE (222))

SIB-Data-variable ::= BIT STRING (SIZE (1..214))

SIB-ReferenceList ::= SEQUENCE (SIZE (1..maxSIB)) OF
    SchedulingInformationSIB

SIBSb-ReferenceList ::= SEQUENCE (SIZE (1..maxSIB)) OF
    SchedulingInformationSIBSb

SIB-ReferenceListFACH ::= SEQUENCE (SIZE (1..maxSIB-FACH)) OF
    SchedulingInformationSIB

SIB-Type ::= ENUMERATED {
    masterInformationBlock,
    systemInformationBlockType1,
    systemInformationBlockType2,
    systemInformationBlockType3,
    systemInformationBlockType4,
    systemInformationBlockType5,
    systemInformationBlockType6,
    systemInformationBlockType7,
    systemInformationBlockType8,
    systemInformationBlockType9,
    systemInformationBlockType10,
    systemInformationBlockType11,
    systemInformationBlockType12,
    systemInformationBlockType13,
    systemInformationBlockType13-1,
    systemInformationBlockType13-2,
    systemInformationBlockType13-3,
    systemInformationBlockType13-4,

```

```

systemInformationBlockType14,
systemInformationBlockType15,
systemInformationBlockType15-1,
systemInformationBlockType15-2,
systemInformationBlockType15-3,
systemInformationBlockType16,
systemInformationBlockType17,
spare1, spare2, spare3, spare4,
spare5, spare6, spare7 }

SIB-TypeAndTag ::=
  sysInfoType1
  sysInfoType2
  sysInfoType3
  sysInfoType4
  sysInfoType5
  sysInfoType6
  sysInfoType7
  sysInfoType8
  sysInfoType9
  sysInfoType10
  sysInfoType11
  sysInfoType12
  sysInfoType13
  sysInfoType13-1
  sysInfoType13-2
  sysInfoType13-3
  sysInfoType13-4
  sysInfoType14
  sysInfoType15
  sysInfoType16
  sysInfoType17
}

CHOICE {
  PLMN-ValueTag,
  PLMN-ValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  NULL,
  NULL,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  PredefinedConfigIdentityAndValueTag,
  NULL
}

SIBSb-TypeAndTag ::=
  sysInfoType1
  sysInfoType2
  sysInfoType3
  sysInfoType4
  sysInfoType5
  sysInfoType6
  sysInfoType7
  sysInfoType8
  sysInfoType9
  sysInfoType10
  sysInfoType11
  sysInfoType12
  sysInfoType13
  sysInfoType13-1
  sysInfoType13-2
  sysInfoType13-3
  sysInfoType13-4
  sysInfoType14
  sysInfoType15
  sysInfoType16
  sysInfoType17
  sysInfoTypeSB1
  sysInfoTypeSB2
}

CHOICE {
  PLMN-ValueTag,
  PLMN-ValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  NULL,
  NULL,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  PredefinedConfigIdentityAndValueTag,
  NULL,
  CellValueTag,
  CellValueTag
}

SibOFF ::=
  ENUMERATED {
    so2, so4, so6, so8, so10,
    so12, so14, so16, so18,
    so20, so22, so24, so26,
    so28, so30, so32 }

SibOFF-List ::=
  SEQUENCE (SIZE (1..15)) OF
  SibOFF

SysInfoType1 ::=
  SEQUENCE {
    -- Core network IEs
    cn-CommonGSM-MAP-NAS-SysInfo  NAS-SystemInformationGSM-MAP,
    cn-DomainSysInfoList          CN-DomainSysInfoList,
    -- User equipment IEs
    ue-ConnTimersAndConstants      UE-ConnTimersAndConstants,
    ue-IdleTimersAndConstants      UE-IdleTimersAndConstants,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  }

SysInfoType2 ::=
  SEQUENCE {
    -- UTRAN mobility IEs
    ura-IdentityList              URA-IdentityList,
  }

```

```

-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

SysInfoType3 ::=
    SEQUENCE {
        sib4indicator BOOLEAN,
        -- UTRAN mobility IEs
        cellIdentity CellIdentity,
        cellSelectReselectInfo CellSelectReselectInfoSIB-3-4,
        cellAccessRestriction CellAccessRestriction,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions SEQUENCE {
            mapping-LCR Mapping-LCR OPTIONAL,
            nonCriticalExtensions SEQUENCE {}
        }
    } OPTIONAL

SysInfoType4 ::=
    SEQUENCE {
        -- UTRAN mobility IEs
        cellIdentity CellIdentity,
        cellSelectReselectInfo CellSelectReselectInfoSIB-3-4,
        cellAccessRestriction CellAccessRestriction,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions SEQUENCE {
            mapping-LCR Mapping-LCR OPTIONAL,
            nonCriticalExtensions SEQUENCE {}
        }
    } OPTIONAL

SysInfoType5 ::=
    SEQUENCE {
        sib6indicator BOOLEAN,
        -- Physical channel IEs
        pich-PowerOffset PICH-PowerOffset,
        modeSpecificInfo CHOICE {
            fdd SEQUENCE {
                aich-PowerOffset AICH-PowerOffset
            },
            tdd SEQUENCE {
                pusch-SysInfoList-SFN PUSCH-SysInfoList-SFN OPTIONAL,
                pdsch-SysInfoList-SFN PDSCH-SysInfoList-SFN OPTIONAL,
                midambleConfiguration MidambleConfiguration OPTIONAL,
                openLoopPowerControl-TDD OpenLoopPowerControl-TDD
            }
        },
        primaryCCPCH-Info PrimaryCCPCH-Info OPTIONAL,
        prach-SystemInformationList PRACH-SystemInformationList OPTIONAL,
        sccpch-SystemInformationList SCCPCH-SystemInformationList OPTIONAL,
        cbs-DRX-Level1Information CBS-DRX-Level1Information OPTIONAL,
        -- Conditional on any of the CTCH indicator IEs in
        -- sccpch-SystemInformationList
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions SEQUENCE {} OPTIONAL
    }

SysInfoType6 ::=
    SEQUENCE {
        -- Physical channel IEs
        pich-PowerOffset PICH-PowerOffset,
        modeSpecificInfo CHOICE {
            fdd SEQUENCE {
                aich-PowerOffset AICH-PowerOffset,
                csich-PowerOffset CSICH-PowerOffset OPTIONAL
            },
            tdd SEQUENCE {
                pusch-SysInfoList-SFN PUSCH-SysInfoList-SFN OPTIONAL,
                pdsch-SysInfoList-SFN PDSCH-SysInfoList-SFN OPTIONAL,
                midambleConfiguration MidambleConfiguration OPTIONAL,
                openLoopPowerControl-TDD OpenLoopPowerControl-TDD
            }
        },
        primaryCCPCH-Info PrimaryCCPCH-Info OPTIONAL,
        prach-SystemInformationList PRACH-SystemInformationList OPTIONAL,
        sccpch-SystemInformationList SCCPCH-SystemInformationList OPTIONAL,
        cbs-DRX-Level1Information CBS-DRX-Level1Information OPTIONAL,
        -- Conditional on any of the CTCH indicator IEs in
        -- sccpch-SystemInformationList
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions SEQUENCE {} OPTIONAL
    }

SysInfoType7 ::=
    SEQUENCE {
        -- Physical channel IEs

```



```

modeSpecificInfo CHOICE {
  fdd SEQUENCE {
    ul-Interference UL-Interference
  },
  tdd NULL
},
prach-Information-SIB5-List DynamicPersistenceLevelList,
prach-Information-SIB6-List DynamicPersistenceLevelList OPTIONAL,
expirationTimeFactor ExpirationTimerFactor OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

SysInfoType8 ::= SEQUENCE {
-- User equipment IEs
cpch-Parameters CPCH-Parameters,
-- Physical channel IEs
cpch-SetInfoList CPCH-SetInfoList,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

SysInfoType9 ::= SEQUENCE {
-- Physical channel IEs
cpch-PersistenceLevelsList CPCH-PersistenceLevelsList,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

SysInfoType10 ::= SEQUENCE {
-- User equipment IEs
drac-SysInfoList DRAC-SysInfoList,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

SysInfoType11 ::= SEQUENCE {
sib12indicator BOOLEAN,
-- Measurement IEs
fach-MeasurementOccasionInfo FACH-MeasurementOccasionInfo OPTIONAL,
measurementControlSysInfo MeasurementControlSysInfo,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {
  fach-MeasurementOccasionInfo-LCR-Ext FACH-MeasurementOccasionInfo-LCR-Ext
  OPTIONAL,
  measurementControlSysInfo-LCR MeasurementControlSysInfo-LCR
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}
}

SysInfoType12 ::= SEQUENCE {
-- Measurement IEs
fach-MeasurementOccasionInfo FACH-MeasurementOccasionInfo OPTIONAL,
measurementControlSysInfo MeasurementControlSysInfo,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {
  fach-MeasurementOccasionInfo-LCR-Ext FACH-MeasurementOccasionInfo-LCR-Ext
  OPTIONAL,
  measurementControlSysInfo-LCR MeasurementControlSysInfo-LCR
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}
}

SysInfoType13 ::= SEQUENCE {
-- Core network IEs
cn-DomainSysInfoList CN-DomainSysInfoList,
-- User equipment IEs
ue-IdleTimersAndConstants UE-IdleTimersAndConstants OPTIONAL,
capabilityUpdateRequirement CapabilityUpdateRequirement OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

SysInfoType13-1 ::= SEQUENCE {
-- ANSI-41 IEs
ansi-41-RAND-Information ANSI-41-RAND-Information,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

SysInfoType13-2 ::= SEQUENCE {

```

```

-- ANSI-41 IEs
ansi-41-UserZoneID-Information ANSI-41-UserZoneID-Information,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType13-3 ::= SEQUENCE {
-- ANSI-41 IEs
ansi-41-PrivateNeighbourListInfo ANSI-41-PrivateNeighbourListInfo,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType13-4 ::= SEQUENCE {
-- ANSI-41 IEs
ansi-41-GlobalServiceRedirectInfo
ANSI-41-GlobalServiceRedirectInfo,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType14 ::= SEQUENCE {
-- Physical channel IEs
individualTS-InterferenceList IndividualTS-InterferenceList,
expirationTimeFactor ExpirationTimerFactor OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType15 ::= SEQUENCE {
-- Measurement IEs
up-GPS-Assistance UP-Cipher-GPS-Data-Indicator OPTIONAL,
up-OTDOA-Assistance UP-OTDOA-AssistanceSIB OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType15-1 ::= SEQUENCE {
-- DGPS corrections
up-DGPS-SIB-Data UP-DGPS-SIB-Data
}

SysInfoType15-2 ::= SEQUENCE {
-- Ephemeris and clock corrections
up-Ephe-SIB-Data UP-Ephe-SIB-Data
}

SysInfoType15-3 ::= SEQUENCE {
-- Almanac and other data
transmissionTOW INTEGER (0..1048575),
satMask BIT STRING (SIZE (1..32)),
lsbTOW BIT STRING (SIZE (8)),
up-Alma-SIB-DataList UP-Alma-SIB-DataList
}

SysInfoType16 ::= SEQUENCE {
-- Radio bearer IEs
preDefinedRadioConfiguration PreDefRadioConfiguration,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoType17 ::= SEQUENCE {
-- Physical channel IEs
pusch-SysInfoList PUSCH-SysInfoList OPTIONAL,
pdsch-SysInfoList PDSCH-SysInfoList OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoTypeSB1 ::= SEQUENCE {
-- Other IEs
sib-ReferenceList SIB-ReferenceList OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}

SysInfoTypeSB2 ::= SEQUENCE {
-- Other IEs
sib-ReferenceList SIB-ReferenceList OPTIONAL,

```

```

-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} _____ OPTIONAL
}
TDD-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumTDDFreqs)) OF
FrequencyInfoTDD

-- *****
--
-- ANSI-41 INFORMATION ELEMENTS (10.3.9)
--
-- *****

ANSI-41-GlobalServiceRedirectInfo ::= ANSI-41-NAS-Parameter
ANSI-41-PrivateNeighbourListInfo ::= ANSI-41-NAS-Parameter
ANSI-41-RAND-Information ::= ANSI-41-NAS-Parameter
ANSI-41-UserZoneID-Information ::= ANSI-41-NAS-Parameter
ANSI-41-NAS-Parameter ::= BIT STRING (SIZE (1..2048))

Min-P-REV ::= BIT STRING (SIZE (8))

NAS-SystemInformationANSI-41 ::= ANSI-41-NAS-Parameter
NID ::= BIT STRING (SIZE (16))

P-REV ::= BIT STRING (SIZE (8))

SID ::= BIT STRING (SIZE (15))

END

```

## 11.4 Constant definitions

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```

hipDSCHidentities INTEGER ::= 64
hipUSCHidentities INTEGER ::= 64
hiRM INTEGER ::= 256
maxAC INTEGER ::= 16
maxAdditionalMeas INTEGER ::= 4
maxASC INTEGER ::= 8
maxASCmap INTEGER ::= 7
maxASCpersist INTEGER ::= 6
maxCCTrCH INTEGER ::= 8
maxCellMeas INTEGER ::= 32
maxCellMeas-1 INTEGER ::= 31
maxCNDomains INTEGER ::= 4
maxCPCHsets INTEGER ::= 16
maxDPCH-DLchan INTEGER ::= 8
maxDPCHcodesPerTS INTEGER ::= 16
-- **TODO**
maxDPDCH-UL INTEGER ::= 6
maxDRACclasses INTEGER ::= 8
-- **TODO**
maxFACH INTEGER ::= 8
maxFreq INTEGER ::= 8
maxFrequencybands INTEGER ::= 4
maxInterSysMessages INTEGER ::= 4
maxLoCHperRLC INTEGER ::= 2
maxMeasEvent INTEGER ::= 8
maxMeasIntervals INTEGER ::= 3
maxMeasParEvent INTEGER ::= 2
maxNumCDMA2000Freqs INTEGER ::= 8
maxNumGSMFreqRanges INTEGER ::= 32
maxNumFDDFreqs INTEGER ::= 8
maxNumTDDFreqs INTEGER ::= 8
maxNoOfMeas INTEGER ::= 16
maxOtherRAT INTEGER ::= 15
maxPagel INTEGER ::= 8
maxPCPCH-APsig INTEGER ::= 16
maxPCPCH-APsubCh INTEGER ::= 12
maxPCPCH-CDsig INTEGER ::= 16
maxPCPCH-CDsubCh INTEGER ::= 12
maxPCPCH-SF INTEGER ::= 7
maxPCPCHs INTEGER ::= 64
maxPDCPalgoType INTEGER ::= 8
maxPDSCH INTEGER ::= 8
maxPDSCH-TFCIgroups INTEGER ::= 256
maxPRACH INTEGER ::= 16
maxPredefConfig INTEGER ::= 16
maxPUSCH INTEGER ::= 8

```

```

maxRABsetup          INTEGER ::= 16
maxRAT               INTEGER ::= 16
maxRB                INTEGER ::= 32
maxRBallRABs        INTEGER ::= 27
maxRBMuxOptions      INTEGER ::= 8
maxRBperRAB         INTEGER ::= 8
maxReportedGSMCells INTEGER ::= 6
maxRL                INTEGER ::= 8
maxRL-1             INTEGER ::= 7
maxSat               INTEGER ::= 16
maxSCCPCH            INTEGER ::= 16
maxSIB               INTEGER ::= 32
-- **TODO**
maxSIB-FACH          INTEGER ::= 8
maxSIBperMsg         INTEGER ::= 16
maxSig               INTEGER ::= 16
maxSRBsetup          INTEGER ::= 8
maxSubCh             INTEGER ::= 12
maxSystemCapability  INTEGER ::= 16
maxTF                INTEGER ::= 32
maxTF-CPCH           INTEGER ::= 16
maxTFC               INTEGER ::= 1024
maxTFCl-2-Combs      INTEGER ::= 512
maxTGPS              INTEGER ::= 6
maxTrCH              INTEGER ::= 32
maxTrCHpreconf       INTEGER ::= 16
maxTS                INTEGER ::= 14
maxTS-1              INTEGER ::= 13
maxTS-LCR             INTEGER ::= 6
maxURA               INTEGER ::= 8

```

END

## 11.5 RRC information between network nodes

Internode-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS

```

    HandoverToUTRANCommand-r3,
    MeasurementReport,
    PhysicalChannelReconfiguration-r3,
    RadioBearerReconfiguration-r3,
    RadioBearerRelease-r3,
    RadioBearerSetup-r3,
    TransportChannelReconfiguration-r3,
    UECapabilityInformation

```

FROM PDU-definitions

```

-- Core Network IEs :
    CN-DomainInformationList,
    NAS-SystemInformationGSM-MAP,
-- UTRAN Mobility IEs :
    CellIdentity,
    URA-Identity,
-- User Equipment IEs :
    C-RNTI,
    RRC-MessageSequenceNumber,
    START-Value,
    STARTList,
    U-RNTI,
    UE-RadioAccessCapability,
-- Radio Bearer IEs :
    PDCP-InfoReconfig,
    PredefinedConfigValueTag,
    RAB-InformationSetupList,
    RB-Identity,
    RB-MappingInfo,
    RLC-Info,
    RLC-SequenceNumber,
    SRB-InformationSetupList,
-- Transport Channel IEs :
    CPCH-SetID,
    DL-CommonTransChInfo,
    DL-AddReconfTransChInfoList,
    DRAC-StaticInformationList,
    UL-CommonTransChInfo,
    UL-AddReconfTransChInfoList,
-- Measurement IEs :
    MeasurementIdentity,

```

```

    MeasurementReportingMode,
    MeasurementType,
    AdditionalMeasurementID-List,
-- Other IEs :
    InterRATMessage
FROM InformationElements

    maxNoOfMeas,
    maxPredefConfig,
    maxRABsetup,
    maxRB,
    maxSRBsetup,
    maxTrCH
FROM Constant-definitions;

-- RRC information transferred between network nodes,
-- per group of information transfers having same endpoint
-- Alike class definitions for RRC PDUs

-- *****
--
-- RRC information, to target RNC
-- *****

-- *****
--
-- RRC information, target RNC to source RNC
-- *****

T-RNC-ToSRNC-Container ::= SEQUENCE {
    message          T-RNC-ToSRNC-ContainerType
}

T-RNC-ToSRNC-ContainerType ::= CHOICE {
    radioBearerSetup          RadioBearerSetup-r3,
    radioBearerReconfiguration RadioBearerReconfiguration-r3,
    radioBearerRelease       RadioBearerRelease-r3,
    transportChannelReconfiguration TransportChannelReconfiguration-r3,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
    extension                 NULL
}

-- *****
--
-- RRC information, target RNC to source RAT
-- *****

-- Container definitions, alike PDU definitions
-- RRC Container definition, to target RNC

-- *****
--
-- SRNC Relocation information
-- *****

SRNC-RelocationInfo ::= SEQUENCE {
-- Non-RRC IEs
    stateOfRRC                StateOfRRC,
    stateOfRRC-Procedure      StateOfRRC-Procedure,
    cipheringStatus           CipheringStatus,
    calculationTimeForCiphering CalculationTimeForCiphering    OPTIONAL,
    cipheringInfoPerRB-List   CipheringInfoPerRB-List    OPTIONAL,
    integrityProtectionStatus IntegrityProtectionStatus,
    srb-SpecificIntegrityProtInfo SRB-SpecificIntegrityProtInfoList,
    implementationSpecificParams ImplementationSpecificParams    OPTIONAL,
-- User equipment IEs
    u-RNTI                    U-RNTI,
    c-RNTI                    C-RNTI                    OPTIONAL,
    ue-RadioAccessCapability  UE-RadioAccessCapability,
-- Other IEs
    interRATMessage           InterRATMessage            OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity              URA-Identity                OPTIONAL,
-- Core network IEs
    cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP,
    cn-DomainInformationList  CN-DomainInformationList    OPTIONAL,
-- Measurement IEs

```

```

    ongoingMeasRepList          OngoingMeasRepList          OPTIONAL,
-- Radio bearer IEs
  preConfigStatusInfo          PreConfigStatusInfo,
  srb-InformationList          SRB-InformationSetupList,
  rab-InformationList          RAB-InformationSetupList          OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo        UL-CommonTransChInfo          OPTIONAL,
  ul-TransChInfoList          UL-AddReconfTransChInfoList        OPTIONAL,
  modeSpecificInfo            CHOICE {
    fdd                        SEQUENCE {
      cpch-SetID              CPCH-SetID              OPTIONAL,
      transChDRAC-Info        DRAC-StaticInformationList  OPTIONAL
    },
    tdd                        NULL
  },
  dl-CommonTransChInfo        DL-CommonTransChInfo          OPTIONAL,
  dl-TransChInfoList          DL-AddReconfTransChInfoList        OPTIONAL,
-- Measurement report
  measurementReport            MeasurementReport          OPTIONAL
}

-- RRC Container definition, target RNC to source RNC
-- Nothing new, only re-using RRC PDUs
--
-- RRC Container definition, target RNC to source system
-- Nothing new, re-using RRC PDUs (HandoverToUTRANCommand)

-- IE definitions

CalculationTimeForCiphering ::= SEQUENCE {
  cell-Id          CellIdentity,
  sfn              INTEGER (0..4095)
}

CipheringInfoPerRB ::= SEQUENCE {
  dl-START          START-Value,
  ul-START          START-Value
}

-- TABULAR: Multiplicity value numberOfRadioBearers has been replaced
-- with maxRB.
CipheringInfoPerRB-List ::= SEQUENCE (SIZE (1..maxRB)) OF
  CipheringInfoPerRB

CipheringStatus ::= ENUMERATED {
  started, notStarted }

ImplementationSpecificParams ::= BIT STRING (SIZE (1..512))

IntegrityProtectionStatus ::= ENUMERATED {
  started, notStarted }

MeasurementCommandWithType ::= CHOICE {
  setup          MeasurementType,
  modify         NULL,
  release        NULL
}

OngoingMeasRep ::= SEQUENCE {
  measurementIdentity          MeasurementIdentity,
  measurementCommandWithType  MeasurementCommandWithType,
  -- TABULAR: The CHOICE Measurement in the tabular description is included
  -- in the IE above.
  measurementReportingMode    MeasurementReportingMode          OPTIONAL,
  additionalMeasurementID-List AdditionalMeasurementID-List    OPTIONAL
}

OngoingMeasRepList ::= SEQUENCE (SIZE (1..maxNoOfMeas)) OF
  OngoingMeasRep

PreConfigStatusInfo ::= SEQUENCE (SIZE (1..maxPredefConfig)) OF
  PredefinedConfigValueTag

SRB-SpecificIntegrityProtInfo ::= SEQUENCE {
  rb-Identity          RB-Identity          OPTIONAL,
  ul-RRC-HFN          BIT STRING (SIZE (28)),
  dl-RRC-HFN          BIT STRING (SIZE (28)),
  ul-RRC-SequenceNumber RRC-MessageSequenceNumber,
  dl-RRC-SequenceNumber RRC-MessageSequenceNumber
}

```

```
SRB-SpecificIntegrityProtInfoList ::= SEQUENCE (SIZE (4..maxSRBsetup)) OF
    SRB-SpecificIntegrityProtInfo

StateOfRRC ::=
    ENUMERATED {
        cell-DCH, cell-FACH,
        cell-PCH, ura-PCH }

StateOfRRC-Procedure ::=
    ENUMERATED {
        awaitNoRRC-Message,
        awaitRRC-ConnectionRe-establishmentComplete,
        awaitRB-SetupComplete,
        awaitRB-ReconfigurationComplete,
        awaitTransportCH-ReconfigurationComplete,
        awaitPhysicalCH-ReconfigurationComplete,
        awaitActiveSetUpdateComplete,
        awaitHandoverComplete,
        sendCellUpdateConfirm,
        sendUraUpdateConfirm,
        sendRrcConnectionReestablishment,
        otherStates }

END
```

**3GPP TSG-RAN WG2 Meeting #19**  
**Sophia Antipolis, France, 19-23 February 2001**

**R2-010591**

CR-Form-v3	
<h2 style="margin: 0;">CHANGE REQUEST</h2>	
⌘ <b>25.331</b> <b>CR</b> <b>708</b> ⌘ rev <b>r1</b> ⌘	Current version: <b>3.5.0</b> ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Introduction of RACH Parameters for 1.28 Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23		<b>Date:</b> ⌘ February 12, 2001
<b>Category:</b>	⌘ <b>B</b>		<b>Release:</b> ⌘ REL-4
<p style="font-size: small; margin: 0;">Use <u>one</u> of the following categories:</p> <p style="font-size: x-small; margin: 0;"> <b>F</b> (essential correction)  <b>A</b> (corresponds to a correction in an earlier release)  <b>B</b> (Addition of feature),  <b>C</b> (Functional modification of feature)  <b>D</b> (Editorial modification)                 </p> <p style="font-size: x-small; margin: 0;">Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p>		<p style="font-size: small; margin: 0;">Use <u>one</u> of the following releases:</p> <p style="font-size: x-small; margin: 0;"> <b>2</b> (GSM Phase 2)  <b>R96</b> (Release 1996)  <b>R97</b> (Release 1997)  <b>R98</b> (Release 1998)  <b>R99</b> (Release 1999)  <b>REL-4</b> (Release 4)  <b>REL-5</b> (Release 5)                 </p>	

<b>Reason for change:</b>	⌘ Support of 1.28 Mcps TDD is introduced in TS 25.331.
<b>Summary of change:</b>	⌘ Support of signalling for 1.28 Mcps RACH procedure.
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 8.5.12, 8.6.6.x (new), 10.3.6.6, 10.3.6.51, 10.3.6.51a (new), 10.3.6.52, 10.3.6.53, 10.3.6.55, 10.3.6.x (new), 10.3.6.y (new), 10.3.10, 11	
<b>Other specs affected:</b>	<input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications	⌘
<b>Other comments:</b>	⌘	

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at:  
[http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.



- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8.5.12 Establishment of Access Service Classes

The PRACH resources (i.e. access slots and preamble signatures for FDD), timeslot (with specific frame allocation and channelization code) for 3.84Mcps TDD and SYNC\_UL codes (with specific frame allocation) for 1.28Mcps TDD may be divided between different Access Service Classes in order to provide different priorities of RACH usage. It is possible for more than one ASC or for all ASCs to be assigned to the same access slot/signature space in FDD, or frame allocation/channelization codes in 3.84Mcps TDD or frame allocation/SYNC\_UL codes in 1.28Mcps TDD.

Access Service Classes shall be numbered in the range  $0 \leq i \leq \text{NumASC} \leq 7$  (i.e. the maximum number of ASCs is "NumASC+1" = 8). An ASC is defined by an identifier,  $i$ , that defines a certain partition of the PRACH resources (SYNC\_UL resources in 1.28Mcps TDD) and an associated persistence value  $P_i$ . A set of ASC parameters consists of "NumASC+1" such parameters ( $i, P_i$ ),  $i = 0, \dots, \text{NumASC}$ .

PRACH partitions shall be established using the information element "PRACH partition". The persistence values  $P_i$  to be associated with each ASC shall be derived from the dynamic persistence level  $N = 1, \dots, 8$  which is broadcast in SIB 7, and the persistence scaling factors  $s_i$ , broadcast in System Information Block Type 5 and possibly also in System Information Block Type 6, as follows:

$$P(N) = 2^{-(N-1)}$$

ASC # $i$	0	1	2	3	4	5	6	7
$P_i$	1	$P(N)$	$s_2 P(N)$	$s_3 P(N)$	$s_4 P(N)$	$s_5 P(N)$	$s_6 P(N)$	$s_7 P(N)$

Scaling factors  $s_i$  are provided optionally for  $i = 2, \dots, \text{NumASC}$ , where NumASC+1 is the number of ASCs as defined by PRACH partitioning. If no scaling factors are broadcast, default value 1 shall be used if NumASC  $\geq 2$ .

If  $k \geq 1$  scaling factors are broadcast and NumASC  $\geq k+2$  then the last scaling factor  $s_{k+1}$  shall be used as default for the ASCs where  $i > k+1$ .

The set of ASC parameters is provided to MAC with the CMAC-Config-REQ primitive (see TS 25.321), the PRACH partitioning is provided to PHY using the CPHY-TrCH-Config-REQ primitive (see TS 25.302).

The ASC enumeration shall be such that it corresponds to the order of priority (ASC 0 = highest priority, ASC 7 = lowest priority). ASC 0 shall be used in case of Emergency Call or for reasons with equivalent priority.

At radio bearer setup/reconfiguration each involved logical channel is assigned a MAC Logical channel Priority (MLP) in the range 1, ..., 8. When the MAC sublayer is configured for RACH transmission in the UE, these MLP levels shall be employed for ASC selection on MAC.

### 8.6.6.x FPACH/ PRACH Selection (1.28 Mcps TDD only)

Where more than one FPACH is defined, the FPACH that a UE should receive following a UpPCH transmission is defined by the UpPCH signature (SYNC\_UL) code that the UE used. The FPACH/PRACH number =  $N \bmod M$  where  $N$  denotes the signature number (0..7) and  $M$  denotes the number of FPACH/PRACH combinations that have been defined. The FPACH/PRACH number indicates the position of the FPACH/PRACH description in the IE "PRACH info".

The PRACH that should be used is that associated with the FPACH in the IE "PRACH info".

## 10.3.6.6 ASC setting

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<u>CHOICE mode</u>					
>FDD					
>>Available signature Start Index	MP		Integer(0..15)	See Note 1 below.	
>>Available signature End Index	MP		Integer(0..15)	See Note 1 below.	
>>Assigned Sub-Channel Number	MP		Bitstring(4)	See Note 2 below.	
>TDD					
>>CHOICE TDD option					REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Available Channelisation codes indices	MD		Bitstring(8)	See Note 3 below.  Default is all defined in PRACH Info.	
>>>>1.28 Mcps TDD					REL-4
>>>>>Available SYNC UL codes indices	MD		Bitstring(8)	See Note 5 below.  Default is all defined in SYNC UL Info.	REL-4
>>CHOICE subchannel size	MP				
>>>Size1					
>>>>Available Subchannels	MP		null	Indicates all	
>>>>Size2					
>>>>>Available Subchannels	MD		Bitstring (2)	Each bit indicates if the subchannel is available for the given ASC.  01: subchannel 0 10: subchannel 1 11: all subchannels  Default is all subchannels.	
>>>>>Size4					
>>>>>>Available Subchannels	MD		Bitstring (4)	Each bit indicates if the subchannel is available for the given ASC.  0001: subchannel 0 0011: subchannels 0 & 1 ... 1111: all subchannels.  Default is all subchannels.	
>>>>>>Size8					
>>>>>>>Available Subchannels	MD		Bitstring (8)	Each bit indicates if the subchannel is available for the given ASC.  00000001: subchannel 0 00000011: subchannels 0 & 1 ... 11111111: all subchannels  Default is all subchannels.	

NOTE 1: In FDD, the list of available signatures is renumbered from signature index 0 to signature index N-1, where N is the number of available signatures, starting with the lowest available signature number and continuing in sequence, in the order of increasing signature numbers.

- List of available signatures : 16 or less signatures are available.

- Example: only signatures 0, 5, 10 and 15 are available, then :

- Signature 0 is : available signature index 0

- Signature 5 is : available signature index 1

- Signature 10 is : available signature index 2

- Signature 15 is : available signature index 3

NOTE2: The usage of this IE is conditional upon setting of IE "AICH transmission timing". In case that "AICH transmission timing" = 0, the leftmost bit shall be ignored. The 3 rightmost (least significant bits) shall be repeated 4 times to form a bitstring of length 12 bits. In case that "AICH transmission timing" = 1, the bitstring shall be repeated 3 times to form a bitstring of length 12 bits.

In both cases, for the resulting bitstring (that includes the repetitions) bit-wise logical AND operation with the IE "Available Sub Channel number" included in IE "PRACH info (for RACH)" shall be performed.

The resulting bitstring, after logical AND operation, indicates the sub-channels assigned to the respective ASC. This bitstring shall be interpreted by the UE in the same way as specified for the IE "Available Sub-Channel Number" , see subclause 10.3.6.61 (i.e. each bit set to 1 or 0 indicates availability or non-availability, respectively, of sub-channel number  $_x$ ,  $x=0$  to 11, for the respective ASC).

NOTE3: In 3.84Mcps TDD, the list of available channelisation codes (defined in PRACH info) is renumbered from channelisation code index 0 to channelisation code index N-1, where N is the number of available channelisation codes, starting with the lowest available channelisation code number and continuing in sequence, in the order of increasing channelisation code numbers.

List of available channelisation codes : 8 or less channelisation codes are available.

The i-th bit of the bitmap defined in the IE "Available Channelisation Code indices" defines whether the channelisation code with the available channelisation code index i is to be used for this ASC (bit set means used, bit unset means not used). Only the low N bits shall be used in the bitmap, where N is the number of available channelisation codes defined in PRACH info.

Ex : spreading factor 16, channelisation codes 16/1, 16/2, 16/5, 16/10 are available :

Channelisation code 16/1 is : available channelisation code index 0

Channelisation code 16/2 is : available channelisation code index 1

Channelisation code 16/5 is : available channelisation code index 2

Channelisation code 16/10 is : available channelisation code index 3

Available Channelisation Code indices has the value '1100' means: Channelisation Codes 16/5 and 16/10 are available for this ASC.

NOTE4: In TDD, the subchannel description is found in 25.224

NOTE5: In 1.28Mcps TDD, the list of available SYNC\_UL codes is renumbered from SYNC\_UL code index 0 to SYNC\_UL code index N-1, where N is the number of available SYNC\_UL code, starting with the lowest available SYNC\_UL code number and continuing in sequence, in the order of increasing SYNC\_UL code numbers.

- List of available SYNC\_UL codes : 8 or less SYNC\_UL codes are available.

The i-th bit of the bitmap defined in the IE "SYNC\_UL codes bitmap" defines whether the SYNC\_UL code with the SYNC\_UL code index i is to be used for this ASC (bit set means used, bit unset means not used). Only the low N bits shall be used in the bitmap, where N is the number of available channelisation codes defined in PRACH info.

- Example: SYNC\_UL codes 0, 2, 5,7 are available, then :

- SYNC\_UL code 0 is : available SYNC\_UL code index 0

- SYNC\_UL code 2 is : available SYNC\_UL code index 1

- SYNC\_UL code 5 is : available SYNC\_UL code index 2

- SYNC\_UL code 7 is : available SYNC\_UL code index 2

- "SYNC\_UL codes bitmap" has the value 'xxxx1100' means: SYNC\_UL codes 5 and 7 are available for this ASC.

## 10.3.6.51 PRACH Channelisation Code List

NOTE: Only for 3.84McpsTDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE SF	MP				
>SF16					
>>Channelisation Code List	MP	1 to 8			
>>>Channelisation code	MP		Enumerated ((16/1)..(16/ 16))	1:1 mapping between spreading code and midamble shift	
>SF8					
>>Channelisation Code List	MP	1 to 8			
>>>Channelisation Code	MP		Enumerated( (8/1)..(8/8))		

## 10.3.6.51a PRACH Channelisation Code 1.28Mcps TDD

NOTE: Only for 1.28Mcps TDD.

<u>Information Element/Group name</u>	<u>Need</u>	<u>Multi</u>	<u>Type and reference</u>	<u>Semantics description</u>	<u>Version</u>
<u>Channelization Code List</u>	<u>MP</u>	<u>1 to 2</u>			<u>REL-4</u>
<u>&gt;Channelization Code</u>	<u>MP</u>		<u>Enumerated( (4/1)..(4/4).(8 /1)..(8/8).(16/ 1)..(16/16))</u>		<u>REL-4</u>

## 10.3.6.52 PRACH info (for RACH)

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE <i>mode</i>	MP				
>FDD					
>> Available Signature	MP		Bitstring(16)	(Note1) 0000000000000001:Signature 0 0000000000000010:Signature 1 0000000000000011:Signature 0&1 .....: 1111111111111111:Signature 0to15	
>>Available SF	MP		Integer (32,64,128,256)	In chips per symbol Defines the smallest permitted SF (i.e. the maximum rate)	
>>Preamble scrambling code number	MP		Integer (0 .. 15)	Identification of scrambling code see TS 25.213	
>>Puncturing Limit	MP		Real(0.40..1.00 by step of 0.04)		
>> Available Sub Channel Number	MP		Bitstring(12)	(Note2) 000000000001:SubChNumber 0 000000000010:SubChNumber 1 000000000011:SubChNumber 0&1 ...: 111111111111:SubChNumber 0to11	
>TDD					
>>CHOICE TDD option					REL-4
>>>3.84 Mcps TDD					REL-4
>>>>Timeslot number	MP		Timeslot number 10.3.6.84		
>>>>PRACH Channelisation Code List	MP		PRACH Channelisation Code List 10.3.6.51		
>>>>PRACH Midamble	MPOP		Enumerated (Direct, Direct/Inverted)	Direct or direct and inverted midamble are used for PRACH	
>>>>1.28 Mcps TDD					REL-4
>>>>SYNC UL info	MP		SYNC UL info 10.3.6.?		REL-4
>>>>PRACH Definition	MP	1..<maxPRACH_FPA			REL-4
>>>>>Timeslot number	MP		Timeslot number 10.3.6.84		REL-4
>>>>>PRACH Channelization Code	MP		PRACH Channelization Code 1.28Mcps TDD 10.3.6.51a		REL-4

>>>>Midamble Shift and burst type	MP		Midamble shift and burst type 10.3.6.41		REL-4
>>>>FPACH info	MP		FPACH info 10.3.6.?		REL-4

NOTE 1: Each bit is 0 or 1 to indicate available signature\_x, x= 0 to 15.

NOTE 2: Each bit is 0 or 1 to indicate available sub channel number \_x, x= 0 to 11.



## 10.3.6.53 PRACH partitioning

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<b>CHOICE mode</b>					
<b>&gt;FDD</b>					
>>Access Service class	MP	1 to maxASC			
>>>ASC Setting	MD		ASC setting 10.3.6.6	The default values are same as the previous ASC. If the "default" is used for the first ASC, the default values are all available signatures and "all available sub-channels".	
>>TDD					
>>>Access Service class List	MP	1 to maxASC		List of Access Service classes	
>>>>Access service class Index	MP		Integer(1..8)		
>>>>Repetition Period	MD		Integer(1, 2, 4, 8)	Default value is continuous. Value 1 indicates continuous allocation	
>>>>Offset	MP		Integer(0..Repetition Period-1)	Note that this is empty if repetition period is set to 1	

The following description applies to FDD only.

The list of available signatures is renumbered from signature index 0 to signature index N-1, where N is the number of available signatures, starting with the lowest available signature number and continuing in sequence, in the order of increasing signature numbers.

- List of available signatures : 16 or less signatures are available.
- Ex : only signatures 0, 5, 10 and 15 are available, then :
- Signature 0 is : available signature index 0
- Signature 5 is : available signature index 1
- Signature 10 is : available signature index 2
- Signature 15 is : available signature index 3

The list of available access slot sub-channels is renumbered from access slot sub-channel index 0 to access slot sub-channel index M-1, where M is the number of available access slot sub-channels, starting with the lowest available access slot sub-channel number and continuing in sequence, in the order of increasing access slot sub-channel numbers.

- List of available Access Slot channels : 12 or less sub-channels are available.
- Ex : only sub-channels 0,1; 4,5; 8,9 are present, then :
- Sub-channel 0 is : available sub-channel index 0
- Sub-channel 1 is : available sub-channel index 1
- Sub-channel 4 is : available sub-channel index 2
- Sub-channel 5 is : available sub-channel index 3
- Sub-channel 8 is : available sub-channel index 4
- Sub-channel 9 is : available sub-channel index 5

~~One ASC has access to all the access slot sub-channels between the Available sub-channel Start Index and the Available sub-channel End Index, and to all the signatures between the Available signature Start Index and the Available signature End Index.~~

~~NOTE: The above text may eventually be moved to a more appropriate location.~~

## 10.3.6.55 PRACH system information list

Information element	Need	Multi	Type and reference	Semantics description	Version
PRACH system information	MP	1 .. <maxPRA CH>			
>PRACH info	MP		PRACH info (for RACH) 10.3.6.52		
>Transport channel identity	MP		Transport channel identity 10.3.5.18		
>RACH TFS	MD		Transport format set 10.3.5.23	Default value is the value of "RACH TFS" for the previous PRACH in the list (note : the first occurrence is then MP)  <u>Note for TDD there is a single TF within the RACH TFS.</u>	
>RACH TFCS	OP D		Transport Format Combination Set 10.3.5.20	Default value is the value of "RACH TFCS" for the previous PRACH in the list (note : the first occurrence is then MP)	
>PRACH partitioning	MD		PRACH partitioning 10.3.6.46	Default value is the value of "PRACH partitioning" for the previous PRACH in the list (note : the first occurrence is then MP)	
>Persistence scaling factors	OP		Persistence scaling factors 10.3.6.48	If this IE is absent, value is the value of "Persistence scaling factors" for the previous PRACH in the list if value exists	
>AC-to-ASC mapping	OP		AC-to-ASC mapping 10.3.6.1	Only present in SIB 5 If this IE is absent, value is the value of "AC-to-ASC mapping" for the previous PRACH in the list if value exists	
>CHOICE <i>mode</i>	MP				
>>FDD					
>>>Primary CPICH TX power	MD		Primary CPICH TX power 10.3.6.61	Default value is the value of "Primary CPICH TX power" for the previous PRACH in the list (note : the first occurrence is then MP)	
>>>Constant value	MD		Constant value 10.3.6.11	Default value is the value of "Constant value" for the previous PRACH in the list (note : the first occurrence is then MP)	
>>>PRACH power offset	MD		PRACH power offset 10.3.6.54	Default value is the value of "PRACH power offset" for the previous PRACH in the list (note : the first occurrence is then MP)	
>>>RACH transmission parameters	MD		RACH transmission parameters 10.3.6.67	Default value is the value of "RACH transmission parameters" for the previous PRACH in the list (note : the first occurrence is then MP)	

>>>AICH info	MD		AICH info 10.3.6.2	Default value is the value of "AICH info" for the previous PRACH in the list (note : the first occurrence is then MP)	
>>TDD				(no data)	

NOTE: If the setting of the PRACH information results in that a combination of a signature, preamble scrambling code and subchannel corresponds to a RACH with different TFS and/or TFCS, then for that combination only the TFS/TFCS of the PRACH listed first is valid, where PRACHs listed in System Information Block type 5 shall be counted first.

10.3.6.? FPACH info

NOTE: Only for 1.28 Mcps TDD.

<u>Information Element/Group name</u>	<u>Need</u>	<u>Multi</u>	<u>Type and reference</u>	<u>Semantics description</u>	<u>Version</u>
<u>Timeslot number</u>	MP		<u>Integer(1..6)</u>		REL-4
<u>Channelization code</u>	MP		<u>Enumerated((16/1)..(16/16))</u>		REL-4
<u>Midamble Shift and burst type</u>	MP		<u>Midamble shift and burst type 10.3.6.41</u>		REL-4

10.3.6.? SYNC\_UL info

NOTE: Only for 1.28 Mcps TDD.

<u>Information Element/Group name</u>	<u>Need</u>	<u>Multi</u>	<u>Type and reference</u>	<u>Semantics description</u>	<u>Version</u>
<u>SYNC_UL codes bitmap</u>	MP		<u>Bitstring(8)</u>	<u>00000001 indicates code 0 can be used, 10000001 indicates that codes 0 and 7 can be used.</u>	REL-4
<u>UL Target SIR</u>	MP		<u>Real(-11 .. 20 by step of 0.5)</u>	<u>In dB</u>	REL-4
<u>Power Ramping Step</u>	MP		<u>Integer(0,1,2,3)</u>	<u>In dB</u>	REL-4
<u>Max SYNC_UL Transmissions</u>	MP		<u>Integer(1,2,4,8)</u>	<u>Maximum numbers of SYNC_UL transmissions in a power ramping sequence.</u>	REL-4

### 10.3.10 Multiplicity values and type constraint values

The following table includes constants that are either used as multi bounds (name starting with "max") or as high or low value in a type specification (name starting with "lo" or "hi"). Constants are specified only for values appearing more than once in the RRC specification. In case a constant is related to one or more other constants, an expression is included in the "value" column instead of the actual value.

Constant	Explanation	Value
<b>CN information</b>		
maxCNdomains	Maximum number of CN domains	4
<b>UTRAN mobility information</b>		
maxRAT	Maximum number of Radio Access Technologies	maxOtherRAT + 1
maxOtherRAT	Maximum number of other Radio Access Technologies	15
maxURA	Maximum number of URAs in a cell	8
maxInterSysMessages	Maximum number of Inter System Messages	4
maxRABsetup	Maximum number of RABs to be established	16
<b>UE information</b>		
maxtransactions	Maximum number of parallel RRC transactions in downlink	25
maxPDCPalgoType	Maximum number of PDCP algorithm types	8
maxDRACclasses	Maximum number of UE classes which would require different DRAC parameters	8
maxFrequencybands	Maximum number of frequency bands supported by the UE as defined in 25.102	4
maxPage1	Number of UEs paged in the Paging Type 1 message	8
maxSystemCapability	Maximum number of system specific capabilities that can be requested in one message.	16
<b>RB information</b>		
maxPredefConfig	Maximum number of predefined configurations	16
maxRB	Maximum number of RBs	32
maxSRBsetup	Maximum number of signalling RBs to be established	8
maxRBperRAB	Maximum number of RBs per RAB	8
maxRBallRBs	Maximum number of non signalling RBs	27
maxRBMuxOptions	Maximum number of RB multiplexing options	8
maxLoCHperRLC	Maximum number of logical channels per RLC entity	2
<b>TrCH information</b>		
maxTrCH	Maximum number of transport channels used in one direction (UL or DL)	32
maxTrCHpreconf	Maximum number of preconfigured Transport channels, per direction	16
maxCCTrCH	Maximum number of CCTrCHs	8
maxTF	Maximum number of different transport formats that can be included in the Transport format set for one transport channel	32
maxTF-CPCH	Maximum number of TFs in a CPCH set	16
maxTFC	Maximum number of Transport Format Combinations	1024
maxTFCl-1-Combs	Maximum number of TFCl (field 1) combinations	512
maxTFCl-2-Combs	Maximum number of TFCl (field 2) combinations	512
maxCPCHsets	Maximum number of CPCH sets per cell	16
maxSIBperMsg	Maximum number of complete system information blocks per SYSTEM INFORMATION message	16
maxSIB	Maximum number of references to other system information blocks.	32
maxSIB-FACH	Maximum number of references to system information blocks on the FACH	8
<b>PhyCH information</b>		
maxSubCh	Maximum number of sub-channels on PRACH	12
maxPCPCH-APsubCH	Maximum number of available sub-channels for AP signature on PCPCH	12
maxPCPCH-CDsubCH	Maximum number of available sub-channels for CD signature on PCPCH	12
maxSig	Maximum number of signatures on PRACH	16
maxPCPCH-APsig	Maximum number of available signatures for AP on PCPCH	16
maxPCPCH-CDsig	Maximum number of available signatures for CD on PCPCH	16
maxAC	Maximum number of access classes	16
maxASC	Maximum number of access service classes	8
maxASCmap	Maximum number of access class to access service classes mappings	7
maxASCpersist	Maximum number of access service classes for which persistence scaling factors are specified	6
maxPRACH	Maximum number of PRACHs in a cell	16 (1 for 1.28Mcps TDD)

MaxPRACH_FPACH	Maximum number of PRACH / FPACH pairs in a cell (1.28 Mcps TDD)	8
maxFACHPCH	Maximum number of FACHs and PCHs mapped onto one secondary CCPCHs	8
maxRL	Maximum number of radio links	8
maxSCCPCH	Maximum number of secondary CCPCHs per cell	16
maxDPDCH-UL	Maximum number of DPDCHs per cell	6
maxDPCH-DLchan	Maximum number of channelisation codes used for DL DPCH	8
maxDPCHcodesPerTS	Maximum number of codes for one timeslots (TDD)	16
maxPUSCH	Maximum number of PUSCHs	(8)
maxPDSCH	Maximum number of PDSCHs	8
maxPDSCHcodes	Maximum number of codes for PDSCH	16
maxPDSCH-TFCIgroups	Maximum number of TFCI groups for PDSCH	256
maxPDSCHcodeGroups	Maximum number of code groups for PDSCH	256
maxPCPCHs	Maximum number of PCPCH channels in a CPCH Set	64
maxPCPCH-SF	Maximum number of available SFs on PCPCH	7
maxTS	Maximum number of timeslots used in one direction (UL or DL)	14
HiPUSCHIdentities	Maximum number of PDSCH Identities	64
HiPDSCHIdentities	Maximum number of PDSCH Identities	64
<b>Measurement information</b>		
maxTGPS	Maximum number of transmission gap pattern sequences	6
maxAdditionalMeas	Maximum number of additional measurements for a given measurement identity	4
maxMeasEvent	Maximum number of events that can be listed in measurement reporting criteria	8
maxMeasParEvent	Maximum number of measurement parameters (e.g. thresholds) per event	2
maxMeasIntervals	Maximum number of intervals that define the mapping function between the measurements for the cell quality Q of a cell and the representing quality value	1
maxCellMeas	Maximum number of cells to measure	32
maxReportedGSMCells	Maximum number of GSM cells to be reported	6
maxFreq	Maximum number of frequencies to measure	8
maxSat	Maximum number of satellites to measure	16
HiRM	Maximum number that could be set as rate matching attribute for a transport channel	256
<b>Frequency information</b>		
maxFDDFreqList	Maximum number of FDD carrier frequencies to be stored in USIM	4
maxTDDFreqList	Maximum number of TDD carrier frequencies to be stored in USIM	4
maxFDDFreqCellList	Maximum number of neighbouring FDD cells to be stored in USIM	32
maxTDDFreqCellList	Maximum number of neighbouring TDD cells to be stored in USIM	32
maxGSMCellList	Maximum number of GSM cells to be stored in USIM	32
<b>Other information</b>		
maxNumGSMFreqRanges	Maximum number of GSM Frequency Ranges to store	32
maxNumFDDFreqs	Maximum number of FDD centre frequencies to store	8
maxNumTDDFreqs	Maximum number of TDD centre frequencies to store	8
maxNumCDMA200Freqs	Maximum number of CDMA2000 centre frequencies to store	8



# 11 Message and Information element abstract syntax (with ASN.1)

This clause contains definitions for RRC PDUs and IEs using a subset of ASN.1 as specified in TR 25.921. PDU and IE definitions are grouped into separate ASN.1 modules.

## 11.1 General message structure

```
Class-definitions DEFINITIONS AUTOMATIC TAGS ::=
```

```
BEGIN
```

```
IMPORTS
```

```

    ActiveSetUpdate-r3,
    ActiveSetUpdateComplete,
    ActiveSetUpdateFailure,
    AssistanceDataDelivery-r3,
    CellChangeOrderFromUTRAN-r3,
    CellChangeFailureFromUTRAN,
    CellUpdate,
    CellUpdateConfirm-CCCH-r3,
    CellUpdateConfirm-r3,
    CounterCheck-r3,
    CounterCheckResponse,
    DownlinkDirectTransfer-r3,
    HandoverToUTRANComplete,
    InitialDirectTransfer,
    HandoverFromUTRANCommand-GSM-r3,
    HandoverFromUTRANCommand-CDMA2000-r3,
    HandoverFromUTRANFailure,
    MeasurementControl-r3,
    MeasurementControlFailure,
    MeasurementReport,
    PagingType1,
    PagingType2,
    PhysicalChannelReconfiguration-r3,
    PhysicalChannelReconfigurationComplete,
    PhysicalChannelReconfigurationFailure,
    PhysicalSharedChannelAllocation-r3,
    PUSCHCapacityRequest,
    RadioBearerReconfiguration-r3,
    RadioBearerReconfigurationComplete,
    RadioBearerReconfigurationFailure,
    RadioBearerRelease-r3,
    RadioBearerReleaseComplete,
    RadioBearerReleaseFailure,
    RadioBearerSetup-r3,
    RadioBearerSetupComplete,
    RadioBearerSetupFailure,
    RRCConnectionReject-r3,
    RRCConnectionRelease-r3,
    RRCConnectionRelease-CCCH-r3,
    RRCConnectionReleaseComplete,
    RRCConnectionRequest,
    RRCConnectionSetup-r3,
    RRCConnectionSetupComplete,
    RRCStatus,
    SecurityModeCommand-r3,
    SecurityModeComplete,
    SecurityModeFailure,
    SignallingConnectionRelease-r3,
    SignallingConnectionReleaseRequest,
    SystemInformation-BCH,
    SystemInformation-FACH,
    SystemInformationChangeIndication,
    TransportChannelReconfiguration-r3,
    TransportChannelReconfigurationComplete,
    TransportChannelReconfigurationFailure,
    TransportFormatCombinationControl,
    TransportFormatCombinationControlFailure,
    UECapabilityEnquiry-r3,
    UECapabilityInformation,
    UECapabilityInformationConfirm-r3,
    UplinkDirectTransfer,

```

```

    UplinkPhysicalChannelControl-r3,
    URAUpdate,
    URAUpdateConfirm-r3,
    URAUpdateConfirm-CCCH-r3,
    UTRANMobilityInformation,
    UTRANMobilityInformationConfirm,
    UTRANMobilityInformationFailure
FROM PDU-definitions

-- User Equipment IEs :
    IntegrityCheckInfo
FROM InformationElements;

--*****
--
-- Downlink DCCH messages
--
--*****

DL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  DL-DCCH-MessageType
}

DL-DCCH-MessageType ::= CHOICE {
    activeSetUpdate                ActiveSetUpdate-r3,
    assistanceDataDelivery         AssistanceDataDelivery-r3,
    cellChangeOrderFromUTRAN      CellChangeOrderFromUTRAN-r3,
    cellUpdateConfirm              CellUpdateConfirm-r3,
    counterCheck                   CounterCheck-r3,
    downlinkDirectTransfer         DownlinkDirectTransfer-r3,
    handoverFromUTRANCommand-GSM   HandoverFromUTRANCommand-GSM-r3,
    handoverFromUTRANCommand-CDMA2000 HandoverFromUTRANCommand-CDMA2000-r3,
    measurementControl             MeasurementControl-r3,
    pagingType2                    PagingType2,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
    physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
    radioBearerReconfiguration     RadioBearerReconfiguration-r3,
    radioBearerRelease             RadioBearerRelease-r3,
    radioBearerSetup               RadioBearerSetup-r3,
    rrcConnectionRelease           RRCConnectionRelease-r3,
    securityModeCommand            SecurityModeCommand-r3,
    signallingConnectionRelease    SignallingConnectionRelease-r3,
    transportChannelReconfiguration TransportChannelReconfiguration-r3,
    transportFormatCombinationControl TransportFormatCombinationControl,
    ueCapabilityEnquiry            UECapabilityEnquiry-r3,
    ueCapabilityInformationConfirm  UECapabilityInformationConfirm-r3,
    uplinkPhysicalChannelControl    UplinkPhysicalChannelControl-r3,
    uraUpdateConfirm               URAUpdateConfirm-r3,
    utranMobilityInformation        UTRANMobilityInformation,
    extension                       NULL
}

--*****
--
-- Uplink DCCH messages
--
--*****

UL-DCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  UL-DCCH-MessageType
}

UL-DCCH-MessageType ::= CHOICE {
    activeSetUpdateComplete        ActiveSetUpdateComplete,
    activeSetUpdateFailure         ActiveSetUpdateFailure,
    cellChangeFailureFromUTRAN     CellChangeFailureFromUTRAN,
    counterCheckResponse           CounterCheckResponse,
    handoverToUTRANComplete        HandoverToUTRANComplete,
    initialDirectTransfer           InitialDirectTransfer,
    handoverFromUTRANFailure       HandoverFromUTRANFailure,
    measurementControlFailure      MeasurementControlFailure,
    measurementReport              MeasurementReport,
    physicalChannelReconfigurationComplete PhysicalChannelReconfigurationComplete,
    physicalChannelReconfigurationFailure PhysicalChannelReconfigurationFailure,
    radioBearerReconfigurationComplete RadioBearerReconfigurationComplete,
    radioBearerReconfigurationFailure RadioBearerReconfigurationFailure,
    radioBearerReleaseComplete     RadioBearerReleaseComplete,
    radioBearerReleaseFailure      RadioBearerReleaseFailure,
    radioBearerSetupComplete       RadioBearerSetupComplete,

```

```

radioBearerSetupFailure      RadioBearerSetupFailure,
rrcConnectionReleaseComplete  RRCCConnectionReleaseComplete,
rrcConnectionSetupComplete  RRCCConnectionSetupComplete,
rrcStatus                    RRCStatus,
securityModeComplete         SecurityModeComplete,
securityModeFailure          SecurityModeFailure,
signallingConnectionReleaseRequest SignallingConnectionReleaseRequest,
transportChannelReconfigurationComplete
transportChannelReconfigurationFailure
transportFormatCombinationControlFailure
ueCapabilityInformation      UECapabilityInformation,
uplinkDirectTransfer         UplinkDirectTransfer,
utranMobilityInformationConfirm UTRANMobilityInformationConfirm,
utranMobilityInformationFailure UTRANMobilityInformationFailure,
extension                     NULL
}

--*****
--
-- Downlink CCCH messages
--
--*****

DL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  DL-CCCH-MessageType
}

DL-CCCH-MessageType ::= CHOICE {
    cellUpdateConfirm        CellUpdateConfirm-CCCH-r3,
    rrcConnectionReject     RRCCConnectionReject-r3,
    rrcConnectionRelease    RRCCConnectionRelease-CCCH-r3,
    rrcConnectionSetup      RRCCConnectionSetup-r3,
    uraUpdateConfirm        URAUpdateConfirm-CCCH-r3,
    extension                NULL
}

--*****
--
-- Uplink CCCH messages
--
--*****

UL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
    message                  UL-CCCH-MessageType
}

UL-CCCH-MessageType ::= CHOICE {
    cellUpdate              CellUpdate,
    rrcConnectionRequest   RRCCConnectionRequest,
    uraUpdate               URAUpdate,
    extension                NULL
}

--*****
--
-- PCCH messages
--
--*****

PCCH-Message ::= SEQUENCE {
    message                  PCCH-MessageType
}

PCCH-MessageType ::= CHOICE {
    pagingType1             PagingType1,
    extension                NULL
}

--*****
--
-- Downlink SHCCH messages
--
--*****

DL-SHCCH-Message ::= SEQUENCE {
    message                  DL-SHCCH-MessageType
}

```

```

DL-SHCCH-MessageType ::= CHOICE {
    physicalSharedChannelAllocation      PhysicalSharedChannelAllocation-r3,
    extension                             NULL
}

--*****
--
-- Uplink SHCCH messages
--
--*****

UL-SHCCH-Message ::= SEQUENCE {
    message                               UL-SHCCH-MessageType
}

UL-SHCCH-MessageType ::= CHOICE {
    puschCapacityRequest                 PUSCHCapacityRequest,
    extension                             NULL
}

--*****
--
-- BCCH messages sent on FACH
--
--*****

BCCH-FACH-Message ::= SEQUENCE {
    message                               BCCH-FACH-MessageType
}

BCCH-FACH-MessageType ::= CHOICE {
    systemInformation                    SystemInformation-FACH,
    systemInformationChangeIndication   SystemInformationChangeIndication,
    extension                             NULL
}

--*****
--
-- BCCH messages sent on BCH
--
--*****

BCCH-BCH-Message ::= SEQUENCE {
    message                               SystemInformation-BCH
}

END

```

## 11.2 PDU definitions

```

--*****
--
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--
--*****

PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--*****
--
-- IE parameter types from other modules
--
--*****

IMPORTS

-- Core Network IEs :
--   CN-DomainIdentity,
--   CN-InformationInfo,
--   NAS-Message,
--   PagingRecordTypeID,
-- UTRAN Mobility IEs :
--   URA-Identity,
-- User Equipment IEs :
--   ActivationTime,
--   C-RNTI,

```

```

CapabilityUpdateRequirement,
CellUpdateCause,
CipheringAlgorithm,
CipheringModeInfo,
EstablishmentCause,
FailureCauseWithProtErr,
FailureCauseWithProtErrTrId,
InitialUE-Identity,
IntegrityProtActivationInfo,
IntegrityProtectionModeInfo,
N-308,
PagingCause,
PagingRecordList,
ProtocolErrorIndicator,
ProtocolErrorIndicatorWithMoreInfo,
Rb-timer-indicator,
Re-EstablishmentTimer,
RedirectionInfo,
RejectionCause,
ReleaseCause,
RRC-StateIndicator,
RRC-TransactionIdentifier,
SecurityCapability,
START-Value,
STARTList,
U-RNTI,
U-RNTI-Short,
UE-RadioAccessCapability,
UE-ConnTimersAndConstants,
URA-UpdateCause,
UTRAN-DRX-CycleLengthCoefficient,
WaitTime,
-- Radio Bearer IEs :
PredefinedConfigIdentity,
RAB-Info,
RAB-Info-Post,
RAB-InformationList,
RAB-InformationReconfigList,
RAB-InformationSetupList,
RB-ActivationTimeInfo,
RB-ActivationTimeInfoList,
RB-COUNT-C-InformationList,
RB-COUNT-C-MSB-InformationList,
RB-IdentityList,
RB-InformationAffectedList,
RB-InformationReconfigList,
RB-InformationReleaseList,
RB-InformationSetupList,
RB-WithPDCP-InfoList,
SRB-InformationSetupList,
SRB-InformationSetupList2,
-- Transport Channel IEs:
CPCH-SetID,
DL-AddReconfTransChInfo2List,
DL-AddReconfTransChInfoList,
DL-CommonTransChInfo,
DL-DeletedTransChInfoList,
DRAC-StaticInformationList,
TFC-Subset,
TFCS-Identity,
UL-AddReconfTransChInfoList,
UL-CommonTransChInfo,
UL-DeletedTransChInfoList,
-- Physical Channel IEs :
AllocationPeriodInfo,
Alpha,
CCTrCH-PowerControlInfo,
ConstantValue,
CPCH-SetInfo,
DL-CommonInformation,
DL-CommonInformationPost,
DL-InformationPerRL,
DL-InformationPerRL-List,
DL-InformationPerRL-ListPostFDD,
DL-InformationPerRL-PostTDD,
DL-DPCH-PowerControlInfo,
DL-PDSCH-Information,
DPCH-CompressedModeStatusInfo,
FrequencyInfo,
FrequencyInfoFDD,
FrequencyInfoTDD,
IndividualTS-InterferenceList,
MaxAllowedUL-TX-Power,

```

```

PDSCH-CapacityAllocationInfo,
PDSCH-Identity,
PDSCH-Info,
PRACH-RACH-Info,
PrimaryCCPCH-TX-Power,
PUSCH-CapacityAllocationInfo,
PUSCH-Identity,
RL-AdditionInformationList,
RL-RemovalInformationList,
SSDT-Information,
TFC-ControlDuration,
TimeslotList,
TX-DiversityMode,
UL-ChannelRequirement,
UL-ChannelRequirementWithCPCH-SetID,
UL-DPCH-Info,
UL-DPCH-InfoPostFDD,
UL-DPCH-InfoPostTDD,
UL-TimingAdvance,
UL-TimingAdvanceControl,
-- Measurement IEs :
AdditionalMeasurementID-List,
EventResults,
InterRAT-TargetCellDescription,
MeasuredResults,
MeasuredResultsList,
MeasuredResultsOnRACH,
MeasurementCommand,
MeasurementIdentity,
MeasurementReportingMode,
PrimaryCCPCH-RSCP,
TimeslotListWithISCP,
TrafficVolumeMeasuredResultsList,
UP-GPS-AssistanceData,
UP-OTDOA-AssistanceData,
-- Other IEs :
BCCH-ModificationInfo,
CDMA2000-MessageList,
GSM-MessageList,
InterRAT-ChangeFailureCause,
InterRAT-HO-Failure,
InterRAT-UE-RadioAccessCapabilityList,
InterRATMessage,
IntraDomainNasNodeSelector,
ProtocolErrorInformation,
ProtocolErrorMoreInformation,
Rplmn-Information,
SegCount,
SegmentIndex,
SFN-Prime,
SIB-Data-fixed,
SIB-Data-variable,
SIB-Type
FROM InformationElements

maxSIBperMsg,
maxSystemCapability
FROM Constant-definitions;

-- *****
--
-- ACTIVE SET UPDATE (FDD only)
--
-- *****

ActiveSetUpdate-r3 ::= CHOICE {
    r3
        activeSetUpdate-r3
        nonCriticalExtensions
    },
    criticalExtensions
    SEQUENCE {
        ActiveSetUpdate-r3-IEs,
        SEQUENCE {} OPTIONAL
    }
    SEQUENCE {}
}

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo CipheringModeInfo OPTIONAL,
    activationTime ActivationTime OPTIONAL,
    newU-RNTI U-RNTI OPTIONAL,
    -- Core network IEs
    cn-InformationInfo CN-InformationInfo OPTIONAL,
    -- Radio bearer IEs
    rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,

```

```

-- Physical channel IEs
  maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
  rl-AdditionInformationList     RL-AdditionInformationList     OPTIONAL,
  rl-RemovalInformationList      RL-RemovalInformationList     OPTIONAL,
  tx-DiversityMode              TX-DiversityMode              OPTIONAL,
  ssdt-Information              SSDT-Information              OPTIONAL
}

-- *****
--
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- *****

ActiveSetUpdateComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo     OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList     OPTIONAL,
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- ACTIVE SET UPDATE FAILURE (FDD only)
--
-- *****

ActiveSetUpdateFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- Assistance Data Delivery
--
-- *****

AssistanceDataDelivery-r3 ::= CHOICE {
  r3                               SEQUENCE {
    assistanceDataDelivery-r3     AssistanceDataDelivery-r3-IEs,
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
  --Assistance Data Information Elements
  up-GPS-AssistanceData          UP-GPS-AssistanceData          OPTIONAL,
  up-OTDOA-AssistanceData        UP-OTDOA-AssistanceData        OPTIONAL
}

-- *****
--
-- CELL CHANGE ORDER FROM UTRAN
--
-- *****

CellChangeOrderFromUTRAN-r3 ::= CHOICE {
  r3                               SEQUENCE {
    cellChangeOrderFromUTRAN-IEs CellChangeOrderFromUTRAN-r3-IEs,
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
  activationTime                 ActivationTime                  OPTIONAL,
  rab-InformationList            RAB-InformationList           OPTIONAL,
  interRAT-TargetCellDescription InterRAT-TargetCellDescription
}

-- *****
--

```

```

-- CELL CHANGE FAILURE FROM UTRAN
--
-- *****
CellChangeFailureFromUTRAN ::= CHOICE {
    r3 SEQUENCE {
        r3-IEs CellChangeFailureFromUTRAN-r3-IEs,
        nonCriticalExtensions SEQUENCE {} OPTIONAL
    },
    criticalExtensions SEQUENCE {}
}

CellChangeFailureFromUTRAN-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    interRAT-ChangeFailureCause InterRAT-ChangeFailureCause
}

-- *****
--
-- CELL UPDATE
--
-- *****

CellUpdate ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI U-RNTI,
    startList STARTList,
    am-RLC-ErrorIndicationC-plane BOOLEAN,
    am-RLC-ErrorIndicationU-plane BOOLEAN,
    cellUpdateCause CellUpdateCause,
    failureCause FailureCauseWithProtErrTrId OPTIONAL,
    -- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
    rb-timer-indicator Rb-timer-indicator,
    -- Measurement IEs
    measuredResultsOnRACH MeasuredResultsOnRACH OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- CELL UPDATE CONFIRM
--
-- *****

CellUpdateConfirm-r3 ::= CHOICE {
    r3 SEQUENCE {
        cellUpdateConfirm-r3 CellUpdateConfirm-r3-IEs,
        nonCriticalExtensions SEQUENCE {} OPTIONAL
    },
    criticalExtensions SEQUENCE {}
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo CipheringModeInfo OPTIONAL,
    activationTime ActivationTime OPTIONAL,
    new-U-RNTI U-RNTI OPTIONAL,
    new-C-RNTI C-RNTI OPTIONAL,
    rrc-StateIndicator RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    rlc-ResetIndicatorC-Plane BOOLEAN,
    rlc-ResetIndicatorU-Plane BOOLEAN,
    -- CN information elements
    cn-InformationInfo CN-InformationInfo OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity URA-Identity OPTIONAL,
    -- Radio bearer IEs
    rb-InformationReleaseList RB-InformationReleaseList OPTIONAL,
    rb-InformationReconfigList RB-InformationReconfigList OPTIONAL,
    rb-InformationAffectedList RB-InformationAffectedList OPTIONAL,
    rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo UL-CommonTransChInfo OPTIONAL,
    ul-deletedTransChInfoList UL-DeletedTransChInfoList OPTIONAL,
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo CHOICE {
        fdd SEQUENCE {
            cpch-SetID CPCH-SetID OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        }
    }
}

```



```

        },
        tdd                                NULL
    },
    dl-CommonTransChInfo                   DL-CommonTransChInfo           OPTIONAL,
    dl-DeletedTransChInfoList              DL-DeletedTransChInfoList        OPTIONAL,
    dl-AddReconfTransChInfoList            DL-AddReconfTransChInfoList      OPTIONAL,
-- Physical channel IEs
    frequencyInfo                           FrequencyInfo                       OPTIONAL,
    maxAllowedUL-TX-Power                   MaxAllowedUL-TX-Power             OPTIONAL,
    ul-ChannelRequirement                   UL-ChannelRequirement             OPTIONAL,
    modeSpecificPhysChInfo                  CHOICE {
        fdd
            dl-PDSCH-Information           DL-PDSCH-Information             OPTIONAL
        },
        tdd                                NULL
    },
    dl-CommonInformation                    DL-CommonInformation              OPTIONAL,
    dl-InformationPerRL-List                DL-InformationPerRL-List          OPTIONAL
}

-- *****
--
-- CELL UPDATE CONFIRM for CCCH
--
-- *****

CellUpdateConfirm-CCCH-r3 ::= CHOICE {
    r3                                     SEQUENCE {
        -- User equipment IEs
        u-RNTI                             U-RNTI,
        -- The rest of the message is identical to the one sent on DCCH.

        cellUpdateConfirm-r3                CellUpdateConfirm-r3-IEs,
        nonCriticalExtensions                SEQUENCE {} OPTIONAL
    },
    criticalExtensions                      SEQUENCE {}
}

-- *****
--
-- COUNTER CHECK
--
-- *****

CounterCheck-r3 ::= CHOICE {
    r3                                     SEQUENCE {
        counterCheck-r3                    CounterCheck-r3-IEs,
        nonCriticalExtensions                SEQUENCE {} OPTIONAL
    },
    criticalExtensions                      SEQUENCE {}
}

CounterCheck-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier               RRC-TransactionIdentifier,
    -- Radio bearer IEs
    rb-COUNT-C-MSB-InformationList          RB-COUNT-C-MSB-InformationList
}

-- *****
--
-- COUNTER CHECK RESPONSE
--
-- *****

CounterCheckResponse ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier               RRC-TransactionIdentifier,
    -- Radio bearer IEs
    rb-COUNT-C-InformationList              RB-COUNT-C-InformationList        OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions                   SEQUENCE {} OPTIONAL
}

-- *****
--
-- DOWNLINK DIRECT TRANSFER
--
-- *****

DownlinkDirectTransfer-r3 ::= CHOICE {
    r3                                     SEQUENCE {
        downlinkDirectTransfer-r3           DownlinkDirectTransfer-r3-IEs,

```

```

        nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    -- Core network IEs
    cn-DomainIdentity                 CN-DomainIdentity,
    nas-Message                        NAS-Message
}

-- *****
--
-- HANOVER TO UTRAN COMMAND
--
-- *****

HandoverToUTRANCommand-r3 ::= CHOICE {
    r3                                 SEQUENCE {
        handoverToUTRANCommand-r3     HandoverToUTRANCommand-r3-IEs,
        nonCriticalExtensions           SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    new-U-RNTI                        U-RNTI-Short,
    activationTime                     ActivationTime                OPTIONAL,
    cipheringAlgorithm                 CipheringAlgorithm        OPTIONAL,
    -- Radio bearer IEs
    rab-Info                           RAB-Info-Post,
    -- Specification mode information
    specificationMode                  CHOICE {
        complete                        SEQUENCE {
            srb-InformationSetupList    SRB-InformationSetupList,
            rab-InformationSetupList    RAB-InformationSetupList    OPTIONAL,
            ul-CommonTransChInfo       UL-CommonTransChInfo,
            ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
            dl-CommonTransChInfo       DL-CommonTransChInfo,
            dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
            ul-DPCH-Info               UL-DPCH-Info,
            modeSpecificInfo           CHOICE {
                fdd                    SEQUENCE {
                    dl-PDSCH-Information DL-PDSCH-Information OPTIONAL,
                    cpch-SetInfo        CPCH-SetInfo        OPTIONAL
                },
                tdd                    NULL
            },
            dl-CommonInformation        DL-CommonInformation,
            dl-InformationPerRL-List    DL-InformationPerRL-List,
            frequencyInfo              FrequencyInfo
        },
        predefinedConfigIdentity        PredefinedConfigIdentity,
        rab-Info                        RAB-Info-Post            OPTIONAL,
        modeSpecificInfo                CHOICE {
            fdd                         SEQUENCE {
                ul-DPCH-Info            UL-DPCH-InfoPostFDD,
                dl-CommonInformationPost DL-CommonInformationPost,
                dl-InformationPerRL-List DL-InformationPerRL-ListPostFDD,
                frequencyInfo           FrequencyInfoFDD
            },
            tdd                         SEQUENCE {
                ul-DPCH-Info            UL-DPCH-InfoPostTDD,
                dl-InformationPerRL      DL-InformationPerRL-PostTDD,
                frequencyInfo           FrequencyInfoTDD,
                primaryCCPCH-TX-Power   PrimaryCCPCH-TX-Power
            }
        }
    },
    preconfiguration                   SEQUENCE {
        -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
        -- one for the FDD only elements and one for the TDD only elements, so that one
        -- FDD/TDD choice in this level is sufficient.
        predefinedConfigIdentity        PredefinedConfigIdentity,
        rab-Info                        RAB-Info-Post            OPTIONAL,
        modeSpecificInfo                CHOICE {
            fdd                         SEQUENCE {
                ul-DPCH-Info            UL-DPCH-InfoPostFDD,
                dl-CommonInformationPost DL-CommonInformationPost,
                dl-InformationPerRL-List DL-InformationPerRL-ListPostFDD,
                frequencyInfo           FrequencyInfoFDD
            },
            tdd                         SEQUENCE {
                ul-DPCH-Info            UL-DPCH-InfoPostTDD,
                dl-InformationPerRL      DL-InformationPerRL-PostTDD,
                frequencyInfo           FrequencyInfoTDD,
                primaryCCPCH-TX-Power   PrimaryCCPCH-TX-Power
            }
        }
    }
},
    -- Physical channel IEs
    maxAllowedUL-TX-Power              MaxAllowedUL-TX-Power
}

```

```

-- *****
--
-- HANDOVER TO UTRAN COMPLETE
--
-- *****

HandoverToUTRANComplete ::= SEQUENCE {
  --TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  -- TABULAR: the IE below is conditional on history.
  startList          STARTList          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {}     OPTIONAL
}

-- *****
--
-- INITIAL DIRECT TRANSFER
--
-- *****

InitialDirectTransfer ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity          CN-DomainIdentity,
  intraDomainNasNodeSelector IntraDomainNasNodeSelector,
  nas-Message                NAS-Message,
  -- Measurement IEs
  measuredResultsOnRACH      MeasuredResultsOnRACH    OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions      SEQUENCE {}               OPTIONAL
}

-- *****
--
-- HANDOVER FROM UTRAN COMMAND
--
-- *****

HandoverFromUTRANCommand-GSM-r3 ::= CHOICE {
  r3          SEQUENCE {
    handoverFromUTRANCommand-GSM-r3
    nonCriticalExtensions          HandoverFromUTRANCommand-GSM-r3-IEs,
    SEQUENCE {}                   OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

HandoverFromUTRANCommand-GSM-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  activationTime                 ActivationTime          OPTIONAL,
  -- Radio bearer IEs
  remainingRAB-Info             RAB-Info               OPTIONAL,
  -- Other IEs
  message-and-extension         CHOICE {
    gsm-Message                  SEQUENCE {},
    -- In this case, what follows the basic production is a variable length bit string
    -- with no length field, containing the GSM message including GSM padding up to end
    -- of container, to be analysed according to GSM specifications
    with-extension               SEQUENCE {
      messages                    GSM-MessageList
    }
  }
}

HandoverFromUTRANCommand-CDMA2000-r3 ::= CHOICE {
  r3          SEQUENCE {
    handoverFromUTRANCommand-CDMA2000-r3
    nonCriticalExtensions          HandoverFromUTRANCommand-CDMA2000-r3-IEs,
    SEQUENCE {}                   OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  activationTime                 ActivationTime          OPTIONAL,
  -- Radio bearer IEs
  remainingRAB-Info             RAB-Info               OPTIONAL,
  -- Other IEs
  cdma2000-MessageList          CDMA2000-MessageList
}

```

```

-- *****
--
-- HANDOVER FROM UTRAN FAILURE
--
-- *****

HandoverFromUTRANFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Other IEs
  interRAT-HO-Failure           InterRAT-HO-Failure           OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                   OPTIONAL
}

-- *****
--
-- MEASUREMENT CONTROL
--
-- *****

MeasurementControl-r3 ::= CHOICE {
  r3                             SEQUENCE {
    measurementControl-r3       MeasurementControl-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}                   OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}

MeasurementControl-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Measurement IEs
  measurementIdentity           MeasurementIdentity,
  measurementCommand            MeasurementCommand,
  -- TABULAR: The measurement type is included in MeasurementCommand.
  measurementReportingMode      MeasurementReportingMode      OPTIONAL,
  additionalMeasurementList     AdditionalMeasurementID-List  OPTIONAL,
  -- Physical channel IEs
  dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo OPTIONAL
}

-- *****
--
-- MEASUREMENT CONTROL FAILURE
--
-- *****

MeasurementControlFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                   OPTIONAL
}

-- *****
--
-- MEASUREMENT REPORT
--
-- *****

MeasurementReport ::= SEQUENCE {
  -- Measurement IEs
  measurementIdentity           MeasurementIdentity,
  measuredResults               MeasuredResults               OPTIONAL,
  measuredResultsOnRACH         MeasuredResultsOnRACH         OPTIONAL,
  additionalMeasuredResults     MeasuredResultsList          OPTIONAL,
  eventResults                  EventResults                 OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                   OPTIONAL
}

-- *****
--
-- PAGING TYPE 1
--
-- *****

PagingType1 ::= SEQUENCE {
  -- User equipment IEs
  pagingRecordList              PagingRecordList              OPTIONAL,

```

```

-- Other IEs
  bcch-ModificationInfo          BCCH-ModificationInfo          OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- PAGING TYPE 2
--
-- *****

PagingType2 ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  pagingCause                    PagingCause,
  -- Core network IEs
  cn-DomainIdentity             CN-DomainIdentity,
  pagingRecordTypeID            PagingRecordTypeID,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION
--
-- *****

PhysicalChannelReconfiguration-r3 ::= CHOICE {
  r3                             SEQUENCE {
    physicalChannelReconfiguration-r3
    nonCriticalExtensions        SEQUENCE {}          OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
  cipheringModeInfo             CipheringModeInfo             OPTIONAL,
  activationTime                 ActivationTime                 OPTIONAL,
  new-U-RNTI                     U-RNTI                     OPTIONAL,
  new-C-RNTI                     C-RNTI                     OPTIONAL,
  rrc-StateIndicator             RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- Core network IEs
  cn-InformationInfo             CN-InformationInfo             OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                   URA-Identity                   OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                  FrequencyInfo                  OPTIONAL,
  maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
  ul-ChannelRequirement          UL-ChannelRequirementWithCPCH-SetID  OPTIONAL,
  -- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
  -- between UL DPCH info, CPCH SET info and CPCH set ID.
  modeSpecificInfo              CHOICE {
    fdd                           SEQUENCE {
      dl-PDSCH-Information        DL-PDSCH-Information        OPTIONAL
    },
    tdd                           NULL
  },
  dl-CommonInformation           DL-CommonInformation           OPTIONAL,
  dl-InformationPerRL-List       DL-InformationPerRL-List       OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
--
-- *****

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo     OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance               UL-TimingAdvance               OPTIONAL,
  -- Radio bearer IEs

```

```

        count-C-ActivationTime           ActivationTime           OPTIONAL,
        rb-UL-CiphActivationTimeInfo     RB-ActivationTimeInfoList OPTIONAL,
        rb-WithPDCP-InfoList             RB-WithPDCP-InfoList    OPTIONAL,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions             SEQUENCE {}            OPTIONAL
    }
-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier           RRC-TransactionIdentifier           OPTIONAL,
    failureCause                         FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions                 SEQUENCE {}            OPTIONAL
}
-- *****
--
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
--
-- *****

PhysicalSharedChannelAllocation-r3 ::= CHOICE {
    r3                                     SEQUENCE {
        physicalSharedChannelAllocation-r3
        PhysicalSharedChannelAllocation-r3-IEs,
        nonCriticalExtensions             SEQUENCE {}            OPTIONAL
    },
    criticalExtensions                     SEQUENCE {}
}

PhysicalSharedChannelAllocation-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
    c-RNTI                                C-RNTI                        OPTIONAL,
    rrc-TransactionIdentifier             RRC-TransactionIdentifier,
-- Physical channel IEs
    ul-TimingAdvance                     UL-TimingAdvanceControl        OPTIONAL,
    pusch-CapacityAllocationInfo         PUSCH-CapacityAllocationInfo   OPTIONAL,
    pdsch-CapacityAllocationInfo         PDSCH-CapacityAllocationInfo   OPTIONAL,
    confirmRequest                        ENUMERATED {
        confirmPDSCH, confirmPUSCH } OPTIONAL,
-- TABULAR: If the above value is not present, the default value "No Confirm"
-- shall be used as specified in 10.2.25.
    iscpTimeslotList                     TimeslotList                    OPTIONAL
}
-- *****
--
-- PUSCH CAPACITY REQUEST (TDD only)
--
-- *****

PUSCHCapacityRequest ::= SEQUENCE {
-- User equipment IEs
    c-RNTI                                C-RNTI                        OPTIONAL,
-- Measurement IEs
    trafficVolumeMeasuredResultsList
    TrafficVolumeMeasuredResultsList,
    timeslotListWithISCP                 TimeslotListWithISCP          OPTIONAL,
    primaryCCPCH-RSCP                     PrimaryCCPCH-RSCP              OPTIONAL,
    allocationConfirmation                CHOICE {
        pdschConfirmation                 PDSCH-Identity,
        puschConfirmation                 PUSCH-Identity
    } OPTIONAL,
    protocolErrorIndicator                 ProtocolErrorIndicatorWithMoreInfo,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions                 SEQUENCE {}            OPTIONAL
}
-- *****
--
-- RADIO BEARER RECONFIGURATION
--
-- *****

RadioBearerReconfiguration-r3 ::= CHOICE {
    r3                                     SEQUENCE {

```

```

        radioBearerReconfiguration-r3  RadioBearerReconfiguration-r3-IEs,
        nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions                  SEQUENCE {}
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    integrityProtectionModeInfo       IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo                 CipheringModeInfo                 OPTIONAL,
    activationTime                     ActivationTime                     OPTIONAL,
    new-U-RNTI                         U-RNTI                           OPTIONAL,
    new-C-RNTI                         C-RNTI                           OPTIONAL,
    rrc-StateIndicator                RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff        UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
-- Core network IEs
    cn-InformationInfo                 CN-InformationInfo                OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity                       URA-Identity                      OPTIONAL,
-- Radio bearer IEs
    rab-InformationReconfigList        RAB-InformationReconfigList       OPTIONAL,
    rb-InformationReconfigList         RB-InformationReconfigList,
    rb-InformationAffectedList         RB-InformationAffectedList        OPTIONAL,
-- Transport channel IEs
    ul-CommonTransChInfo              UL-CommonTransChInfo              OPTIONAL,
    ul-deletedTransChInfoList         UL-DeletedTransChInfoList         OPTIONAL,
    ul-AddReconfTransChInfoList       UL-AddReconfTransChInfoList       OPTIONAL,
    modeSpecificTransChInfo           CHOICE {
        fdd                            SEQUENCE {
            cpch-SetID                  CPCH-SetID                        OPTIONAL,
            addReconfTransChDRAC-Info    DRAC-StaticInformationList        OPTIONAL
        },
        tdd                            NULL
    }
    dl-CommonTransChInfo              DL-CommonTransChInfo              OPTIONAL,
    dl-DeletedTransChInfoList         DL-DeletedTransChInfoList         OPTIONAL,
    dl-AddReconfTransChInfoList       DL-AddReconfTransChInfo2List      OPTIONAL,
-- Physical channel IEs
    frequencyInfo                     FrequencyInfo                       OPTIONAL,
    maxAllowedUL-TX-Power              MaxAllowedUL-TX-Power              OPTIONAL,
    ul-ChannelRequirement              UL-ChannelRequirement              OPTIONAL,
    modeSpecificPhysChInfo             CHOICE {
        fdd                            SEQUENCE {
            dl-PDSCH-Information         DL-PDSCH-Information              OPTIONAL
        },
        tdd                            NULL
    },
    dl-CommonInformation               DL-CommonInformation              OPTIONAL,
    dl-InformationPerRL-List           DL-InformationPerRL-List
}

-- *****
--
-- RADIO BEARER RECONFIGURATION COMPLETE
--
-- *****

RadioBearerReconfigurationComplete ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo         IntegrityProtActivationInfo        OPTIONAL,
-- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance                   UL-TimingAdvance                   OPTIONAL,
-- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo       RB-ActivationTimeInfoList         OPTIONAL,
    rb-WithPDCP-InfoList               RB-WithPDCP-InfoList              OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RECONFIGURATION FAILURE
--
-- *****

RadioBearerReconfigurationFailure ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    failureCause                       FailureCauseWithProtErr,
-- Radio bearer IEs
    potentiallySuccessfulBearerList     RB-IdentityList                    OPTIONAL,

```

```

-- Extension mechanism for non- release99 information
nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE
--
-- *****

RadioBearerRelease-r3 ::= CHOICE {
  r3 SEQUENCE {
    radioBearerRelease-r3 RadioBearerRelease-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

RadioBearerRelease-r3-IEs ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo CipheringModeInfo OPTIONAL,
  activationTime ActivationTime OPTIONAL,
  new-U-RNTI U-RNTI OPTIONAL,
  new-C-RNTI C-RNTI OPTIONAL,
  rrc-StateIndicator RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- Core network IEs
  cn-InformationInfo CN-InformationInfo OPTIONAL,
  signallingConnectionRelIndication CN-DomainIdentity OPTIONAL,
-- UTRAN mobility IEs
  ura-Identity URA-Identity OPTIONAL,
-- Radio bearer IEs
  rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,
  rb-InformationReleaseList RB-InformationReleaseList,
  rb-InformationAffectedList RB-InformationAffectedList OPTIONAL,
  rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo UL-CommonTransChInfo OPTIONAL,
  ul-deletedTransChInfoList UL-DeletedTransChInfoList OPTIONAL,
  ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
  modeSpecificTransChInfo CHOICE {
    fdd SEQUENCE {
      cpch-SetID CPCH-SetID OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
    },
    tdd NULL
  }
  dl-CommonTransChInfo DL-CommonTransChInfo OPTIONAL,
  dl-DeletedTransChInfoList DL-DeletedTransChInfoList OPTIONAL,
  dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List OPTIONAL,
-- Physical channel IEs
  frequencyInfo FrequencyInfo OPTIONAL,
  maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
  ul-ChannelRequirement UL-ChannelRequirement OPTIONAL,
  modeSpecificPhysChInfo CHOICE {
    fdd SEQUENCE {
      dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
    },
    tdd NULL
  },
  dl-CommonInformation DL-CommonInformation OPTIONAL,
  dl-InformationPerRL-List DL-InformationPerRL-List OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE COMPLETE
--
-- *****

RadioBearerReleaseComplete ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo IntegrityProtActivationInfo OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance UL-TimingAdvance OPTIONAL,
-- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

```



```

-- *****
--
-- RADIO BEARER RELEASE FAILURE
--
-- *****

RadioBearerReleaseFailure ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Radio bearer IES
  potentiallySuccessfulBearerList RB-IdentityList           OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}                OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP
--
-- *****

RadioBearerSetup-r3 ::= CHOICE {
  r3                               SEQUENCE {
    radioBearerSetup-r3           RadioBearerSetup-r3-IES,
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RadioBearerSetup-r3-IES ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo   IntegrityProtectionModeInfo   OPTIONAL,
  cipheringModeInfo             CipheringModeInfo                   OPTIONAL,
  activationTime                 ActivationTime                       OPTIONAL,
  new-U-RNTI                     U-RNTI                             OPTIONAL,
  new-C-RNTI                     C-RNTI                             OPTIONAL,
  rrc-StateIndicator             RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- UTRAN mobility IES
  ura-Identity                   URA-Identity                       OPTIONAL,
  -- Core network IES
  cn-InformationInfo             CN-InformationInfo                 OPTIONAL,
  -- Radio bearer IES
  srb-InformationSetupList       SRB-InformationSetupList           OPTIONAL,
  rab-InformationSetupList       RAB-InformationSetupList           OPTIONAL,
  rb-InformationAffectedList     RB-InformationAffectedList     OPTIONAL,
  -- Transport channel IES
  ul-CommonTransChInfo           UL-CommonTransChInfo           OPTIONAL,
  ul-deletedTransChInfoList      UL-DeletedTransChInfoList      OPTIONAL,
  ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList    OPTIONAL,
  modeSpecificTransChInfo        CHOICE {
    fdd                           SEQUENCE {
      cpch-SetID                  CPCH-SetID                   OPTIONAL,
      addReconfTransChDRAC-Info    DRAC-StaticInformationList  OPTIONAL
    },
    tdd                            NULL
  }
  dl-CommonTransChInfo           DL-CommonTransChInfo           OPTIONAL,
  dl-DeletedTransChInfoList      DL-DeletedTransChInfoList      OPTIONAL,
  dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList    OPTIONAL,
  -- Physical channel IES
  frequencyInfo                  FrequencyInfo                   OPTIONAL,
  maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
  ul-ChannelRequirement          UL-ChannelRequirement          OPTIONAL,
  modeSpecificPhysChInfo         CHOICE {
    fdd                           SEQUENCE {
      dl-PDSCH-Information         DL-PDSCH-Information         OPTIONAL
    },
    tdd                            NULL
  },
  dl-CommonInformation           DL-CommonInformation           OPTIONAL,
  dl-InformationPerRL-List       DL-InformationPerRL-List       OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP COMPLETE
--
-- *****

```

```

RadioBearerSetupComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo      IntegrityProtActivationInfo      OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance              UL-TimingAdvance              OPTIONAL,
  start-Value                   START-Value                   OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime        ActivationTime              OPTIONAL,
  rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList  OPTIONAL,
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList      OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}              OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP FAILURE
--
-- *****

RadioBearerSetupFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
  -- Radio bearer IEs
  potentiallySuccessfulBearerList  RB-IdentityList          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}              OPTIONAL
}

-- *****
--
-- RRC CONNECTION REJECT
--
-- *****

RRCConnectionReject-r3 ::= CHOICE {
  r3                             SEQUENCE {
    rrcConnectionReject-r3      RRCConnectionReject-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}              OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}

RRCConnectionReject-r3-IEs ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  initialUE-Identity            InitialUE-Identity,
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  rejectionCause                RejectionCause,
  waitTime                      WaitTime,
  redirectionInfo               RedirectionInfo          OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE
--
-- *****

RRCConnectionRelease-r3 ::= CHOICE {
  r3                             SEQUENCE {
    rrcConnectionRelease-r3      RRCConnectionRelease-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}              OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}

RRCConnectionRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  n-308                          N-308                  OPTIONAL,
  -- The IE above is conditional on the UE state.
  releaseCause                  ReleaseCause,
  rplmn-information             Rplmn-Information          OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE for CCCH
--
-- *****

```

```

RRCConnectionRelease-CCCH-r3 ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionRelease-CCCH-r3  RRCConnectionRelease-CCCH-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI          U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease  RRCConnectionRelease-r3-IEs
}

-- *****
--
-- RRC CONNECTION RELEASE COMPLETE
--
-- *****

RRCConnectionReleaseComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier  RRC-TransactionIdentifier,
  errorIndication           FailureCauseWithProtErr          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions      SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RRC CONNECTION REQUEST
--
-- *****

RRCConnectionRequest ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  initialUE-Identity          InitialUE-Identity,
  establishmentCause          EstablishmentCause,
  protocolErrorIndicator      ProtocolErrorIndicator,
  -- The IE above is MD, but for compactness reasons no default value
  -- has been assigned to it.
  -- Measurement IEs
  measuredResultsOnRACH       MeasuredResultsOnRACH          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions       SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RRC CONNECTION SETUP
--
-- *****

RRCConnectionSetup-r3 ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionSetup-r3  RRCConnectionSetup-r3-IEs,
    nonCriticalExtensions  SEQUENCE {} OPTIONAL
  },
  criticalExtensions      SEQUENCE {}
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  initialUE-Identity          InitialUE-Identity,
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  activationTime              ActivationTime          OPTIONAL,
  new-U-RNTI                  U-RNTI,
  new-c-RNTI                   C-RNTI                OPTIONAL,
  rrc-StateIndicator          RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient,
  capabilityUpdateRequirement CapabilityUpdateRequirement OPTIONAL,
  -- TABULAR: If the IE is not present, the default value defined in 10.3.3.2 shall
  -- be used.
  -- Radio bearer IEs
  srb-InformationSetupList    SRB-InformationSetupList2,
  -- Transport channel IEs
  ul-CommonTransChInfo       UL-CommonTransChInfo    OPTIONAL,
  ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
  dl-CommonTransChInfo       DL-CommonTransChInfo    OPTIONAL,
}

```

```

        dl-AddReconfTransChInfoList      DL-AddReconfTransChInfoList,
-- Physical channel IEs
    frequencyInfo                        FrequencyInfo                OPTIONAL,
    maxAllowedUL-TX-Power                 MaxAllowedUL-TX-Power        OPTIONAL,
    ul-ChannelRequirement                 UL-ChannelRequirement        OPTIONAL,
    dl-CommonInformation                  DL-CommonInformation          OPTIONAL,
    dl-InformationPerRL-List               DL-InformationPerRL-List     OPTIONAL
}
-- *****
--
-- RRC CONNECTION SETUP COMPLETE
--
-- *****

RRCConnectionSetupComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
    rrc-TransactionIdentifier             RRC-TransactionIdentifier,
    startList                             STARTList,
    ue-RadioAccessCapability              UE-RadioAccessCapability     OPTIONAL,
-- Other IEs
    ue-RATSpecificCapability              InterRAT-UE-RadioAccessCapabilityList  OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions                 SEQUENCE {}                  OPTIONAL
}
-- *****
--
-- RRC STATUS
--
-- *****

RRCStatus ::= SEQUENCE {
-- Other IEs
    protocolErrorInformation              ProtocolErrorMoreInformation,
-- TABULAR: Identification of received message is nested in
-- ProtocolErrorMoreInformation
-- Extension mechanism for non- release99 information
    nonCriticalExtensions                 SEQUENCE {}                  OPTIONAL
}
}

SecurityModeCommand-r3 ::= CHOICE {
    r3                                     SEQUENCE {
        securityModeCommand-r3           SecurityModeCommand-r3-IEs,
        nonCriticalExtensions             SEQUENCE {}                  OPTIONAL
    },
    criticalExtensions                    SEQUENCE {}
}
-- *****
--
-- SECURITY MODE COMMAND
--
-- *****

SecurityModeCommand-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
-- User equipment IEs
    rrc-TransactionIdentifier             RRC-TransactionIdentifier,
    securityCapability                    SecurityCapability,
    cipheringModeInfo                     CipheringModeInfo            OPTIONAL,
    integrityProtectionModeInfo           IntegrityProtectionModeInfo  OPTIONAL,
-- Core network IEs
    cn-DomainIdentity                     CN-DomainIdentity
}
-- *****
--
-- SECURITY MODE COMPLETE
--
-- *****

SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.

-- User equipment IEs
    rrc-TransactionIdentifier             RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo            IntegrityProtActivationInfo   OPTIONAL,
-- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo          RB-ActivationTimeInfoList    OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions                 SEQUENCE {}                  OPTIONAL
}

```

```

}

-- *****
--
-- SECURITY MODE FAILURE
--
-- *****

SecurityModeFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE
--
-- *****

SignallingConnectionRelease-r3 ::= CHOICE {
  r3                             SEQUENCE {
    signallingConnectionRelease-r3 SignallingConnectionRelease-r3-IEs,
    nonCriticalExtensions           SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Core network IEs
  cn-DomainIdentity             CN-DomainIdentity
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE REQUEST
--
-- *****

SignallingConnectionReleaseRequest ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity             CN-DomainIdentity,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- SYSTEM INFORMATION for BCH
--
-- *****

SystemInformation-BCH ::= SEQUENCE {
  -- Other information elements
  sfn-Prime                     SFN-Prime,
  payload                        CHOICE {
    noSegment                    NULL,
    firstSegment                 FirstSegment,
    subsequentSegment            SubsequentSegment,
    lastSegmentShort             LastSegmentShort,
    lastAndFirst                 SEQUENCE {
      lastSegmentShort           LastSegmentShort,
      firstSegment               FirstSegmentShort
    },
    lastAndComplete              SEQUENCE {
      lastSegmentShort           LastSegmentShort,
      completeSIB-List           CompleteSIB-List
    },
    lastAndCompleteAndFirst      SEQUENCE {
      lastSegmentShort           LastSegmentShort,
      completeSIB-List           CompleteSIB-List,
      firstSegment               FirstSegmentShort
    },
    completeSIB-List             CompleteSIB-List,
    completeAndFirst             SEQUENCE {
      completeSIB-List           CompleteSIB-List,
      firstSegment               FirstSegmentShort
    },
    completeSIB                  CompleteSIB,
  }
}

```

```

        lastSegment          LastSegment
    }
}

-- *****
--
-- SYSTEM INFORMATION for FACH
--
-- *****

SystemInformation-FACH ::= SEQUENCE {
    -- Other information elements
    payload                CHOICE {
        noSegment          NULL,
        firstSegment       FirstSegment,
        subsequentSegment  SubsequentSegment,
        lastSegmentShort   LastSegmentShort,
        lastAndFirst       SEQUENCE {
            lastSegmentShort LastSegmentShort,
            firstSegment      FirstSegmentShort
        },
        lastAndComplete    SEQUENCE {
            lastSegmentShort LastSegmentShort,
            completeSIB-List CompleteSIB-List
        },
        lastAndCompleteAndFirst SEQUENCE {
            lastSegmentShort LastSegmentShort,
            completeSIB-List CompleteSIB-List,
            firstSegment      FirstSegmentShort
        },
        completeSIB-List   CompleteSIB-List,
        completeAndFirst   SEQUENCE {
            completeSIB-List CompleteSIB-List,
            firstSegment     FirstSegmentShort
        },
        completeSIB        CompleteSIB,
        lastSegment        LastSegment
    }
}

-- *****
--
-- First segment
--
-- *****

FirstSegment ::= SEQUENCE {
    -- Other information elements
    sib-Type          SIB-Type,
    seg-Count         SegCount,
    sib-Data-fixed    SIB-Data-fixed
}

-- *****
--
-- First segment (short)
--
-- *****

FirstSegmentShort ::= SEQUENCE {
    -- Other information elements
    sib-Type          SIB-Type,
    seg-Count         SegCount,
    sib-Data-variable SIB-Data-variable
}

-- *****
--
-- Subsequent segment
--
-- *****

SubsequentSegment ::= SEQUENCE {
    -- Other information elements
    sib-Type          SIB-Type,
    segmentIndex      SegmentIndex,
    sib-Data-fixed    SIB-Data-fixed
}

-- *****
--
-- Last segment
--

```

```

-- *****
LastSegment ::=                               SEQUENCE {
  -- Other information elements
  sib-Type                SIB-Type,
  segmentIndex            SegmentIndex,
  sib-Data-fixed          SIB-Data-fixed
  -- In case the SIB data is less than 222 bits, padding shall be used
  -- The same padding bits shall be used as defined in clause 12.1
}

LastSegmentShort ::=                          SEQUENCE {
  -- Other information elements
  sib-Type                SIB-Type,
  segmentIndex            SegmentIndex,
  sib-Data-variable      SIB-Data-variable
}

-- *****
--
-- Complete SIB
--
-- *****

CompleteSIB-List ::=                          SEQUENCE (SIZE (1..maxSIBperMsg)) OF
  CompleteSIBshort

CompleteSIB ::=                               SEQUENCE {
  -- Other information elements
  sib-Type                SIB-Type,
  sib-Data-fixed          BIT STRING (SIZE (226))
  -- In case the SIB data is less than 226 bits, padding shall be used
  -- The same padding bits shall be used as defined in clause 12.1
}

CompleteSIBshort ::=                          SEQUENCE {
  -- Other information elements
  sib-Type                SIB-Type,
  sib-Data-variable      SIB-Data-variable
}

-- *****
--
-- SYSTEM INFORMATION CHANGE INDICATION
--
-- *****

SystemInformationChangeIndication ::=         SEQUENCE {
  -- Other IEs
  bcch-ModificationInfo   BCCH-ModificationInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {} OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION
--
-- *****

TransportChannelReconfiguration-r3 ::= CHOICE {
  r3                       SEQUENCE {
    transportChannelReconfiguration-r3
    nonCriticalExtensions   SEQUENCE {} OPTIONAL
  },
  criticalExtensions       SEQUENCE {}
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo        CipheringModeInfo OPTIONAL,
  activationTime           ActivationTime OPTIONAL,
  new-U-RNTI               U-RNTI OPTIONAL,
  new-C-RNTI               C-RNTI OPTIONAL,
  rrc-StateIndicator       RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- Core network IEs
  cn-InformationInfo       CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity             URA-Identity OPTIONAL,
}

```

```

-- Radio bearer IEs
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo         UL-CommonTransChInfo         OPTIONAL,
  ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList  OPTIONAL,
  modeSpecificTransChInfo      CHOICE {
    fdd                          SEQUENCE {
      cpch-SetID                 CPCH-SetID                 OPTIONAL,
      addReconfTransChDRAC-Info  DRAC-StaticInformationList OPTIONAL
    },
    tdd                          NULL
  }
  dl-CommonTransChInfo         DL-CommonTransChInfo         OPTIONAL,
  dl-AddReconfTransChInfoList  DL-AddReconfTransChInfoList  OPTIONAL,
-- Physical channel IEs
  frequencyInfo                FrequencyInfo                OPTIONAL,
  maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power        OPTIONAL,
  ul-ChannelRequirement        UL-ChannelRequirement        OPTIONAL,
  modeSpecificPhysChInfo      CHOICE {
    fdd                          SEQUENCE {
      dl-PDSCH-Information        DL-PDSCH-Information        OPTIONAL
    },
    tdd                          NULL
  },
  dl-CommonInformation         DL-CommonInformation         OPTIONAL,
  dl-InformationPerRL-List     DL-InformationPerRL-List     OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
--
-- *****

TransportChannelReconfigurationComplete ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier     RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo    IntegrityProtActivationInfo  OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance             UL-TimingAdvance             OPTIONAL,
-- Radio bearer IEs
  count-C-ActivationTime       ActivationTime                OPTIONAL,
  rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList   OPTIONAL,
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList        OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
--
-- *****

TransportChannelReconfigurationFailure ::= SEQUENCE {
-- User equipment IEs
  rrc-TransactionIdentifier     RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL
--
-- *****

TransportFormatCombinationControl ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message when transmitting this
message
-- on the transparent mode signalling DCCH.
  rrc-TransactionIdentifier     RRC-TransactionIdentifier   OPTIONAL,
-- The information element is not included when transmitting the message
-- on the transparent mode signalling DCCH
  modeSpecificInfo             CHOICE {
    fdd                          NULL,
    tdd                          SEQUENCE {
      tfcs-ID                    TFCS-Identity              OPTIONAL
    }
  },
  dpch-TFCS-InUplink           TFC-Subset,
  tfc-ControlDuration           TFC-ControlDuration         OPTIONAL,
}

```



```

-- The information element is not included when transmitting the message
-- on the transparent mode signalling DCCH and is optional otherwise
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
--
-- *****

TransportFormatCombinationControlFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                   FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UE CAPABILITY ENQUIRY
--
-- *****

UECapabilityEnquiry-r3 ::= CHOICE {
    r3                             SEQUENCE {
        ueCapabilityEnquiry-r3     UECapabilityEnquiry-r3-IEs,
        nonCriticalExtensions      SEQUENCE {}          OPTIONAL
    },
    criticalExtensions             SEQUENCE {}
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    capabilityUpdateRequirement    CapabilityUpdateRequirement
}

-- *****
--
-- UE CAPABILITY INFORMATION
--
-- *****

UECapabilityInformation ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier          OPTIONAL,
    ue-RadioAccessCapability       UE-RadioAccessCapability          OPTIONAL,
    -- Other IEs
    ue-RATSpecificCapability       InterRAT-UE-RadioAccessCapabilityList
    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UE CAPABILITY INFORMATION CONFIRM
--
-- *****

UECapabilityInformationConfirm-r3 ::= CHOICE {
    r3                             SEQUENCE {
        ueCapabilityInformationConfirm-r3
        nonCriticalExtensions      UECapabilityInformationConfirm-r3-IEs,
        SEQUENCE {}              OPTIONAL
    },
    criticalExtensions             SEQUENCE {}
}

UECapabilityInformationConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier
}

-- *****
--
-- UPLINK DIRECT TRANSFER
--
-- *****

```

```

UplinkDirectTransfer ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity          CN-DomainIdentity,
  nas-Message                 NAS-Message,
  -- Measurement IEs
  measuredResultsOnRACH      MeasuredResultsOnRACH          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions      SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UPLINK PHYSICAL CHANNEL CONTROL
--
-- *****

UplinkPhysicalChannelControl-r3 ::= CHOICE {
  r3                          SEQUENCE {
    uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
    nonCriticalExtensions           SEQUENCE {}          OPTIONAL
  },
  criticalExtensions           SEQUENCE {}
}

UplinkPhysicalChannelControl-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  -- Physical channel IEs
  ccTrCH-PowerControlInfo     CCTrCH-PowerControlInfo      OPTIONAL,
  timingAdvance                UL-TimingAdvanceControl      OPTIONAL,
  alpha                         Alpha                        OPTIONAL,
  prach-ConstantValue          ConstantValue                OPTIONAL,
  pusch-ConstantValue          ConstantValue                OPTIONAL
}

-- *****
--
-- URA UPDATE
--
-- *****

URAUUpdate ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                       U-RNTI,
  ura-UpdateCause              URA-UpdateCause,
  protocolErrorIndicator       ProtocolErrorIndicatorWithMoreInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions        SEQUENCE {}          OPTIONAL
}

-- *****
--
-- URA UPDATE CONFIRM
--
-- *****

URAUUpdateConfirm-r3 ::= CHOICE {
  r3                            SEQUENCE {
    uraUpdateConfirm-r3        URAUpdateConfirm-r3-IEs,
    nonCriticalExtensions       SEQUENCE {}          OPTIONAL
  },
  criticalExtensions           SEQUENCE {}
}

URAUUpdateConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  integrityProtectionModeInfo  IntegrityProtectionModeInfo  OPTIONAL,
  cipheringModeInfo           CipheringModeInfo             OPTIONAL,
  new-U-RNTI                  U-RNTI                        OPTIONAL,
  new-C-RNTI                  C-RNTI                        OPTIONAL,
  rrc-StateIndicator          RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- CN information elements
  cn-InformationInfo          CN-InformationInfo              OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                URA-Identity                  OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList        RB-WithPDCP-InfoList          OPTIONAL
}

-- *****

```

```

--
-- URA UPDATE CONFIRM for CCCH
--
-- *****
URAUUpdateConfirm-CCCH-r3 ::= CHOICE {
  r3 SEQUENCE {
    uraUpdateConfirm-CCCH-r3 URAUpdateConfirm-CCCH-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

URAUUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  uraUpdateConfirm URAUpdateConfirm-r3-IEs
}

-- *****
--
-- UTRAN MOBILITY INFORMATION
--
-- *****

UTRANMobilityInformation ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo CipheringModeInfo OPTIONAL,
  new-U-RNTI U-RNTI OPTIONAL,
  new-C-RNTI C-RNTI OPTIONAL,
  ue-ConnTimersAndConstants UE-ConnTimersAndConstants OPTIONAL,
  -- CN information elements
  cn-InformationInfo CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity URA-Identity OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime ActivationTime OPTIONAL,
  rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION CONFIRM
--
-- *****

UTRANMobilityInformationConfirm ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo IntegrityProtActivationInfo OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL,
  rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION FAILURE
--
-- *****

UTRANMobilityInformationFailure ::= SEQUENCE {
  -- UE information elements
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  failureCause FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

```

END

## 11.3 Information element definitions

InformationElements DEFINITIONS AUTOMATIC TAGS ::=

```

-- *****
--
-- CORE NETWORK INFORMATION ELEMENTS (10.3.1)
--
-- *****

BEGIN

IMPORTS

    hiPDSCHidentities,
    hiPUSCHidentities,
    hiRM,
    maxAC,
    maxAdditionalMeas,
    maxASC,
    maxASCmap,
    maxASCPersist,
    maxCCTrCH,
    maxCellMeas,
    maxCellMeas-1,
    maxCNdomains,
    maxCPCHsets,
    maxDPCH-DLchan,
    maxDPCHcodesPerTS,
    maxDPDCH-UL,
    maxDRACclasses,
    maxFACH,
    maxFreq,
    maxFrequencybands,
    maxInterSysMessages,
    maxLoCHperRLC,
    maxMeasEvent,
    maxMeasIntervals,
    maxMeasParEvent,
    maxNumCDMA2000Freqs,
    maxNumFDDFreqs,
    maxNumGSMFreqRanges,
    maxNumTDDFreqs,
    maxOtherRAT,
    maxPage1,
    maxPCPCH-APsig,
    maxPCPCH-APsubCh,
    maxPCPCH-CDsig,
    maxPCPCH-CDsubCh,
    maxPCPCH-SF,
    maxPCPCHs,
    maxPDCPAlgoType,
    maxPDSCH,
    maxPDSCH-TFCIgroups,
    maxPRACH,
    maxPRACH-FPACH,
    maxPUSCH,
    maxRABsetup,
    maxRAT,
    maxRB,
    maxRBallRABs,
    maxRBMuxOptions,
    maxRBperRAB,
    maxReportedGSMCells,
    maxSRBsetup,
    maxRL,
    maxRL-1,
    maxSCCPCH,
    maxSat,
    maxSIB,
    maxSIB-FACH,
    maxSig,
    maxSubCh,
    maxSystemCapability,
    maxTF,
    maxTF-CPCH,
    maxTFC,
    maxTFCI-2-Combs,
    maxTGPS,
    maxTrCH,
    maxTS,
    maxTS-1,
    maxURA

FROM Constant-definitions;

CN-DomainIdentity ::= ENUMERATED {
    cs-domain,
    ps-domain }

```

```

CN-DomainInformation ::= SEQUENCE {
  cn-DomainIdentity          CN-DomainIdentity,
  cn-DomainSpecificNAS-Info NAS-SystemInformationGSM-MAP
}

CN-DomainInformationList ::= SEQUENCE (SIZE (1..maxCNdomains)) OF
  CN-DomainInformation

CN-DomainSysInfo ::= SEQUENCE {
  cn-DomainIdentity          CN-DomainIdentity,
  cn-Type                    CHOICE {
    gsm-MAP                  NAS-SystemInformationGSM-MAP,
    ansi-41                  NAS-SystemInformationANSI-41
  },
  cn-DRX-CycleLengthCoeff   CN-DRX-CycleLengthCoefficient
}

CN-DomainSysInfoList ::= SEQUENCE (SIZE (1..maxCNdomains)) OF
  CN-DomainSysInfo

CN-InformationInfo ::= SEQUENCE {
  plmn-Identity              PLMN-Identity,
  cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP,
  cn-DomainInformationList  CN-DomainInformationList
}

Digit ::= INTEGER (0..9)

IMEI ::= SEQUENCE (SIZE (15)) OF
  IMEI-Digit

IMEI-Digit ::= INTEGER (0..15)

IMSI-GSM-MAP ::= SEQUENCE (SIZE (6..15)) OF
  Digit

IntraDomainNasNodeSelector ::= BIT STRING (SIZE (16))

LAI ::= SEQUENCE {
  plmn-Identity              PLMN-Identity,
  lac                        BIT STRING (SIZE (16))
}

MCC ::= SEQUENCE (SIZE (3)) OF
  Digit

MNC ::= SEQUENCE (SIZE (2..3)) OF
  Digit

NAS-Message ::= OCTET STRING (SIZE (1..4095))

NAS-Synchronisation-Indicator ::= BIT STRING(SIZE(4))

NAS-SystemInformationGSM-MAP ::= OCTET STRING (SIZE (1..8))

P-TMSI-GSM-MAP ::= BIT STRING (SIZE (32))

PagingRecordTypeID ::= ENUMERATED {
  imsi-GSM-MAP,
  tmsi-GSM-MAP-P-TMSI,
  imsi-DS-41,
  tmsi-DS-41 }

PLMN-Identity ::= SEQUENCE {
  mcc                        MCC,
  mnc                        MNC
}

PLMN-Type ::= CHOICE {
  gsm-MAP                    SEQUENCE {
    plmn-Identity            PLMN-Identity
  },
  ansi-41                    SEQUENCE {
    p-REV                    P-REV,
    min-P-REV                Min-P-REV,
    sid                       SID,
    nid                       NID
  },
  gsm-MAP-and-ANSI-41        SEQUENCE {
    plmn-Identity            PLMN-Identity,
    p-REV                    P-REV,
    min-P-REV                Min-P-REV,
    sid                       SID,
}

```

```

    }
    }
    }
RAB-Identity ::=
    CHOICE {
        gsm-MAP-RAB-Identity    BIT STRING (SIZE (8)),
        ansi-4l-RAB-Identity    BIT STRING (SIZE (8))
    }

RAI ::=
    SEQUENCE {
        lai    LAI,
        rac    RoutingAreaCode
    }

RoutingAreaCode ::=
    BIT STRING (SIZE (8))

TMSI-GSM-MAP ::=
    BIT STRING (SIZE (32))

-- *****
--
--     UTRAN MOBILITY INFORMATION ELEMENTS (10.3.2)
--
-- *****

AccessClassBarred ::=
    ENUMERATED {
        barred, notBarred
    }

AccessClassBarredList ::=
    SEQUENCE (SIZE (maxAC)) OF
        AccessClassBarred

AllowedIndicator ::=
    ENUMERATED {
        allowed, notAllowed
    }

CellAccessRestriction ::=
    SEQUENCE {
        cellBarred            CellBarred,
        cellReservedForOperatorUse    ReservedIndicator,
        cellReservedForSOLSA    ReservedIndicator,
        accessClassBarredList    AccessClassBarredList
    }
    OPTIONAL

CellBarred ::=
    CHOICE {
        barred                SEQUENCE {
            intraFreqCellReselectionInd    AllowedIndicator,
            t-Barred                        T-Barred
        },
        notBarred            NULL
    }

CellIdentity ::=
    BIT STRING (SIZE (28))

CellSelectReselectInfoSIB-3-4 ::=
    SEQUENCE {
        mappingInfo            MappingInfo
    }
    OPTIONAL,
    cellSelectQualityMeasure    CHOICE {
        cpich-Ec-No            SEQUENCE {
            q-HYST-2-S            Q-Hyst-S
        }
    }
    OPTIONAL,
        cpich-RSCP            NULL
    },
    modeSpecificInfo            CHOICE {
        fdd                    SEQUENCE {
            s-Intrasearch        S-SearchQual
            s-Intersearch        S-SearchQual
            s-SearchHCS          S-SearchRXLEV
            rat-List             RAT-FDD-InfoList
            q-QualMin            Q-QualMin,
            q-RxlevMin           Q-RxlevMin
        },
        tdd                    SEQUENCE {
            s-Intrasearch        S-SearchRXLEV
            s-Intersearch        S-SearchRXLEV
            s-SearchHCS          S-SearchRXLEV
            rat-List             RAT-TDD-InfoList
            q-RxlevMin           Q-RxlevMin
        }
    },
    q-Hyst-1-S                Q-Hyst-S,
    t-Reselection-S          T-Reselection-S,
    hcs-ServingCellInformation    HCS-ServingCellInformation
    OPTIONAL,
    maxAllowedUL-TX-Power    MaxAllowedUL-TX-Power
}

MapParameter ::=
    INTEGER (0..99)

```

```

Mapping ::=
    rat
    mappingFunctionParameterList
}

MappingFunctionParameter ::=
    functionType
    mapParameter1
    mapParameter2
    upperLimit
    -- The parameter is conditional on the number of repetition
}

MappingFunctionParameterList ::=
    SEQUENCE (SIZE (1..maxMeasIntervals)) OF
        MappingFunctionParameter

MappingFunctionType ::=
    ENUMERATED {
        linear,
        functionType2,
        functionType3,
        functionType4 }

MappingInfo ::=
    SEQUENCE (SIZE (1..maxRAT)) OF
        Mapping

-- Actual value = IE value * 2
Q-Hyst-S ::=
    INTEGER (0..20)

RAT ::=
    ENUMERATED {
        ultra-FDD,
        ultra-TDD,
        gsm,
        cdma2000 }

RAT-FDD-Info ::=
    rat-Identifier
    s-SearchRAT
    s-HCS-RAT
    s-Limit-SearchRAT
}

RAT-FDD-InfoList ::=
    SEQUENCE (SIZE (1..maxOtherRAT)) OF
        RAT-FDD-Info

RAT-Identifier ::=
    ENUMERATED {
        gsm, cdma2000 }

RAT-TDD-Info ::=
    rat-Identifier
    s-SearchRAT
    s-HCS-RAT
    s-Limit-SearchRAT
}

RAT-TDD-InfoList ::=
    SEQUENCE (SIZE (1..maxOtherRAT)) OF
        RAT-TDD-Info

ReservedIndicator ::=
    ENUMERATED {
        reserved,
        notReserved }

-- Actual value = IE value * 2
S-SearchQual ::=
    INTEGER (-16..10)

-- Actual value = (IE value * 2) + 1
S-SearchRXLEV ::=
    INTEGER (-53..45)

T-Barred ::=
    ENUMERATED {
        s10, s20, s40, s80,
        s160, s320, s640, s1280 }

T-Reselection-S ::=
    INTEGER (0..31)

-- The used range depends on the RAT used.
UpperLimit ::=
    INTEGER (1..91)

URA-Identity ::=
    BIT STRING (SIZE (16))

URA-IdentityList ::=
    SEQUENCE (SIZE (1..maxURA)) OF
        URA-Identity

-- *****

```

```

--
--      USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
--
-- *****
ActivationTime ::=                INTEGER (0..255)
-- TABULAR : value 'now' always appear as default, and is encoded by absence of the field

BackoffControlParams ::=         SEQUENCE {
    n-AP-RetransMax              N-AP-RetransMax,
    n-AccessFails                N-AccessFails,
    nf-BO-NoAICH                 NF-BO-NoAICH,
    ns-BO-Busy                    NS-BO-Busy,
    nf-BO-AllBusy                NF-BO-AllBusy,
    nf-BO-Mismatch                NF-BO-Mismatch,
    t-CPCH                        T-CPCH
}

C-RNTI ::=                       BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::=  SEQUENCE {
    ue-RadioCapabilityUpdateRequirement  BOOLEAN,
    systemSpecificCapUpdateReqList       SystemSpecificCapUpdateReqList  OPTIONAL
}

CellUpdateCause ::=             ENUMERATED {
    cellReselection,
    periodicalCellUpdate,
    uplinkDataTransmission,
    utran-pagingResponse,
    re-enteredServiceArea,
    radiolinkFailure,
    rlc-unrecoverableError,
    spare1 }

ChipRateCapability ::=          ENUMERATED {
    mcps3-84, mcps1-28 }

CipheringAlgorithm ::=          ENUMERATED {
    uea0, uea1 }

CipheringModeCommand ::=        CHOICE {
    startRestart                  CipheringAlgorithm,
    stopCiphering                 NULL
}

CipheringModeInfo ::=           SEQUENCE {
    cipheringModeCommand          CipheringModeCommand,
    -- TABULAR: The ciphering algorithm is included in
    -- the CipheringModeCommand.
    activationTimeForDPCH         ActivationTime                OPTIONAL,
    rb-DL-CiphActivationTimeInfo  RB-ActivationTimeInfoList    OPTIONAL
}

CN-DRX-CycleLengthCoefficient ::= INTEGER (6..9)

CN-PagedUE-Identity ::=         CHOICE {
    imsi-GSM-MAP                 IMSI-GSM-MAP,
    tmsi-GSM-MAP                 TMSI-GSM-MAP,
    p-TMSI-GSM-MAP               P-TMSI-GSM-MAP,
    imsi-DS-41                   IMSI-DS-41,
    tmsi-DS-41                   TMSI-DS-41
}

CompressedModeMeasCapability ::= SEQUENCE {
    fdd-Measurements              BOOLEAN,
    -- TABULAR: The IEs below are made optional since they are conditional based
    -- on another information element. Their absence corresponds to the case where
    -- the condition is not true.
    tdd-Measurements              BOOLEAN                OPTIONAL,
    gsm-Measurements              GSM-Measurements        OPTIONAL,
    multiCarrierMeasurements      BOOLEAN                OPTIONAL
}

CPCH-Parameters ::=            SEQUENCE {
    initialPriorityDelayList       InitialPriorityDelayList    OPTIONAL,
    backoffControlParams           BackoffControlParams,
    powerControlAlgorithm          PowerControlAlgorithm,
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    dl-DPCCH-BER                 DL-DPCCH-BER
}

```



```

DL-DPCCH-BER ::= INTEGER (0..63)

DL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPCH-PDSCH-Codes          INTEGER (1..8),
    maxNoPhysChBitsReceived        MaxNoPhysChBitsReceived,
    supportForSF-512                BOOLEAN,
    supportOfPDSCH                  BOOLEAN,
    simultaneousSCCPCH-DPCH-Reception SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame                 MaxTS-PerFrame,
    maxPhysChPerFrame              MaxPhysChPerFrame,
    minimumSF                       MinimumSF-DL,
    supportOfPDSCH                  BOOLEAN,
    maxPhysChPerTS                 MaxPhysChPerTS
}

DL-TransChCapability ::= SEQUENCE {
    maxNoBitsReceived              MaxNoBits,
    maxConvCodeBitsReceived        MaxNoBits,
    turboDecodingSupport           TurboSupport,
    maxSimultaneousTransChs        MaxSimultaneousTransChsDL,
    maxSimultaneousCCTrCH-Count    MaxSimultaneousCCTrCH-Count,
    maxReceivedTransportBlocks     MaxTransportBlocksDL,
    maxNumberOfTFC-InTFCS          MaxNumberOfTFC-InTFCS-DL,
    maxNumberOfTF                  MaxNumberOfTF
}

DRAC-SysInfo ::= SEQUENCE {
    transmissionProbability        TransmissionProbability,
    maximumBitRate                 MaximumBitRate
}

DRAC-SysInfoList ::= SEQUENCE (SIZE (1..maxDRACclasses)) OF
    DRAC-SysInfo

ESN-DS-41 ::= BIT STRING (SIZE (32))

EstablishmentCause ::= ENUMERATED {
    originatingConversationalCall,
    originatingStreamingCall,
    originatingInteractiveCall,
    originatingBackgroundCall,
    originatingSubscribedTrafficCall,
    terminatingConversationalCall,
    terminatingStreamingCall,
    terminatingInteractiveCall,
    terminatingBackgroundCall,
    emergencyCall,
    interRAT-CellReselection,
    interRAT-CellChangeOrder,
    registration,
    detach,
    highPrioritySignalling,
    lowPrioritySignalling,
    callRe-establishment,
    spare1 }

FailureCauseWithProtErr ::= CHOICE {
    configurationUnsupported        NULL,
    physicalChannelFailure          NULL,
    incompatibleSimultaneousReconfiguration
    NULL,
    compressedModeRuntimeError      TGPSI,
    protocolError                   ProtocolErrorInformation,
    cellReselection                 NULL,
    invalidConfiguration            NULL,
    configurationIncomplete          NULL,
    unsupportedMeasurement          NULL,
    spare1                          NULL,
    spare2                          NULL,
    spare3                          NULL,
    spare4                          NULL,
    spare5                          NULL,
    spare6                          NULL,
    spare7                          NULL
}

FailureCauseWithProtErrTrId ::= SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    failureCause                    FailureCauseWithProtErr
}

```

```

GSM-Measurements ::= SEQUENCE {
    gsm900          BOOLEAN,
    dcs1800        BOOLEAN,
    gsm1900        BOOLEAN
}

ICS-Version ::= ENUMERATED {
    r99 }

IMSI-and-ESN-DS-41 ::= SEQUENCE {
    imsi-DS-41     IMSI-DS-41,
    esn-DS-41      ESN-DS-41
}

IMSI-DS-41 ::= OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::= SEQUENCE (SIZE (maxASC)) OF
    NS-IP

InitialUE-Identity ::= CHOICE {
    imsi            IMSI-GSM-MAP,
    tmsi-and-LAI    TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI P-TMSI-and-RAI-GSM-MAP,
    imei            IMEI,
    esn-DS-41      ESN-DS-41,
    imsi-DS-41     IMSI-DS-41,
    imsi-and-ESN-DS-41 IMSI-and-ESN-DS-41,
    tmsi-DS-41     TMSI-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode MessageAuthenticationCode,
    rrc-MessageSequenceNumber RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList RRC-MessageSequenceNumberList
}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uial }

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection SEQUENCE {
        integrityProtInitNumber IntegrityProtInitNumber
    },
    modify                    SEQUENCE {
        dl-IntegrityProtActivationInfo IntegrityProtActivationInfo
    }
}

IntegrityProtectionModeInfo ::= SEQUENCE {
    integrityProtectionModeCommand IntegrityProtectionModeCommand,
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionAlgorithm IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MaxHcContextSpace ::= ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192 }

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am32 }

-- Actual value = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600 }

```

```

MaxNoBits ::=
    ENUMERATED {
        b640, b1280, b2560, b3840, b5120,
        b6400, b7680, b8960, b10240,
        b20480, b40960, b81920, b163840 }

MaxNoPhysChBitsReceived ::=
    ENUMERATED {
        b600, b1200, b2400, b3600,
        b4800, b7200, b9600, b14400,
        b19200, b28800, b38400, b48000,
        b57600, b67200, b76800 }

MaxNoSCCPCH-RL ::=
    ENUMERATED {
        r11 }

MaxNumberOfTF ::=
    ENUMERATED {
        tf32, tf64, tf128, tf256,
        tf512, tf1024 }

MaxNumberOfTFC-InTFCS-DL ::=
    ENUMERATED {
        tfc16, tfc32, tfc48, tfc64, tfc96,
        tfc128, tfc256, tfc512, tfc1024 }

MaxNumberOfTFC-InTFCS-UL ::=
    ENUMERATED {
        tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
        tfc96, tfc128, tfc256, tfc512, tfc1024 }

MaxPhysChPerFrame ::=
    INTEGER (1..224)

MaxPhysChPerTimeslot ::=
    ENUMERATED {
        ts1, ts2 }

MaxPhysChPerTS ::=
    INTEGER (1..16)

MaxSimultaneousCCTrCH-Count ::=
    INTEGER (1..8)

MaxSimultaneousTransChsDL ::=
    ENUMERATED {
        e4, e8, e16, e32 }

MaxSimultaneousTransChsUL ::=
    ENUMERATED {
        e2, e4, e8, e16, e32 }

MaxTransportBlocksDL ::=
    ENUMERATED {
        tb4, tb8, tb16, tb32, tb48,
        tb64, tb96, tb128, tb256, tb512 }

MaxTransportBlocksUL ::=
    ENUMERATED {
        tb2, tb4, tb8, tb16, tb32, tb48,
        tb64, tb96, tb128, tb256, tb512 }

MaxTS-PerFrame ::=
    INTEGER (1..14)

-- TABULAR: This IE contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.
MeasurementCapability ::=
    SEQUENCE {
        downlinkCompressedMode
            CompressedModeMeasCapability,
        uplinkCompressedMode
            CompressedModeMeasCapability
    }

MessageAuthenticationCode ::=
    BIT STRING (SIZE (32))

MinimumSF-DL ::=
    ENUMERATED {
        sf1, sf16 }

MinimumSF-UL ::=
    ENUMERATED {
        sf1, sf2, sf4, sf8, sf16 }

MultiModeCapability ::=
    ENUMERATED {
        tdd, fdd, fdd-tdd }

MultiRAT-Capability ::=
    SEQUENCE {
        supportOfGSM
            BOOLEAN,
        supportOfMulticarrier
            BOOLEAN
    }

N-300 ::=
    INTEGER (0..7)

N-301 ::=
    INTEGER (0..7)

N-302 ::=
    INTEGER (0..7)

N-304 ::=
    INTEGER (0..7)

N-308 ::=
    INTEGER (1..8)

```

```

N-310 ::= INTEGER (0..7)

N-312 ::= ENUMERATED {
    s1, s50, s100, s200, s400,
    s600, s800, s1000 }

N-313 ::= ENUMERATED {
    s1, s2, s4, s10, s20,
    s50, s100, s200 }

N-315 ::= ENUMERATED {
    s1, s50, s100, s200, s400,
    s600, s800, s1000 }

N-AccessFails ::= INTEGER (1..64)

N-AP-RetransMax ::= INTEGER (1..64)

NetworkAssistedGPS-Supported ::= ENUMERATED {
    networkBased,
    ue-Based,
    bothNetworkAndUE-Based,
    noNetworkAssistedGPS }

NF-BO-AllBusy ::= INTEGER (0..31)

NF-BO-NoAICH ::= INTEGER (0..31)

NF-BO-Mismatch ::= INTEGER (0..127)

NS-BO-Busy ::= INTEGER (0..63)

NS-IP ::= INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::= SEQUENCE {
    p-TMSI P-TMSI-GSM-MAP,
    rai RAI
}

PagingCause ::= ENUMERATED {
    terminatingConversationalCall,
    terminatingStreamingCall,
    terminatingInteractiveCall,
    terminatingBackgroundCall,
    highPrioritySignalling,
    lowPrioritySignalling
}

PagingRecord ::= CHOICE {
    cn-Identity SEQUENCE {
        pagingCause PagingCause,
        cn-DomainIdentity CN-DomainIdentity,
        cn-pagedUE-Identity CN-PagedUE-Identity
    },
    utran-Identity SEQUENCE {
        u-RNTI U-RNTI,
        cn-OriginatedPage-connectedMode-UE SEQUENCE {
            pagingCause PagingCause,
            cn-DomainIdentity CN-DomainIdentity,
            pagingRecordTypeID PagingRecordTypeID
        }
    }
} OPTIONAL

PagingRecordList ::= SEQUENCE (SIZE (1..maxPage1)) OF
    PagingRecord

PDCP-Capability ::= SEQUENCE {
    losslessSRNS-RelocationSupport BOOLEAN,
    supportForRfc2507 CHOICE {
        notSupported NULL,
        supported MaxHcContextSpace
    }
}

PhysicalChannelCapability ::= SEQUENCE {
    fddPhysChCapability SEQUENCE {
        downlinkPhysChCapability DL-PhysChCapabilityFDD,
        uplinkPhysChCapability UL-PhysChCapabilityFDD
    } OPTIONAL,
    tddPhysChCapability SEQUENCE {
        downlinkPhysChCapability DL-PhysChCapabilityTDD,

```

```

        uplinkPhysChCapability          UL-PhysChCapabilityTDD
    }
}
OPTIONAL

ProtocolErrorCause ::=
    ENUMERATED {
        asn1-ViolationOrEncodingError,
        messageTypeNonexistent,
        messageNotCompatibleWithReceiverState,
        ie-ValueNotComprehended,
        conditionalInformationElementError,
        messageExtensionNotComprehended,
        spare1, spare2 }

ProtocolErrorIndicator ::=
    ENUMERATED {
        noError, errorOccurred }

ProtocolErrorIndicatorWithMoreInfo ::=
    CHOICE {
        noError
        errorOccurred
            rrc-TransactionIdentifier
            protocolErrorInformation
    }
}

ProtocolErrorMoreInformation ::=
    SEQUENCE {
        diagnosticsType
            type1
                asn1-ViolationOrEncodingError
                messageTypeNonexistent
                messageNotCompatibleWithReceiverState
                ie-ValueNotComprehended
                conditionalInformationElementError
                messageExtensionNotComprehended
                spare1
                spare2
            },
            spare
    }
}

RadioFrequencyBand ::=
    ENUMERATED {
        a, b, c, ab, ac, bc, abc }

Rb-timer-indicator ::=
    SEQUENCE {
        t314-expired
        t315-expired
    }

Re-EstablishmentTimer ::=
    ENUMERATED {
        useT314, useT315
    }

RedirectionInfo ::=
    CHOICE {
        frequencyInfo
        interRATInfo
    }

RejectionCause ::=
    ENUMERATED {
        congestion,
        unspecified }

ReleaseCause ::=
    ENUMERATED {
        normalEvent,
        unspecified,
        pre-emptiveRelease,
        congestion,
        re-establishmentReject,
        directedsignallingconnectionre-establishment,
        userInactivity }

RF-Capability ::=
    SEQUENCE {
        fddRF-Capability
            ue-PowerClass
            txRxFrequencySeparation
        }
        tddRF-Capability
            ue-PowerClass
            radioFrequencyBandList
            chipRateCapability
        }
    }
}
OPTIONAL

```

```

RLC-Capability ::=
    totalRLC-AM-BufferSize
    maximumRLC-WindowSize
    maximumAM-EntityNumber
}
SEQUENCE {
    TotalRLC-AM-BufferSize,
    MaximumRLC-WindowSize,
    MaximumAM-EntityNumberRLC-Cap
}

RRC-MessageSequenceNumber ::=
    INTEGER (0..15)

RRC-MessageSequenceNumberList ::=
    SEQUENCE (SIZE (4..5)) OF
        RRC-MessageSequenceNumber

RRC-StateIndicator ::=
    ENUMERATED {
        cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::=
    INTEGER (0..3)

S-RNTI ::=
    BIT STRING (SIZE (20))

S-RNTI-2 ::=
    BIT STRING (SIZE (10))

SecurityCapability ::=
    cipheringAlgorithmCap
    integrityProtectionAlgorithmCap
}
SEQUENCE {
    BIT STRING (SIZE (16)),
    BIT STRING (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported
    supported
        maxNoSCCPCH-RL
        simultaneousSCCPCH-DPCH-DPDCH-Reception
        BOOLEAN
        -- The IE above is applicable only if IE Support of PDSCH = TRUE
}

SRNC-Identity ::=
    BIT STRING (SIZE (12))

START-Value ::=
    BIT STRING (SIZE (20))

STARTList ::=
    SEQUENCE (SIZE (1..maxCNdomains)) OF
        STARTSingle

STARTSingle ::=
    cn-DomainIdentity
    start-Value
}
SEQUENCE {
    CN-DomainIdentity,
    START-Value
}

SystemSpecificCapUpdateReq ::=
    ENUMERATED {
        gsm }

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    SystemSpecificCapUpdateReq

T-300 ::=
    ENUMERATED {
        ms100, ms200, ms400, ms600, ms800,
        ms1000, ms1200, ms1400, ms1600,
        ms1800, ms2000, ms3000, ms4000,
        ms6000, ms8000 }

T-301 ::=
    ENUMERATED {
        ms100, ms200, ms400, ms600, ms800,
        ms1000, ms1200, ms1400, ms1600,
        ms1800, ms2000, ms3000, ms4000,
        ms6000, ms8000 }

T-302 ::=
    ENUMERATED {
        ms100, ms200, ms400, ms600, ms800,
        ms1000, ms1200, ms1400, ms1600,
        ms1800, ms2000, ms3000, ms4000,
        ms6000, ms8000 }

T-304 ::=
    ENUMERATED {
        ms100, ms200, ms400,
        ms1000, ms2000 }

T-305 ::=
    ENUMERATED {
        noUpdate, m5, m10, m30,
        m60, m120, m360, m720 }

```

```

T-307 ::=
    ENUMERATED {
        s5, s10, s15, s20,
        s30, s40, s50 }

T-308 ::=
    ENUMERATED {
        ms40, ms80, ms160, ms320 }

T-309 ::=
    INTEGER (1..8)

T-310 ::=
    ENUMERATED {
        ms40, ms80, ms120, ms160,
        ms200, ms240, ms280, ms320 }

T-311 ::=
    ENUMERATED {
        ms250, ms500, ms750, ms1000,
        ms1250, ms1500, ms1750, ms2000 }

T-312 ::=
    INTEGER (0..15)

T-313 ::=
    INTEGER (0..15)

T-314 ::=
    ENUMERATED {
        s0, s2, s4, s6, s8,
        s12, s16, s20 }

T-315 ::=
    ENUMERATED {
        s0, s10, s30, s60, s180,
        s600, s1200, s1800 }

T-316 ::=
    ENUMERATED {
        s0, s10, s20, s30, s40,
        s50, s-inf }

T-317 ::=
    ENUMERATED {
        s0, s10, s30, s60, s180,
        s600, s1200, s1800 }

T-CPCH ::=
    ENUMERATED {
        ct0, ct1 }

TMSI-and-LAI-GSM-MAP ::=
    tmsi
    lai
    }
    SEQUENCE {
        TMSI-GSM-MAP,
        LAI
    }

TMSI-DS-41 ::=
    OCTET STRING (SIZE (2..12))

TotalRLC-AM-BufferSize ::=
    ENUMERATED {
        kb2, kb10, kb50, kb100,
        kb150, kb500, kb1000 }

-- Actual value = IE value * 0.125
TransmissionProbability ::=
    INTEGER (1..8)

TransportChannelCapability ::=
    dl-TransChCapability
    ul-TransChCapability
    }
    SEQUENCE {
        DL-TransChCapability,
        UL-TransChCapability
    }

TurboSupport ::=
    notSupported
    supported
    }
    CHOICE {
        NULL,
        MaxNoBits
    }

TxRxFrequencySeparation ::=
    ENUMERATED {
        mhz190, mhz174-8-205-2,
        mhz134-8-245-2 }

U-RNTI ::=
    srnc-Identity
    s-RNTI
    }
    SEQUENCE {
        SRNC-Identity,
        S-RNTI
    }

U-RNTI-Short ::=
    srnc-Identity
    s-RNTI-2
    }
    SEQUENCE {
        SRNC-Identity,
        S-RNTI-2
    }

UE-ConnTimersAndConstants ::=
    SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
    t-301
    n-301
    t-302
    }
    T-301
    N-301
    T-302
    }
    DEFAULT ms2000,
    DEFAULT 2,
    DEFAULT ms4000,

```

n-302	N-302	DEFAULT 3,
t-304	T-304	OPTIONAL,
n-304	N-304	OPTIONAL,
t-305	T-305	DEFAULT m30,
t-307	T-307	DEFAULT s30,
t-308	T-308	OPTIONAL,
t-309	T-309	OPTIONAL,
t-310	T-310	DEFAULT ms160,
n-310	N-310	DEFAULT 4,
t-311	T-311	DEFAULT ms2000,
t-312	T-312	DEFAULT 1,
n-312	N-312	DEFAULT s1,
t-313	T-313	OPTIONAL,
n-313	N-313	OPTIONAL,
t-314	T-314	OPTIONAL,
t-315	T-315	OPTIONAL,
n-315	N-315	OPTIONAL,
t-316	T-316	OPTIONAL,
t-317	T-317	OPTIONAL
}		
UE-IdleTimersAndConstants ::=	SEQUENCE {	
t-300	T-300,	
n-300	N-300,	
t-312	T-312,	
n-312	N-312	
}		
UE-MultiModeRAT-Capability ::=	SEQUENCE {	
multiRAT-CapabilityList	MultiRAT-Capability,	
multiModeCapability	MultiModeCapability	
}		
UE-PowerClass ::=	INTEGER (1..4)	
UE-RadioAccessCapability ::=	SEQUENCE {	
ics-Version	ICS-Version,	
pdcp-Capability	PDCP-Capability,	
rlc-Capability	RLC-Capability,	
transportChannelCapability	TransportChannelCapability,	
rf-Capability	RF-Capability,	
physicalChannelCapability	PhysicalChannelCapability,	
ue-MultiModeRAT-Capability	UE-MultiModeRAT-Capability,	
securityCapability	SecurityCapability,	
up-Capability	UP-Capability,	
measurementCapability	MeasurementCapability	OPTIONAL
}		
UL-PhysChCapabilityFDD ::=	SEQUENCE {	
maxNoDPDCH-BitsTransmitted	MaxNoDPDCH-BitsTransmitted,	
supportOfPCPCH	BOOLEAN	
}		
UL-PhysChCapabilityTDD ::=	SEQUENCE {	
maxTS-PerFrame	MaxTS-PerFrame,	
maxPhysChPerTimeslot	MaxPhysChPerTimeslot,	
minimumSF	MinimumSF-UL,	
supportOfPUSCH	BOOLEAN	
}		
UL-TransChCapability ::=	SEQUENCE {	
maxNoBitsTransmitted	MaxNoBits,	
maxConvCodeBitsTransmitted	MaxNoBits,	
turboDecodingSupport	TurboSupport,	
maxSimultaneousTransChs	MaxSimultaneousTransChsUL,	
modeSpecificInfo	CHOICE {	
fdd	NULL,	
tdd	SEQUENCE {	
maxSimultaneousCCTrCH-Count	MaxSimultaneousCCTrCH-Count	
}		
},		
maxTransmittedBlocks	MaxTransportBlocksUL,	
maxNumberOfTFC-InTFCS	MaxNumberOfTFC-InTFCS-UL,	
maxNumberOfTF	MaxNumberOfTF	
}		
UP-Capability ::=	SEQUENCE {	
standaloneLocMethodsSupported	BOOLEAN,	
ue-BasedOTDOA-Supported	BOOLEAN,	
networkAssistedGPS-Supported	NetworkAssistedGPS-Supported,	
gps-ReferenceTimeCapable	BOOLEAN,	
supportForIDL	BOOLEAN	
}		



```

URA-UpdateCause ::=
    ENUMERATED {
        changeOfURA,
        periodicURAUpdate,
        re-enteredServiceArea,
        spare1 }

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::=
    INTEGER (0..15)

-- *****
--
-- RADIO BEARER INFORMATION ELEMENTS (10.3.4)
--
-- *****

AlgorithmSpecificInfo ::=
    CHOICE {
        rfc2507-Info
        RFC2507-Info
    }

-- Upper limit is 2^32 - 1
COUNT-C ::=
    INTEGER (0..4294967295)

-- Upper limit is 2^25 - 1
COUNT-C-MSB ::=
    INTEGER (0..33554431)

DL-AM-RLC-Mode ::=
    SEQUENCE {
        inSequenceDelivery
        receivingWindowSize
        dl-RLC-StatusInfo
    }

DL-LogicalChannelMapping ::=
    SEQUENCE {
        -- TABULAR: DL-TransportChannelType contains TransportChannelIdentity as well.
        dl-TransportChannelType
        logicalChannelIdentity
        LogicalChannelIdentity
    }
    OPTIONAL

DL-LogicalChannelMappingList ::=
    SEQUENCE (SIZE (1..maxLoCHperRLC)) OF
        DL-LogicalChannelMapping

DL-RLC-Mode ::=
    CHOICE {
        dl-AM-RLC-Mode
        dl-UM-RLC-Mode
        dl-TM-RLC-Mode
    }

DL-RLC-StatusInfo ::=
    SEQUENCE {
        timerStatusProhibit
        timerEPC
        missingPU-Indicator
        timerStatusPeriodic
    }
    OPTIONAL,
    OPTIONAL,
    OPTIONAL

DL-TM-RLC-Mode ::=
    SEQUENCE {
        segmentationIndication
        BOOLEAN
    }

DL-TransportChannelType ::=
    CHOICE {
        dch
        fach
        dsch
        TransportChannelIdentity,
        NULL,
        TransportChannelIdentity
    }

ExpectReordering ::=
    ENUMERATED {
        reorderingNotExpected,
        reorderingExpected }

ExplicitDiscard ::=
    SEQUENCE {
        timerMRW
        timerDiscard
        maxMRW
    }

HeaderCompressionInfo ::=
    SEQUENCE {
        algorithmSpecificInfo
        AlgorithmSpecificInfo
    }

HeaderCompressionInfoList ::=
    SEQUENCE (SIZE (1..maxPDCPALgoType)) OF
        HeaderCompressionInfo

```

```

LogicalChannelIdentity ::=          INTEGER (1..15)

LosslessSRNS-RelocSupport ::=     CHOICE {
    supported                      MaxPDCP-SN-WindowSize,
    notSupported                    NULL
}

MAC-LogicalChannelPriority ::=     INTEGER (1..8)

MaxDAT ::=                         ENUMERATED {
    dat1, dat2, dat3, dat4, dat5, dat6,
    dat7, dat8, dat9, dat10, dat15, dat20,
    dat25, dat30, dat35, dat40 }

MaxDAT-Retransmissions ::=        SEQUENCE {
    maxDAT                          MaxDAT,
    timerMRW                        TimerMRW,
    maxMRW                          MaxMRW
}

MaxMRW ::=                         ENUMERATED {
    mm1, mm4, mm6, mm8, mm12, mm16,
    mm24, mm32 }

MaxPDCP-SN-WindowSize ::=         ENUMERATED {
    sn255, sn65535 }

MaxRST ::=                         ENUMERATED {
    rst1, rst4, rst6, rst8, rst12,
    rst16, rst24, rst32 }

NoExplicitDiscard ::=            ENUMERATED {
    dt10, dt20, dt30, dt40, dt50,
    dt60, dt70, dt80, dt90, dt100 }

PDCP-Info ::=                    SEQUENCE {
    losslessSRNS-RelocSupport      LosslessSRNS-RelocSupport      OPTIONAL,
    pdcp-PDU-Header                PDCP-PDU-Header,
    -- TABULAR: The IE above is MD in the tabular format and it can be encoded
    -- in one bit, so the OPTIONAL is removed for compactness.
    headerCompressionInfoList      HeaderCompressionInfoList      OPTIONAL
}

PDCP-InfoReconfig ::=            SEQUENCE {
    pdcp-Info                      PDCP-Info,
    pdcp-SN-Info                  PDCP-SN-Info
}

PDCP-PDU-Header ::=              ENUMERATED {
    present, absent }

PDCP-SN-Info ::=                 INTEGER (0..65535)

Poll-PU ::=                       ENUMERATED {
    pu1, pu2, pu4, pu8, pu16,
    pu32, pu64, pu128 }

Poll-SDU ::=                      ENUMERATED {
    sdu1, sdu4, sdu16, sdu64 }

PollingInfo ::=                  SEQUENCE {
    timerPollProhibit              TimerPollProhibit              OPTIONAL,
    timerPoll                      TimerPoll                        OPTIONAL,
    poll-PU                        Poll-PU                        OPTIONAL,
    poll-SDU                       Poll-SDU                       OPTIONAL,
    lastTransmissionPU-Poll        BOOLEAN,
    lastRetransmissionPU-Poll      BOOLEAN,
    pollWindow                     PollWindow                     OPTIONAL,
    timerPollPeriodic              TimerPollPeriodic              OPTIONAL
}

PollWindow ::=                   ENUMERATED {
    pw50, pw60, pw70, pw80, pw85,
    pw90, pw95, pw99 }

PredefinedConfigIdentity ::=     INTEGER (0..15)

PredefinedConfigValueTag ::=     INTEGER (0..15)

PredefinedRB-Configuration ::=   SEQUENCE {
    srb-InformationList            SRB-InformationSetupList,
    rb-InformationList             RB-InformationSetupList
}

```

```

PreDefRadioConfiguration ::= SEQUENCE {
  -- User equipment IEs
  re-EstablishmentTimer      Re-EstablishmentTimer,
  -- Radio bearer IEs
  predefinedRB-Configuration  PredefinedRB-Configuration,
  -- Transport channel IEs
  preDefTransChConfiguration PreDefTransChConfiguration,
  -- Physical channel IEs
  preDefPhyChConfiguration   PreDefPhyChConfiguration
}

RAB-Info ::= SEQUENCE {
  rab-Identity      RAB-Identity,
  cn-DomainIdentity CN-DomainIdentity,
  nas-Synchronisation-Indicator NAS-Synchronisation-Indicator OPTIONAL,
  re-EstablishmentTimer Re-EstablishmentTimer
}

RAB-InformationList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
  RAB-Info

RAB-InformationReconfigList ::= SEQUENCE (SIZE (1.. maxRABsetup)) OF
  RAB-InformationReconfig

RAB-InformationReconfig ::= SEQUENCE {
  rab-Identity      RAB-Identity,
  cn-DomainIdentity CN-DomainIdentity,
  nas-Synchronisation-Indicator NAS-Synchronisation-Indicator
}

RAB-Info-Post ::= SEQUENCE {
  rab-Identity      RAB-Identity,
  cn-DomainIdentity CN-DomainIdentity,
  nas-Synchronisation-Indicator NAS-Synchronisation-Indicator OPTIONAL
}

RAB-InformationSetup ::= SEQUENCE {
  rab-Info      RAB-Info,
  rb-InformationSetupList RB-InformationSetupList
}

RAB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
  RAB-InformationSetup

RB-ActivationTimeInfo ::= SEQUENCE {
  rb-Identity      RB-Identity,
  rlc-SequenceNumber RLC-SequenceNumber
}

RB-ActivationTimeInfoList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-ActivationTimeInfo

RB-COUNT-C-Information ::= SEQUENCE {
  rb-Identity      RB-Identity,
  count-C-UL      COUNT-C,
  count-C-DL      COUNT-C
}

RB-COUNT-C-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
  RB-COUNT-C-Information

RB-COUNT-C-MSB-Information ::= SEQUENCE {
  rb-Identity      RB-Identity,
  count-C-MSB-UL  COUNT-C-MSB,
  count-C-MSB-DL  COUNT-C-MSB
}

RB-COUNT-C-MSB-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
  RB-COUNT-C-MSB-Information

RB-Identity ::= INTEGER (1..32)

RB-IdentityList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-Identity

RB-InformationAffected ::= SEQUENCE {
  rb-Identity      RB-Identity,
  rb-MappingInfo  RB-MappingInfo
}

RB-InformationAffectedList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-InformationAffected

```

```

RB-InformationReconfig ::=          SEQUENCE {
    rb-Identity                      RB-Identity,
    pdcp-Info                        PDCP-InfoReconfig          OPTIONAL,
    rlc-Info                          RLC-Info                    OPTIONAL,
    rb-MappingInfo                    RB-MappingInfo            OPTIONAL,
    rb-StopContinue                    RB-StopContinue          OPTIONAL
}

RB-InformationReconfigList ::=      SEQUENCE (SIZE (1..maxRB)) OF
    RB-InformationReconfig

RB-InformationReleaseList ::=      SEQUENCE (SIZE (1..maxRB)) OF
    RB-Identity

RB-InformationSetup ::=            SEQUENCE {
    rb-Identity                      RB-Identity,
    pdcp-Info                        PDCP-Info                    OPTIONAL,
    rlc-Info                          RLC-Info,
    rb-MappingInfo                    RB-MappingInfo
}

RB-InformationSetupList ::=        SEQUENCE (SIZE (1..maxRBperRAB)) OF
    RB-InformationSetup

RB-MappingInfo ::=                SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
    RB-MappingOption

RB-MappingOption ::=              SEQUENCE {
    ul-LogicalChannelMappings        UL-LogicalChannelMappings    OPTIONAL,
    dl-LogicalChannelMappingList     DL-LogicalChannelMappingList OPTIONAL
}

RB-StopContinue ::=               ENUMERATED {
    stopRB, continueRB }

RB-WithPDCP-Info ::=              SEQUENCE {
    rb-Identity                      RB-Identity,
    pdcp-SN-Info                     PDCP-SN-Info
}

RB-WithPDCP-InfoList ::=          SEQUENCE (SIZE (1..maxRBallRABs)) OF
    RB-WithPDCP-Info

ReceivingWindowSize ::=           ENUMERATED {
    rw1, rw8, rw16, rw32, rw64, rw128, rw256,
    rw512, rw768, rw1024, rw1536, rw2047,
    rw2560, rw3072, rw3584, rw4095 }

RFC2507-Info ::=                 SEQUENCE {
    f-MAX-PERIOD                      INTEGER (1..65535)           DEFAULT 256,
    f-MAX-TIME                        INTEGER (1..255)             DEFAULT 5,
    max-HEADER                        INTEGER (60..65535)         DEFAULT 168,
    tcp-SPACE                          INTEGER (3..255)            DEFAULT 15,
    non-TCP-SPACE                     INTEGER (3..65535)         DEFAULT 15,
    expectReordering                  ExpectReordering
    -- TABULAR: The IE above has only two possible values, so using Optional or Default
    -- would be wasteful
}

RLC-Info ::=                      SEQUENCE {
    ul-RLC-Mode                       UL-RLC-Mode                 OPTIONAL,
    dl-RLC-Mode                       DL-RLC-Mode                 OPTIONAL
}

RLC-SequenceNumber ::=            INTEGER (0..4095)

RLC-SizeInfo ::=                  SEQUENCE {
    rlc-SizeIndex                     INTEGER (1..maxTF)
}

RLC-SizeExplicitList ::=          SEQUENCE (SIZE (1..maxTF)) OF
    RLC-SizeInfo

SRB-InformationSetup ::=           SEQUENCE {
    rb-Identity                      RB-Identity                    OPTIONAL,
    -- The default value for the IE above is the smallest value not used yet.
    rlc-Info                          RLC-Info,
    rb-MappingInfo                    RB-MappingInfo
}

SRB-InformationSetupList ::=      SEQUENCE (SIZE (1..maxSRBsetup)) OF
    SRB-InformationSetup

```

```

SRB-InformationSetupList2 ::= SEQUENCE (SIZE (3..4)) OF
    SRB-InformationSetup

TimerDiscard ::= ENUMERATED {
    td0-1, td0-25, td0-5, td0-75,
    td1, td1-25, td1-5, td1-75,
    td2, td2-5, td3, td3-5, td4,
    td4-5, td5, td7-5 }

TimerEPC ::= ENUMERATED {
    te50, te60, te70, te80, te90,
    te100, te120, te140, te160, te180,
    te200, te300, te400, te500, te700,
    te900 }

TimerMRW ::= ENUMERATED {
    te50, te60, te70, te80, te90, te100,
    te120, te140, te160, te180, te200,
    te300, te400, te500, te700, te900 }

TimerPoll ::= ENUMERATED {
    tp10, tp20, tp30, tp40, tp50,
    tp60, tp70, tp80, tp90, tp100,
    tp110, tp120, tp130, tp140, tp150,
    tp160, tp170, tp180, tp190, tp200,
    tp210, tp220, tp230, tp240, tp250,
    tp260, tp270, tp280, tp290, tp300,
    tp310, tp320, tp330, tp340, tp350,
    tp360, tp370, tp380, tp390, tp400,
    tp410, tp420, tp430, tp440, tp450,
    tp460, tp470, tp480, tp490, tp500,
    tp510, tp520, tp530, tp540, tp550,
    tp600, tp650, tp700, tp750, tp800,
    tp850, tp900, tp950, tp1000 }

TimerPollPeriodic ::= ENUMERATED {
    tper100, tper200, tper300, tper400,
    tper500, tper750, tper1000, tper2000 }

TimerPollProhibit ::= ENUMERATED {
    tpp10, tpp20, tpp30, tpp40, tpp50,
    tpp60, tpp70, tpp80, tpp90, tpp100,
    tpp110, tpp120, tpp130, tpp140, tpp150,
    tpp160, tpp170, tpp180, tpp190, tpp200,
    tpp210, tpp220, tpp230, tpp240, tpp250,
    tpp260, tpp270, tpp280, tpp290, tpp300,
    tpp310, tpp320, tpp330, tpp340, tpp350,
    tpp360, tpp370, tpp380, tpp390, tpp400,
    tpp410, tpp420, tpp430, tpp440, tpp450,
    tpp460, tpp470, tpp480, tpp490, tpp500,
    tpp510, tpp520, tpp530, tpp540, tpp550,
    tpp600, tpp650, tpp700, tpp750, tpp800,
    tpp850, tpp900, tpp950, tpp1000 }

TimerRST ::= ENUMERATED {
    tr50, tr100, tr150, tr200, tr250, tr300,
    tr350, tr400, tr450, tr500, tr550,
    tr600, tr700, tr800, tr900, tr1000 }

TimerStatusPeriodic ::= ENUMERATED {
    tsp100, tsp200, tsp300, tsp400, tsp500,
    tsp750, tsp1000, tsp2000 }

TimerStatusProhibit ::= ENUMERATED {
    tsp10, tsp20, tsp30, tsp40, tsp50,
    tsp60, tsp70, tsp80, tsp90, tsp100,
    tsp110, tsp120, tsp130, tsp140, tsp150,
    tsp160, tsp170, tsp180, tsp190, tsp200,
    tsp210, tsp220, tsp230, tsp240, tsp250,
    tsp260, tsp270, tsp280, tsp290, tsp300,
    tsp310, tsp320, tsp330, tsp340, tsp350,
    tsp360, tsp370, tsp380, tsp390, tsp400,
    tsp410, tsp420, tsp430, tsp440, tsp450,
    tsp460, tsp470, tsp480, tsp490, tsp500,
    tsp510, tsp520, tsp530, tsp540, tsp550,
    tsp600, tsp650, tsp700, tsp750, tsp800,
    tsp850, tsp900, tsp950, tsp1000 }

TransmissionRLC-Discard ::= CHOICE {
    timerBasedExplicit      ExplicitDiscard,
    timerBasedNoExplicit    NoExplicitDiscard,
    maxDAT-Retransmissions MaxDAT-Retransmissions,
    noDiscard               MaxDAT
}

```

```

}

TransmissionWindowSize ::=          ENUMERATED {
    tw1, tw8, tw16, tw32, tw64, tw128, tw256,
    tw512, tw768, tw1024, tw1536, tw2047,
    tw2560, tw3072, tw3584, tw4095 }

UL-AM-RLC-Mode ::=                 SEQUENCE {
    transmissionRLC-Discard          TransmissionRLC-Discard,
    transmissionWindowSize           TransmissionWindowSize,
    timerRST                         TimerRST,
    max-RST                          MaxRST,
    pollingInfo                      PollingInfo
}

UL-LogicalChannelMapping ::=       SEQUENCE {
    -- TABULAR: UL-TransportChannelType contains TransportChannelIdentity as well.
    ul-TransportChannelType          UL-TransportChannelType,
    logicalChannelIdentity            LogicalChannelIdentity          OPTIONAL,
    rlc-SizeList                     CHOICE {
        allSizes                     NULL,
        configured                   NULL,
        explicitList                 RLC-SizeExplicitList
    },
    mac-LogicalChannelPriority        MAC-LogicalChannelPriority
}

UL-LogicalChannelMappingList ::=   SEQUENCE {
    rlc-LogicalChannelMappingIndicator  BOOLEAN,
    ul-LogicalChannelMapping            SEQUENCE (SIZE (maxLoChperRLC)) OF
                                        UL-LogicalChannelMapping
}

UL-LogicalChannelMappings ::=      CHOICE {
    oneLogicalChannel                 UL-LogicalChannelMapping,
    twoLogicalChannels                 UL-LogicalChannelMappingList
}

UL-RLC-Mode ::=                   CHOICE {
    ul-AM-RLC-Mode                   UL-AM-RLC-Mode,
    ul-UM-RLC-Mode                   UL-UM-RLC-Mode,
    ul-TM-RLC-Mode                   UL-TM-RLC-Mode,
    spare                             NULL
}

UL-TM-RLC-Mode ::=                SEQUENCE {
    transmissionRLC-Discard           TransmissionRLC-Discard          OPTIONAL,
    segmentationIndication            BOOLEAN
}

UL-UM-RLC-Mode ::=                SEQUENCE {
    transmissionRLC-Discard           TransmissionRLC-Discard          OPTIONAL
}

UL-TransportChannelType ::=        CHOICE {
    dch                               TransportChannelIdentity,
    rach                              NULL,
    cpch                              NULL,
    usch                              NULL
}

-- *****
--
--     TRANSPORT CHANNEL INFORMATION ELEMENTS (10.3.5)
--
-- *****

AllowedTFC-List ::=                SEQUENCE (SIZE (1..maxTFC)) OF
    TFC-Value

AllowedTFI-List ::=                SEQUENCE (SIZE (1..maxTF)) OF
    INTEGER (0..31)

BitModeRLC-SizeInfo ::=            CHOICE {
    sizeType1                        INTEGER (1..127),
    sizeType2                        SEQUENCE {
        part1                        INTEGER (0..15),
        part2                        INTEGER (1..7)          OPTIONAL
    },
    -- Actual size = (part1 * 8) + 128 + part2
    sizeType3                        SEQUENCE {
        part1                        INTEGER (0..47),

```

```

        part2                INTEGER (1..15)                OPTIONAL
        -- Actual size = (part1 * 16) + 256 + part2
    },
    sizeType4                SEQUENCE {
        part1                INTEGER (0..62),
        part2                INTEGER (1..63)                OPTIONAL
        -- Actual size = (part1 * 64) + 1024 + part2
    }
}
-- Actual value = IE value * 0.1
BLER-QualityValue ::=      INTEGER (-63..0)

ChannelCodingType ::=      CHOICE {
    noCoding                 NULL,
    convolutional            CodingRate,
    turbo                   NULL
}

CodingRate ::=              ENUMERATED {
    half,
    third }

CommonDynamicTF-Info ::=   SEQUENCE {
    rlc-Size                 CHOICE {
        fdd                 SEQUENCE {
            octetModeRLC-SizeInfoType2    OctetModeRLC-SizeInfoType2
        },
        tdd                 SEQUENCE {
            commonTDD-Choice    CHOICE {
                bitModeRLC-SizeInfo    BitModeRLC-SizeInfo,
                octetModeRLC-SizeInfoType1    OctetModeRLC-SizeInfoType1
            }
        }
    },
    numberOfTbSizeList       SEQUENCE (SIZE (1..maxTF)) OF
        NumberOfTransportBlocks,
    logicalChannelList       LogicalChannelList
}

CommonDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    commonTDD-Choice         CHOICE {
        bitModeRLC-SizeInfo    BitModeRLC-SizeInfo,
        octetModeRLC-SizeInfoType1    OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeAndTTIList    NumberOfTbSizeAndTTIList,
    logicalChannelList         LogicalChannelList
}

CommonDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
    CommonDynamicTF-Info

CommonDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    CommonDynamicTF-Info-DynamicTTI

CommonTransChTFS ::=      SEQUENCE {
    tti                     CHOICE {
        tti10                CommonDynamicTF-InfoList,
        tti20                CommonDynamicTF-InfoList,
        tti40                CommonDynamicTF-InfoList,
        tti80                CommonDynamicTF-InfoList,
        dynamic              CommonDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information    SemistaticTF-Information
}

CPCH-SetID ::=            INTEGER (1..maxCPCHsets)

CRC-Size ::=              ENUMERATED {
    crc0, crc8, crc12, crc16, crc24 }

DedicatedDynamicTF-Info ::= SEQUENCE {
    rlc-Size                 CHOICE {
        bitMode              BitModeRLC-SizeInfo,
        octetModeType1       OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeList       SEQUENCE (SIZE (1..maxTF)) OF
        NumberOfTransportBlocks,
    logicalChannelList       LogicalChannelList
}

DedicatedDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    rlc-Size                 CHOICE {
        bitMode              BitModeRLC-SizeInfo,

```

```

    octetModeType1                               OctetModeRLC-SizeInfoType1
  },
  numberOfTbSizeAndTTIList                       NumberOfTbSizeAndTTIList,
  logicalChannelList                             LogicalChannelList
}

DedicatedDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info

DedicatedDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info-DynamicTTI

DedicatedTransChTFS ::= SEQUENCE {
    tti CHOICE {
        tti10 DedicatedDynamicTF-InfoList,
        tti20 DedicatedDynamicTF-InfoList,
        tti40 DedicatedDynamicTF-InfoList,
        tti80 DedicatedDynamicTF-InfoList,
        dynamic DedicatedDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information SemistaticTF-Information
}

DL-AddReconfTransChInfo2List ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation2

DL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of messages other than: Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation ::= SEQUENCE {
    dl-transportChannelIdentity TransportChannelIdentity,
    tfs-SignallingMode CHOICE {
        explicit TransportFormatSet,
        sameAsULTrCH TransportChannelIdentity
    },
    dch-QualityTarget QualityTarget OPTIONAL,
    tm-SignallingInfo TM-SignallingInfo OPTIONAL
}

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation2 ::= SEQUENCE {
    transportChannelIdentity TransportChannelIdentity,
    tfs-SignallingMode CHOICE {
        explicit TransportFormatSet,
        sameAsULTrCH TransportChannelIdentity
    },
    qualityTarget QualityTarget OPTIONAL
}

DL-CommonTransChInfo ::= SEQUENCE {
    sccpch-TFCS TFCS OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            tfs-SignallingMode CHOICE {
                explicit TFCS,
                sameAsUL NULL
            } OPTIONAL,
            tdd SEQUENCE {
                individualDL-CCTrCH-InfoList IndividualDL-CCTrCH-InfoList OPTIONAL
            }
        }
    }
}

DL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

DRAC-ClassIdentity ::= INTEGER (1..maxDRACclasses)

DRAC-StaticInformation ::= SEQUENCE {
    transmissionTimeValidity TransmissionTimeValidity,
    timeDurationBeforeRetry TimeDurationBeforeRetry,
    drac-ClassIdentity DRAC-ClassIdentity
}

DRAC-StaticInformationList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DRAC-StaticInformation

```



```

ExplicitTFCS-Configuration ::= CHOICE {
  complete
  addition
  removal
  replacement
    tfcsRemoval
    tfcsAdd
  }
}

GainFactor ::= INTEGER (0..15)

GainFactorInformation ::= CHOICE {
  signalledGainFactors
  computedGainFactors
}

IndividualDL-CCTrCH-Info ::= SEQUENCE {
  dl-TFCS-Identity
  tfcs-SignallingMode
    explicit
    sameAsUL
  }
}

IndividualDL-CCTrCH-InfoList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
  IndividualDL-CCTrCH-Info

IndividualUL-CCTrCH-Info ::= SEQUENCE {
  ul-TFCS-Identity
  ul-TFCS
}

IndividualUL-CCTrCH-InfoList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
  IndividualUL-CCTrCH-Info

LogicalChannelByRB ::= SEQUENCE {
  rb-Identity
  logChOfRb
  }
}

LogicalChannelList ::= CHOICE {
  allSizes
  configured
  explicitList
  }

NumberOfTbSizeAndTTIList ::= SEQUENCE (SIZE (1..maxTF)) OF SEQUENCE {
  numberOfTransportBlocks
  transmissionTimeInterval
}

MessType ::= ENUMERATED {
  transportFormatCombinationControl }

Non-allowedTFC-List ::= SEQUENCE (SIZE (1..maxTFC)) OF
  TFC-Value

NumberOfTransportBlocks ::= CHOICE {
  zero
  one
  small
  large
  }

OctetModeRLC-SizeInfoType1 ::= CHOICE {
  sizeType1
    INTEGER (0..31),
  -- Actual size = (8 * sizeType1) + 16
  sizeType2
    SEQUENCE {
      part1
        INTEGER (0..23),
      part2
        INTEGER (1..3)
    }
    -- Actual size = (32 * part1) + 272 + (part2 * 8)
  },
  sizeType3
    SEQUENCE {
      part1
        INTEGER (0..61),
      part2
        INTEGER (1..7)
    }
    -- Actual size = (64 * part1) + 1040 + (part2 * 8)
  }
}

OctetModeRLC-SizeInfoType2 ::= CHOICE {

```

```

sizeType1                INTEGER (0..31),
-- Actual size = (sizeType1 * 8) + 48
sizeType2                INTEGER (0..63),
-- Actual size = (sizeType2 * 16) + 312
sizeType3                INTEGER (0..56)
-- Actual size = (sizeType3 *64) + 1384
}

PowerOffsetInformation ::=          SEQUENCE {
  gainFactorInformation          GainFactorInformation,
  -- PowerOffsetPp-m is always absent in TDD
  powerOffsetPp-m              PowerOffsetPp-m              OPTIONAL
}

PowerOffsetPp-m ::=              INTEGER (-5..10)

PreDefTransChConfiguration ::=    SEQUENCE {
  ul-CommonTransChInfo         UL-CommonTransChInfo,
  ul-AddReconfTrChInfoList     UL-AddReconfTransChInfoList,
  dl-CommonTransChInfo         DL-CommonTransChInfo,
  dl-TrChInfoList              DL-AddReconfTransChInfoList
}

QualityTarget ::=              SEQUENCE {
  bler-QualityValue            BLER-QualityValue
}

RateMatchingAttribute ::=        INTEGER (1..hIRM)

ReferenceTFC-ID ::=            INTEGER (0..3)

RestrictedTrChInfo ::=          SEQUENCE {
  restrictedTrChIdentity        TransportChannelIdentity,
  allowedTFI-List              AllowedTFI-List              OPTIONAL
}

RestrictedTrChInfoList ::=       SEQUENCE (SIZE (1..maxTrCH)) OF
  RestrictedTrChInfo

SemistaticTF-Information ::=     SEQUENCE {
  -- TABULAR: Transmission time interval has been included in the IE CommonTransChTFS.
  channelCodingType            ChannelCodingType,
  rateMatchingAttribute        RateMatchingAttribute,
  crc-Size                     CRC-Size
}

SignalledGainFactors ::=        SEQUENCE {
  modeSpecificInfo             CHOICE {
    fdd                         SEQUENCE {
      gainFactorBetaC           GainFactor
    },
    tdd                         NULL
  },
  gainFactorBetaD              GainFactor,
  referenceTFC-ID              ReferenceTFC-ID              OPTIONAL
}

SplitTFCI-Signalling ::=        SEQUENCE {
  splitType                    SplitType                    OPTIONAL,
  tfci-Field2-Length           INTEGER (1..10)              OPTIONAL,
  tfci-Field1-Information      ExplicitTFCS-Configuration  OPTIONAL,
  tfci-Field2-Information      TFCI-Field2-Information  OPTIONAL
}

SplitType ::=                  ENUMERATED {
  hardSplit, logicalSplit }

TFC-Subset ::=                 CHOICE {
  minimumAllowedTFC-Number     TFC-Value,
  allowedTFC-List              AllowedTFC-List,
  non-allowedTFC-List          Non-allowedTFC-List,
  restrictedTrChInfoList       RestrictedTrChInfoList,
  fullTFCS                     NULL
}

TFC-Value ::=                  INTEGER (0..1023)

TFCI-Field2-Information ::=     CHOICE {
  tfci-Range                   TFCI-RangeList,
  explicit                      ExplicitTFCS-Configuration
}

```

```

TFCI-Range ::=
    maxTFCIField2Value
    tfcs-InfoForDSCH
}

TFCI-RangeList ::=
    SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
        TFCI-Range

TFCS ::=
    normalTFCS-Signalling
    splitTFCS-Signalling
}

TFCS-Identity ::=
    tfcs-ID
    sharedChannelIndicator
}

TFCS-IdentityPlain ::=
    INTEGER (1..8)

TFCS-InfoForDSCH ::=
    ctfc2bit
    ctfc4bit
    ctfc6bit
    ctfc8bit
    ctfc12bit
    ctfc16bit
    ctfc24bit
}

TFCS-ReconfAdd ::=
    ctfcSize
    ctfc2Bit
        ctfc2
        gainFactorInformation
    },
    ctfc4Bit
        ctfc4
        gainFactorInformation
    },
    ctfc6Bit
        ctfc6
        gainFactorInformation
    },
    ctfc8Bit
        ctfc8
        gainFactorInformation
    },
    ctfc12Bit
        ctfc12
        gainFactorInformation
    },
    ctfc16Bit
        ctfc16
        gainFactorInformation
    },
    ctfc24Bit
        ctfc24
        gainFactorInformation
    }
}

TFCS-Removal ::=
    tfci
}

TFCS-RemovalList ::=
    SEQUENCE (SIZE (1..maxTFC)) OF
        TFCI-Removal

TimeDurationBeforeRetry ::=
    INTEGER (1..256)

TM-SignallingInfo ::=
    messType
    tm-SignallingMode
    mode1
    mode2
    ul-controlledTrChList
}

TransmissionTimeInterval ::=
    ENUMERATED {

```

```

SEQUENCE {
    INTEGER (1..1023),
    TFCI-InfoForDSCH
}

SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    TFCI-Range

CHOICE {
    ExplicitTFCS-Configuration,
    SplitTFCS-Signalling
}

SEQUENCE {
    INTEGER (1..8)
    BOOLEAN
    DEFAULT 1,
}

INTEGER (1..8)

CHOICE {
    INTEGER (0..3),
    INTEGER (0..15),
    INTEGER (0..63),
    INTEGER (0..255),
    INTEGER (0..4095),
    INTEGER (0..65535),
    INTEGER (0..16777215)
}

SEQUENCE{
    CHOICE{
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER (0..3),
            PowerOffsetInformation
            OPTIONAL
        },
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER (0..15),
            PowerOffsetInformation
            OPTIONAL
        },
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER (0..63),
            PowerOffsetInformation
            OPTIONAL
        },
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER (0..255),
            PowerOffsetInformation
            OPTIONAL
        },
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER (0..4095),
            PowerOffsetInformation
            OPTIONAL
        },
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER(0..65535),
            PowerOffsetInformation
            OPTIONAL
        },
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER(0..16777215),
            PowerOffsetInformation
            OPTIONAL
        }
    }
}

SEQUENCE {
    INTEGER (0..1023)
}

SEQUENCE (SIZE (1..maxTFC)) OF
    TFCI-Removal

INTEGER (1..256)

SEQUENCE {
    MessType,
    CHOICE {
        NULL,
        SEQUENCE {
            UL-ControlledTrChList
        }
    }
}

ENUMERATED {

```

```

tti10, tti20, tti40, tti80 }

TransmissionTimeValidity ::=      INTEGER (1..256)

TransportChannelIdentity ::=      INTEGER (1..32)

TransportFormatSet ::=            CHOICE {
    dedicatedTransChTFS          DedicatedTransChTFS,
    commonTransChTFS             CommonTransChTFS
}

UL-AddReconfTransChInfoList ::=  SEQUENCE (SIZE (1..maxTrCH)) OF
    UL-AddReconfTransChInformation

UL-AddReconfTransChInformation ::= SEQUENCE {
    transportChannelIdentity      TransportChannelIdentity,
    transportFormatSet            TransportFormatSet
}

UL-CommonTransChInfo ::=         SEQUENCE {
    tfc-Subset                    TFC-Subset                OPTIONAL,
    prach-TFCS                    TFCS                    OPTIONAL,
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            ul-TFCS                TFCS
        },
        tdd                        SEQUENCE {
            individualUL-CCTrCH-InfoList IndividualUL-CCTrCH-InfoList OPTIONAL,
            ul-TFCS                TFCS
        }
    }
}

UL-ControlledTrChList ::=        SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

UL-DeletedTransChInfoList ::=    SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

-- *****
--
--     PHYSICAL CHANNEL INFORMATION ELEMENTS (10.3.6)
--
-- *****

AC-To-ASC-Mapping ::=           INTEGER (0..7)

AC-To-ASC-MappingTable ::=       SEQUENCE (SIZE (maxASCmap)) OF
    AC-To-ASC-Mapping

AccessServiceClass-FDD ::=       SEQUENCE {
    availableSignatureStartIndex   INTEGER (0..15),
    availableSignatureEndIndex     INTEGER (0..15),
    assignedSubChannelNumber       BIT STRING (SIZE(4))
}

AccessServiceClass-TDD ::=       SEQUENCE {
    channelisationCodeIndices      BIT STRING (SIZE(8))                OPTIONAL,
    subchannelSize                 CHOICE {
        size1                       NULL,
        size2                       ENUMERATED (subch0, subch1)    OPTIONAL,
        size4                       BIT STRING (SIZE(4))          OPTIONAL,
        size8                       BIT STRING (SIZE(8))          OPTIONAL
    }
}

AccessServiceClass-TDD-LCR ::=   SEQUENCE {
    AvailableSYNC_ULCodesIndics    BIT STRING (SIZE(8))                OPTIONAL,
    subchannelSize                 CHOICE {
        size1                       NULL,
        size2                       ENUMERATED (subch0, subch1)    OPTIONAL,
        size4                       BIT STRING (SIZE(4))          OPTIONAL,
        size8                       BIT STRING (SIZE(8))          OPTIONAL
    }
}

AccessServiceClassIndex ::=      INTEGER (1..8)

```

```

AICH-Info ::= SEQUENCE {
    channelisationCode256      ChannelisationCode256,
    sttd-Indicator             BOOLEAN,
    aich-TransmissionTiming    AICH-TransmissionTiming
}

AICH-PowerOffset ::= INTEGER (-22..5)

AICH-TransmissionTiming ::= ENUMERATED {
    e0, e1 }

AllocationPeriodInfo ::= SEQUENCE {
    allocationActivationTime    INTEGER (1..256),
    allocationDuration          INTEGER (1..256)
}

Alpha ::= INTEGER (0..8)

AP-AICH-ChannelisationCode ::= INTEGER (0..255)

AP-PreambleScramblingCode ::= INTEGER (0..79)

AP-Signature ::= INTEGER (0..15)

AP-Signature-VCAM ::= SEQUENCE {
    ap-Signature                AP-Signature,
    availableAP-SubchannelList  AvailableAP-SubchannelList OPTIONAL
}

AP-Subchannel ::= INTEGER (0..11)

ASC ::= SEQUENCE {
    accessServiceClass           AccessServiceClassIndex,
    repetitionPeriodAndOffset    ASC RepetitionPeriodAndOffset OPTIONAL
    -- TABULAR: The offset is nested in the repetition period
}

ASC-RepetitionPeriodAndOffset ::= CHOICE {
    rp1                          NULL,
    rp2                          INTEGER (0..1),
    rp4                          INTEGER (0..3),
    rp8                          INTEGER (0..7)
}

ASCSetting-FDD ::= SEQUENCE {
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available signature and sub-channels
    accessServiceClass-FDD       AccessServiceClass-FDD OPTIONAL
}

ASCSetting-TDD ::= SEQUENCE {
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available channelisation codes and
    -- all available sub-channels with subchannelSize=size1.
    accessServiceClass-TDD       AccessServiceClass-TDD OPTIONAL
}

ASCSetting-TDD-LCR ::= SEQUENCE {
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available SYNC_UL codes and
    -- all available sub-channels with subchannelSize=size1.
    accessServiceClass-TDD-LCR   AccessServiceClass-TDD-LCR OPTIONAL
}

AvailableAP-Signature-VCAMList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
    AP-Signature-VCAM

AvailableAP-SignatureList ::= SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
    AP-Signature

AvailableAP-SubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-APsubCh)) OF
    AP-Subchannel

AvailableMinimumSF-ListVCAM ::= SEQUENCE (SIZE (1..maxPCPCH-SF)) OF
    AvailableMinimumSF-VCAM

AvailableMinimumSF-VCAM ::= SEQUENCE {
    minimumSpreadingFactor      MinimumSpreadingFactor,
    nf-Max                      NF-Max,
    maxAvailablePCPCH-Number     MaxAvailablePCPCH-Number,
}

```

```

    availableAP-Signature-VCAMList    AvailableAP-Signature-VCAMList
}
AvailableSignatures ::=             BIT STRING(SIZE(16))
AvailableSubChannelNumbers ::=      BIT STRING(SIZE(12))
BurstType ::=                       ENUMERATED {
    short1, long2 }
BurstType1 ::=                     ENUMERATED { ms4, ms8, ms16 }
BurstType2 ::=                     ENUMERATED { ms3, ms6 }
CCTrCH-PowerControlInfo ::=        SEQUENCE {
    tfcs-Identity                    TFCS-Identity                    OPTIONAL,
    ul-DPCH-PowerControlInfo        UL-DPCH-PowerControlInfo
}
CD-AccessSlotSubchannel ::=         INTEGER (0..11)
CD-AccessSlotSubchannelList ::=     SEQUENCE (SIZE (1..maxPCPCH-CDsubCh)) OF
    CD-AccessSlotSubchannel
CD-CA-ICH-ChannelisationCode ::=    INTEGER (0..255)
CD-PreambleScramblingCode ::=       INTEGER (0..79)
CD-SignatureCode ::=               INTEGER (0..15)
CD-SignatureCodeList ::=           SEQUENCE (SIZE (1..maxPCPCH-CDsig)) OF
    CD-SignatureCode
CellParametersID ::=               INTEGER (0..127)
Cfntargetsfnframeoffset ::=         INTEGER(0..255)
ChannelAssignmentActive ::=         CHOICE {
    notActive                        NULL,
    isActive                         AvailableMinimumSF-ListVCAM
}
ChannelisationCode256 ::=           INTEGER (0..255)
ChannelReqParamsForUCSM ::=         SEQUENCE {
    availableAP-SignatureList        AvailableAP-SignatureList,
    availableAP-SubchannelList      AvailableAP-SubchannelList      OPTIONAL
}
ClosedLoopTimingAdjMode ::=        ENUMERATED {
    slot1, slot2 }
CodeNumberDSCH ::=                 INTEGER (0..255)
CodeRange ::=                       SEQUENCE {
    pdsch-CodeMapList               PDSCH-CodeMapList,
    codeNumberStart                  CodeNumberDSCH,
    codeNumberStop                   CodeNumberDSCH
}
CodeWordSet ::=                    ENUMERATED {
    longCWS,
    mediumCWS,
    shortCWS,
    ssdtOff }
CommonTimeslotInfo ::=             SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode          SecondInterleavingMode,
    tfci-Coding                     TFCSI-Coding                    OPTIONAL,
    puncturingLimit                 PuncturingLimit,
    repetitionPeriodAndLength       RepetitionPeriodAndLength      OPTIONAL
}
CommonTimeslotInfoSCCPCH ::=       SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode          SecondInterleavingMode,
    tfci-Coding                     TFCSI-Coding                    OPTIONAL,
    puncturingLimit                 PuncturingLimit,
    repetitionPeriodLengthAndOffset  RepetitionPeriodLengthAndOffset  OPTIONAL
}

```

```

ConstantValue ::=                               INTEGER (-35..10)

CPCH-PersistenceLevels ::=                     SEQUENCE {
  cpch-SetID                                   CPCH-SetID,
  dynamicPersistenceLevelTF-List              DynamicPersistenceLevelTF-List
}

CPCH-PersistenceLevelsList ::=                 SEQUENCE (SIZE (1..maxCPCHsets)) OF
  CPCH-PersistenceLevels

CPCH-SetInfo ::=                               SEQUENCE {
  cpch-SetID                                   CPCH-SetID,
  transportFormatSet                           TransportFormatSet,
  tfcs                                         TFCS,
  ap-PreambleScramblingCode                   AP-PreambleScramblingCode,
  ap-AICH-ChannelisationCode                  AP-AICH-ChannelisationCode,
  cd-PreambleScramblingCode                   CD-PreambleScramblingCode,
  cd-CA-ICH-ChannelisationCode                CD-CA-ICH-ChannelisationCode,
  cd-AccessSlotSubchannelList                 CD-AccessSlotSubchannelList      OPTIONAL,
  cd-SignatureCodeList                       CD-SignatureCodeList             OPTIONAL,
  deltaPp-m                                   DeltaPp-m,
  ul-DPCCH-SlotFormat                         UL-DPCCH-SlotFormat,
  n-StartMessage                             N-StartMessage,
  n-EOT                                       N-EOT,
  channelAssignmentActive                     ChannelAssignmentActive,
  -- TABULAR: VCAM info has been nested inside ChannelAssignmentActive,
  -- which in turn is mandatory since it's only a binary choice.
  cpch-StatusIndicationMode                  CPCH-StatusIndicationMode,
  pcpcch-ChannelInfoList                     PCPCH-ChannelInfoList
}

CPCH-SetInfoList ::=                           SEQUENCE (SIZE (1..maxCPCHsets)) OF
  CPCH-SetInfo

CPCH-StatusIndicationMode ::=                 ENUMERATED {
  pa-mode,
  pamsf-mode }

CSICH-PowerOffset ::=                         INTEGER (-10..5)

-- DefaultDPCH-OffsetValueFDD and DefaultDPCH-OffsetValueTDD corresponds to
-- IE "Default DPCH Offset Value" depending on the mode.
-- Actual value = IE value * 512
DefaultDPCH-OffsetValueFDD ::=                 INTEGER (0..599)

DefaultDPCH-OffsetValueTDD ::=                 INTEGER (0..7)

DeltaPp-m ::=                                 INTEGER (-10..10)

-- Actual value = IE value * 0.1
DeltaSIR ::=                                  INTEGER (0..30)

DL-CCTrCh ::=                                 SEQUENCE {
  tfcs-Identity                               TFCS-IdentityPlain              OPTIONAL,
  timeInfo                                    TimeInfo,
  dl-CCTrCH-TimeslotsCodes                   DownlinkTimeslotsCodes          OPTIONAL,
  ul-CCTrChTPCList                           UL-CCTrChTPCList               OPTIONAL
}

DL-CCTrChList ::=                             SEQUENCE (SIZE (1..maxCCTrCH)) OF
  DL-CCTrCh

DL-ChannelisationCode ::=                     SEQUENCE {
  secondaryScramblingCode                     SecondaryScramblingCode          OPTIONAL,
  sf-AndCodeNumber                           SF512-AndCodeNumber,
  scramblingCodeChange                        ScramblingCodeChange            OPTIONAL
}

DL-ChannelisationCodeList ::=                 SEQUENCE (SIZE (1..maxDPCH-DLchan)) OF
  DL-ChannelisationCode

DL-CommonInformation ::=                      SEQUENCE {
  dl-DPCH-InfoCommon                          DL-DPCH-InfoCommon              OPTIONAL,
  modeSpecificInfo                             CHOICE {
    fdd                                         SEQUENCE {
      defaultDPCH-OffsetValue                   DefaultDPCH-OffsetValueFDD      OPTIONAL,
      dpch-CompressedModeInfo                   DPCH-CompressedModeInfo        OPTIONAL,
      tx-DiversityMode                           TX-DiversityMode                OPTIONAL,
      ssdt-Information                           SSDT-Information                OPTIONAL
    },
    tdd                                         SEQUENCE {
      defaultDPCH-OffsetValue                   DefaultDPCH-OffsetValueTDD      OPTIONAL
    }
  }
}

```

```

    }
  }
}

DL-CommonInformationPost ::=          SEQUENCE {
  dl-DPCH-InfoCommon                  DL-DPCH-InfoCommonPost
}

DL-CommonInformationPredef ::=        SEQUENCE {
  dl-DPCH-InfoCommon                  DL-DPCH-InfoCommonPredef    OPTIONAL,
  modeSpecificInfo                    CHOICE {
    fdd                                SEQUENCE {
      defaultDPCH-OffsetValue          DefaultDPCH-OffsetValueFDD
    },
    tdd                                SEQUENCE {
      defaultDPCH-OffsetValue          DefaultDPCH-OffsetValueTDD
    }
  }
}

DL-CompressedModeMethod ::=           ENUMERATED {
  puncturing, sf-2,
  higherLayerScheduling }

DL-DPCH-InfoCommon ::=                SEQUENCE {
  cfnHandling                          CHOICE {
    maintain                            NULL,
    initialise                          SEQUENCE {
      cfnTargetsfnframeoffset          CfnTargetsfnframeoffset    OPTIONAL
    }
  },
  modeSpecificInfo                    CHOICE {
    fdd                                SEQUENCE {
      dl-DPCH-PowerControlInfo          DL-DPCH-PowerControlInfo    OPTIONAL,
      dl-rate-matching-restriction      Dl-rate-matching-restriction  OPTIONAL,
      spreadingFactorAndPilot           SF512-AndPilot,
      -- TABULAR: The number of pilot bits is nested inside the spreading factor.
      positionFixedOrFlexible          PositionFixedOrFlexible,
      tfci-Existence                   BOOLEAN
    },
    tdd                                SEQUENCE {
      commonTimeslotInfo                CommonTimeslotInfo          OPTIONAL
    }
  }
}

DL-DPCH-InfoCommonPost ::=            SEQUENCE {
  dl-DPCH-PowerControlInfo            DL-DPCH-PowerControlInfo    OPTIONAL
}

DL-DPCH-InfoCommonPredef ::=          SEQUENCE {
  modeSpecificInfo                    CHOICE {
    fdd                                SEQUENCE {
      spreadingFactorAndPilot           SF512-AndPilot,
      -- TABULAR: The number of pilot bits is nested inside the spreading factor.
      positionFixedOrFlexible          PositionFixedOrFlexible,
      tfci-Existence                   BOOLEAN
    },
    tdd                                SEQUENCE {
      commonTimeslotInfo                CommonTimeslotInfo
    }
  }
}

DL-DPCH-InfoPerRL ::=                 CHOICE {
  fdd                                  SEQUENCE {
    pCPICH-UsageForChannelEst          PCPICH-UsageForChannelEst,
    dcph-FrameOffset                  DPCH-FrameOffset,
    secondaryCPICH-Info                SecondaryCPICH-Info          OPTIONAL,
    dl-ChannelisationCodeList          DL-ChannelisationCodeList,
    tpc-CombinationIndex               TPC-CombinationIndex,
    ssdt-CellIdentity                  SSdT-CellIdentity          OPTIONAL,
    closedLoopTimingAdjMode            ClosedLoopTimingAdjMode    OPTIONAL
  },
  tdd                                  DL-CCTrChList
}

DL-DPCH-InfoPerRL-PostFDD ::=         SEQUENCE {
  pCPICH-UsageForChannelEst            PCPICH-UsageForChannelEst,
  dl-ChannelisationCode                DL-ChannelisationCode,
  tpc-CombinationIndex                 TPC-CombinationIndex
}

```



```

DL-DPCH-InfoPerRL-PostTDD ::= SEQUENCE {
    dl-CCTrCH-TimeslotsCodes
    DownlinkTimeslotsCodes
}

DL-DPCH-PowerControlInfo ::= SEQUENCE {
    modeSpecificInfo
    CHOICE {
        fdd
            dpc-Mode
        },
    tdd
        SEQUENCE {
            tpc-StepSizeTDD
            TPC-StepSizeTDD
        }
    }
    OPTIONAL
}

DL-FrameType ::= ENUMERATED {
    dl-FrameTypeA, dl-FrameTypeB }

DL-InformationPerRL ::= SEQUENCE {
    modeSpecificInfo
    CHOICE {
        fdd
            SEQUENCE {
                primaryCPICH-Info
                PDSCH-SHO-DCH-Info
                PDSCH-CodeMapping
            },
            tdd
                PrimaryCCPCH-Info
        },
    dl-DPCH-InfoPerRL
    DL-DPCH-InfoPerRL
    secondaryCCPCH-Info
    SecondaryCCPCH-Info
    OPTIONAL,
    OPTIONAL
}

DL-InformationPerRL-List ::= SEQUENCE (SIZE (1..maxRL)) OF
    DL-InformationPerRL

DL-InformationPerRL-ListPostFDD ::= SEQUENCE (SIZE (1..maxRL)) OF
    DL-InformationPerRL-PostFDD

DL-InformationPerRL-PostFDD ::= SEQUENCE {
    primaryCPICH-Info
    PrimaryCPICH-Info,
    dl-DPCH-InfoPerRL
    DL-DPCH-InfoPerRL-PostFDD
}

DL-InformationPerRL-PostTDD ::= SEQUENCE {
    primaryCCPCH-Info
    PrimaryCCPCH-InfoPost,
    dl-DPCH-InfoPerRL
    DL-DPCH-InfoPerRL-PostTDD
}

DL-PDSCH-Information ::= SEQUENCE {
    pdsch-SHO-DCH-Info
    PDSCH-SHO-DCH-Info
    pdsch-CodeMapping
    PDSCH-CodeMapping
    OPTIONAL,
    OPTIONAL
}

DL-rate-matching-restriction ::= SEQUENCE {
    restrictedTrCH-InfoList
    RestrictedTrCH-InfoList
    OPTIONAL
}

DL-TS-ChannelisationCode ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

DL-TS-ChannelisationCodesShort ::= SEQUENCE {
    codesRepresentation
    CHOICE {
        consecutive
            SEQUENCE {
                firstChannelisationCode
                DL-TS-ChannelisationCode,
                lastChannelisationCode
                DL-TS-ChannelisationCode
            },
        bitmap
            BIT STRING (SIZE (16))
    }
}

DownlinkAdditionalTimeslots ::= SEQUENCE {
    parameters
    CHOICE {
        sameAsLast
            SEQUENCE {
                timeslotNumber
                TimeslotNumber
            },
        newParameters
            SEQUENCE {
                individualTimeslotInfo
                IndividualTimeslotInfo,
                dl-TS-ChannelisationCodesShort
                DL-TS-ChannelisationCodesShort
            }
    }
}

```

```

DownlinkTimeslotsCodes ::= SEQUENCE {
    firstIndividualTimeslotInfo IndividualTimeslotInfo,
    dl-TS-ChannelisationCodesShort DL-TS-ChannelisationCodesShort,
    moreTimeslots CHOICE {
        noMore NULL,
        additionalTimeslots CHOICE {
            consecutive INTEGER (1..maxTS-1),
            timeslotList SEQUENCE (SIZE (1..maxTS-1)) OF
                DownlinkAdditionalTimeslots
        }
    }
}

DPC-Mode ::= ENUMERATED {
    singleTPC,
    tpcTripletInSoft }

-- The actual value of DPCCH power offset is the value of this IE * 2.
DPCCH-PowerOffset ::= INTEGER (-82..-3)

DPCH-CompressedModeInfo ::= SEQUENCE {
    tgp-SequenceList TGP-SequenceList
}

DPCH-CompressedModeStatusInfo ::= SEQUENCE (SIZE (1..maxTGPS)) OF
    TGP-SequenceShort

-- TABULAR: Actual value = IE value * 256
DPCH-FrameOffset ::= INTEGER (0..149)

DSCH-Mapping ::= SEQUENCE {
    maxTFCI-Field2Value MaxTFCI-Field2Value,
    spreadingFactor SF-PDSCH,
    codeNumber CodeNumberDSCH,
    multiCodeInfo MultiCodeInfo
}

DSCH-MappingList ::= SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    DSCH-Mapping

DSCH-RadioLinkIdentifier ::= INTEGER (0..511)

DurationTimeInfo ::= INTEGER (1..4096)

-- TABULAR : value [Duration = infinite] is the value by default,
-- and is encoded by absence of the full sequence. If the sequence is present,
-- thefield is absent, the default is respectivelyinfinite. Presence of the
-- field absent should not be used, but shall be understood as if the
-- sequence was absent.

DynamicPersistenceLevel ::= INTEGER (1..8)

DynamicPersistenceLevelList ::= SEQUENCE (SIZE (1..maxPRACH)) OF
    DynamicPersistenceLevel

DynamicPersistenceLevelTF-List ::= SEQUENCE (SIZE (1..maxTF-CPCH)) OF
    DynamicPersistenceLevel

FACH-PCH-Information ::= SEQUENCE {
    transportFormatSet TransportFormatSet,
    transportChannelIdentity TransportChannelIdentity,
    ctch-Indicator BOOLEAN
}

FACH-PCH-InformationList ::= SEQUENCE (SIZE (1..maxFACH)) OF
    FACH-PCH-Information

FPACH-Info ::= SEQUENCE {
    timeslot TimeslotNumber-PRACH-LCR,
    channelisationCode TDD-FPACH-CCode16,
    midambleShiftAndBurstType MidambleShiftAndBurstType-LCR,
}

FrequencyInfo ::= SEQUENCE {
    modeSpecificInfo CHOICE {
        fdd FrequencyInfoFDD,
        tdd FrequencyInfoTDD }
}

FrequencyInfoFDD ::= SEQUENCE {
    uarfcn-UL UARFCN OPTIONAL,

```

```

    uarfcn-DL                                UARFCN
}

FrequencyInfoTDD ::=                        SEQUENCE {
    uarfcn-Nt                                UARFCN
}

IndividualTimeslotInfo ::=                  SEQUENCE {
    timeslotNumber                          TimeslotNumber,
    tfci-Existence                          BOOLEAN,
    midambleShiftAndBurstType                MidambleShiftAndBurstType
}

IndividualTS-Interference ::=               SEQUENCE {
    timeslot                                  TimeslotNumber,
    ul-TimeslotInterference                  UL-Interference
}

IndividualTS-InterferenceList ::=          SEQUENCE (SIZE (1..maxTS)) OF
    IndividualTS-Interference

ITP ::=                                     ENUMERATED {
    mode0, mode1 }

MaxAllowedUL-TX-Power ::=                  INTEGER (-50..33)

MaxAvailablePCPCH-Number ::=               INTEGER (1..64)

MaxTFCI-Field2Value ::=                   INTEGER (1..1023)

MidambleConfiguration ::=                  SEQUENCE {
    burstType1                               BurstType1                                DEFAULT ms8,
    -- TABULAR: The default value for BurstType2 has not been specified due to
    -- compactness reasons.
    burstType2                               BurstType2
}

MidambleShiftAndBurstType ::=              SEQUENCE {
    burstType                                CHOICE {
        type1                               SEQUENCE {
            midambleAllocationMode          CHOICE {
                defaultMidamble             NULL,
                commonMidamble             NULL,
                ueSpecificMidamble         SEQUENCE {
                    midambleShift           MidambleShiftLong
                }
            }
        },
        type2                               SEQUENCE {
            midambleAllocationMode          CHOICE {
                defaultMidamble             NULL,
                commonMidamble             NULL,
                ueSpecificMidamble         SEQUENCE {
                    midambleShift           MidambleShiftShort
                }
            }
        },
        type3                               SEQUENCE {
            midambleAllocationMode          CHOICE {
                defaultMidamble             NULL,
                ueSpecificMidamble         SEQUENCE {
                    midambleShift           MidambleShiftLong
                }
            }
        }
    }
}

MidambleShiftLong ::=                      INTEGER (0..15)

MidambleShiftShort ::=                     INTEGER (0..5)

MinimumSpreadingFactor ::=                 ENUMERATED {
    sf4, sf8, sf16, sf32,
    sf64, sf128, sf256 }

MultiCodeInfo ::=                          INTEGER (1..16)

N-EOT ::=                                  INTEGER (0..7)

N-GAP ::=                                  ENUMERATED {

```

```

        f2, f4, f8 }

N-PCH ::=
INTEGER (1..8)

N-StartMessage ::=
INTEGER (1..8)

NB01 ::=
INTEGER (0..50)

NF-Max ::=
INTEGER (1..64)

NumberOfDPDCH ::=
INTEGER (1..maxDPDCH-UL)

NumberOfFBI-Bits ::=
INTEGER (1..2)

OpenLoopPowerControl-TDD ::=
SEQUENCE {
    primaryCCPCH-TX-Power
    alpha
    prach-ConstantValue
    dpch-ConstantValue
    pusch-ConstantValue
}
OPTIONAL,
OPTIONAL

PagingIndicatorLength ::=
ENUMERATED {
    pi4, pi8, pi16 }

PC-Preamble ::=
ENUMERATED {
    pcp0, pcp15 }

PCP-Length ::=
ENUMERATED {
    as0, as8 }

PCPCH-ChannelInfo ::=
SEQUENCE {
    pcpch-UL-ScramblingCode
    pcpch-DL-ChannelisationCode
    pcpch-DL-ScramblingCode
    pcp-Length
    ucsm-Info
}
INTEGER (0..79),
INTEGER (0..511),
SecondaryScramblingCode
PCP-Length,
UCSM-Info
OPTIONAL,
OPTIONAL

PCPCH-ChannelInfoList ::=
SEQUENCE (SIZE (1..maxPCPCHs)) OF
PCPCH-ChannelInfo

PCPICH-UsageForChannelEst ::=
ENUMERATED {
    mayBeUsed,
    shallNotBeUsed }

PDSCH-CapacityAllocationInfo ::=
SEQUENCE {
    pdsch-PowerControlInfo
    pdsch-AllocationPeriodInfo
    tfcs-Identity
    configuration
    CHOICE {
        old-Configuration
        pdsch-Identity
    },
    new-Configuration
    pdsch-Info
    pdsch-Identity
}
OPTIONAL,
OPTIONAL,
OPTIONAL

PDSCH-CodeInfo ::=
SEQUENCE {
    spreadingFactor
    codeNumber
    multiCodeInfo
}
SF-PDSCH,
CodeNumberDSCH,
MultiCodeInfo

PDSCH-CodeInfoList ::=
SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
PDSCH-CodeInfo

PDSCH-CodeMap ::=
SEQUENCE {
    spreadingFactor
    multiCodeInfo
}
SF-PDSCH,
MultiCodeInfo

PDSCH-CodeMapList ::=
SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
PDSCH-CodeMap

PDSCH-CodeMapping ::=
SEQUENCE {
    dl-ScramblingCode
    signallingMethod
    CHOICE {
        codeRange
        tfci-Range
        explicit
    }
    SecondaryScramblingCode
    DSCH-MappingList,
    PDSCH-CodeInfoList,
    OPTIONAL,
}

```

```

    replace
  }
}

PDSCH-Identity ::=
    INTEGER (1..hiPDSCHidentities)

PDSCH-Info ::=
    SEQUENCE {
        tfcs-Identity          OPTIONAL,
        commonTimeslotInfo    OPTIONAL,
        pdsch-TimeslotsCodes  OPTIONAL
    }

PDSCH-PowerControlInfo ::=
    SEQUENCE {
        tpc-StepSizeTDD      OPTIONAL,
        ul-CCTrChTPCList    OPTIONAL
    }

PDSCH-SHO-DCH-Info ::=
    SEQUENCE {
        dsch-RadioLinkIdentifier,
        tfci-CombiningSet    OPTIONAL,
        rl-IdentifierList    OPTIONAL
    }

PDSCH-SysInfo ::=
    SEQUENCE {
        pdsch-Identity,
        pdsch-Info,
        dsch-TFS             OPTIONAL,
        dsch-TFCS           OPTIONAL
    }

PDSCH-SysInfoList ::=
    SEQUENCE (SIZE (1..maxPDSCH)) OF
        PDSCH-SysInfo

PDSCH-SysInfoList-SFN ::=
    SEQUENCE (SIZE (1..maxPDSCH)) OF
        SEQUENCE {
            pdsch-SysInfo,
            sfn-TimeInfo    OPTIONAL
        }
    }

PersistenceScalingFactor ::=
    ENUMERATED {
        psf0-9, psf0-8, psf0-7, psf0-6,
        psf0-5, psf0-4, psf0-3, psf0-2 }

PersistenceScalingFactorList ::=
    SEQUENCE (SIZE (1..maxASCPersist)) OF
        PersistenceScalingFactor

PI-CountPerFrame ::=
    ENUMERATED {
        e18, e36, e72, e144 }

PICH-Info ::=
    CHOICE {
        fdd
            SEQUENCE {
                channelisationCode256,
                pi-CountPerFrame,
                sttd-Indicator
            },
        tdd
            SEQUENCE {
                channelisationCode    OPTIONAL,
                timeslot              OPTIONAL,
                burstType             CHOICE {
                    type-1            MidambleShiftLong,
                    type-2            MidambleShiftShort
                },
                repetitionPeriodLengthOffset  OPTIONAL,
                pagingIndicatorLength  OPTIONAL,
                n-GAP                  DEFAULT pi4,
                n-PCH                  DEFAULT f4,
                n-PCH                  DEFAULT 2
            }
    }

PICH-PowerOffset ::=
    INTEGER (-10..5)

PilotBits128 ::=
    ENUMERATED {
        pb4, pb8 }

PilotBits256 ::=
    ENUMERATED {
        pb2, pb4, pb8 }

PositionFixedOrFlexible ::=
    ENUMERATED {
        fixed,
        flexible }

PowerControlAlgorithm ::=
    CHOICE {

```

```

    algorithm1                TPC-StepSizeFDD,
    algorithm2                NULL
}

PowerRampStep ::=            INTEGER (1..8)

PRACH-ChanCodes-LCR ::=     SEQUENCE (SIZE (1..2)) OF
                             TDD-PRACH-CCode-LCR

PRACH-Definition-LCR ::=    SEQUENCE {
    timeslot                  TimeslotNumber-PRACH-LCR,
    prach-ChanCodes-LCR      PRACH-ChanCodes-LCR,
    midambleShiftAndBurstType MidambleShiftAndBurstType-LCR,
    fpach-Info                FPACH-Info
}

PRACH-Midamble ::=          ENUMERATED {
    direct,
    direct-Inverted }

PRACH-Partitioning ::=     CHOICE {
    fdd                       SEQUENCE (SIZE (1..maxASC)) OF
                             ASCSetting-FDD,
    tdd                       SEQUENCE (SIZE (1..maxASC)) OF
                             ASCSetting-TDD
}

PRACH-Partitioning-LCR ::= SEQUENCE (SIZE (1..maxASC)) OF
                             ASCSetting-TDD-LCR,
                             _____

PRACH-PowerOffset ::=      SEQUENCE {
    powerRampStep            PowerRampStep,
    preambleRetransMax       PreambleRetransMax
}

PRACH-RACH-Info ::=        SEQUENCE {
    modeSpecificInfo         CHOICE {
        fdd                  SEQUENCE {
            availableSignatures AvailableSignatures,
            availableSF         SF-PRACH,
            preambleScramblingCodeWordNumber PreambleScramblingCodeWordNumber,
            puncturingLimit     PuncturingLimit,
            availableSubChannelNumbers AvailableSubChannelNumbers
        },
        tdd                  SEQUENCE {
            timeslot            TimeslotNumber,
            channelisationCode TDD-PRACH-CCodeList,
            prach-Midamble      PRACH-Midamble OPTIONAL
        }
    }
}

PRACH-RACH-Info-LCR ::=    SEQUENCE {
    sync-UL-Info             SYNC-UL-Info,
    prach-DefinitionList     SEQUENCE (SIZE (1..maxPRACH-FPACH)) OF
                             PRACH-Definition-LCR
}

PRACH-SystemInformation ::= SEQUENCE {
    prach-RACH-Info          PRACH-RACH-Info,
    transportChannelIdentity TransportChannelIdentity,
    rach-TransportFormatSet  TransportFormatSet OPTIONAL,
    rach-TFCS                TFCS OPTIONAL,
    prach-Partitioning       PRACH-Partitioning OPTIONAL,
    persistenceScalingFactorList PersistenceScalingFactorList OPTIONAL,
    ac-To-ASC-MappingTable   AC-To-ASC-MappingTable OPTIONAL,
    modeSpecificInfo         CHOICE {
        fdd                  SEQUENCE {
            primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,
            constantValue         ConstantValue OPTIONAL,
            prach-PowerOffset     PRACH-PowerOffset OPTIONAL,
            rach-TransmissionParameters RACH-TransmissionParameters OPTIONAL,
            aich-Info            AICH-Info OPTIONAL
        },
        tdd                  NULL
    }
}

-- For 1.28Mcps TDD, the following list shall include only one PRACH-SystemInformation.
PRACH-SystemInformationList ::= SEQUENCE (SIZE (1..maxPRACH)) OF
    PRACH-SystemInformation

PreambleRetransMax ::=     INTEGER (1..64)

```

```

PreambleScramblingCodeWordNumber ::= INTEGER (0..15)

PreDefPhyChConfiguration ::= SEQUENCE {
    ul-DPCH-InfoPredef          UL-DPCH-InfoPredef,
    dl-CommonInformationPredef  DL-CommonInformationPredef OPTIONAL
}

PrimaryCCPCH-Info ::= CHOICE {
    fdd SEQUENCE {
        tx-DiversityIndicator BOOLEAN
    },
    tdd SEQUENCE {
        syncCase CHOICE {
            syncCase1 SEQUENCE {
                timeslot TimeslotNumber
            },
            syncCase2 SEQUENCE {
                timeslotSync2 TimeslotSync2
            }
        }
        cellParametersID CellParametersID OPTIONAL,
        blockSTTD-Indicator BOOLEAN OPTIONAL
    }
}

PrimaryCCPCH-InfoPost ::= SEQUENCE {
    syncCase CHOICE {
        syncCase1 SEQUENCE {
            timeslot TimeslotNumber
        },
        syncCase2 SEQUENCE {
            timeslotSync2 TimeslotSync2
        }
    },
    cellParametersID CellParametersID,
    blockSTTD-Indicator BOOLEAN
}

PrimaryCCPCH-TX-Power ::= INTEGER (6..43)

PrimaryCPICH-Info ::= SEQUENCE {
    primaryScramblingCode PrimaryScramblingCode
}

PrimaryCPICH-TX-Power ::= INTEGER (-10..50)

PrimaryScramblingCode ::= INTEGER (0..511)

PuncturingLimit ::= ENUMERATED {
    p10-40, p10-44, p10-48, p10-52, p10-56,
    p10-60, p10-64, p10-68, p10-72, p10-76,
    p10-80, p10-84, p10-88, p10-92, p10-96, p11 }

PUSCH-CapacityAllocationInfo ::= SEQUENCE {
    pusch-Allocation CHOICE {
        pusch-AllocationPending NULL,
        pusch-AllocationAssignment SEQUENCE {
            pdsch-AllocationPeriodInfo AllocationPeriodInfo,
            pusch-PowerControlInfo UL-TargetSIR OPTIONAL,
            tfcs-Identity configuration TFCS-IdentityPlain OPTIONAL,
            configuration CHOICE {
                old-Configuration SEQUENCE {
                    pusch-Identity PUSCH-Identity
                },
                new-Configuration SEQUENCE {
                    pusch-Info PUSCH-Info,
                    pusch-Identity PUSCH-Identity OPTIONAL
                }
            }
        }
    }
}

PUSCH-Identity ::= INTEGER (1..hiPUSCHidentities)

PUSCH-Info ::= SEQUENCE {
    tfcs-Identity TFCS-IdentityPlain OPTIONAL,
    commonTimeslotInfo CommonTimeslotInfo OPTIONAL,
    pusch-TimeslotsCodes UplinkTimeslotsCodes OPTIONAL
}

PUSCH-SysInfo ::= SEQUENCE {

```

```

    pusch-Identity          PUSCH-Identity,
    pusch-Info             PUSCH-Info,
    usch-TFS               TransportFormatSet
    usch-TFCS              TFCS
}
}
PUSCH-SysInfoList ::= SEQUENCE (SIZE (1..maxPUSCH)) OF
                      PUSCH-SysInfo

PUSCH-SysInfoList-SFN ::= SEQUENCE (SIZE (1..maxPDSCH)) OF
                          SEQUENCE {
    pusch-SysInfo          PUSCH-SysInfo,
    sfn-TimeInfo           SFN-TimeInfo
}
}
RACH-TransmissionParameters ::= SEQUENCE {
    mmax                   INTEGER (1..32),
    nb01Min                NB01,
    nb01Max                NB01
}

ReducedScramblingCodeNumber ::= INTEGER (0..8191)

RepetitionPeriodAndLength ::= CHOICE {
    repetitionPeriod1      NULL,
    repetitionPeriod2      INTEGER (1..1),
    -- repetitionPeriod2 could just as well be NULL also.
    repetitionPeriod4      INTEGER (1..3),
    repetitionPeriod8      INTEGER (1..7),
    repetitionPeriod16     INTEGER (1..15),
    repetitionPeriod32     INTEGER (1..31),
    repetitionPeriod64     INTEGER (1..63)
}

RepetitionPeriodLengthAndOffset ::= CHOICE {
    repetitionPeriod1      NULL,
    repetitionPeriod2      SEQUENCE {
        length             NULL,
        offset             INTEGER (0..1)
    },
    repetitionPeriod4      SEQUENCE {
        length             INTEGER (1..3),
        offset             INTEGER (0..3)
    },
    repetitionPeriod8      SEQUENCE {
        length             INTEGER (1..7),
        offset             INTEGER (0..7)
    },
    repetitionPeriod16     SEQUENCE {
        length             INTEGER (1..15),
        offset             INTEGER (0..15)
    },
    repetitionPeriod32     SEQUENCE {
        length             INTEGER (1..31),
        offset             INTEGER (0..31)
    },
    repetitionPeriod64     SEQUENCE {
        length             INTEGER (1..63),
        offset             INTEGER (0..63)
    }
}

ReplacedPDSCH-CodeInfo ::= SEQUENCE {
    tfci-Field2           MaxTFCI-Field2Value,
    spreadingFactor       SF-PDSCH,
    codeNumber            CodeNumberDSCH,
    multiCodeInfo         MultiCodeInfo
}

ReplacedPDSCH-CodeInfoList ::= SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
                                ReplacedPDSCH-CodeInfo

RepPerLengthOffset-PICH ::= CHOICE {
    rpp4-2                INTEGER (0..3),
    rpp8-2                INTEGER (0..7),
    rpp8-4                INTEGER (0..7),
    rpp16-2              INTEGER (0..15),
    rpp16-4              INTEGER (0..15),
    rpp32-2              INTEGER (0..31),
    rpp32-4              INTEGER (0..31),
    rpp64-2              INTEGER (0..63),
    rpp64-4              INTEGER (0..63)
}

```



```

RestrictedTrCH ::=
    restrictedDL-TrCH-Identity
    allowedTFIList
}
SEQUENCE {
    TransportChannelIdentity,
    AllowedTFI-List
}

RestrictedTrCH-InfoList ::=
SEQUENCE (SIZE(1..maxTrCH)) OF
    RestrictedTrCH

RL-AdditionInformation ::=
    primaryCPICH-Info
    dl-DPCH-InfoPerRL
    tfci-CombiningIndicator
    sccpch-InfoForFACH
}
SEQUENCE {
    PrimaryCPICH-Info,
    DL-DPCH-InfoPerRL,
    BOOLEAN,
    SCCPCH-InfoForFACH
} OPTIONAL

RL-AdditionInformationList ::=
SEQUENCE (SIZE (1..maxRL)) OF
    RL-AdditionInformation

RL-IdentifierList ::=
SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RL-RemovalInformationList ::=
SEQUENCE (SIZE (1..maxRL-1)) OF
    PrimaryCPICH-Info

RPP ::=
ENUMERATED {
    mode0, mode1
}

S-Field ::=
ENUMERATED {
    e1bit, e2bits
}

SCCPCH-ChannelisationCode ::=
ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16
}

SCCPCH-ChannelisationCodeList ::=
SEQUENCE (SIZE (1..16)) OF
    SCCPCH-ChannelisationCode

SCCPCH-InfoForFACH ::=
    secondaryCCPCH-Info
    tfcs
    fach-PCH-InformationList
    sib-ReferenceListFACH
}
SEQUENCE {
    SecondaryCCPCH-Info,
    TFCS,
    FACH-PCH-InformationList,
    SIB-ReferenceListFACH
}

SCCPCH-SystemInformation ::=
    secondaryCCPCH-Info
    tfcs
    fach-PCH-InformationList
    pich-Info
}
SEQUENCE {
    SecondaryCCPCH-Info,
    TFCS,
    FACH-PCH-InformationList
} OPTIONAL,
    PICH-Info
} OPTIONAL

SCCPCH-SystemInformationList ::=
SEQUENCE (SIZE (1..maxSCCPCH)) OF
    SCCPCH-SystemInformation

ScramblingCodeChange ::=
ENUMERATED {
    codeChange, noCodeChange
}

ScramblingCodeType ::=
ENUMERATED {
    shortSC,
    longSC
}

SecondaryCCPCH-Info ::=
    modeSpecificInfo
    fdd
    pcpich-UsageForChannelEst
    secondaryCPICH-Info
    secondaryScramblingCode
    sttd-Indicator
    sf-AndCodeNumber
    pilotSymbolExistence
    tfci-Existence
    positionFixedOrFlexible
    timingOffset
},
    tdd
    -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
    commonTimeslotInfo
    individualTimeslotInfo
    channelisationCode
}
SEQUENCE {
    CHOICE {
        SEQUENCE {
            PCPICH-UsageForChannelEst,
            SecondaryCPICH-Info
        } OPTIONAL,
        SecondaryScramblingCode
    } OPTIONAL,
    BOOLEAN,
    SF256-AndCodeNumber,
    BOOLEAN,
    BOOLEAN,
    PositionFixedOrFlexible,
    TimingOffset
} DEFAULT 0
    SEQUENCE {
        CommonTimeslotInfoSCCPCH,
        IndividualTimeslotInfo,
        SCCPCH-ChannelisationCodeList
    }
}

```

```

}
}
SecondaryCPICH-Info ::= SEQUENCE {
    secondaryDL-ScramblingCode SecondaryScramblingCode OPTIONAL,
    channelisationCode ChannelisationCode256
}
SecondaryScramblingCode ::= INTEGER (1..15)
SecondInterleavingMode ::= ENUMERATED {
    frameRelated, timeslotRelated }
-- SF256-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF256-AndCodeNumber ::= CHOICE {
    sf4 INTEGER (0..3),
    sf8 INTEGER (0..7),
    sf16 INTEGER (0..15),
    sf32 INTEGER (0..31),
    sf64 INTEGER (0..63),
    sf128 INTEGER (0..127),
    sf256 INTEGER (0..255)
}
-- SF512-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF512-AndCodeNumber ::= CHOICE {
    sf4 INTEGER (0..3),
    sf8 INTEGER (0..7),
    sf16 INTEGER (0..15),
    sf32 INTEGER (0..31),
    sf64 INTEGER (0..63),
    sf128 INTEGER (0..127),
    sf256 INTEGER (0..255),
    sf512 INTEGER (0..511)
}
-- SF512-AndPilot encodes both "Spreading factor" and "Number of bits for Pilot bits"
SF512-AndPilot ::= CHOICE {
    sfd4 NULL,
    sfd8 NULL,
    sfd16 NULL,
    sfd32 NULL,
    sfd64 NULL,
    sfd128 PilotBits128,
    sfd256 PilotBits256,
    sfd512 NULL
}
SF-PDSCH ::= ENUMERATED {
    sfp4, sfp8, sfp16, sfp32,
    sfp64, sfp128, sfp256 }
SF-PRACH ::= ENUMERATED {
    sfpr32, sfpr64, sfpr128, sfpr256 }
SFN-TimeInfo ::= SEQUENCE {
    activationTimeSFN INTEGER (0..4095),
    physChDuration DurationTimeInfo
}
SpreadingFactor ::= ENUMERATED {
    sf4, sf8, sf16, sf32,
    sf64, sf128, sf256 }
SSDT-CellIdentity ::= ENUMERATED {
    ssdt-id-a, ssdt-id-b, ssdt-id-c,
    ssdt-id-d, ssdt-id-e, ssdt-id-f,
    ssdt-id-g, ssdt-id-h }
SSDT-Information ::= SEQUENCE {
    s-Field S-Field,
    codeWordSet CodeWordSet
}
SYNC-UL-Info ::= SEQUENCE {
    sync-UL-Codes-Bitmap BIT STRING ( SIZE (8)),
    ul-TargetSIR UL-TargetSIR,
    powerRampingStep INTEGER (0..3),
    max-SYNC-UL-Transmissions ENUMERATED { tr1, tr2, tr4, tr8 }
}
TDD-FPACH-CCode16 ::= ENUMERATED {
    ccl6-1, ccl6-2, ccl6-3, ccl6-4,
    ccl6-5, ccl6-6, ccl6-7, ccl6-8,

```

```

cc16-9, cc16-10, cc16-11, cc16-12,
cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PICH-CCode ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCode8 ::= ENUMERATED {
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8 }

TDD-PRACH-CCode16 ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCode-LCR ::= ENUMERATED {
    cc4-1, cc4-2, cc4-3, cc4-4,
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8,
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCodeList ::= CHOICE {
    sf8 SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode8,
    sf16 SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode16
}

TFC-ControlDuration ::= ENUMERATED {
    tfc-cd1, tfc-cd2, tfc-cd4, tfc-cd8,
    tfc-cd16, tfc-cd24, tfc-cd32,
    tfc-cd48, tfc-cd64, tfc-cd128,
    tfc-cd192, tfc-cd256, tfc-cd512 }

TFCI-Coding ::= ENUMERATED {
    tfcI-bits-4, tfcI-bits-8,
    tfcI-bits-16, tfcI-bits-32 }

-- **TODO**, not defined
TFCI-CombiningSet ::= SEQUENCE {
}

TGCFN ::= INTEGER (0..255)

-- The value 270 represents "undefined" in the tabular description.
TGD ::= INTEGER (15..270)

TGL ::= INTEGER (1..14)

TGMP ::= ENUMERATED {
    tdd-Measurement, fdd-Measurement,
    gsm-CarrierRSSIMeasurement,
    gsm-initialBSICIdentification, gsmBSICReconfirmation }

TGP-Sequence ::= SEQUENCE {
    tgpsi TGPSI,
    tgps-StatusFlag TGPS-StatusFlag,
    tgcfn TGCFN,
    tgps-ConfigurationParams TGPS-ConfigurationParams OPTIONAL
}

TGP-SequenceList ::= SEQUENCE (SIZE (1..maxTGPS)) OF
    TGP-Sequence

TGP-SequenceShort ::= SEQUENCE {
    tgpsi TGPSI,
    tgps-StatusFlag TGPS-StatusFlag,
    tgcfn TGCFN
}

TGPL ::= INTEGER (1..144)

-- TABULAR: The value 0 represents "infinity" in the tabular description.
TGPRC ::= INTEGER (0..63)

TGPS-ConfigurationParams ::= SEQUENCE {

```



```

    cpch-SetInfo          CPCH-SetInfo,
    cpch-SetID           CPCH-SetID
  }

UL-CompressedModeMethod ::=      ENUMERATED {
    sf-2,
    higherLayerScheduling }

UL-DL-Mode ::=                  CHOICE {
    ul
    dl
  }

UL-DPCCH-SlotFormat ::=        ENUMERATED {
    slf0, slf1, slf2 }

UL-DPCH-Info ::=               SEQUENCE {
    ul-DPCH-PowerControlInfo    UL-DPCH-PowerControlInfo    OPTIONAL,
    modeSpecificInfo            CHOICE {
        fdd                     SEQUENCE {
            scramblingCodeType   ScramblingCodeType,
            scramblingCode       UL-ScramblingCode,
            numberOfDPDCH        NumberOfDPDCH             DEFAULT 1,
            spreadingFactor      SpreadingFactor,
            tfci-Existence       BOOLEAN,
            numberOfFBI-Bits     NumberOfFBI-Bits             OPTIONAL,
            -- The IE above is conditional based on history
            puncturingLimit      PuncturingLimit
        },
        tdd                     SEQUENCE {
            ul-TimingAdvance      UL-TimingAdvanceControl    OPTIONAL,
            ul-CCTrCHList         UL-CCTrCHList
        }
    }
  }

UL-DPCH-InfoPostFDD ::=       SEQUENCE {
    ul-DPCH-PowerControlInfo    UL-DPCH-PowerControlInfoPostFDD,
    scramblingCodeType          ScramblingCodeType,
    reducedScramblingCodeNumber ReducedScramblingCodeNumber,
    spreadingFactor             SpreadingFactor
  }

UL-DPCH-InfoPostTDD ::=       SEQUENCE {
    ul-DPCH-PowerControlInfo    UL-DPCH-PowerControlInfoPostTDD,
    ul-TimingAdvance            UL-TimingAdvanceControl    OPTIONAL,
    ul-CCTrCH-TimeslotsCodes    UplinkTimeslotsCodes
  }

UL-DPCH-InfoPredef ::=        SEQUENCE {
    ul-DPCH-PowerControlInfo    UL-DPCH-PowerControlInfoPredef,
    modeSpecificInfo            CHOICE {
        fdd                     SEQUENCE {
            tfci-Existence       BOOLEAN,
            puncturingLimit      PuncturingLimit
        },
        tdd                     SEQUENCE {
            commonTimeslotInfo    CommonTimeslotInfo
        }
    }
  }

UL-DPCH-PowerControlInfo ::=  CHOICE {
    fdd                          SEQUENCE {
        dpcch-PowerOffset        DPCCH-PowerOffset,
        pc-Preamble              PC-Preamble,
        powerControlAlgorithm     PowerControlAlgorithm
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    },
    tdd                          SEQUENCE {
        ul-TargetSIR             UL-TargetSIR,
        ul-OL-PC-Signalling       CHOICE {
            broadcast-UL-OL-PC-info NULL,
            handoverGroup         SEQUENCE {
                individualTS-InterferenceList IndividualTS-InterferenceList,
                dpch-ConstantValue ConstantValue,
                primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
            }
        }
    }
  }
  OPTIONAL
}

```

```

UL-DPCH-PowerControlInfoPostFDD ::= SEQUENCE {
    powerControlAlgorithm      PowerControlAlgorithm
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
}

UL-DPCH-PowerControlInfoPostTDD ::= SEQUENCE {
    ul-TargetSIR              UL-TargetSIR,
    ul-TimeslotInterference   UL-Interference
}

UL-DPCH-PowerControlInfoPredef ::= CHOICE {
    fdd                       SEQUENCE {
        dpcch-PowerOffset     DPCCH-PowerOffset,
        pc-Preamble           PC-Preamble
    },
    tdd                       SEQUENCE {
        dpch-ConstantValue    ConstantValue
    }
}

UL-Interference ::= INTEGER (-110..-70)

UL-ScramblingCode ::= INTEGER (0..16777215)

-- Actual value = (IE value * 0.5) - 11
UL-TargetSIR ::= INTEGER (0..62)

UL-TimingAdvance ::= INTEGER (0..63)

UL-TimingAdvanceControl ::= CHOICE {
    disabled                 NULL,
    enabled                 SEQUENCE {
        ul-TimingAdvance     UL-TimingAdvance           OPTIONAL,
        activationTime       ActivationTime             OPTIONAL
    }
}

UL-TS-ChannelisationCode ::= ENUMERATED {
    cc1-1, cc2-1, cc2-2,
    cc4-1, cc4-2, cc4-3, cc4-4,
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8,
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

UL-TS-ChannelisationCodeList ::= SEQUENCE (SIZE (1..2)) OF
    UL-TS-ChannelisationCode

UplinkAdditionalTimeslots ::= SEQUENCE {
    parameters              CHOICE {
        sameAsLast          SEQUENCE {
            timeslotNumber  TimeslotNumber
        },
        newParameters       SEQUENCE {
            individualTimeslotInfo IndividualTimeslotInfo,
            ul-TS-ChannelisationCodeList UL-TS-ChannelisationCodeList
        }
    }
}

UplinkTimeslotsCodes ::= SEQUENCE {
    dynamicSFusage          BOOLEAN,
    firstIndividualTimeslotInfo IndividualTimeslotInfo,
    ul-TS-ChannelisationCodeList UL-TS-ChannelisationCodeList,
    moreTimeslots          CHOICE {
        noMore              NULL,
        additionalTimeslots CHOICE {
            consecutive     SEQUENCE {
                numAdditionalTimeslots INTEGER (1..maxTS-1)
            },
            timeslotList    SEQUENCE (SIZE (1..maxTS-1)) OF
                UplinkAdditionalTimeslots
        }
    }
}

-- *****
--
-- MEASUREMENT INFORMATION ELEMENTS (10.3.7)
--
-- *****

```

```

AcquisitionSatInfo ::=
    satID
    doppler0thOrder
    extraDopplerInfo
    codePhase
    integerCodePhase
    gps-BitNumber
    codePhaseSearchWindow
    azimuthAndElevation
}
SEQUENCE {
    SatID,
    INTEGER (-2048..2047),
    ExtraDopplerInfo
    INTEGER (0..1022),
    INTEGER (0..19),
    INTEGER (0..3),
    CodePhaseSearchWindow,
    AzimuthAndElevation
} OPTIONAL

AcquisitionSatInfoList ::=
SEQUENCE (SIZE (1..maxSat)) OF
    AcquisitionSatInfo

AdditionalAssistanceData ::=
OCTET STRING (SIZE (1..38))

AdditionalMeasurementID-List ::=
SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
    MeasurementIdentity

AlmanacSatInfo ::=
    satID
    e
    t-0a
    deltaI
    omegaDot
    satHealth
    a-Sqrt
    omega0
    m0
    omega
    af0
    af1
}
SEQUENCE {
    SatID,
    BIT STRING (SIZE (16)),
    BIT STRING (SIZE (8)),
    BIT STRING (SIZE (16)),
    BIT STRING (SIZE (16)),
    BIT STRING (SIZE (8)),
    BIT STRING (SIZE (24)),
    BIT STRING (SIZE (24)),
    BIT STRING (SIZE (24)),
    BIT STRING (SIZE (24)),
    BIT STRING (SIZE (11)),
    BIT STRING (SIZE (11))
}

AlmanacSatInfoList ::=
SEQUENCE (SIZE (1..maxSat)) OF
    AlmanacSatInfo

AverageRLC-BufferPayload ::=
ENUMERATED {
    pla0, pla4, pla8, pla16, pla32,
    pla64, pla128, pla256, pla512,
    pla1024, pla2k, pla4k, pla8k, pla16k,
    pla32k, pla64k, pla128k, pla256k,
    pla512k, pla1024k }

AzimuthAndElevation ::=
    azimuth
    elevation
}
SEQUENCE {
    INTEGER (0..31),
    INTEGER (0..7)
}

BadSatList ::=
SEQUENCE (SIZE (1..maxSat)) OF
    INTEGER (0..63)

BCCH-ARFCN ::=
INTEGER (0..1023)

BLER-MeasurementResults ::=
    transportChannelIdentity
    dl-TransportChannelBLER
}
SEQUENCE {
    TransportChannelIdentity,
    DL-TransportChannelBLER
} OPTIONAL

BLER-MeasurementResultsList ::=
SEQUENCE (SIZE (1..maxTrCH)) OF
    BLER-MeasurementResults

BLER-TransChIdList ::=
SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

BSIC-VerificationRequired ::=
ENUMERATED {
    required, notRequired }

BSICReported ::=
    verifiedBSIC
    nonVerifiedBSIC
}
CHOICE {
    INTEGER (0..maxCellMeas),
    BCCH-ARFCN
}

BurstModeParameters ::=
    burstStart
    burstLength
    burstFreq
}
SEQUENCE {
    INTEGER (0..15),
    INTEGER (10..25),
    INTEGER (1..16)
}

CellDCH-ReportCriteria ::=
    intraFreqReportingCriteria
    periodicalReportingCriteria
}
CHOICE {
    IntraFreqReportingCriteria,
    PeriodicalReportingCriteria
}

```

```

}

-- Actual value = IE value * 0.5
CellIndividualOffset ::= INTEGER (-20..20)

CellInfo ::= SEQUENCE {
  cellIndividualOffset CellIndividualOffset DEFAULT 0,
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      primaryCPICH-Info PrimaryCPICH-Info OPTIONAL,
      primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,
      readSFN-Indicator BOOLEAN,
      tx-DiversityIndicator BOOLEAN
    },
    tdd SEQUENCE {
      primaryCCPCH-Info PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,
      timeslotInfoList TimeslotInfoList OPTIONAL
    }
  }
}

CellInfoSI-RSCP ::= SEQUENCE {
  cellIndividualOffset CellIndividualOffset DEFAULT 0,
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      primaryCPICH-Info PrimaryCPICH-Info OPTIONAL,
      primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,
      readSFN-Indicator BOOLEAN,
      tx-DiversityIndicator BOOLEAN
    },
    tdd SEQUENCE {
      primaryCCPCH-Info PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,
      timeslotInfoList TimeslotInfoList OPTIONAL
    }
  },
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-RSCP OPTIONAL
}

CellInfoSI-ECN0 ::= SEQUENCE {
  cellIndividualOffset CellIndividualOffset DEFAULT 0,
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      primaryCPICH-Info PrimaryCPICH-Info OPTIONAL,
      primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,
      readSFN-Indicator BOOLEAN,
      tx-DiversityIndicator BOOLEAN
    },
    tdd SEQUENCE {
      primaryCCPCH-Info PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,
      timeslotInfoList TimeslotInfoList OPTIONAL
    }
  },
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-ECN0 OPTIONAL
}

CellInfoSI-HCS-RSCP ::= SEQUENCE {
  cellIndividualOffset CellIndividualOffset DEFAULT 0,
  referenceTimeDifferenceToCell ReferenceTimeDifferenceToCell OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      primaryCPICH-Info PrimaryCPICH-Info OPTIONAL,
      primaryCPICH-TX-Power PrimaryCPICH-TX-Power OPTIONAL,
      readSFN-Indicator BOOLEAN,
      tx-DiversityIndicator BOOLEAN
    },
    tdd SEQUENCE {
      primaryCCPCH-Info PrimaryCCPCH-Info,
      primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power OPTIONAL,
      timeslotInfoList TimeslotInfoList OPTIONAL
    }
  },
  cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12-HCS-RSCP OPTIONAL
}

CellInfoSI-HCS-ECN0 ::= SEQUENCE {
  cellIndividualOffset CellIndividualOffset DEFAULT 0,

```



```

referenceTimeDifferenceToCell      ReferenceTimeDifferenceToCell      OPTIONAL,
modeSpecificInfo                  CHOICE {
  fdd                              SEQUENCE {
    primaryCPICH-Info              PrimaryCPICH-Info              OPTIONAL,
    primaryCPICH-TX-Power          PrimaryCPICH-TX-Power        OPTIONAL,
    readSFN-Indicator             BOOLEAN,
    tx-DiversityIndicator          BOOLEAN
  },
  tdd                              SEQUENCE {
    primaryCCPCH-Info              PrimaryCCPCH-Info,
    primaryCCPCH-TX-Power          PrimaryCCPCH-TX-Power        OPTIONAL,
    timeslotInfoList              TimeslotInfoList              OPTIONAL
  }
},
cellSelectionReselectionInfo      CellSelectReselectInfoSIB-11-12-HCS-ECN0  OPTIONAL
}

CellMeasuredResults ::=
cellIdentity                      SEQUENCE {
  cellIdentity                    CellIdentity                    OPTIONAL,
  sfn-SFN-ObsTimeDifference       SFN-SFN-ObsTimeDifference       OPTIONAL,
  cellSynchronisationInfo         CellSynchronisationInfo         OPTIONAL,
  modeSpecificInfo                CHOICE {
    fdd                            SEQUENCE {
      primaryCPICH-Info            PrimaryCPICH-Info,
      cpich-Ec-N0                  CPICH-Ec-N0                    OPTIONAL,
      cpich-RSCP                   CPICH-RSCP                      OPTIONAL,
      pathloss                      Pathloss                        OPTIONAL
    },
    tdd                            SEQUENCE {
      cellParametersID             CellParametersID,
      proposedTGSN                 TGSN                            OPTIONAL,
      primaryCCPCH-RSCP            PrimaryCCPCH-RSCP              OPTIONAL,
      timeslotISCP-List            TimeslotISCP-List              OPTIONAL
    }
  }
}

CellMeasurementEventResults ::=
  fdd                              SEQUENCE (SIZE (1..maxCellMeas)) OF
    PrimaryCPICH-Info
  tdd                              SEQUENCE (SIZE (1..maxCellMeas)) OF
    PrimaryCCPCH-Info
}

CellPosition ::=
  relativeNorth                    INTEGER (-32767..32767),
  relativeEast                     INTEGER (-32767..32767),
  relativeAltitude                 INTEGER (-4095..4095)
}

CellReportingQuantities ::=
  sfn-SFN-OTD-Type                 SFN-SFN-OTD-Type,
  cellIdentity-reportingIndicator   BOOLEAN,
  cellSynchronisationInfoReportingIndicator  BOOLEAN,
  modeSpecificInfo                 CHOICE {
    fdd                             SEQUENCE {
      cpich-Ec-N0-reportingIndicator  BOOLEAN,
      cpich-RSCP-reportingIndicator   BOOLEAN,
      pathloss-reportingIndicator     BOOLEAN
    },
    tdd                             SEQUENCE {
      timeslotISCP-reportingIndicator  BOOLEAN,
      proposedTGSN-ReportingRequired  BOOLEAN,
      primaryCCPCH-RSCP-reportingIndicator  BOOLEAN,
      pathloss-reportingIndicator     BOOLEAN
    }
  }
}

CellSelectReselectInfoSIB-11-12 ::= SEQUENCE {
  q-Offset1S-N                     Q-OffsetS-N                     DEFAULT 0,
  q-Offset2S-N                     Q-OffsetS-N                     OPTIONAL,
  maxAllowedUL-TX-Power             MaxAllowedUL-TX-Power           OPTIONAL,
  hcs-NeighbouringCellInformation-RSCP  HCS-NeighbouringCellInformation-RSCP
  OPTIONAL,
  modeSpecificInfo                  CHOICE {
    fdd                             SEQUENCE {
      q-QualMin                     Q-QualMin                       OPTIONAL,
      q-RxlevMin                     Q-RxlevMin                      OPTIONAL
    },
    tdd                             SEQUENCE {
      q-RxlevMin                     Q-RxlevMin                      OPTIONAL
    }
  },

```

```

        gsm                SEQUENCE {
            q-RxlevMin      Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-RSCP ::= SEQUENCE {
    q-OffsetS-N            Q-OffsetS-N                DEFAULT 0,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power      OPTIONAL,
    modeSpecificInfo      CHOICE {
        fdd                SEQUENCE {
            q-QualMin      Q-QualMin                OPTIONAL,
            q-RxlevMin     Q-RxlevMin              OPTIONAL
        },
        tdd                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        },
        gsm                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-ECNO ::= SEQUENCE {
    q-Offset1S-N          Q-OffsetS-N                DEFAULT 0,
    q-Offset2S-N          Q-OffsetS-N                DEFAULT 0,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power      OPTIONAL,
    modeSpecificInfo      CHOICE {
        fdd                SEQUENCE {
            q-QualMin      Q-QualMin                OPTIONAL,
            q-RxlevMin     Q-RxlevMin              OPTIONAL
        },
        tdd                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        },
        gsm                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-RSCP ::= SEQUENCE {
    q-OffsetS-N            Q-OffsetS-N                DEFAULT 0,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power      OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo      CHOICE {
        fdd                SEQUENCE {
            q-QualMin      Q-QualMin                OPTIONAL,
            q-RxlevMin     Q-RxlevMin              OPTIONAL
        },
        tdd                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        },
        gsm                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-ECNO ::= SEQUENCE {
    q-Offset1S-N          Q-OffsetS-N                DEFAULT 0,
    q-Offset2S-N          Q-OffsetS-N                DEFAULT 0,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power      OPTIONAL,
    hcs-NeighbouringCellInformation-ECNO HCS-NeighbouringCellInformation-ECNO
    OPTIONAL,
    modeSpecificInfo      CHOICE {
        fdd                SEQUENCE {
            q-QualMin      Q-QualMin                OPTIONAL,
            q-RxlevMin     Q-RxlevMin              OPTIONAL
        },
        tdd                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        },
        gsm                SEQUENCE {
            q-RxlevMin     Q-RxlevMin                OPTIONAL
        }
    }
}

CellSynchronisationInfo ::= SEQUENCE {
    modeSpecificInfo      CHOICE {
        fdd                SEQUENCE {

```

```

        countC-SFN-Frame-difference      CountC-SFN-Frame-difference      OPTIONAL,
        tm                                INTEGER(0..38399)
    },
    tdd                                    SEQUENCE {
        countC-SFN-Frame-difference      CountC-SFN-Frame-difference
    }
}

CellToMeasure ::=
    sfn-sfn-Drift                          INTEGER (0..30)                    OPTIONAL,
    primaryCPICH-Info                       PrimaryCPICH-Info,
    frequencyInfo                            FrequencyInfo                       OPTIONAL,
    sfn-SFN-ObservedTimeDifference           SFN-SFN-ObsTimeDifferencel,
    fineSFN-SFN                             FineSFN-SFN,
    cellPosition                             CellPosition                       OPTIONAL
}

CellToMeasureInfoList ::=
    SEQUENCE (SIZE (1..maxCellMeas)) OF
        CellToMeasure

CellToReport ::=
    bsicReported                            BSICReported
}

CellToReportList ::=
    SEQUENCE (SIZE (1..maxCellMeas)) OF
        CellToReport

CodePhaseSearchWindow ::=
    ENUMERATED {
        w1023, w1, w2, w3, w4, w6, w8,
        w12, w16, w24, w32, w48, w64,
        w96, w128, w192 }

CountC-SFN-Frame-difference ::= SEQUENCE {
    countC-SFN-High                         INTEGER(0..15),                    -- Actual value = IE value * 256
    off                                       INTEGER(0..255)
}

CPICH-Ec-NO ::=
    INTEGER (-20..0)

-- IE value 0 = <-24 dB, 1 = between -24 and -23 and so on
CPICH-Ec-NO-OTDOA ::=
    INTEGER (0..26)

CPICH-RSCP ::=
    INTEGER (-115..-40)

DeltaPRC ::=
    INTEGER (-127..127)

DeltaRRC ::=
    INTEGER (-7..7)

DGPS-CorrectionSatInfo ::=
    satID                                    SatID,
    iode                                     BIT STRING (SIZE (8)),
    udre                                    UDRE,
    prc                                     PRC,
    rrc                                    RRC,
    deltaPRC2                              DeltaPRC,
    deltaRRC2                              DeltaRRC,
    deltaPRC3                              DeltaPRC,
    deltaRRC3                              DeltaRRC
}

DGPS-CorrectionSatInfoList ::=
    SEQUENCE (SIZE (1..maxSat)) OF
        DGPS-CorrectionSatInfo

DGPS-Information ::=
    satID                                    SatID,
    iode                                    IODE,
    udre                                    UDRE,
    prc                                    PRC,
    rrc                                    RRC,
    deltaPRC2                              DeltaPRC,
    deltaRRC2                              DeltaRRC
}

DGPS-InformationList ::=
    SEQUENCE (SIZE (1..maxSat)) OF
        DGPS-Information

DiffCorrectionStatus ::=
    ENUMERATED {
        udre-1-0, udre-0-75, udre-0-5, udre-0-3,
        udre-0-2, udre-0-1, noData, invalidData }

-- Actual value = IE value * 0.02

```

```

DL-PhysicalChannelBER ::= INTEGER (0..255)
DL-TransportChannelBLER ::= INTEGER (0..63)
DopplerUncertainty ::= ENUMERATED {
    hz12-5, hz25, hz50, hz100, hz200 }
EllipsoidPoint ::= OCTET STRING (SIZE (7))
EllipsoidPointAltitude ::= OCTET STRING (SIZE (9))
EllipsoidPointAltitudeEllipse ::= OCTET STRING (SIZE (14))
EllipsoidPointUncertCircle ::= OCTET STRING (SIZE (8))
EllipsoidPointUncertEllipse ::= OCTET STRING (SIZE (11))
EnvironmentCharacterisation ::= ENUMERATED {
    possibleHeavyMultipathNLOS,
    lightMultipathLOS,
    notDefined }
Event1a ::= SEQUENCE {
    triggeringCondition TriggeringCondition2,
    reportingRange ReportingRange,
    forbiddenAffectCellList ForbiddenAffectCellList OPTIONAL,
    w W,
    reportDeactivationThreshold ReportDeactivationThreshold,
    reportingAmount ReportingAmount,
    reportingInterval ReportingInterval
}
Event1b ::= SEQUENCE {
    triggeringCondition TriggeringCondition1,
    reportingRange ReportingRange,
    forbiddenAffectCellList ForbiddenAffectCellList OPTIONAL,
    w W
}
Event1c ::= SEQUENCE {
    replacementActivationThreshold ReplacementActivationThreshold,
    reportingAmount ReportingAmount,
    reportingInterval ReportingInterval
}
Event1e ::= SEQUENCE {
    triggeringCondition TriggeringCondition2,
    thresholdUsedFrequency ThresholdUsedFrequency
}
Event1f ::= SEQUENCE {
    triggeringCondition TriggeringCondition1,
    thresholdUsedFrequency ThresholdUsedFrequency
}
Event2a ::= SEQUENCE {
    usedFreqThreshold Threshold,
    usedFreqW W,
    hysteresis HysteresisInterFreq,
    timeToTrigger TimeToTrigger,
    reportingCellStatus ReportingCellStatus OPTIONAL,
    nonUsedFreqParameterList NonUsedFreqParameterList OPTIONAL
}
Event2b ::= SEQUENCE {
    usedFreqThreshold Threshold,
    usedFreqW W,
    hysteresis HysteresisInterFreq,
    timeToTrigger TimeToTrigger,
    reportingCellStatus ReportingCellStatus OPTIONAL,
    nonUsedFreqParameterList NonUsedFreqParameterList OPTIONAL
}
Event2c ::= SEQUENCE {
    hysteresis HysteresisInterFreq,
    timeToTrigger TimeToTrigger,
    reportingCellStatus ReportingCellStatus OPTIONAL,
    nonUsedFreqParameterList NonUsedFreqParameterList OPTIONAL
}
Event2d ::= SEQUENCE {
    usedFreqThreshold Threshold,
    usedFreqW W,

```

```

    hysteresis                HysteresisInterFreq,
    timeToTrigger             TimeToTrigger,
    reportingCellStatus       ReportingCellStatus
}
                                OPTIONAL

Event2e ::=
    hysteresis                HysteresisInterFreq,
    timeToTrigger             TimeToTrigger,
    reportingCellStatus       ReportingCellStatus
    nonUsedFreqParameterList NonUsedFreqParameterList
}
                                OPTIONAL,
                                OPTIONAL

Event2f ::=
    usedFreqThreshold         Threshold,
    usedFreqW                 W,
    hysteresis                HysteresisInterFreq,
    timeToTrigger             TimeToTrigger,
    reportingCellStatus       ReportingCellStatus
}
                                OPTIONAL

Event3a ::=
    thresholdOwnSystem        Threshold,
    w                          W,
    thresholdOtherSystem      Threshold,
    hysteresis                Hysteresis,
    timeToTrigger             TimeToTrigger,
    reportingCellStatus       ReportingCellStatus
}
                                OPTIONAL

Event3b ::=
    thresholdOtherSystem      Threshold,
    hysteresis                Hysteresis,
    timeToTrigger             TimeToTrigger,
    reportingCellStatus       ReportingCellStatus
}
                                OPTIONAL

Event3c ::=
    thresholdOtherSystem      Threshold,
    hysteresis                Hysteresis,
    timeToTrigger             TimeToTrigger,
    reportingCellStatus       ReportingCellStatus
}
                                OPTIONAL

Event3d ::=
    hysteresis                Hysteresis,
    timeToTrigger             TimeToTrigger,
    reportingCellStatus       ReportingCellStatus
}
                                OPTIONAL

EventIDInterFreq ::=
    ENUMERATED {
        e2a, e2b, e2c, e2d, e2e, e2f }

EventIDInterRAT ::=
    ENUMERATED {
        e3a, e3b, e3c, e3d }

EventIDIntraFreq ::=
    ENUMERATED {
        e1a, e1b, e1c, e1d, e1e,
        e1f, e1g, e1h, e1i }

EventResults ::=
    intraFreqEventResults     IntraFreqEventResults,
    interFreqEventResults     InterFreqEventResults,
    interRATEventResults     InterRATEventResults,
    trafficVolumeEventResults TrafficVolumeEventResults,
    qualityEventResults       QualityEventResults,
    ue-InternalEventResults   UE-InternalEventResults,
    up-MeasurementEventResults UP-MeasurementEventResults
}

ExtraDopplerInfo ::=
    doppler1stOrder           INTEGER (-42..21),
    dopplerUncertainty        DopplerUncertainty
}

FACH-MeasurementOccasionInfo ::=
    FACH-meas-occasion-coeff  INTEGER (1..12)
    inter-freq-FDD-meas-ind   BOOLEAN
    inter-freq-TDD-meas-ind   BOOLEAN
    inter-RAT-meas-ind        SEQUENCE (SIZE (1..maxOtherRAT)) OF
                                RAT-Type
}
                                OPTIONAL,
                                OPTIONAL,
                                OPTIONAL

```

```

FilterCoefficient ::=
    ENUMERATED {
        fc0, fc1, fc2, fc3, fc4, fc5,
        fc6, fc7, fc8, fc9, fc11, fc13,
        fc15, fc17, fc19, spare1 }

FineSFN-SFN ::=
    ENUMERATED {
        fs0, fs0-25, fs0-5, fs0-75 }

ForbiddenAffectCell ::=
    CHOICE {
        fdd
        tdd
    }

ForbiddenAffectCellList ::=
    SEQUENCE (SIZE (1..maxCellMeas)) OF
        ForbiddenAffectCell

FreqQualityEstimateQuantity-FDD ::=
    ENUMERATED {
        cpich-EC-N0,
        cpich-RSCP }

FreqQualityEstimateQuantity-TDD ::=
    ENUMERATED {
        primaryCCPCH-RSCP }

GPS-MeasurementParam ::=
    SEQUENCE {
        satelliteID
            INTEGER (0..63),
        c-N0
            INTEGER (0..63),
        doppler
            INTEGER (-32768..32768),
        wholeGPS-Chips
            INTEGER (0..1023),
        fractionalGPS-Chips
            INTEGER (0..1023),
        multipathIndicator
            MultipathIndicator,
        pseudorangeRMS-Error
            INTEGER (0..63)
    }

GPS-MeasurementParamList ::=
    SEQUENCE (SIZE (1..maxSat)) OF
        GPS-MeasurementParam

GSM-CarrierRSSI ::=
    BIT STRING (SIZE (6))

GSM-MeasuredResults ::=
    SEQUENCE {
        gsm-CarrierRSSI
            GSM-CarrierRSSI
            OPTIONAL,
        pathloss
            Pathloss
            OPTIONAL,
        bsicReported
            BSICReported,
        observedTimeDifferenceToGSM
            ObservedTimeDifferenceToGSM
            OPTIONAL
    }

GSM-MeasuredResultsList ::=
    SEQUENCE (SIZE (1..maxReportedGSMCells)) OF
        GSM-MeasuredResults

-- **TODO**, not defined yet
GSM-OutputPower ::=
    SEQUENCE {
    }

GPS-TOW-1msec ::=
    INTEGER (0..604799999)

GPS-TOW-1usec ::=
    SEQUENCE {
        tow-1msec
            GPS-TOW-1msec,
        tow-rem-usec
            GPS-TOW-rem-usec
    }

GPS-TOW-Assist ::=
    SEQUENCE {
        satID
            SatID,
        tlm-Message
            BIT STRING (SIZE (14)),
        antiSpoof
            BOOLEAN,
        alert
            BOOLEAN,
        tlm-Reserved
            BIT STRING (SIZE (2))
    }

GPS-TOW-AssistList ::=
    SEQUENCE (SIZE (1..maxSat)) OF
        GPS-TOW-Assist

GPS-TOW-rem-usec ::=
    INTEGER (0..999)

HCS-CellReselectInformation-RSCP ::=
    SEQUENCE {
        penaltyTime
            PenaltyTime-RSCP
        -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
    }

HCS-CellReselectInformation-ECN0 ::=
    SEQUENCE {
        penaltyTime
            PenaltyTime-ECN0
        -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
    }

```

```

HCS-NeighbouringCellInformation-RSCP ::= SEQUENCE {
    hcs-PRIO                HCS-PRIO                DEFAULT 0,
    q-HCS                   Q-HCS                   DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-RSCP
}

HCS-NeighbouringCellInformation-ECNO ::= SEQUENCE {
    hcs-PRIO                HCS-PRIO                DEFAULT 0,
    q-HCS                   Q-HCS                   DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-ECNO
}

HCS-PRIO ::=
    INTEGER (0..7)

HCS-ServingCellInformation ::=
    SEQUENCE {
        hcs-PRIO                HCS-PRIO                DEFAULT 0,
        q-HCS                   Q-HCS                   DEFAULT 0,
        t-CR-Max                T-CR-Max                OPTIONAL
    }

-- Actual value = IE value * 0.5
Hysteresis ::=
    INTEGER (0..15)

-- Actual value = IE value * 0.5
HysteresisInterFreq ::=
    INTEGER (0..29)

InterFreqCell ::=
    SEQUENCE {
        frequencyInfo          FrequencyInfo,
        nonFreqRelatedEventResults CellMeasurementEventResults
    }

InterFreqCellID ::=
    INTEGER (0..maxCellMeas-1)

InterFreqCellInfoList ::=
    SEQUENCE {
        removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
        newInterFreqCellList     NewInterFreqCellList     OPTIONAL
    }

InterFreqCellInfoSI-List-RSCP ::=
    SEQUENCE {
        removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
        newInterFreqCellList     NewInterFreqCellSI-List-RSCP OPTIONAL
    }

InterFreqCellInfoSI-List-ECNO ::=
    SEQUENCE {
        removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
        newInterFreqCellList     NewInterFreqCellSI-List-ECNO OPTIONAL
    }

InterFreqCellInfoSI-List-HCS-RSCP ::=
    SEQUENCE {
        removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
        newInterFreqCellList     NewInterFreqCellSI-List-HCS-RSCP OPTIONAL
    }

InterFreqCellInfoSI-List-HCS-ECNO ::=
    SEQUENCE {
        removedInterFreqCellList RemovedInterFreqCellList OPTIONAL,
        newInterFreqCellList     NewInterFreqCellSI-List-HCS-ECNO OPTIONAL
    }

InterFreqCellList ::=
    SEQUENCE (SIZE (1..maxFreq)) OF
        InterFreqCell

InterFreqCellMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
        CellMeasuredResults

InterFreqEvent ::=
    CHOICE {
        event2a      Event2a,
        event2b      Event2b,
        event2c      Event2c,
        event2d      Event2d,
        event2e      Event2e,
        event2f      Event2f
    }

InterFreqEventList ::=
    SEQUENCE (SIZE (1..maxMeasEvent)) OF
        InterFreqEvent

InterFreqEventResults ::=
    SEQUENCE {
        eventID      EventIDInterFreq,
        interFreqCellList InterFreqCellList OPTIONAL
    }

InterFreqMeasQuantity ::=
    SEQUENCE {

```

```

reportingCriteria CHOICE {
  intraFreqReportingCriteria SEQUENCE {
    intraFreqMeasQuantity IntraFreqMeasQuantity
  },
  interFreqReportingCriteria SEQUENCE {
    filterCoefficient FilterCoefficient DEFAULT fc0,
    modeSpecificInfo CHOICE {
      fdd SEQUENCE {
        freqQualityEstimateQuantity-FDD FreqQualityEstimateQuantity-FDD
      },
      tdd SEQUENCE {
        freqQualityEstimateQuantity-TDD FreqQualityEstimateQuantity-TDD
      }
    }
  }
}
}
}

InterFreqMeasuredResults ::= SEQUENCE {
  frequencyInfo FrequencyInfo OPTIONAL,
  ultra-CarrierRSSI UTRA-CarrierRSSI OPTIONAL,
  interFreqCellMeasuredResultsList InterFreqCellMeasuredResultsList OPTIONAL
}

InterFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxFreq)) OF
  InterFreqMeasuredResults

InterFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
  interFreqCellInfoSI-List InterFreqCellInfoSI-List-RSCP OPTIONAL
}

InterFreqMeasurementSysInfo-ECNO ::= SEQUENCE {
  interFreqCellInfoSI-List InterFreqCellInfoSI-List-ECNO OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
  interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-RSCP OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECNO ::= SEQUENCE {
  interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-ECNO OPTIONAL
}

InterFreqReportCriteria ::= CHOICE {
  intraFreqReportingCriteria IntraFreqReportingCriteria,
  interFreqReportingCriteria InterFreqReportingCriteria,
  periodicalReportingCriteria PeriodicalWithReportingCellStatus,
  noReporting ReportingCellStatusOpt
}

InterFreqReportingCriteria ::= SEQUENCE {
  interFreqEventList InterFreqEventList OPTIONAL
}

InterFreqReportingQuantity ::= SEQUENCE {
  ultra-Carrier-RSSI BOOLEAN,
  frequencyQualityEstimate BOOLEAN,
  nonFreqRelatedQuantities CellReportingQuantities
}

InterFrequencyMeasurement ::= SEQUENCE {
  interFreqCellInfoList InterFreqCellInfoList,
  interFreqMeasQuantity InterFreqMeasQuantity OPTIONAL,
  interFreqReportingQuantity InterFreqReportingQuantity OPTIONAL,
  measurementValidity MeasurementValidity OPTIONAL,
  interFreqSetUpdate UE-AutonomousUpdateMode OPTIONAL,
  reportCriteria InterFreqReportCriteria
}

InterRAT-TargetCellDescription ::= SEQUENCE {
  technologySpecificInfo CHOICE {
    gsm SEQUENCE {
      bsic BSIC,
      bcch-ARFCN BCCH-ARFCN,
      ncMode NC-Mode OPTIONAL
    },
    is-2000 NULL,
    spare NULL
  }
}

InterRATCellID ::= INTEGER (0..maxCellMeas-1)

```



```

InterRATCellInfoList ::= SEQUENCE {
    removedInterRATCellList
    newInterRATCellList
}

InterRATCellInfoList-HCS ::= SEQUENCE {
    removedInterRATCellList
    newInterRATCellList-HCS
}

InterRATEvent ::= CHOICE {
    event3a      Event3a,
    event3b      Event3b,
    event3c      Event3c,
    event3d      Event3d
}

InterRATEventList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    InterRATEvent

InterRATEventResults ::= SEQUENCE {
    eventID      EventIDInterRAT,
    cellToReportList
}

InterRATInfo ::= ENUMERATED {
    gsm
}

InterRATMeasQuantity ::= SEQUENCE {
    measQuantityUTRAN-QualityEstimate
    ratSpecificInfo
    gsm          CHOICE {
        measurementQuantity
        filterCoefficient
        bsic-VerificationRequired
    },
    is-2000     SEQUENCE {
        tadd-EcIo          INTEGER (0..63),
        tcomp-EcIo        INTEGER (0..15),
        softSlope          INTEGER (0..63)
    },
    addIntercept          INTEGER (0..63)
}

InterRATMeasuredResults ::= CHOICE {
    gsm          GSM-MeasuredResultsList,
    spare       NULL
}

InterRATMeasuredResultsList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
    InterRATMeasuredResults

InterRATMeasurement ::= SEQUENCE {
    interRATCellInfoList
    interRATMeasQuantity
    interRATReportingQuantity
    reportCriteria
}

InterRATMeasurementSysInfo ::= SEQUENCE {
    interRATCellInfoList
}

InterRATMeasurementSysInfo-HCS ::= SEQUENCE {
    interRATCellInfoList
}

InterRATReportCriteria ::= CHOICE {
    interRATReportingCriteria
    periodicalReportingCriteria
    noReporting
}

InterRATReportingCriteria ::= SEQUENCE {
    interRATEventList
}

InterRATReportingQuantity ::= SEQUENCE {
    utran-EstimatedQuality
    ratSpecificInfo
    gsm          CHOICE {
        pathloss
    }
}

```

```

        observedTimeDifferenceGSM          BOOLEAN,
        gsm-Carrier-RSSI                   BOOLEAN
    }
}

IntraFreqCellID ::=                      INTEGER (0..maxCellMeas-1)

IntraFreqCellInfoList ::=                SEQUENCE {
    removedIntraFreqCellList             RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList                  NewIntraFreqCellList              OPTIONAL
}

IntraFreqCellInfoSI-List-RSCP ::=        SEQUENCE {
    removedIntraFreqCellList             RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList                  NewIntraFreqCellSI-List-RSCP
}

IntraFreqCellInfoSI-List-ECNO ::=        SEQUENCE {
    removedIntraFreqCellList             RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList                  NewIntraFreqCellSI-List-ECNO
}

IntraFreqCellInfoSI-List-HCS-RSCP ::=    SEQUENCE {
    removedIntraFreqCellList             RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList                  NewIntraFreqCellSI-List-HCS-RSCP
}

IntraFreqCellInfoSI-List-HCS-ECNO ::=    SEQUENCE {
    removedIntraFreqCellList             RemovedIntraFreqCellList          OPTIONAL,
    newIntraFreqCellList                  NewIntraFreqCellSI-List-HCS-ECNO
}

IntraFreqEvent ::=                       CHOICE {
    e1a                                    Event1a,
    e1b                                    Event1b,
    e1c                                    Event1c,
    e1d                                    NULL,
    e1e                                    Event1e,
    e1f                                    Event1f,
    e1g                                    NULL,
    e1h                                    ThresholdUsedFrequency,
    e1i                                    ThresholdUsedFrequency
}

IntraFreqEventCriteria ::=                SEQUENCE {
    event                                  IntraFreqEvent,
    hysteresis                             Hysteresis,
    timeToTrigger                          TimeToTrigger,
    reportingCellStatus                    ReportingCellStatus          OPTIONAL
}

IntraFreqEventCriteriaList ::=            SEQUENCE (SIZE (1..maxMeasEvent)) OF
    IntraFreqEventCriteria

IntraFreqEventResults ::=                 SEQUENCE {
    eventID                                 EventIDIntraFreq,
    cellMeasurementEventResults            CellMeasurementEventResults
}

IntraFreqMeasQuantity ::=                 SEQUENCE {
    filterCoefficient                      FilterCoefficient          DEFAULT fc1,
    modeSpecificInfo                       CHOICE {
        fdd                                SEQUENCE {
            intraFreqMeasQuantity-FDD      IntraFreqMeasQuantity-FDD
        },
        tdd                                SEQUENCE {
            intraFreqMeasQuantity-TDDList   IntraFreqMeasQuantity-TDDList
        }
    }
}

IntraFreqMeasQuantity-FDD ::=             ENUMERATED {
    cpich-Ec-NO,
    cpich-RSCP,
    pathloss,
    ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDD ::=             ENUMERATED {
    primaryCCPCH-RSCP,
    pathloss,
    timeslotISCP,
    ultra-CarrierRSSI }

```

```

IntraFreqMeasQuantity-TDDList ::= SEQUENCE (SIZE (1..4)) OF
    IntraFreqMeasQuantity-TDD

IntraFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellMeasuredResults

IntraFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
    intraFreqMeasurementID          MeasurementIdentity          DEFAULT 1,
    intraFreqCellInfoSI-List        IntraFreqCellInfoSI-List-RSCP  OPTIONAL,
    intraFreqMeasQuantity           IntraFreqMeasQuantity          OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
    maxReportedCellsOnRACH          MaxReportedCellsOnRACH          OPTIONAL,
    reportingInfoForCellDCH         ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqMeasurementSysInfo-ECN0 ::= SEQUENCE {
    intraFreqMeasurementID          MeasurementIdentity          DEFAULT 1,
    intraFreqCellInfoSI-List        IntraFreqCellInfoSI-List-ECN0  OPTIONAL,
    intraFreqMeasQuantity           IntraFreqMeasQuantity          OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
    maxReportedCellsOnRACH          MaxReportedCellsOnRACH          OPTIONAL,
    reportingInfoForCellDCH         ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
    intraFreqMeasurementID          MeasurementIdentity          DEFAULT 1,
    intraFreqCellInfoSI-List        IntraFreqCellInfoSI-List-HCS-RSCP  OPTIONAL,
    intraFreqMeasQuantity           IntraFreqMeasQuantity          OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
    maxReportedCellsOnRACH          MaxReportedCellsOnRACH          OPTIONAL,
    reportingInfoForCellDCH         ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECN0 ::= SEQUENCE {
    intraFreqMeasurementID          MeasurementIdentity          DEFAULT 1,
    intraFreqCellInfoSI-List        IntraFreqCellInfoSI-List-HCS-ECN0  OPTIONAL,
    intraFreqMeasQuantity           IntraFreqMeasQuantity          OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH  OPTIONAL,
    maxReportedCellsOnRACH          MaxReportedCellsOnRACH          OPTIONAL,
    reportingInfoForCellDCH         ReportingInfoForCellDCH          OPTIONAL
}

IntraFreqReportCriteria ::= CHOICE {
    intraFreqReportingCriteria      IntraFreqReportingCriteria,
    periodicalReportingCriteria     PeriodicalWithReportingCellStatus,
    noReporting                     ReportingCellStatusOpt
}

IntraFreqReportingCriteria ::= SEQUENCE {
    eventCriteriaList              IntraFreqEventCriteriaList  OPTIONAL
}

IntraFreqReportingQuantity ::= SEQUENCE {
    activeSetReportingQuantities    CellReportingQuantities,
    monitoredSetReportingQuantities CellReportingQuantities,
    detectedSetReportingQuantities  CellReportingQuantities      OPTIONAL
}

IntraFreqReportingQuantityForRACH ::= SEQUENCE {
    sfn-SFN-OTD-Type              SFN-SFN-OTD-Type,
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            intraFreqRepQuantityRACH-FDD  IntraFreqRepQuantityRACH-FDD
        },
        tdd                        SEQUENCE {
            intraFreqRepQuantityRACH-TDDList  IntraFreqRepQuantityRACH-TDDList
        }
    }
}

IntraFreqRepQuantityRACH-FDD ::= ENUMERATED {
    cpich-EcN0, cpich-RSCP,
    pathloss, noReport }

IntraFreqRepQuantityRACH-TDD ::= ENUMERATED {
    timeslotISCP,
    primaryCCPCH-RSCP,
    noReport }

IntraFreqRepQuantityRACH-TDDList ::= SEQUENCE (SIZE (1..2)) OF
    IntraFreqRepQuantityRACH-TDD

```

```

IntraFrequencyMeasurement ::= SEQUENCE {
    intraFreqCellInfoList          IntraFreqCellInfoList          OPTIONAL,
    intraFreqMeasQuantity          IntraFreqMeasQuantity          OPTIONAL,
    intraFreqReportingQuantity     IntraFreqReportingQuantity     OPTIONAL,
    measurementValidity            MeasurementValidity          OPTIONAL,
    reportCriteria                 IntraFreqReportCriteria      OPTIONAL
}

IODE ::= INTEGER (0..255)

IP-Length ::= ENUMERATED {
    ip15, ip110 }

IP-Spacing ::= ENUMERATED {
    e5, e7, e10, e15, e20,
    e30, e40, e50 }

IS-2000SpecificMeasInfo ::= ENUMERATED {
    frequency, timeslot, colourcode,
    outputpower, pn-Offset }

MaxNumberOfReportingCellsType1 ::= ENUMERATED {
    e1, e2, e3, e4, e5, e6 }

MaxNumberOfReportingCellsType2 ::= ENUMERATED {
    e1, e2, e3, e4, e5, e6, e7, e8, e9, e10, e11, e12 }

MaxNumberOfReportingCellsType3 ::= ENUMERATED {
    viactCellsPlus1,
    viactCellsPlus2,
    viactCellsPlus3,
    viactCellsPlus4,
    viactCellsPlus5,
    viactCellsPlus6 }

MaxReportedCellsOnRACH ::= ENUMERATED {
    noReport,
    currentCell,
    currentAnd-1-BestNeighbour,
    currentAnd-2-BestNeighbour,
    currentAnd-3-BestNeighbour,
    currentAnd-4-BestNeighbour,
    currentAnd-5-BestNeighbour,
    currentAnd-6-BestNeighbour }

MeasuredResults ::= CHOICE {
    intraFreqMeasuredResultsList  IntraFreqMeasuredResultsList,
    interFreqMeasuredResultsList  InterFreqMeasuredResultsList,
    interRATMeasuredResultsList   InterRATMeasuredResultsList,
    trafficVolumeMeasuredResultsList TrafficVolumeMeasuredResultsList,
    qualityMeasuredResults        QualityMeasuredResults,
    ue-InternalMeasuredResults    UE-InternalMeasuredResults,
    up-MeasuredResults            UP-MeasuredResults
}

MeasuredResultsList ::= SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
    MeasuredResults

MeasuredResultsOnRACH ::= SEQUENCE {
    currentCell
        SEQUENCE {
            modeSpecificInfo
                CHOICE {
                    fdd
                        SEQUENCE {
                            measurementQuantity
                                CHOICE {
                                    cpich-Ec-N0,
                                    cpich-RSCP,
                                    pathloss
                                }
                        },
                    tdd
                        SEQUENCE {
                            timeslotISCP
                                TimeslotISCP-List          OPTIONAL,
                            primaryCCPCH-RSCP
                                PrimaryCCPCH-RSCP          OPTIONAL
                        }
                }
    },
    monitoredCells
        MonitoredCellRACH-List          OPTIONAL
}

MeasurementCommand ::= CHOICE {
    setup
        MeasurementType,
    modify
        SEQUENCE {
            measurementType
                MeasurementType          OPTIONAL
        },
    release
        NULL
}

```

```

}
MeasurementControlSysInfo ::= SEQUENCE {
    use-of-HCS CHOICE {
        hcs-not-used SEQUENCE {
            cellSelectQualityMeasure CHOICE {
                cpich-RSCP SEQUENCE {
                    intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-RSCP
                }
            },
            interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-RSCP OPTIONAL
        },
        cpich-Ec-No SEQUENCE {
            intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-ECNO
        }
    },
    interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-ECNO OPTIONAL
},
interRATMeasurementSysInfo InterRATMeasurementSysInfo-HCS OPTIONAL
},
hcs-used SEQUENCE {
    cellSelectQualityMeasure CHOICE {
        cpich-RSCP SEQUENCE {
            intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-RSCP
        },
        interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-RSCP
    },
    cpich-Ec-No SEQUENCE {
        intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-ECNO
    },
    interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-ECNO
},
interRATMeasurementSysInfo InterRATMeasurementSysInfo OPTIONAL
},
trafficVolumeMeasSysInfo TrafficVolumeMeasSysInfo OPTIONAL,
ue-InternalMeasurementSysInfo UE-InternalMeasurementSysInfo OPTIONAL
}

MeasurementIdentity ::= INTEGER (1..16)

MeasurementQuantityGSM ::= ENUMERATED {
    gsm-CarrierRSSI,
    pathloss }

MeasurementReportingMode ::= SEQUENCE {
    measurementReportTransferMode TransferMode,
    periodicalOrEventTrigger PeriodicalOrEventTrigger
}

MeasurementType ::= CHOICE {
    intraFrequencyMeasurement IntraFrequencyMeasurement,
    interFrequencyMeasurement InterFrequencyMeasurement,
    interRATMeasurement InterRATMeasurement,
    up-Measurement UP-Measurement,
    trafficVolumeMeasurement TrafficVolumeMeasurement,
    qualityMeasurement QualityMeasurement,
    ue-InternalMeasurement UE-InternalMeasurement
}

MeasurementValidity ::= SEQUENCE {
    ue-State ENUMERATED {
        cell-DCH, all-But-Cell-DCH, all-States }
}

MonitoredCellRACH-List ::= SEQUENCE (SIZE (1..7)) OF
    MonitoredCellRACH-Result

MonitoredCellRACH-Result ::= SEQUENCE {
    sfn-SFN-ObsTimeDifference SFN-SFN-ObsTimeDifference OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            primaryCPICH-Info PrimaryCPICH-Info,
            measurementQuantity CHOICE {
                cpich-Ec-NO CPICH-Ec-NO,
                cpich-RSCP CPICH-RSCP,
                pathloss Pathloss
            }
        } OPTIONAL,
        tdd SEQUENCE {
            cellParametersID CellParametersID,

```

```

    }
    }
}

primaryCCPCH-RSCP                                PrimaryCCPCH-RSCP

MultipathIndicator ::=                           ENUMERATED {
    nm,
    low,
    medium,
    high }

N-CR-T-CRMaxHyst ::=                             SEQUENCE {
    n-CR                                           INTEGER (1..16)           DEFAULT 8,
    t-CRMaxHyst                                    T-CRMaxHyst
}

NavigationModelSatInfo ::=                       SEQUENCE {
    satID                                           SatID,
    satelliteStatus                               SatelliteStatus,
    navModel                                        NavModel
}

NavigationModelSatInfoList ::=                   SEQUENCE (SIZE (1..maxSat)) OF
    NavigationModelSatInfo

NavModel ::=                                     SEQUENCE {
    codeOnL2                                       BIT STRING (SIZE (2)),
    uraIndex                                       BIT STRING (SIZE (4)),
    satHealth                                       BIT STRING (SIZE (6)),
    iodc                                           BIT STRING (SIZE (10)),
    l2Pflag                                        BIT STRING (SIZE (1)),
    sflRevd                                        SubFrame1Reserved,
    t-GD                                           BIT STRING (SIZE (8)),
    t-oc                                           BIT STRING (SIZE (16)),
    af2                                           BIT STRING (SIZE (8)),
    af1                                           BIT STRING (SIZE (16)),
    af0                                           BIT STRING (SIZE (22)),
    c-rs                                           BIT STRING (SIZE (16)),
    delta-n                                       BIT STRING (SIZE (16)),
    m0                                           BIT STRING (SIZE (32)),
    c-uc                                           BIT STRING (SIZE (16)),
    e                                           BIT STRING (SIZE (32)),
    c-us                                           BIT STRING (SIZE (16)),
    a-Sqrt                                        BIT STRING (SIZE (32)),
    t-oe                                           BIT STRING (SIZE (16)),
    fitInterval                                    BIT STRING (SIZE (1)),
    aodo                                           BIT STRING (SIZE (5)),
    c-ic                                           BIT STRING (SIZE (16)),
    omega0                                         BIT STRING (SIZE (32)),
    c-is                                           BIT STRING (SIZE (16)),
    i0                                           BIT STRING (SIZE (32)),
    c-rc                                           BIT STRING (SIZE (16)),
    omega                                         BIT STRING (SIZE (32)),
    omegaDot                                       BIT STRING (SIZE (24)),
    iDot                                           BIT STRING (SIZE (14))
}

NC-Mode ::=                                     BIT STRING (SIZE (3))

Neighbour ::=                                    SEQUENCE {
    neighbourIdentity                               PrimaryCPICH-Info         OPTIONAL,
    neighbourQuantity                               NeighbourQuantity,
    sfn-SFN-ObsTimeDifference2                     SFN-SFN-ObsTimeDifference2
}

NeighbourList ::=                               SEQUENCE (SIZE (1..maxCellMeas)) OF
    Neighbour

-- **TODO**, to be defined fully
NeighbourQuantity ::=                           SEQUENCE {

NewInterFreqCell ::=                             SEQUENCE {
    interFreqCellID                               InterFreqCellID          OPTIONAL,
    frequencyInfo                                  FrequencyInfo             OPTIONAL,
    cellInfo                                        CellInfo
}

NewInterFreqCellList ::=                       SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCell

NewInterFreqCellSI-RSCP ::=                     SEQUENCE {
    interFreqCellID                               InterFreqCellID          OPTIONAL,
    frequencyInfo                                  FrequencyInfo             OPTIONAL,
}

```

```

}
cellInfo CellInfoSI-RSCP
}

NewInterFreqCellSI-ECNO ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-ECNO
}

NewInterFreqCellSI-HCS-RSCP ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-HCS-RSCP
}

NewInterFreqCellSI-HCS-ECNO ::= SEQUENCE {
    interFreqCellID InterFreqCellID OPTIONAL,
    frequencyInfo FrequencyInfo OPTIONAL,
    cellInfo CellInfoSI-HCS-ECNO
}

NewInterFreqCellSI-List-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterFreqCellSI-ECNO

NewInterFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterFreqCellSI-HCS-RSCP

NewInterFreqCellSI-List-HCS-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterFreqCellSI-HCS-ECNO

NewInterFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterFreqCellSI-RSCP

NewInterRATCell ::= SEQUENCE {
    interRATCellID InterRATCellID OPTIONAL,
    technologySpecificInfo CHOICE {
        gsm SEQUENCE {
            cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12 OPTIONAL,
            bsic BSIC,
            bcch-ARFCN BCCH-ARFCN,
            gsm-OutputPower GSM-OutputPower OPTIONAL
        },
        is-2000 SEQUENCE {
            is-2000SpecificMeasInfo IS-2000SpecificMeasInfo
        },
        spare1 NULL,
        spare2 NULL
    }
}

NewInterRATCell-HCS ::= SEQUENCE {
    interRATCellID InterRATCellID OPTIONAL,
    technologySpecificInfo CHOICE {
        gsm SEQUENCE {
            cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12 OPTIONAL,
            bsic BSIC,
            bcch-ARFCN BCCH-ARFCN,
            gsm-OutputPower GSM-OutputPower OPTIONAL
        },
        is-2000 SEQUENCE {
            is-2000SpecificMeasInfo IS-2000SpecificMeasInfo
        },
        spare1 NULL,
        spare2 NULL
    }
}

NewInterRATCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterRATCell

NewInterRATCellList-HCS ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterRATCell-HCS

NewIntraFreqCell ::= SEQUENCE {
    intraFreqCellID IntraFreqCellID OPTIONAL,
    cellInfo CellInfo
}

NewIntraFreqCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewIntraFreqCell

NewIntraFreqCellSI-RSCP ::= SEQUENCE {
    intraFreqCellID IntraFreqCellID OPTIONAL,

```

```

    cellInfo                CellInfoSI-RSCP
}

NewIntraFreqCellSI-ECNO ::= SEQUENCE {
    intraFreqCellID        IntraFreqCellID           OPTIONAL,
    cellInfo                CellInfoSI-ECNO
}

NewIntraFreqCellSI-HCS-RSCP ::= SEQUENCE {
    intraFreqCellID        IntraFreqCellID           OPTIONAL,
    cellInfo                CellInfoSI-HCS-RSCP
}

NewIntraFreqCellSI-HCS-ECNO ::= SEQUENCE {
    intraFreqCellID        IntraFreqCellID           OPTIONAL,
    cellInfo                CellInfoSI-HCS-ECNO
}

NewIntraFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-RSCP

NewIntraFreqCellSI-List-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-ECNO

NewIntraFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-HCS-RSCP

NewIntraFreqCellSI-List-HCS-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-HCS-ECNO

NodeB-ClockDrift ::= INTEGER (0..15)

NonUsedFreqParameter ::= SEQUENCE {
    nonUsedFreqThreshold   Threshold,
    nonUsedFreqW           W
}

NonUsedFreqParameterList ::= SEQUENCE (SIZE (1..maxFreq)) OF
    NonUsedFreqParameter

ObservedTimeDifferenceToGSM ::= INTEGER (0..4095)

OTDOA-SearchWindowSize ::= ENUMERATED {
    c10, c20, c30, c40, c50,
    c60, c70, moreThan70 }

Pathloss ::= INTEGER (46..158)

PenaltyTime-RSCP ::= CHOICE {
    notUsed                NULL,
    pt10                   TemporaryOffset,
    pt20                   TemporaryOffset,
    pt30                   TemporaryOffset,
    pt40                   TemporaryOffset,
    pt50                   TemporaryOffset,
    pt60                   TemporaryOffset
}

PenaltyTime-ECNO ::= CHOICE {
    notUsed                NULL,
    pt10                   TemporaryOffsetList,
    pt20                   TemporaryOffsetList,
    pt30                   TemporaryOffsetList,
    pt40                   TemporaryOffsetList,
    pt50                   TemporaryOffsetList,
    pt60                   TemporaryOffsetList
}

PendingTimeAfterTrigger ::= ENUMERATED {
    ptat0-25, ptat0-5, ptat1,
    ptat2, ptat4, ptat8, ptat16 }

PeriodicalOrEventTrigger ::= ENUMERATED {
    periodical,
    eventTrigger }

PeriodicalReportingCriteria ::= SEQUENCE {
    reportingAmount        ReportingAmount           DEFAULT ra-Infinity,
    reportingInterval      ReportingIntervalLong
}

PeriodicalWithReportingCellStatus ::= SEQUENCE {
    periodicalReportingCriteria PeriodicalReportingCriteria,
    reportingCellStatus      ReportingCellStatus           OPTIONAL
}

```



```

}

PositionEstimate ::=
    ellipsoidPoint
    ellipsoidPointUncertCircle
    ellipsoidPointUncertEllipse
    ellipsoidPointAltitude
    ellipsoidPointAltitudeEllipse
}

PositioningMethod ::=
    ENUMERATED {
        otdoa,
        gps,
        otdoaOrGPS }

PRC ::=
    INTEGER (-2047..2047)

PrimaryCCPCH-RSCP ::=
    INTEGER (-115..-25)

Q-HCS ::=
    INTEGER (0..99)

Q-OffsetS-N ::=
    INTEGER (-50..50)

Q-QualMin ::=
    INTEGER (-20..0)

-- Actual value = (IE value * 2) + 1
Q-RxlevMin ::=
    INTEGER (-58..-13)

QualityEventResults ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
        TransportChannelIdentity

QualityMeasuredResults ::=
    blerMeasurementResultsList
    modeSpecificInfo
    fdd
    tdd
    sir-MeasurementResults
}
}

QualityMeasurement ::=
    qualityReportingQuantity
    reportCriteria
}

QualityReportCriteria ::=
    qualityReportingCriteria
    periodicalReportingCriteria
    noReporting
}

QualityReportingCriteria ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
        QualityReportingCriteriaSingle

QualityReportingCriteriaSingle ::=
    transportChannelIdentity
    totalCRC
    badCRC
    pendingAfterTrigger
}

QualityReportingQuantity ::=
    dl-TransChBLER
    bler-dl-TransChIdList
    modeSpecificInfo
    fdd
    tdd
    sir-TFCS-List
}
}

QualityType ::=
    ENUMERATED {
        std-10, std-50, cpich-Ec-N0 }

RAT-Type ::=
    ENUMERATED {
        gsm, is2000 }

ReferenceCellPosition ::=
    ellipsoidPoint
    ellipsoidPointWithAltitude
    CHOICE {
        EllipsoidPoint,
        EllipsoidPointAltitude
    }

```

```

}

ReferenceCellRelation ::=          ENUMERATED {
                                   first-12-second-3,
                                   first-13-second-2,
                                   first-1-second-23 }

-- As defined in 23.032 (2D with 24bits for each coordinate)
ReferenceLocationforSIB ::=      SEQUENCE {
                                   ellipsoidPoint
                                   EllipsoidPoint
}

ReferenceQuality ::=             ENUMERATED {
                                   m0-19, m20-39, m40-79,
                                   m80-159, m160-319, m320-639,
                                   m640-1319, m1320Plus }

-- Actual value = IE value * 10
ReferenceQuality10 ::=           INTEGER (1..32)

-- Actual value = IE value * 50
ReferenceQuality50 ::=           INTEGER (1..32)

ReferenceSFN ::=                 INTEGER (0..4095)

-- Actual value = IE value * 512
ReferenceTimeDifferenceToCell ::= CHOICE {
    -- Actual value = IE value * 40
    accuracy40                    INTEGER (0..960),
    -- Actual value = IE value * 256
    accuracy256                   INTEGER (0..150),
    -- Actual value = IE value * 2560
    accuracy2560                  INTEGER (0..15)
}

RemovedInterFreqCellList ::=    CHOICE {
    removeAllInterFreqCells       NULL,
    removeSomeInterFreqCells      SEQUENCE (SIZE (1..maxCellMeas)) OF
                                   InterFreqCellID,
    removeNoInterFreqCells        NULL
}

RemovedInterRATCellList ::=     CHOICE {
    removeAllInterRATCells        NULL,
    removeSomeInterRATCells       SEQUENCE (SIZE (1..maxCellMeas)) OF
                                   InterRATCellID,
    removeNoInterRATCells         NULL
}

RemovedIntraFreqCellList ::=    CHOICE {
    removeAllIntraFreqCells       NULL,
    removeSomeIntraFreqCells      SEQUENCE (SIZE (1..maxCellMeas)) OF
                                   IntraFreqCellID,
    removeNoIntraFreqCells        NULL
}

ReplacementActivationThreshold ::= ENUMERATED {
                                   notApplicable, t1, t2,
                                   t3, t4, t5, t6, t7 }

ReportDeactivationThreshold ::=  ENUMERATED {
                                   notApplicable, t1, t2,
                                   t3, t4, t5, t6, t7 }

ReportingAmount ::=             ENUMERATED {
                                   ra1, ra2, ra4, ra8, ra16, ra32,
                                   ra64, ra-Infinity }

ReportingCellStatus ::=         CHOICE{
    withinActiveSet                MaxNumberOfReportingCellsType1,
    withinMonitoredSetUsedFreq      MaxNumberOfReportingCellsType1,
    withinActiveAndOrMonitoredUsedFreq MaxNumberOfReportingCellsType1,
    withinDetectedSetUsedFreq       MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrDetectedUsedFreq MaxNumberOfReportingCellsType1,
    allActiveplusMonitoredSet       MaxNumberOfReportingCellsType3,
    allActivePlusDetectedSet        MaxNumberOfReportingCellsType3,
    allActivePlusMonitoredAndOrDetectedSet
                                   MaxNumberOfReportingCellsType3,
    withinVirtualActSet             MaxNumberOfReportingCellsType1,
    withinMonitoredSetNonUsedFreq   MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrActiveSetNonUsedFreq
                                   MaxNumberOfReportingCellsType1,
}

```

```

    allVirtualActSetplusMonitoredSetNonUsedFreq
    withinActSetOrVirtualActSet
    withinActSetAndOrMonitoredUsedFreqOrMonitoredNonUsedFreq
    MaxNumberOfReportingCellsType3,
    MaxNumberOfReportingCellsType2,
    MaxNumberOfReportingCellsType2
}

ReportingCellStatusOpt ::=
    reportingCellStatus
}

ReportingInfoForCellDCH ::=
    intraFreqReportingQuantity
    measurementReportingMode
    reportCriteria
}

ReportingInterval ::=
    ENUMERATED {
        noPeriodicalreporting, ri0-25,
        ri0-5, ril, ri2, ri4, ri8, ril6 }

ReportingIntervalLong ::=
    ENUMERATED {
        ril0, ril0-25, ril0-5, ril1,
        ril2, ril3, ril4, ril6, ril8,
        ril12, ril16, ril20, ril24,
        ril28, ril32, ril64 }

-- Actual value = IE value * 0.5
ReportingRange ::=
    INTEGER (0..29)

RL-AdditionInfoList ::=
    SEQUENCE (SIZE (1..maxRL)) OF
        PrimaryCPICH-Info

RL-InformationLists ::=
    rl-AdditionInfoList
    rl-RemovalInfoList
}

RL-RemovalInfoList ::=
    SEQUENCE (SIZE (1..maxRL)) OF
        PrimaryCPICH-Info

RLC-BuffersPayload ::=
    ENUMERATED {
        pl0, pl4, pl8, pl16, pl32, pl64, pl128,
        pl256, pl512, pl1024, pl2k, pl4k,
        pl8k, pl16k, pl32k, pl64k, pl128k,
        pl256k, pl512k, pl1024k }

RRC ::=
    INTEGER (-127..127)

SatelliteStatus ::=
    ENUMERATED {
        ns-NN-U,
        es-SN,
        es-NN-U,
        es-NN-C }

SatID ::=
    INTEGER (0..63)

SFN-SFN-ObsTimeDifference ::=
    CHOICE {
        type1
        -- Actual value for type2 = IE value * 0.0625 - 1280
        type2
    }

SFN-SFN-ObsTimeDifference1 ::=
    INTEGER (0..9830399)

SFN-SFN-ObsTimeDifference2 ::=
    INTEGER (0..40961)

SFN-SFN-OTD-Type ::=
    ENUMERATED {
        noReport,
        type1,
        type2 }

SIR ::=
    INTEGER (-10..20)

SIR-MeasurementList ::=
    SEQUENCE (SIZE (1..maxCCTrCH)) OF
        SIR-MeasurementResults

SIR-MeasurementResults ::=
    tfcs-ID
    sir-TimeslotList
    SEQUENCE {
        TFCS-IdentityPlain,
        SIR-TimeslotList
    }

```

```

}
SIR-TFCS ::=                                TFCS-IdentityPlain

SIR-TFCS-List ::=                           SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                             SIR-TFCS

SIR-TimeslotList ::=                        SEQUENCE (SIZE (1..maxTS)) OF
                                             SIR

-- Reserved bits in subframe 1 of the GPS navigation message
SubFrame1Reserved ::=                      SEQUENCE {
    reserved1                               BIT STRING (SIZE (23)),
    reserved2                               BIT STRING (SIZE (24)),
    reserved3                               BIT STRING (SIZE (24)),
    reserved4                               BIT STRING (SIZE (16))
}

T-CRMax ::=                                 CHOICE {
    notUsed                                  NULL,
    t30                                       N-CR-T-CRMaxHyst,
    t60                                       N-CR-T-CRMaxHyst,
    t120                                      N-CR-T-CRMaxHyst,
    t180                                      N-CR-T-CRMaxHyst,
    t240                                      N-CR-T-CRMaxHyst
}

T-CRMaxHyst ::=                             ENUMERATED {
    notUsed, t10, t20, t30,
    t40, t50, t60, t70 }

TemporaryOffset ::=                         ENUMERATED {
    to10, to20, to30, to40, to50,
    to60, to70, infinite }

TemporaryOffsetList ::=                    SEQUENCE {
    temporaryOffset1                         TemporaryOffset,
    temporaryOffset2                         TemporaryOffset
}

Threshold ::=                               INTEGER (-115..0)

ThresholdPositionChange ::=                 ENUMERATED {
    pc10, pc20, pc30, pc40, pc50,
    pc100, pc200, pc300, pc500,
    pc1000, pc2000, pc5000, pc10000,
    pc20000, pc50000, pc100000 }

ThresholdSFN-GPS-TOW ::=                   ENUMERATED {
    ms1, ms2, ms3, ms5, ms10,
    ms20, ms50, ms100 }

ThresholdSFN-SFN-Change ::=                 ENUMERATED {
    c0-25, c0-5, c1, c2, c3, c4, c5,
    c10, c20, c50, c100, c200, c500,
    c1000, c2000, c5000 }

ThresholdUsedFrequency ::=                  INTEGER (-115..165)

-- Actual value = IE value * 20.
TimeInterval ::=                            INTEGER (1..13)

TimeslotInfo ::=                            SEQUENCE {
    timeslotNumber                           TimeslotNumber,
    burstType                                 BurstType
}

TimeslotInfoList ::=                        SEQUENCE (SIZE (1..maxTS)) OF
                                             TimeslotInfo

TimeslotISCP ::=                             INTEGER (-115..-25)

TimeslotISCP-List ::=                       SEQUENCE (SIZE (1..maxTS)) OF
                                             TimeslotISCP

TimeslotListWithISCP ::=                    SEQUENCE (SIZE (1..maxTS)) OF
                                             TimeslotWithISCP

TimeslotWithISCP ::=                        SEQUENCE {

```

```

    timeslot                TimeslotNumber,
    timeslotISCP            TimeslotISCP
}

TimeToTrigger ::=          ENUMERATED {
                            ttt0, ttt10, ttt20, ttt40, ttt60,
                            ttt80, ttt100, ttt120, ttt160,
                            ttt200, ttt240, ttt320, ttt640,
                            ttt1280, ttt2560, ttt5000 }

TrafficVolumeEventParam ::= SEQUENCE {
    eventID                  TrafficVolumeEventType,
    reportingThreshold       TrafficVolumeThreshold,
    timeToTrigger            TimeToTrigger                OPTIONAL,
    pendingTimeAfterTrigger PendingTimeAfterTrigger     OPTIONAL,
    tx-InterruptionAfterTrigger TX-InterruptionAfterTrigger OPTIONAL
}

TrafficVolumeEventResults ::= SEQUENCE {
    ul-transportChannelCausingEvent TransportChannelIdentity,
    trafficVolumeEventIdentity     TrafficVolumeEventType
}

TrafficVolumeEventType ::= ENUMERATED {
    e4a,
    e4b }

TrafficVolumeMeasQuantity ::= CHOICE {
    rlc-BufferPayload          NULL,
    averageRLC-BufferPayload   TimeInterval,
    varianceOfRLC-BufferPayload TimeInterval
}

TrafficVolumeMeasSysInfo ::= SEQUENCE {
    trafficVolumeMeasurementID MeasurementIdentity          DEFAULT 4,
    trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
    trafficVolumeMeasQuantity TrafficVolumeMeasQuantity          OPTIONAL,
    trafficVolumeReportingQuantity TrafficVolumeReportingQuantity OPTIONAL,
    trafficVolumeMeasRepCriteria TrafficVolumeReportingCriteria OPTIONAL,
    measurementValidity MeasurementValidity                    OPTIONAL,
    measurementReportingMode MeasurementReportingMode,
    reportCriteriaSysInf TrafficVolumeReportCriteriaSysInfo
}

TrafficVolumeMeasuredResults ::= SEQUENCE {
    rb-Identity                RB-Identity,
    rlc-BuffersPayload          RLC-BuffersPayload          OPTIONAL,
    averageRLC-BufferPayload AverageRLC-BufferPayload     OPTIONAL,
    varianceOfRLC-BufferPayload VarianceOfRLC-BufferPayload     OPTIONAL
}

TrafficVolumeMeasuredResultsList ::= SEQUENCE (SIZE (1..maxRB)) OF
    TrafficVolumeMeasuredResults

TrafficVolumeMeasurement ::= SEQUENCE {
    trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
    trafficVolumeMeasQuantity TrafficVolumeMeasQuantity          OPTIONAL,
    trafficVolumeReportingQuantity TrafficVolumeReportingQuantity OPTIONAL,
    measurementValidity MeasurementValidity                    OPTIONAL,
    reportCriteria TrafficVolumeReportCriteria
}

TrafficVolumeMeasurementObjectList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

TrafficVolumeReportCriteria ::= CHOICE {
    trafficVolumeReportingCriteria TrafficVolumeReportingCriteria,
    periodicalReportingCriteria PeriodicalReportingCriteria,
    noReporting NULL
}

TrafficVolumeReportCriteriaSysInfo ::= CHOICE {
    trafficVolumeReportingCriteria TrafficVolumeReportingCriteria,
    periodicalReportingCriteria PeriodicalReportingCriteria
}

TrafficVolumeReportingCriteria ::= SEQUENCE {
    transChCriteriaList TransChCriteriaList                OPTIONAL
}

TrafficVolumeReportingQuantity ::= SEQUENCE {
    rlc-RB-BufferPayload BOOLEAN,

```

```

    rlc-RB-BufferPayloadAverage      BOOLEAN,
    rlc-RB-BufferPayloadVariance     BOOLEAN
}

TrafficVolumeThreshold ::=          ENUMERATED {
    th8, th16, th32, th64, th128,
    th256, th512, th1024, th2k, th3k,
    th4k, th6k, th8k, th12k, th16k,
    th24k, th32k, th48k, th64k, th96k,
    th128k, th192k, th256k, th384k,
    th512k, th768k }

TransChCriteria ::=                 SEQUENCE {
    ul-transportChannelID            OPTIONAL,
    eventSpecificParameters          SEQUENCE (SIZE (1..maxMeasParEvent)) OF
    TrafficVolumeEventParam          OPTIONAL
}

TransChCriteriaList ::=             SEQUENCE (SIZE (1..maxTrCH)) OF
    TransChCriteria

TransferMode ::=                    ENUMERATED {
    acknowledgedModeRLC,
    unacknowledgedModeRLC }

TransmittedPowerThreshold ::=       INTEGER (-50..33)

TriggeringCondition1 ::=            ENUMERATED {
    activeSetCellsOnly,
    monitoredSetCellsOnly,
    activeSetAndMonitoredSetCells }

TriggeringCondition2 ::=            ENUMERATED {
    activeSetCellsOnly,
    monitoredSetCellsOnly,
    activeSetAndMonitoredSetCells,
    detectedSetCellsOnly,
    detectedSetAndMonitoredSetCells }

TX-InterruptionAfterTrigger ::=     ENUMERATED {
    txiat0-25, txiat0-5, txiat1,
    txiat2, txiat4, txiat8, txiat16 }

UDRE ::=                            ENUMERATED {
    lessThan1,
    between1-and-4,
    between4-and-8,
    over8 }

UE-6AB-Event ::=                   SEQUENCE {
    timeToTrigger                    TimeToTrigger,
    transmittedPowerThreshold        TransmittedPowerThreshold
}

UE-6FG-Event ::=                   SEQUENCE {
    timeToTrigger                    TimeToTrigger,
    ue-RX-TX-TimeDifferenceThreshold UE-RX-TX-TimeDifferenceThreshold
}

UE-AutonomousUpdateMode ::=        CHOICE {
    on                                NULL,
    onWithNoReporting                NULL,
    off                               RL-InformationLists
}

UE-InternalEventParam ::=           CHOICE {
    event6a                          UE-6AB-Event,
    event6b                          UE-6AB-Event,
    event6c                          TimeToTrigger,
    event6d                          TimeToTrigger,
    event6e                          TimeToTrigger,
    event6f                          UE-6FG-Event,
    event6g                          UE-6FG-Event
}

UE-InternalEventParamList ::=       SEQUENCE (SIZE (1..maxMeasEvent)) OF
    UE-InternalEventParam

UE-InternalEventResults ::=         CHOICE {
    event6a                          NULL,
    event6b                          NULL,
    event6c                          NULL,
    event6d                          NULL,

```

```

    event6e                NULL,
    event6f                PrimaryCPICH-Info,
    event6g                PrimaryCPICH-Info
}

UE-InternalMeasQuantity ::= SEQUENCE {
    measurementQuantity    UE-MeasurementQuantity,
    filterCoefficient      FilterCoefficient           DEFAULT fcl
}

UE-InternalMeasuredResults ::= SEQUENCE {
    modeSpecificInfo      CHOICE {
        fdd                SEQUENCE {
            ue-TransmittedPowerFDD    UE-TransmittedPower    OPTIONAL,
            ue-RX-TX-ReportEntryList  UE-RX-TX-ReportEntryList  OPTIONAL
        },
        tdd                SEQUENCE {
            ue-TransmittedPowerTDD-List UE-TransmittedPowerTDD-List  OPTIONAL,
            appliedTA           UL-TimingAdvance           OPTIONAL
        }
    }
}

UE-InternalMeasurement ::= SEQUENCE {
    ue-InternalMeasQuantity    UE-InternalMeasQuantity    OPTIONAL,
    ue-InternalReportingQuantity UE-InternalReportingQuantity  OPTIONAL,
    reportCriteria             UE-InternalReportCriteria
}

UE-InternalMeasurementSysInfo ::= SEQUENCE {
    ue-InternalMeasurementID    MeasurementIdentity    DEFAULT 5,
    ue-InternalMeasQuantity     UE-InternalMeasQuantity
}

UE-InternalReportCriteria ::= CHOICE {
    ue-InternalReportingCriteria,
    periodicalReportingCriteria,
    noReporting
}

UE-InternalReportingCriteria ::= SEQUENCE {
    ue-InternalEventParamList  UE-InternalEventParamList    OPTIONAL
}

UE-InternalReportingQuantity ::= SEQUENCE {
    ue-TransmittedPower        BOOLEAN,
    modeSpecificInfo          CHOICE {
        fdd                    SEQUENCE {
            ue-RX-TX-TimeDifferece  BOOLEAN
        },
        tdd                    SEQUENCE {
            appliedTA              BOOLEAN
        }
    }
}

-- TABULAR: For TDD only the first two values are used.
UE-MeasurementQuantity ::= ENUMERATED {
    ue-TransmittedPower,
    ultra-Carrier-RSSI,
    ue-RX-TX-TimeDifference }

UE-RX-TX-ReportEntry ::= SEQUENCE {
    primaryCPICH-Info        PrimaryCPICH-Info,
    ue-RX-TX-TimeDifferenceType1 UE-RX-TX-TimeDifferenceType1
}

UE-RX-TX-ReportEntryList ::= SEQUENCE (SIZE (1..maxRL)) OF
    UE-RX-TX-ReportEntry

UE-RX-TX-TimeDifferenceType1 ::= INTEGER (768..1280)

-- Actual value = IE value * 0.0625 + 768
UE-RX-TX-TimeDifferenceType2 ::= INTEGER (0..8191)

UE-RX-TX-TimeDifferenceThreshold ::= INTEGER (768..1280)

UE-TransmittedPower ::= INTEGER (-50..33)

UE-TransmittedPowerTDD-List ::= SEQUENCE (SIZE (1..maxTS)) OF
    UE-TransmittedPower

UP-Accuracy ::= BIT STRING (SIZE (7))

```

```

-- For sfID=0 (sf4), pageNo=18, and sfID=0 & sfID=1 (sf4 & sf5), pageNo=25,
-- the IE fields for word3 - word10 are the same as UP-GPS-IonosphericModel
-- and UP-GPS-UTC-Model. For the rest of the pages, they are the same as
-- UP-GPS-Almanac.
UP-Alma-SIB-Data ::=
    sfID                SEQUENCE {
                        INTEGER (0..1),
    dataID              INTEGER (0..3),
    pageNo              INTEGER (0..63),
    word3               BIT STRING (SIZE (16)),
    word4               BIT STRING (SIZE (24)),
    word5               BIT STRING (SIZE (24)),
    word6               BIT STRING (SIZE (24)),
    word7               BIT STRING (SIZE (24)),
    word8               BIT STRING (SIZE (24)),
    word9               BIT STRING (SIZE (24)),
    word10              BIT STRING (SIZE (22))
    }

UP-Alma-SIB-DataList ::= SEQUENCE (SIZE (1..3)) OF
    UP-Alma-SIB-Data

UP-CipherParameters ::= SEQUENCE {
    cipheringKeyFlag    BIT STRING (SIZE (1)),
    cipheringSerialNumber INTEGER (0..65535)
    }

UP-DGPS-SIB-Data ::= SEQUENCE {
    nodeBClockDrift      NodeB-ClockDrift                OPTIONAL,
    referenceLocationforSIB ReferenceLocationforSIB,
    referenceSFN          ReferenceSFN                    OPTIONAL,
    referenceGPS-TOW      GPS-TOW-lusec,
    statusHealth          DiffCorrectionStatus,
    dgps-InformationList DGPS-InformationList
    }

UP-Ephe-SIB-Data ::= SEQUENCE {
    transmissionTOW      INTEGER (0..1048575),
    satID                SatID,
    tlmMessage           BIT STRING (SIZE (14)),
    tlmRevd              BIT STRING (SIZE (2)),
    how                  BIT STRING (SIZE (22)),
    wn                   BIT STRING (SIZE (10)),
    navModel             NavModel
    }

UP-Error ::= SEQUENCE {
    errorReason          UP-ErrorCause,
    additionalAssistanceData AdditionalAssistanceData
    }

UP-ErrorCause ::= ENUMERATED {
    notEnoughOTDOA-Cells,
    notEnoughGPS-Satellites,
    assistanceDataMissing,
    methodNotSupported,
    undefinedError,
    requestDeniedByUser,
    notProcessedAndTimeout }

UP-EventID ::= ENUMERATED {
    e7a, e7b, e7c }

UP-EventParam ::= SEQUENCE {
    reportingAmount      ReportingAmount,
    reportFirstFix       BOOLEAN,
    measurementInterval UP-MeasurementInterval,
    eventSpecificInfo    UP-EventSpecificInfo
    }

UP-EventParamList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    UP-EventParam

UP-EventSpecificInfo ::= CHOICE {
    e7a                  ThresholdPositionChange,
    e7b                  ThresholdSFN-SFN-Change,
    e7c                  ThresholdSFN-GPS-TOW
    }

UP-GPS-AcquisitionAssistance ::= SEQUENCE {
    referenceTime        CHOICE {
        utran-ReferenceTime    UTRAN-ReferenceTime,
        gps-ReferenceTimeOnly  INTEGER (0..604799999)
    }

```



```

    },
    satelliteInformationList      AcquisitionSatInfoList
}

UP-GPS-Almanac ::=
    wn-a                          SEQUENCE {
    almanacSatInfoList           BIT STRING (SIZE (8)),
                                AlmanacSatInfoList
}

UP-GPS-AssistanceData ::=
    up-GPS-ReferenceTime         UP-GPS-ReferenceTime           OPTIONAL,
    up-GPS-ReferenceLocation     EllipsoidPointAltitude         OPTIONAL,
    up-GPS-DGPS-Corrections      UP-GPS-DGPS-Corrections         OPTIONAL,
    up-GPS-NavigationModel       UP-GPS-NavigationModel         OPTIONAL,
    up-GPS-IonosphericModel      UP-GPS-IonosphericModel         OPTIONAL,
    up-GPS-UTC-Model             UP-GPS-UTC-Model               OPTIONAL,
    up-GPS-Almanac               UP-GPS-Almanac                 OPTIONAL,
    up-GPS-AcquisitionAssistance UP-GPS-AcquisitionAssistance  OPTIONAL,
    up-GPS-Real-timeIntegrity    BadSatList                    OPTIONAL
}

UP-Cipher-GPS-Data-Indicator ::=
    up-CipherParameters          UP-CipherParameters           OPTIONAL
}

UP-GPS-DGPS-Corrections ::=
    gps-TOW                      INTEGER (0..604799),
    statusHealth                 DiffCorrectionStatus,
    dgps-CorrectionSatInfoList  DGPS-CorrectionSatInfoList
}

UP-GPS-IonosphericModel ::=
    alfa0                        BIT STRING (SIZE (8)),
    alfa1                        BIT STRING (SIZE (8)),
    alfa2                        BIT STRING (SIZE (8)),
    alfa3                        BIT STRING (SIZE (8)),
    beta0                        BIT STRING (SIZE (8)),
    beta1                        BIT STRING (SIZE (8)),
    beta2                        BIT STRING (SIZE (8)),
    beta3                        BIT STRING (SIZE (8))
}

UP-GPS-Measurement ::=
    referenceSFN                 ReferenceSFN                    OPTIONAL,
    gps-TOW-lmsec               GPS-TOW-lmsec,
    gps-TOW-rem-usec            GPS-TOW-rem-usec                OPTIONAL,
    gps-MeasurementParamList    GPS-MeasurementParamList
}

UP-GPS-NavigationModel ::=
    n-SAT                       INTEGER (1..16),
    navigationModelSatInfoList  NavigationModelSatInfoList
}

UP-GPS-ReferenceTime ::=
    gps-Week                    INTEGER (0..1023),
    gps-TOW                     GPS-TOW-lusec,
    sfn                         INTEGER (0..4095),
    gps-TOW-AssistList          GPS-TOW-AssistList             OPTIONAL
}

UP-GPS-UTC-Model ::=
    a1                          BIT STRING (SIZE (24)),
    a0                          BIT STRING (SIZE (32)),
    t-ot                        BIT STRING (SIZE (8)),
    wn-t                        BIT STRING (SIZE (8)),
    delta-t-LS                 BIT STRING (SIZE (8)),
    wn-lsf                      BIT STRING (SIZE (8)),
    dn                          BIT STRING (SIZE (8)),
    delta-t-LSF                BIT STRING (SIZE (8))
}

UP-IPDL-Parameters ::=
    ip-Spacing                  IP-Spacing,
    ip-Length                   IP-Length,
    ip-Offset                   INTEGER (0..9),
    seed                       INTEGER (0..63),
    burstModeParameters         BurstModeParameters
}

UP-MeasuredResults ::=
    up-MultipleSets             UP-MultipleSets                OPTIONAL,
    up-ReferenceCellIdentity    PrimaryCPICH-Info              OPTIONAL,

```

```

    up-OTDOA-Measurement      UP-OTDOA-Measurement      OPTIONAL,
    up-Position                UP-Position                OPTIONAL,
    up-GPS-Measurement         UP-GPS-Measurement         OPTIONAL,
    up-Error                   UP-Error                   OPTIONAL
}

UP-Measurement ::=          SEQUENCE {
    up-ReportingQuantity      UP-ReportingQuantity,
    reportCriteria            UP-ReportCriteria,
    up-OTDOA-AssistanceData  UP-OTDOA-AssistanceData    OPTIONAL,
    up-GPS-AssistanceData    UP-GPS-AssistanceData      OPTIONAL
}

UP-MeasurementEventResults ::= CHOICE {
    event7a                   UP-Position,
    event7b                   UP-OTDOA-Measurement,
    event7c                   UP-GPS-Measurement
}

UP-MeasurementInterval ::=  ENUMERATED {
    e5, e15, e60, e300,
    e900, e1800, e3600, e7200 }

UP-MethodType ::=          ENUMERATED {
    ue-Assisted,
    ue-Based,
    ue-BasedPreferred,
    ue-AssistedPreferred }

UP-MultipleSets ::=        SEQUENCE {
    numberOfOTDOA-IPDL-GPS-Sets  INTEGER (2..3),
    numberOfReferenceCells       INTEGER (1..3),
    referenceCellRelation        ReferenceCellRelation
}

UP-OTDOA-AssistanceData ::= SEQUENCE {
    up-OTDOA-ReferenceCell      UP-OTDOA-ReferenceCell      OPTIONAL,
    up-OTDOA-MeasurementAssistDataList  UP-OTDOA-MeasurementAssistDataList  OPTIONAL,
    up-IPDL-Parameters          UP-IPDL-Parameters          OPTIONAL
}

UP-OTDOA-AssistanceSIB ::= SEQUENCE {
    up-CipherParameters         UP-CipherParameters         OPTIONAL,
    searchWindowSize            OTDOA-SearchWindowSize,
    referenceCellPosition       ReferenceCellPosition,
    up-IPDL-Parameters          UP-IPDL-Parameters          OPTIONAL,
    cellToMeasureInfoList      CellToMeasureInfoList
}

UP-OTDOA-Measurement ::=   SEQUENCE {
    sfn                         INTEGER (0..4095),
    ue-RX-TX-TimeDifferenceType2  UE-RX-TX-TimeDifferenceType2,
    qualityChoice               CHOICE {
        std-10                 ReferenceQuality10,
        std-50                 ReferenceQuality50,
        cpich-EcN0              CPICH-Ec-N0-OTDOA,
        defaultQuality          ReferenceQuality
    },
    neighbourList               NeighbourList      OPTIONAL
}

UP-OTDOA-MeasurementAssistData ::= SEQUENCE {
    primaryCPICH-Info           PrimaryCPICH-Info,
    frequencyInfo               FrequencyInfo      OPTIONAL,
    sfn-SFN-ObsTimeDifference   SFN-SFN-ObsTimeDifference1,
    fineSFN-SFN                 FineSFN-SFN          OPTIONAL,
    searchWindowSize            OTDOA-SearchWindowSize,
    relativeNorth               INTEGER (-20000..20000)  OPTIONAL,
    relativeEast                INTEGER (-20000..20000)  OPTIONAL,
    relativeAltitude            INTEGER (-4000..4000)  OPTIONAL
}

UP-OTDOA-MeasurementAssistDataList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    UP-OTDOA-MeasurementAssistData

UP-OTDOA-ReferenceCell ::= SEQUENCE {
    primaryCPICH-Info           PrimaryCPICH-Info,
    frequencyInfo               FrequencyInfo      OPTIONAL,
    cellPosition                ReferenceCellPosition  OPTIONAL
}

UP-Position ::=            SEQUENCE {
    referenceSFN                ReferenceSFN,

```

```

    gps-TOW                GPS-TOW-lusec,
    positionEstimate       PositionEstimate
}

UP-ReportCriteria ::=
    up-ReportingCriteria   CHOICE {
    periodicalReportingCriteria
    noReporting            UP-EventParamList,
                          PeriodicalReportingCriteria,
                          NULL
    }

UP-ReportingQuantity ::=
    methodType            SEQUENCE {
    positioningMethod      UP-MethodType,
    responseTime           PositioningMethod,
    accuracy               UP-ResponseTime,
    gps-TimingOfCellWanted
    multipleSets           UP-Accuracy
    environmentCharacterisation
                          BOOLEAN,
                          BOOLEAN,
                          EnvironmentCharacterisation
    }
    OPTIONAL,
    OPTIONAL

UP-ResponseTime ::=
    ENUMERATED {
        s1, s2, s4, s8, s16,
        s32, s64, s128 }

UTRA-CarrierRSSI ::=
    INTEGER (-95..-30)

UTRAN-ReferenceTime ::=
    SEQUENCE {
        gps-TOW            GPS-TOW-lusec,
        sfn                INTEGER (0..4095)
    }

VarianceOfRLC-BufferPayload ::=
    ENUMERATED {
        plv0, plv4, plv8, plv16, plv32, plv64,
        plv128, plv256, plv512, plv1024,
        plv2k, plv4k, plv8k, plv16k }

-- Actual value = IE value * 0.1
W ::=
    INTEGER (0..20)

-- *****
--
--     OTHER INFORMATION ELEMENTS (10.3.8)
--
-- *****

BCC ::=
    INTEGER (0..7)

BCCH-ModificationInfo ::=
    SEQUENCE {
        mib-ValueTag      MIB-ValueTag,
        bcch-ModificationTime
    }
    OPTIONAL

-- Actual value = IE value * 8
BCCH-ModificationTime ::=
    INTEGER (0..511)

BSIC ::=
    SEQUENCE {
        ncc                NCC,
        bcc                BCC
    }

CBS-DRX-Level1Information ::=
    SEQUENCE {
        ctch-AllocationPeriod
        cbs-FrameOffset   INTEGER (1..256),
                          INTEGER (0..255)
    }

CDMA2000-Message ::=
    SEQUENCE {
        msg-Type           BIT STRING (SIZE (8)),
        payload            BIT STRING (SIZE (1..512))
    }

CDMA2000-MessageList ::=
    SEQUENCE (SIZE (1..maxInterSysMessages)) OF
        CDMA2000-Message

CDMA2000-UMTS-Frequency-List ::=
    SEQUENCE (SIZE (1..maxNumCDMA2000Freqs)) OF
        FrequencyInfoCDMA2000

CellValueTag ::=
    INTEGER (1..4)

--Actual value = 2^(IE value)
ExpirationTimerFactor ::=
    INTEGER (1..8)

FDD-UMTS-Frequency-List ::=
    SEQUENCE (SIZE (1..maxNumFDDFreqs)) OF

```

```

FrequencyInfoFDD
FrequencyInfoCDMA2000 ::= SEQUENCE {
    band-Class      BIT STRING (SIZE (5)),
    cdma-Freq       BIT STRING (SIZE(11))
}
GSM-BA-Range ::= SEQUENCE {
    gsmLowRangeUARFCN  UARFCN,
    gsmUpRangeUARFCN   UARFCN
}
GSM-BA-Range-List ::= SEQUENCE (SIZE (1..maxNumGSMFreqRanges)) OF
    GSM-BA-Range
GSM-Classmark2 ::= OCTET STRING (SIZE (5))
GSM-Classmark3 ::= OCTET STRING
GSM-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    BIT STRING (SIZE (1..512))
IdentificationOfReveivedMessage ::= SEQUENCE {
    rrc-TransactionIdentifier  RRC-TransactionIdentifier,
    receivedMessageType        ReceivedMessageType
}
InterRAT-ChangeFailureCause ::= CHOICE {
    configurationUnacceptable  NULL,
    physicalChannelFailure     NULL,
    protocolError              ProtocolErrorInformation,
    unspecified                NULL,
    spare1                     NULL,
    spare2                     NULL,
    spare3                     NULL
}
InterRAT-UE-RadioAccessCapability ::= CHOICE {
    gsm SEQUENCE {
        gsm-Classmark2  GSM-Classmark2,
        gsm-Classmark3  GSM-Classmark3
    },
    cdma2000 SEQUENCE {
        cdma2000-MessageList  CDMA2000-MessageList
    }
}
InterRAT-UE-RadioAccessCapabilityList ::= SEQUENCE (SIZE(1..maxInterSysMessages)) OF
    InterRAT-UE-RadioAccessCapability
InterRAT-HO-Failure ::= SEQUENCE {
    interRAT-HO-FailureCause  InterRAT-HO-FailureCause OPTIONAL,
    interRATMessage           InterRATMessage           OPTIONAL
}
InterRAT-HO-FailureCause ::= CHOICE {
    configurationUnacceptable  NULL,
    physicalChannelFailure     NULL,
    protocolError              ProtocolErrorInformation,
    interRAT-ProtocolError    NULL,
    unspecified                NULL,
    spare1                     NULL,
    spare2                     NULL,
    spare3                     NULL,
    spare4                     NULL
}
InterRATMessage ::= CHOICE {
    gsm SEQUENCE {
        gsm-MessageList  GSM-MessageList
    },
    cdma2000 SEQUENCE {
        cdma2000-MessageList  CDMA2000-MessageList
    }
}
InterRATMessageList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    InterRATMessage
MasterInformationBlock ::= SEQUENCE {
    mib-ValueTag  MIB-ValueTag,
    plmn-Type     PLMN-Type,
    -- TABULAR: The PLMN identity and ANSI-41 core network information
}

```

```

-- are included in PLMN-Type.
sibSb-ReferenceList          SIBSb-ReferenceList,
-- Extension mechanism for non- release99 information
nonCriticalExtensions        SEQUENCE {}                                OPTIONAL
}

MIB-ValueTag ::=              INTEGER (1..8)

NCC ::=                        INTEGER (0..7)

PLMN-ValueTag ::=             INTEGER (1..256)

PredefinedConfigIdentityAndValueTag ::= SEQUENCE {
    predefinedConfigIdentity    PredefinedConfigIdentity,
    predefinedConfigValueTag    PredefinedConfigValueTag    OPTIONAL
}

ProtocolErrorInformation ::=   SEQUENCE {
    diagnosticsType             CHOICE {
        type1                    SEQUENCE {
            protocolErrorCause    ProtocolErrorCause
        },
        spare                      NULL
    }
}

ReceivedMessageType ::=       ENUMERATED {
    activeSetUpdate,
    cellUpdateConfirm,
    counterCheck,
    downlinkDirectTransfer,
    interRATHandoverCommand,
    measurementControl,
    pagingType2,
    physicalChannelReconfiguration,
    physicalSharedChannelAllocation,
    radioBearerReconfiguration,
    radioBearerRelease,
    radioBearerSetup,
    rrcConnectionRelease,
    rrcConnectionReject,
    rrcConnectionSetup,
    securityModeCommand,
    signallingConnectionRelease,
    transportChannelReconfiguration,
    transportFormatCombinationControl,
    ueCapabilityEnquiry,
    ueCapabilityInformationConfirm,
    uplinkPhysicalChannelControl,
    uraUpdateConfirm,
    utranMobilityInformation,
    spare1, spare2, spare3, spare4,
    spare5, spare6, spare7
}

Rplmn-Information ::=        SEQUENCE {
    gsm-BA-Range-List           GSM-BA-Range-List    OPTIONAL,
    fdd-UMTS-Frequency-List     FDD-UMTS-Frequency-List
    OPTIONAL,
    tdd-UMTS-Frequency-List     FDD-UMTS-Frequency-List
    OPTIONAL,
    cdma2000-UMTS-Frequency-List CDMA2000-UMTS-Frequency-
List    OPTIONAL
}

SchedulingInformation ::=     SEQUENCE {
    scheduling                    SEQUENCE {
        segCount                  SegCount            DEFAULT 1,
        sib-Pos                    CHOICE {
            -- The element name indicates the repetition period and the value
            -- (multiplied by two) indicates the position of the first segment.
            rep4                    INTEGER (0..1),
            rep8                    INTEGER (0..3),
            rep16                   INTEGER (0..7),
            rep32                   INTEGER (0..15),
            rep64                   INTEGER (0..31),
            rep128                  INTEGER (0..63),
            rep256                  INTEGER (0..127),
            rep512                  INTEGER (0..255),
            rep1024                 INTEGER (0..511),
            rep2048                 INTEGER (0..1023),
            rep4096                 INTEGER (0..2047)
        }
    }
}

```



```

sysInfoType13-4      CellValueTag,
sysInfoType14        NULL,
sysInfoType15        CellValueTag,
sysInfoType16        PredefinedConfigIdentityAndValueTag,
sysInfoType17        NULL
}

SIBSb-TypeAndTag ::=
  sysInfoType1        CHOICE {
    sysInfoType2      PLMN-ValueTag,
    sysInfoType3      PLMN-ValueTag,
    sysInfoType4      CellValueTag,
    sysInfoType5      CellValueTag,
    sysInfoType6      CellValueTag,
    sysInfoType7      NULL,
    sysInfoType8      CellValueTag,
    sysInfoType9      NULL,
    sysInfoType10     NULL,
    sysInfoType11     CellValueTag,
    sysInfoType12     CellValueTag,
    sysInfoType13     CellValueTag,
    sysInfoType13-1  CellValueTag,
    sysInfoType13-2  CellValueTag,
    sysInfoType13-3  CellValueTag,
    sysInfoType13-4  CellValueTag,
    sysInfoType14     NULL,
    sysInfoType15     CellValueTag,
    sysInfoType16     PredefinedConfigIdentityAndValueTag,
    sysInfoType17     NULL,
    sysInfoTypeSB1   CellValueTag,
    sysInfoTypeSB2   CellValueTag
  }

SibOFF ::=
  ENUMERATED {
    so2, so4, so6, so8, so10,
    so12, so14, so16, so18,
    so20, so22, so24, so26,
    so28, so30, so32 }

SibOFF-List ::=
  SEQUENCE (SIZE (1..15)) OF
  SibOFF

SysInfoType1 ::=
  SEQUENCE {
    -- Core network IEs
    cn-CommonGSM-MAP-NAS-SysInfo  NAS-SystemInformationGSM-MAP,
    cn-DomainSysInfoList          CN-DomainSysInfoList,
    -- User equipment IEs
    ue-ConnTimersAndConstants      UE-ConnTimersAndConstants,
    ue-IdleTimersAndConstants      UE-IdleTimersAndConstants,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}
  }

SysInfoType2 ::=
  SEQUENCE {
    -- UTRAN mobility IEs
    ura-IdentityList              URA-IdentityList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}
  }

SysInfoType3 ::=
  SEQUENCE {
    sib4indicator                 BOOLEAN,
    -- UTRAN mobility IEs
    cellIdentity                  CellIdentity,
    cellSelectReselectInfo        CellSelectReselectInfoSIB-3-4,
    cellAccessRestriction         CellAccessRestriction,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}
  }

SysInfoType4 ::=
  SEQUENCE {
    -- UTRAN mobility IEs
    cellIdentity                  CellIdentity,
    cellSelectReselectInfo        CellSelectReselectInfoSIB-3-4,
    cellAccessRestriction         CellAccessRestriction,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}
  }

SysInfoType5 ::=
  SEQUENCE {
    sib6indicator                 BOOLEAN,
    -- Physical channel IEs
    pich-PowerOffset              PICH-PowerOffset,
  }

```

```

modeSpecificInfo          CHOICE {
  fdd                      SEQUENCE {
    aich-PowerOffset      AICH-PowerOffset
  },
  tdd                      SEQUENCE {
    pusch-SysInfoList-SFN PUSCH-SysInfoList-SFN    OPTIONAL,
    pdsch-SysInfoList-SFN PDSCH-SysInfoList-SFN    OPTIONAL,
    midambleConfiguration MidambleConfiguration  OPTIONAL,
    openLoopPowerControl-TDD OpenLoopPowerControl-TDD
  }
},
primaryCCPCH-Info        PrimaryCCPCH-Info          OPTIONAL,
prach-SystemInformationList PRACH-SystemInformationList,
sccpach-SystemInformationList SCCPCH-SystemInformationList,
cbs-DRX-Level1Information CBS-DRX-Level1Information  OPTIONAL,
-- Conditional on any of the CTCH indicator IEs in
-- sccpach-SystemInformationList
-- Extension mechanism for non- release99 information
nonCriticalExtensions    SEQUENCE {
-- If SysInfoType5 is sent to describe a 1.28Mcps TDD cell, the IE PRACH-RACH-Info included in
-- PRACH-SystemInformationList shall be ignored, and the following IE shall describe
-- the PRACH-RACH-Information.
  prach-RACH-Info-LCR      PRACH-RACH-Info-LCR          OPTIONAL,
-- If SysInfoType5 is sent to describe a 1.28Mcps TDD cell, the IE PRACH-Partitioning in
-- PRACH-SystemInformationList shall be absent, and the following IE shall describe
-- the PRACH-Partitioning.
  prach-Partitioning-LCR   PRACH-Partitioning-LCR      OPTIONAL,
-- Extension mechanism for non- rel-4 information
  nonCriticalExtensions    SEQUENCE {}              OPTIONAL
}
}

SysInfoType6 ::=          SEQUENCE {
-- Physical channel IEs
  pich-PowerOffset        PICH-PowerOffset,
  modeSpecificInfo        CHOICE {
    fdd                    SEQUENCE {
      aich-PowerOffset     AICH-PowerOffset,
      csich-PowerOffset    CSICH-PowerOffset      OPTIONAL
    },
    tdd                    SEQUENCE {
      pusch-SysInfoList-SFN PUSCH-SysInfoList-SFN    OPTIONAL,
      pdsch-SysInfoList-SFN PDSCH-SysInfoList-SFN    OPTIONAL,
      midambleConfiguration MidambleConfiguration  OPTIONAL,
      openLoopPowerControl-TDD OpenLoopPowerControl-TDD
    }
  },
  primaryCCPCH-Info        PrimaryCCPCH-Info          OPTIONAL,
  prach-SystemInformationList PRACH-SystemInformationList  OPTIONAL,
  sccpach-SystemInformationList SCCPCH-SystemInformationList  OPTIONAL,
  cbs-DRX-Level1Information CBS-DRX-Level1Information  OPTIONAL,
-- Conditional on any of the CTCH indicator IEs in
-- sccpach-SystemInformationList
-- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {
-- If SysInfoType6 is sent to describe a 1.28Mcps TDD cell, the IE PRACH-RACH-Info included in
-- PRACH-SystemInformationList shall be ignored, and the following IE shall describe
-- the PRACH-RACH-Information.
    prach-RACH-Info-LCR      PRACH-RACH-Info-LCR          OPTIONAL,
-- If SysInfoType6 is sent to describe a 1.28Mcps TDD cell, the IE PRACH-Partitioning in
-- PRACH-SystemInformationList shall be absent, and the following IE shall describe
-- the PRACH-Partitioning.
    prach-Partitioning-LCR   PRACH-Partitioning-LCR      OPTIONAL,
-- Extension mechanism for non- rel-4 information
    nonCriticalExtensions    SEQUENCE {}              OPTIONAL
  }
}

SysInfoType7 ::=          SEQUENCE {
-- Physical channel IEs
  modeSpecificInfo        CHOICE {
    fdd                    SEQUENCE {
      ul-Interference       UL-Interference
    },
    tdd                    NULL
  },
  prach-Information-SIB5-List DynamicPersistenceLevelList,
  prach-Information-SIB6-List DynamicPersistenceLevelList  OPTIONAL,
  expirationTimeFactor     ExpirationTimerFactor      OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {}
}

```



```

SysInfoType8 ::=                               SEQUENCE {
  -- User equipment IEs
  cpch-Parameters                               CPCH-Parameters,
  -- Physical channel IEs
  cpch-SetInfoList                             CPCH-SetInfoList,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType9 ::=                               SEQUENCE {
  -- Physical channel IEs
  cpch-PersistenceLevelsList                 CPCH-PersistenceLevelsList,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType10 ::=                             SEQUENCE {
  -- User equipment IEs
  drac-SysInfoList                           DRAC-SysInfoList,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType11 ::=                             SEQUENCE {
  sib12indicator                             BOOLEAN,
  -- Measurement IEs
  fach-MeasurementOccasionInfo              FACH-MeasurementOccasionInfo      OPTIONAL,
  measurementControlSysInfo                MeasurementControlSysInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType12 ::=                             SEQUENCE {
  -- Measurement IEs
  fach-MeasurementOccasionInfo              FACH-MeasurementOccasionInfo      OPTIONAL,
  measurementControlSysInfo                MeasurementControlSysInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType13 ::=                             SEQUENCE {
  -- Core network IEs
  cn-DomainSysInfoList                     CN-DomainSysInfoList,
  -- User equipment IEs
  ue-IdleTimersAndConstants                 UE-IdleTimersAndConstants          OPTIONAL,
  capabilityUpdateRequirement              CapabilityUpdateRequirement         OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType13-1 ::=                           SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-RAND-Information                  ANSI-41-RAND-Information,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType13-2 ::=                           SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-UserZoneID-Information           ANSI-41-UserZoneID-Information,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType13-3 ::=                           SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-PrivateNeighbourListInfo         ANSI-41-PrivateNeighbourListInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType13-4 ::=                           SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-GlobalServiceRedirectInfo        ANSI-41-GlobalServiceRedirectInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                       SEQUENCE {}
}

SysInfoType14 ::=                             SEQUENCE {
  -- Physical channel IEs
  individualTS-InterferenceList            IndividualTS-InterferenceList,
  expirationTimeFactor                     ExpirationTimerFactor              OPTIONAL,
}

```

```

-- Extension mechanism for non- release99 information
nonCriticalExtensions      SEQUENCE {}
}

SysInfoType15 ::=
-- Measurement IEs
  up-GPS-Assistance          UP-Cipher-GPS-Data-Indicator      OPTIONAL,
  up-OTDOA-Assistance        UP-OTDOA-AssistanceSIB            OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions      SEQUENCE {}
}

SysInfoType15-1 ::=
-- DGPS corrections
  up-DGPS-SIB-Data          UP-DGPS-SIB-Data
}

SysInfoType15-2 ::=
-- Ephemeris and clock corrections
  up-Ephe-SIB-Data          UP-Ephe-SIB-Data
}

SysInfoType15-3 ::=
-- Almanac and other data
  transmissionTOW           INTEGER (0..1048575),
  satMask                    BIT STRING (SIZE (1..32)),
  lsbTOW                      BIT STRING (SIZE (8)),
  up-Alma-SIB-DataList       UP-Alma-SIB-DataList
}

SysInfoType16 ::=
-- Radio bearer IEs
  preDefinedRadioConfiguration PreDefRadioConfiguration,
-- Extension mechanism for non- release99 information
nonCriticalExtensions      SEQUENCE {}
}

SysInfoType17 ::=
-- Physical channel IEs
  pusch-SysInfoList          PUSCH-SysInfoList              OPTIONAL,
  pdsch-SysInfoList          PDSCH-SysInfoList              OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions      SEQUENCE {}
}

SysInfoTypeSB1 ::=
-- Other IEs
  sib-ReferenceList          SIB-ReferenceList                OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions      SEQUENCE {}
}

SysInfoTypeSB2 ::=
-- Other IEs
  sib-ReferenceList          SIB-ReferenceList                OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions      SEQUENCE {}
}

TDD-UMTS-Frequency-List ::=
  SEQUENCE (SIZE (1..maxNumTDDFreqs)) OF
  FrequencyInfoTDD

-- *****
--
-- ANSI-41 INFORMATION ELEMENTS (10.3.9)
--
-- *****

ANSI-41-GlobalServiceRedirectInfo ::= ANSI-41-NAS-Parameter
ANSI-41-PrivateNeighbourListInfo ::= ANSI-41-NAS-Parameter
ANSI-41-RAND-Information ::= ANSI-41-NAS-Parameter
ANSI-41-UserZoneID-Information ::= ANSI-41-NAS-Parameter
ANSI-41-NAS-Parameter ::= BIT STRING (SIZE (1..2048))

Min-P-REV ::= BIT STRING (SIZE (8))

NAS-SystemInformationANSI-41 ::= ANSI-41-NAS-Parameter
NID ::= BIT STRING (SIZE (16))

P-REV ::= BIT STRING (SIZE (8))

SID ::= BIT STRING (SIZE (15))

END

```

## 11.4 Constant definitions

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

```

BEGIN

hipDSCHidentities      INTEGER ::= 64
hiPUSCHidentities     INTEGER ::= 64
hiRM                   INTEGER ::= 256
maxAC                  INTEGER ::= 16
maxAdditionalMeas     INTEGER ::= 4
maxASC                INTEGER ::= 8
maxASCmap             INTEGER ::= 7
maxASCpersist        INTEGER ::= 6
maxCCTrCH            INTEGER ::= 8
maxCellMeas          INTEGER ::= 32
maxCellMeas-1        INTEGER ::= 31
maxCNDomains         INTEGER ::= 4
maxCPCHsets          INTEGER ::= 16
maxDPCH-DLchan       INTEGER ::= 8
maxDPCHcodesPerTS    INTEGER ::= 16
-- **TODO**
maxDPDCH-UL          INTEGER ::= 6
maxDRACclasses        INTEGER ::= 8
-- **TODO**
maxFACH              INTEGER ::= 8
maxFreq              INTEGER ::= 8
maxFrequencybands     INTEGER ::= 4
maxInterSysMessages  INTEGER ::= 4
maxLoCHperRLC        INTEGER ::= 2
maxMeasEvent          INTEGER ::= 8
maxMeasIntervals     INTEGER ::= 3
maxMeasParEvent      INTEGER ::= 2
maxNumCDMA2000Freqs  INTEGER ::= 8
maxNumGSMFreqRanges  INTEGER ::= 32
maxNumFDDFreqs       INTEGER ::= 8
maxNumTDDFreqs       INTEGER ::= 8
maxNoOfMeas          INTEGER ::= 16
maxOtherRAT          INTEGER ::= 15
maxPage1             INTEGER ::= 8
maxPCPCH-APsig       INTEGER ::= 16
maxPCPCH-APsubCh     INTEGER ::= 12
maxPCPCH-CDsig       INTEGER ::= 16
maxPCPCH-CsubCh     INTEGER ::= 12
maxPCPCH-SF          INTEGER ::= 7
maxPCPCHs            INTEGER ::= 64
maxPDCPAlgoType      INTEGER ::= 8
maxPDSCH             INTEGER ::= 8
maxPDSCH-TFCIgroups  INTEGER ::= 256
maxPRACH             INTEGER ::= 16
maxPRACH-FPACH       INTEGER ::= 8
maxPredefConfig      INTEGER ::= 16
maxPUSCH             INTEGER ::= 8
maxRABsetup          INTEGER ::= 16
maxRAT               INTEGER ::= 16
maxRB                INTEGER ::= 32
maxRBallRABs         INTEGER ::= 27
maxRBMuxOptions      INTEGER ::= 8
maxRBperRAB          INTEGER ::= 8
maxReportedGSMCells  INTEGER ::= 6
maxRL                INTEGER ::= 8
maxRL-1              INTEGER ::= 7
maxSat               INTEGER ::= 16
maxSCCPCH            INTEGER ::= 16
maxSIB               INTEGER ::= 32
-- **TODO**
maxSIB-FACH          INTEGER ::= 8
maxSIBperMsg         INTEGER ::= 16
maxSig               INTEGER ::= 16
maxSRBsetup          INTEGER ::= 8
maxSubCh             INTEGER ::= 12
maxSystemCapability  INTEGER ::= 16
maxTF                INTEGER ::= 32
maxTF-CPCH           INTEGER ::= 16
maxTFC               INTEGER ::= 1024
maxTFCl-2-Combs     INTEGER ::= 512
maxTGPS              INTEGER ::= 6
maxTrCH              INTEGER ::= 32
maxTrCHpreconf       INTEGER ::= 16
maxTS                INTEGER ::= 14
maxTS-1              INTEGER ::= 13
maxURA              INTEGER ::= 8

```

END

## 11.5 RRC information between network nodes

```

Internode-definitions DEFINITIONS AUTOMATIC TAGS ::=
BEGIN

IMPORTS

    HandoverToUTRANCommand-r3,
    MeasurementReport,
    PhysicalChannelReconfiguration-r3,
    RadioBearerReconfiguration-r3,
    RadioBearerRelease-r3,
    RadioBearerSetup-r3,
    TransportChannelReconfiguration-r3,
    UECapabilityInformation
FROM PDU-definitions

-- Core Network IEs :
    CN-DomainInformationList,
    NAS-SystemInformationGSM-MAP,
-- UTRAN Mobility IEs :
    CellIdentity,
    URA-Identity,
-- User Equipment IEs :
    C-RNTI,
    RRC-MessageSequenceNumber,
    START-Value,
    STARTList,
    U-RNTI,
    UE-RadioAccessCapability,
-- Radio Bearer IEs :
    PDCP-InfoReconfig,
    PredefinedConfigValueTag,
    RAB-InformationSetupList,
    RB-Identity,
    RB-MappingInfo,
    RLC-Info,
    RLC-SequenceNumber,
    SRB-InformationSetupList,
-- Transport Channel IEs :
    CPCH-SetID,
    DL-CommonTransChInfo,
    DL-AddReconfTransChInfoList,
    DRAC-StaticInformationList,
    UL-CommonTransChInfo,
    UL-AddReconfTransChInfoList,
-- Measurement IEs :
    MeasurementIdentity,
    MeasurementReportingMode,
    MeasurementType,
    AdditionalMeasurementID-List,
-- Other IEs :
    InterRATMessage
FROM InformationElements

    maxNoOfMeas,
    maxPredefConfig,
    maxRABsetup,
    maxRB,
    maxSRBsetup,
    maxTrCH
FROM Constant-definitions;

-- RRC information transferred between network nodes,
-- per group of information transfers having same endpoint
-- Alike class definitions for RRC PDUs

-- *****
--
-- RRC information, to target RNC
--
-- *****

-- *****
--
-- RRC information, target RNC to source RNC
--
-- *****

```

```

T-RNC-ToSRNC-Container ::= SEQUENCE {
    message          T-RNC-ToSRNC-ContainerType
}

T-RNC-ToSRNC-ContainerType ::= CHOICE {
    radioBearerSetup          RadioBearerSetup-r3,
    radioBearerReconfiguration RadioBearerReconfiguration-r3,
    radioBearerRelease       RadioBearerRelease-r3,
    transportChannelReconfiguration TransportChannelReconfiguration-r3,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
    extension                 NULL
}

-- *****
--
-- RRC information, target RNC to source RAT
--
-- *****

-- Container definitions, alike PDU definitions
-- RRC Container definition, to target RNC

-- *****
--
-- SRNC Relocation information
--
-- *****

SRNC-RelocationInfo ::= SEQUENCE {
    -- Non-RRC IEs
    stateOfRRC                StateOfRRC,
    stateOfRRC-Procedure      StateOfRRC-Procedure,
    cipheringStatus           CipheringStatus,
    calculationTimeForCiphering CalculationTimeForCiphering OPTIONAL,
    cipheringInfoPerRB-List   CipheringInfoPerRB-List   OPTIONAL,
    integrityProtectionStatus IntegrityProtectionStatus,
    srb-SpecificIntegrityProtInfo SRB-SpecificIntegrityProtInfoList,
    implementationSpecificParams ImplementationSpecificParams OPTIONAL,
    -- User equipment IEs
    u-RNTI                    U-RNTI,
    c-RNTI                    C-RNTI                    OPTIONAL,
    ue-RadioAccessCapability  UE-RadioAccessCapability,
    -- Other IEs
    interRATMessage           InterRATMessage           OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity              URA-Identity              OPTIONAL,
    -- Core network IEs
    cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP,
    cn-DomainInformationList   CN-DomainInformationList   OPTIONAL,
    -- Measurement IEs
    ongoingMeasRepList        OngoingMeasRepList        OPTIONAL,
    -- Radio bearer IEs
    preConfigStatusInfo       PreConfigStatusInfo,
    srb-InformationList       SRB-InformationSetupList,
    rab-InformationList       RAB-InformationSetupList   OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo      UL-CommonTransChInfo      OPTIONAL,
    ul-TransChInfoList        UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificInfo          CHOICE {
        fdd                    SEQUENCE {
            cpch-SetID          CPCH-SetID          OPTIONAL,
            transChDRAC-Info    DRAC-StaticInformationList OPTIONAL
        },
        tdd                    NULL
    },
    dl-CommonTransChInfo      DL-CommonTransChInfo      OPTIONAL,
    dl-TransChInfoList        DL-AddReconfTransChInfoList OPTIONAL,
    -- Measurement report
    measurementReport         MeasurementReport         OPTIONAL
}

-- RRC Container definition, target RNC to source RNC
-- Nothing new, only re-using RRC PDUs
--
-- RRC Container definition, target RNC to source system
-- Nothing new, re-using RRC PDUs (HandoverToUTRANCommand)

-- IE definitions

CalculationTimeForCiphering ::= SEQUENCE {
    cell-Id                  CellIdentity,

```

```

    sfn                                INTEGER (0..4095)
}

CipheringInfoPerRB ::=                SEQUENCE {
    dl-START                            START-Value,
    ul-START                            START-Value
}

-- TABULAR: Multiplicity value numberOfRadioBearers has been replaced
-- with maxRB.
CipheringInfoPerRB-List ::=          SEQUENCE (SIZE (1..maxRB)) OF
    CipheringInfoPerRB

CipheringStatus ::=                  ENUMERATED {
    started, notStarted }

ImplementationSpecificParams ::=     BIT STRING (SIZE (1..512))

IntegrityProtectionStatus ::=       ENUMERATED {
    started, notStarted }

MeasurementCommandWithType ::=      CHOICE {
    setup                               MeasurementType,
    modify                              NULL,
    release                             NULL
}

OngoingMeasRep ::=                  SEQUENCE {
    measurementIdentity                 MeasurementIdentity,
    measurementCommandWithType         MeasurementCommandWithType,
    -- TABULAR: The CHOICE Measurement in the tabular description is included
    -- in the IE above.
    measurementReportingMode           MeasurementReportingMode           OPTIONAL,
    additionalMeasurementID-List       AdditionalMeasurementID-List       OPTIONAL
}

OngoingMeasRepList ::=              SEQUENCE (SIZE (1..maxNoOfMeas)) OF
    OngoingMeasRep

PreConfigStatusInfo ::=              SEQUENCE (SIZE (1..maxPredefConfig)) OF
    PredefinedConfigValueTag

SRB-SpecificIntegrityProtInfo ::=   SEQUENCE {
    rb-Identity                         RB-Identity                         OPTIONAL,
    ul-RRC-HFN                         BIT STRING (SIZE (28)),
    dl-RRC-HFN                         BIT STRING (SIZE (28)),
    ul-RRC-SequenceNumber              RRC-MessageSequenceNumber,
    dl-RRC-SequenceNumber              RRC-MessageSequenceNumber
}

SRB-SpecificIntegrityProtInfoList ::= SEQUENCE (SIZE (4..maxSRBsetup)) OF
    SRB-SpecificIntegrityProtInfo

StateOfRRC ::=                       ENUMERATED {
    cell-DCH, cell-FACH,
    cell-PCH, ura-PCH }

StateOfRRC-Procedure ::=             ENUMERATED {
    awaitNoRRC-Message,
    awaitRRC-ConnectionRe-establishmentComplete,
    awaitRB-SetupComplete,
    awaitRB-ReconfigurationComplete,
    awaitTransportCH-ReconfigurationComplete,
    awaitPhysicalCH-ReconfigurationComplete,
    awaitActiveSetUpdateComplete,
    awaitHandoverComplete,
    sendCellUpdateConfirm,
    sendUraUpdateConfirm,
    sendRrcConnectionReestablishment,
    otherStates }

END

```

## CHANGE REQUEST

⌘ **25.331 CR 709** ⌘ rev **-** ⌘ Current version: **3.5.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Introduction of UE radio access capability Parameters for 1.28 Mcps TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ 2001-02-12
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
Use <u>one</u> of the following categories: <b>F</b> (essential correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (Addition of feature), <b>C</b> (Functional modification of feature) <b>D</b> (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5)	

<b>Reason for change:</b>	⌘ Support of 1.28 Mcps TDD is introduced in TS 25.331.		
<b>Summary of change:</b>	⌘ Support of 1.28 Mcps TDD is included in IE "capability update requirement", "measurement capability", "physical channel capability", "RF capability".		
<b>Consequences if not approved:</b>	⌘		

<b>Clauses affected:</b>	⌘ 8.1.3.6, 10.3.3.2, 10.3.3.21, 10.3.3.25, 10.3.3.33, 10.3.3.42, 11		
<b>Other specs affected:</b>	<input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications	⌘	
<b>Other comments:</b>	⌘		

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/>. For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

### 8.1.3.6 Reception of an RRC CONNECTION SETUP message by the UE

The UE shall compare the value of the IE "Initial UE identity" in the received RRC CONNECTION SETUP message with the value of the variable INITIAL\_UE\_IDENTITY.

If the values are different, the UE shall:

- ignore the rest of the message;

If the values are identical, the UE shall:

- stop timer T300, and act upon all received information elements as specified in subclause 8.6, unless specified otherwise in the following;
  - if the UE will be in the CELL\_FACH state at the conclusion of this procedure:
    - select PRACH according to subclause 8.6.6.2;
    - select Secondary CCPCH according to subclause 8.6.6.5;
    - if the contents of the variable C\_RNTI is empty:
      - perform a cell update procedure according to subclause 8.3.1 and then continue with the procedure as indicated in the following;
  - enter a state according to subclause 8.6.3.3;
- submit an RRC CONNECTION SETUP COMPLETE message to the lower layers on the uplink DCCH after successful state transition per subclause 8.6.3.3, with the contents set as specified below:
  - set the IE "RRC transaction identifier" to
    - the value of "RRC transaction identifier" in the entry for the RRC CONNECTION SETUP message in the table "Accepted transactions" in the variable TRANSACTIONS; and
    - clear that entry.
  - calculate START values for each CN domain according to subclause 8.5.9 and include the result in the IE "START list";
  - if the IE "UE radio access FDD capability update requirement" included in the RRC CONNECTION SETUP message has the value TRUE:
    - include its UTRAN-specific FDD capabilities and its UTRAN –specific capabilities common to FDD and TDD in the IE "UE radio access capability";
  - if the IE "UE radio access 3.84Mcps TDD capability update requirement" included in the RRC CONNECTION SETUP message has the value TRUE:
    - include its UTRAN-specific 3.84Mcps TDD capabilities and its UTRAN –specific capabilities common to FDD and TDD in the IE "UE radio access capability";
  - if the IE "UE radio access 1.28Mcps TDD capability update requirement" included in the RRC CONNECTION SETUP message has the value TRUE:
    - include its UTRAN-specific 1.28Mcps TDD capabilities and its UTRAN –specific capabilities common to FDD and TDD in the IE "UE radio access capability";
  - if the IE "System specific capability update requirement list" is present in the RRC CONNECTION SETUP message:
    - include its inter-RAT capabilities for the requested systems in the IE "UE system specific capability".

When of the RRC CONNECTION SETUP COMPLETE message has been submitted to lower layers for transmission the UE shall:

- if the UE has entered CELL\_FACH state:



- start timer T305 if periodical cell update has been requested in system information block type 1;
- update its variable UE\_CAPABILITY\_TRANSFERRED which UE capabilities it has transmitted to the UTRAN;
- set the "Status" in the variable INTEGRITY\_PROTECTION\_INFO to "Not started";
- set the "Historical status" in the variable INTEGRITY\_PROTECTION\_INFO to "Never been active";

and the procedure ends.

### 10.3.3.2 Capability Update Requirement

This IE indicates to the UE which specific capabilities to transfer to the network.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
UE radio access FDD capability update requirement	MP		Boolean	TRUE indicates update required	
UE radio access <u>3.84Mcps</u> TDD capability update requirement	MP		Boolean	TRUE indicates update required	<u>Name changed in REL-4</u>
<u>UE radio access 1.28Mcps TDD capability update requirement</u>	<u>MP</u>		<u>Boolean</u>	<u>TRUE indicates update required</u>	<u>REL-4</u>
System specific capability update requirement list	OP	1 to <maxSystemCapability>			
>System specific capability update requirement	MP		Enumerated (GSM)		

Default value is:

"UE radio capability FDD update requirement" = false

"UE radio capability 3.84Mcps TDD update requirement" = false

"UE radio capability 1.28Mcps TDD update requirement" = false

"System specific capability update requirement" not present.

## 10.3.3.21 Measurement capability

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<b>Need for downlink compressed mode</b>					
FDD measurements	MP		Boolean	TRUE means that the UE requires DL compressed mode in order to perform measurements on FDD	
<u>3.84Mcps TDD measurements</u>	CV <u>3.84Mcps_tdd_sup</u>		Boolean	TRUE means that the UE requires DL compressed mode in order to perform measurements on <u>3.84Mcps TDD</u>	<u>Name changed in REL-4</u>
<u>1.28Mcps TDD measurements</u>	CV <u>1.28Mcps_tdd_sup</u>		<u>Boolean</u>	TRUE means that the UE requires DL compressed mode in order to perform <u>measurements on 1.28Mcps TDD</u>	<u>REL-4</u>
GSM 900	CV <i>Gsm900_s upM</i>		Boolean	TRUE means that the UE requires DL compressed mode in order to perform measurements on GSM 900	
DCS 1800	CV <i>Gsm1800_sup</i>		Boolean	TRUE means that the UE requires DL compressed mode in order to perform measurements on DCS 1800	
GSM 1900	CV <i>Gsm1900_sup</i>		Boolean	TRUE means that the UE requires DL compressed mode in order to perform measurements on GSM 1900	
Multi-carrier measurement	CV <i>mc_sup</i>		Boolean	TRUE means that the UE requires DL compressed mode in order to perform measurements on multi-carrier	
<b>Need for uplink compressed mode</b>					
FDD measurements	MP		Boolean	TRUE means that the UE requires UL compressed mode in order to perform measurements on FDD	
<u>3.84Mcps TDD measurements</u>	CV <u>3.84Mcps_tdd_sup</u>		Boolean	TRUE means that the UE requires UL compressed mode in order to perform measurements on <u>3.84Mcps TDD</u>	<u>Name changed in REL-4</u>
<u>1.28Mcps TDD measurements</u>	CV <u>1.28Mcps_tdd_sup</u>		<u>Boolean</u>	TRUE means that the UE requires DL compressed mode in order to perform <u>measurements on 1.28Mcps TDD</u>	<u>REL-4</u>
GSM 900	CV <i>Gsm900_s up</i>		Boolean	TRUE means that the UE requires UL compressed mode in order to perform measurements on GSM 900	
DCS 1800	CV <i>Gsm1800_sup</i>		Boolean	TRUE means that the UE requires UL compressed mode in order to perform measurements on DCS 1800	
GSM 1900	CV <i>Gsm1900_sup</i>		Boolean	TRUE means that the UE requires UL compressed mode in order to perform measurements on GSM 1900	
Multi-carrier measurement	CV <i>mc_sup</i>		Boolean	TRUE means that the UE requires UL compressed mode in order to perform	

				measurements on multi-carrier	
--	--	--	--	-------------------------------	--

Condition	Explanation
<u>3.84Mcps_tdd_sup</u>	Presence is mandatory if an IE "TDD RF capability" is present with the IE "Chip rate capability" set to <u>"3.84Mcps"</u> . Otherwise this field is not needed in the message.
<u>1.28Mcps_tdd_sup</u>	Presence is mandatory if an IE "TDD RF capability" is present with the IE "Chip rate capability" set to <u>"1.28Mcps"</u> . Otherwise this field is not needed in the message.
Gsm900_sup	Presence is mandatory if IE Support of GSM900 has the value TRUE. Otherwise this field is not needed in the message.
Gsm1800_sup	Presence is mandatory if IE Support of GSM1800 has the value TRUE. Otherwise this field is not needed in the message.
Gsm1900_sup	Presence is mandatory if IE Support of GSM1900 has the value TRUE. Otherwise this field is not needed in the message.
mc_sup	Presence is mandatory if IE Support of multi-carrier has the value TRUE. Otherwise this field is not needed in the message.

## 10.3.3.25 Physical channel capability

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
<b>Downlink physical channel capability information elements</b>					
FDD downlink physical channel capability	CH- <i>fdd_req_su p</i>				
>Max no DPCH/PDSCH codes	MP		Integer (1..8)	Maximum number of DPCH/PDSCH codes to be simultaneously received	
>Max no physical channel bits received	MP		Integer (600, 1200, 2400, 3600, 4800, 7200, 9600, 14400, 19200, 28800, 38400, 48000, 57600, 67200, 76800)	Maximum number of physical channel bits received in any 10 ms interval (DPCH, PDSCH, S-CCPCH)	
>Support for SF 512	MP		Boolean	TRUE means supported	
>Support of PDSCH	MP		Boolean	TRUE means supported	
>Simultaneous reception of SCCPCH and DPCH	MP		Boolean	TRUE means supported	
>Simultaneous reception of SCCPCH, DPCH and PDSCH	CV- <i>if_sim_rec _pdsch _sup</i>		Boolean	TRUE means supported	
>Max no of S-CCPCH RL	CV- <i>if_sim_rec</i>		Integer(1)	Maximum number of simultaneous S-CCPCH radio links	
<u>3.84Mcps TDD downlink physical channel capability</u>	CH- <u><i>3.84Mcps tdd_req_su p</i></u>				<u>Name changed in REL-4</u>
>Maximum number of timeslots per frame	MP		Integer (1..14)		
>Maximum number of physical channels per frame	MP		Integer (1..224)		
>Minimum SF	MP		Integer (1, 16)		
>Support of PDSCH	MP		Boolean	TRUE means supported	
>Maximum number of physical channels per timeslot	MP		Integer (1..16)		
<u>1.28Mcps TDD downlink physical channel capability</u>	CH- <u><i>1.28Mcps tdd_req_su p</i></u>				<u>REL-4</u>
>Maximum number of timeslots per subframe	MP		<u>Integer (1..6)</u>		<u>REL-4</u>
>Maximum number of physical channels per subframe	MP		<u>Integer (1..96)</u>		<u>REL-4</u>
>Minimum SF	MP		<u>Integer (1, 16)</u>		<u>REL-4</u>
>Support of PDSCH	MP		<u>Boolean</u>	<u>TRUE means supported</u>	<u>REL-4</u>
>Maximum number of physical channels per timeslot	MP		<u>Integer (1..16)</u>		<u>REL-4</u>
>Support of 8PSK	MP		<u>Boolean</u>	<u>TRUE means supported</u>	<u>REL-4</u>
<b>Uplink physical channel capability information elements</b>					

>FDD uplink physical channel capability	CH- <i>fdd_req_su</i> <i>p</i>				
>Maximum number of DPDCH bits transmitted per 10 ms	MP		Integer (600, 1200, 2400, 4800. 9600, 19200. 28800, 38400, 48000, 57600)		
>Support of PCPCH	MP		Boolean	TRUE means supported	
<u>3.84Mcps TDD uplink physical channel capability</u>	CH- <i>3.84Mcps_tdd_req_su</i> <i>p</i>				Name changed in REL-4
>Maximum Number of timeslots per frame	MP		Integer (1..14)		
>Maximum number of physical channels per timeslot	MP		Integer (1, 2)		
>Minimum SF	MP		Integer (1, 2, 4, 8, 16)		
>Support of PUSCH	MP		Boolean	TRUE means supported	
<u>1.28Mcps TDD uplink physical channel capability</u>	CH- <i>1.28Mcps_tdd_req_su</i> <i>p</i>				REL-4
>Maximum Number of timeslots per subframe	MP		Integer (1..6)		REL-4
>Maximum number of physical channels per timeslot	MP		Integer (1, 2)		REL-4
>Minimum SF	MP		Integer (1, 2, 4, 8, 16)		REL-4
>Support of PUSCH	MP		Boolean	TRUE means supported	REL-4
>Support of 8PSK	MP		Boolean	TRUE means supported	REL-4

Condition	Explanation
<i>if_sim_rec_pdsch_sup</i>	Presence is mandatory if IE Simultaneous reception of SCCPCH and DPCH = True and IE Support of PDSCH = True. Otherwise this field is not needed in the message.
<i>if_sim_rec</i>	Presence is mandatory if IE capability Simultaneous reception of SCCPCH and DPCH = True. Otherwise this field is not needed in the message.
<u>3.84Mcps_tdd_req_sup</u>	Presence is mandatory if an IE "TDD RF capability" is present with the IE "Chip rate capability" set to "3.84Mcps" and a 3.84Mcps TDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.
<u>1.28Mcps_tdd_req_sup</u>	Presence is mandatory if an IE "TDD RF capability" is present with the IE "Chip rate capability" set to "1.28Mcps" and a 1.28Mcps TDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.
<i>fdd_req_sup</i>	Presence is mandatory if IE Multi-mode capability has the value "FDD" or "FDD/TDD" and a FDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.

10.3.3.33 RF capability

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
FDD RF capability	CH- <i>fdd_req_sup</i>				
>UE power class	MP		Enumerated(1..4)	as defined in 3GPP TS 25.101 subclause 6.2.1	
>Tx/Rx frequency separation	MP		Enumerated(190, 174.8-205.2, 134.8-245.2)	In MHz as defined in 3GPP TS 25.101 subclause 5.3. NOTE: Not applicable if UE is not operating in frequency band a (as defined in 25.101).	
TDD RF capability	CH- <i>tdd_req_sup</i>	<u>1 to 2</u>		<u>One "TDD RF capability" entity shall be included for every Chip rate capability supported.</u>	<u>Multi=2 is included in REL-4</u>
>UE power class	MP		Enumerated (1..4)	as defined in 3GPP TS 25.102 subclause 6.2.1	
>Radio frequency bands	MP		Enumerated(a, b, c, a+b, a+c, b+c, a+b+c)	as defined in 3GPP TS 25.102 subclause 5.2	
>Chip rate capability	MP		Enumerated(3.84Mcps, 1.28Mcps)	as defined in 3GPP TS 25.102	

Condition	Explanation
<i>tdd_req_sup</i>	Presence is mandatory if IE Multi-mode capability has the value "TDD" or "FDD/TDD" and a <u>3.84Mcps TDD capability update</u> or a <u>1.28Mcps TDD capability update</u> has been requested in a previous message. Otherwise this field is not needed in the message.
<i>fdd_req_sup</i>	Presence is mandatory if IE Multi-mode capability has the value "FDD" or "FDD/TDD" and a FDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.

10.3.3.42 UE radio access capability

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
ICS version	MP		Enumerated(R99, REL-4)	Indicates the release version of TS 34.123-2 (Implementation Conformance Statement (ICS) proforma specification) that is applicable for the UE.	<u>Value REL-4 added in REL-4</u>
PDCP capability	MP		PDCP capability 10.3.3.24		
RLC capability	MP		RLC capability 10.3.3.34		
Transport channel capability	MP		Transport channel capability 10.3.3.40		
RF capability	MP		RF capability 10.3.3.33		
Physical channel capability	MP		Physical channel capability 10.3.3.25		
UE multi-mode/multi-RAT capability	MP		UE multi-mode/multi-RAT capability 10.3.3.41		
Security capability	MP		Security capability 10.3.3.37		
UP capability	MP		UP capability 10.3.3.45		
Measurement capability	CH- <i>fdd_req_sup</i>		Measurement capability 10.3.3.21		

Condition	Explanation
<i>fdd_req_sup</i>	Presence is mandatory if IE Multi-mode capability has the value "FDD" or "FDD/TDD" and a FDD capability update has been requested in a previous message. Otherwise this field is not needed in the message.



# 11 Message and Information element abstract syntax (with ASN.1)

This clause contains definitions for RRC PDUs and IEs using a subset of ASN.1 as specified in TR 25.921. PDU and IE definitions are grouped into separate ASN.1 modules.

## 11.1 General message structure

```
Class-definitions DEFINITIONS AUTOMATIC TAGS ::=
```

```
BEGIN
```

```
IMPORTS
```

```

ActiveSetUpdate-r3,
ActiveSetUpdateComplete,
ActiveSetUpdateFailure,
AssistanceDataDelivery-r3,
CellChangeOrderFromUTRAN-r3,
CellChangeFailureFromUTRAN,
CellUpdate,
CellUpdateConfirm-CCCH-r3,
CellUpdateConfirm-r3,
CounterCheck-r3,
CounterCheckResponse,
DownlinkDirectTransfer-r3,
HandoverToUTRANComplete,
InitialDirectTransfer,
HandoverFromUTRANCommand-GSM-r3,
HandoverFromUTRANCommand-CDMA2000-r3,
HandoverFromUTRANFailure,
MeasurementControl-r3,
MeasurementControlFailure,
MeasurementReport,
PagingType1,
PagingType2,
PhysicalChannelReconfiguration-r3,
PhysicalChannelReconfigurationComplete,
PhysicalChannelReconfigurationFailure,
PhysicalSharedChannelAllocation-r3,
PUSCHCapacityRequest,
RadioBearerReconfiguration-r3,
RadioBearerReconfigurationComplete,
RadioBearerReconfigurationFailure,
RadioBearerRelease-r3,
RadioBearerReleaseComplete,
RadioBearerReleaseFailure,
RadioBearerSetup-r3,
RadioBearerSetupComplete,
RadioBearerSetupFailure,
RRCConnectionReject-r3,
RRCConnectionRelease-r3,
RRCConnectionRelease-CCCH-r3,
RRCConnectionReleaseComplete,
RRCConnectionRequest,
RRCConnectionSetup-r3,
RRCConnectionSetupComplete,
RRCStatus,
SecurityModeCommand-r3,
SecurityModeComplete,
SecurityModeFailure,
SignallingConnectionRelease-r3,
SignallingConnectionReleaseRequest,
SystemInformation-BCH,
SystemInformation-FACH,
SystemInformationChangeIndication,
TransportChannelReconfiguration-r3,
TransportChannelReconfigurationComplete,
TransportChannelReconfigurationFailure,
TransportFormatCombinationControl,
TransportFormatCombinationControlFailure,

```

```

UECapabilityEnquiry-r3,
UECapabilityInformation,
UECapabilityInformationConfirm-r3,
UplinkDirectTransfer,
UplinkPhysicalChannelControl-r3,
URAUUpdate,
URAUUpdateConfirm-r3,
URAUUpdateConfirm-CCCH-r3,
UTRANMobilityInformation,
UTRANMobilityInformationConfirm,
UTRANMobilityInformationFailure
FROM PDU-definitions

-- User Equipment IEs :
  IntegrityCheckInfo
FROM InformationElements;

--*****
--
-- Downlink DCCH messages
--
--*****

DL-DCCH-Message ::= SEQUENCE {
  integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
  message                  DL-DCCH-MessageType
}

DL-DCCH-MessageType ::= CHOICE {
  activeSetUpdate                ActiveSetUpdate-r3,
  assistanceDataDelivery         AssistanceDataDelivery-r3,
  cellChangeOrderFromUTRAN      CellChangeOrderFromUTRAN-r3,
  cellUpdateConfirm              CellUpdateConfirm-r3,
  counterCheck                   CounterCheck-r3,
  downlinkDirectTransfer         DownlinkDirectTransfer-r3,
  handoverFromUTRANCommand-GSM   HandoverFromUTRANCommand-GSM-r3,
  handoverFromUTRANCommand-CDMA2000 HandoverFromUTRANCommand-CDMA2000-r3,
  measurementControl             MeasurementControl-r3,
  pagingType2                    PagingType2,
  physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
  physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
  radioBearerReconfiguration     RadioBearerReconfiguration-r3,
  radioBearerRelease             RadioBearerRelease-r3,
  radioBearerSetup               RadioBearerSetup-r3,
  rrcConnectionRelease           RRCConnectionRelease-r3,
  securityModeCommand            SecurityModeCommand-r3,
  signallingConnectionRelease     SignallingConnectionRelease-r3,
  transportChannelReconfiguration TransportChannelReconfiguration-r3,
  transportFormatCombinationControl TransportFormatCombinationControl,
  ueCapabilityEnquiry            UECapabilityEnquiry-r3,
  ueCapabilityInformationConfirm  UECapabilityInformationConfirm-r3,
  uplinkPhysicalChannelControl    UplinkPhysicalChannelControl-r3,
  uraUpdateConfirm               URAUpdateConfirm-r3,
  utranMobilityInformation        UTRANMobilityInformation,
  extension                       NULL
}

--*****
--
-- Uplink DCCH messages
--
--*****

UL-DCCH-Message ::= SEQUENCE {
  integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
  message                  UL-DCCH-MessageType
}

UL-DCCH-MessageType ::= CHOICE {
  activeSetUpdateComplete        ActiveSetUpdateComplete,
  activeSetUpdateFailure         ActiveSetUpdateFailure,
  cellChangeFailureFromUTRAN     CellChangeFailureFromUTRAN,
  counterCheckResponse           CounterCheckResponse,
  handoverToUTRANComplete        HandoverToUTRANComplete,
  initialDirectTransfer          InitialDirectTransfer,
  handoverFromUTRANFailure       HandoverFromUTRANFailure,
  measurementControlFailure       MeasurementControlFailure,
  measurementReport              MeasurementReport,
}

```

```

physicalChannelReconfigurationComplete
physicalChannelReconfigurationFailure
radioBearerReconfigurationComplete
radioBearerReconfigurationFailure
radioBearerReleaseComplete
radioBearerReleaseFailure
radioBearerSetupComplete
radioBearerSetupFailure
rrcConnectionReleaseComplete
rrcConnectionSetupComplete
rrcStatus
securityModeComplete
securityModeFailure
signallingConnectionReleaseRequest
transportChannelReconfigurationComplete
transportChannelReconfigurationFailure
transportFormatCombinationControlFailure
ueCapabilityInformation
uplinkDirectTransfer
utranMobilityInformationConfirm
utranMobilityInformationFailure
extension
}

```

```

--*****
--
-- Downlink CCCH messages
--
--*****

```

```

DL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo    IntegrityCheckInfo    OPTIONAL,
    message                DL-CCCH-MessageType
}

```

```

DL-CCCH-MessageType ::= CHOICE {
    cellUpdateConfirm      CellUpdateConfirm-CCCH-r3,
    rrcConnectionReject    RRCConnectionReject-r3,
    rrcConnectionRelease    RRCConnectionRelease-CCCH-r3,
    rrcConnectionSetup      RRCConnectionSetup-r3,
    uraUpdateConfirm        URAUpdateConfirm-CCCH-r3,
    extension                NULL
}

```

```

--*****
--
-- Uplink CCCH messages
--
--*****

```

```

UL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo    IntegrityCheckInfo    OPTIONAL,
    message                UL-CCCH-MessageType
}

```

```

UL-CCCH-MessageType ::= CHOICE {
    cellUpdate              CellUpdate,
    rrcConnectionRequest    RRCConnectionRequest,
    uraUpdate                URAUpdate,
    extension                NULL
}

```

```

--*****
--
-- PCCH messages
--
--*****

```

```

PCCH-Message ::= SEQUENCE {
    message                PCCH-MessageType
}

```

```

PCCH-MessageType ::= CHOICE {

```

```

    pagingTypel          PagingTypel,
    extension            NULL
}

--*****
--
-- Downlink SHCCH messages
--
--*****

DL-SHCCH-Message ::= SEQUENCE {
    message            DL-SHCCH-MessageType
}

DL-SHCCH-MessageType ::= CHOICE {
    physicalSharedChannelAllocation    PhysicalSharedChannelAllocation-r3,
    extension                          NULL
}

--*****
--
-- Uplink SHCCH messages
--
--*****

UL-SHCCH-Message ::= SEQUENCE {
    message            UL-SHCCH-MessageType
}

UL-SHCCH-MessageType ::= CHOICE {
    pusSchCapacityRequest    PUSCHCapacityRequest,
    extension                NULL
}

--*****
--
-- BCCH messages sent on FACH
--
--*****

BCCH-FACH-Message ::= SEQUENCE {
    message            BCCH-FACH-MessageType
}

BCCH-FACH-MessageType ::= CHOICE {
    systemInformation            SystemInformation-FACH,
    systemInformationChangeIndication    SystemInformationChangeIndication,
    extension                    NULL
}

--*****
--
-- BCCH messages sent on BCH
--
--*****

BCCH-BCH-Message ::= SEQUENCE {
    message            SystemInformation-BCH
}

END

```

## 11.2 PDU definitions

```

--*****
--
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--
--*****

PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```

```

--*****
--
-- IE parameter types from other modules
--
--*****

IMPORTS

-- Core Network IEs :
  CN-DomainIdentity,
  CN-InformationInfo,
  NAS-Message,
  PagingRecordTypeID,
-- UTRAN Mobility IEs :
  URA-Identity,
-- User Equipment IEs :
  ActivationTime,
  C-RNTI,
  CapabilityUpdateRequirement,
  CapabilityUpdateRequirement-r4Ext,
  CellUpdateCause,
  CipheringAlgorithm,
  CipheringModeInfo,
  EstablishmentCause,
  FailureCauseWithProtErr,
  FailureCauseWithProtErrTrId,
  InitialUE-Identity,
  IntegrityProtActivationInfo,
  IntegrityProtectionModeInfo,
  N-308,
  PagingCause,
  PagingRecordList,
  ProtocolErrorIndicator,
  ProtocolErrorIndicatorWithMoreInfo,
  Rb-timer-indicator,
  Re-EstablishmentTimer,
  RedirectionInfo,
  RejectionCause,
  ReleaseCause,
  RRC-StateIndicator,
  RRC-TransactionIdentifier,
  SecurityCapability,
  START-Value,
  STARTList,
  U-RNTI,
  U-RNTI-Short,
  UE-RadioAccessCapability,
  UE-RadioAccessCapability-r4Ext,
  UE-ConnTimersAndConstants,
  URA-UpdateCause,
  UTRAN-DRX-CycleLengthCoefficient,
  WaitTime,
-- Radio Bearer IEs :
  PredefinedConfigIdentity,
  RAB-Info,
  RAB-Info-Post,
  RAB-InformationList,
  RAB-InformationReconfigList,
  RAB-InformationSetupList,
  RB-ActivationTimeInfo,
  RB-ActivationTimeInfoList,
  RB-COUNT-C-InformationList,
  RB-COUNT-C-MSB-InformationList,
  RB-IdentityList,
  RB-InformationAffectedList,
  RB-InformationReconfigList,
  RB-InformationReleaseList,
  RB-InformationSetupList,
  RB-WithPDCP-InfoList,
  SRB-InformationSetupList,
  SRB-InformationSetupList2,
-- Transport Channel IEs:
  CPCH-SetID,
  DL-AddReconfTransChInfo2List,
  DL-AddReconfTransChInfoList,
  DL-CommonTransChInfo,
  DL-DeletedTransChInfoList,

```

```

DRAC-StaticInformationList,
TFC-Subset,
TFCS-Identity,
UL-AddReconfTransChInfoList,
UL-CommonTransChInfo,
UL-DeletedTransChInfoList,
-- Physical Channel IEs :
AllocationPeriodInfo,
Alpha,
CCTrCH-PowerControlInfo,
ConstantValue,
CPCH-SetInfo,
DL-CommonInformation,
DL-CommonInformationPost,
DL-InformationPerRL,
DL-InformationPerRL-List,
DL-InformationPerRL-ListPostFDD,
DL-InformationPerRL-PostTDD,
DL-DPCH-PowerControlInfo,
DL-PDSCH-Information,
DPCH-CompressedModeStatusInfo,
FrequencyInfo,
FrequencyInfoFDD,
FrequencyInfoTDD,
IndividualTS-InterferenceList,
MaxAllowedUL-TX-Power,
PDSCH-CapacityAllocationInfo,
PDSCH-Identity,
PDSCH-Info,
PRACH-RACH-Info,
PrimaryCCPCH-TX-Power,
PUSCH-CapacityAllocationInfo,
PUSCH-Identity,
RL-AdditionInformationList,
RL-RemovalInformationList,
SSDT-Information,
TFC-ControlDuration,
TimeslotList,
TX-DiversityMode,
UL-ChannelRequirement,
UL-ChannelRequirementWithCPCH-SetID,
UL-DPCH-Info,
UL-DPCH-InfoPostFDD,
UL-DPCH-InfoPostTDD,
UL-TimingAdvance,
UL-TimingAdvanceControl,
-- Measurement IEs :
AdditionalMeasurementID-List,
EventResults,
InterRAT-TargetCellDescription,
MeasuredResults,
MeasuredResultsList,
MeasuredResultsOnRACH,
MeasurementCommand,
MeasurementIdentity,
MeasurementReportingMode,
PrimaryCCPCH-RSCP,
TimeslotListWithISCP,
TrafficVolumeMeasuredResultsList,
UP-GPS-AssistanceData,
UP-OTDOA-AssistanceData,
-- Other IEs :
BCCH-ModificationInfo,
CDMA2000-MessageList,
GSM-MessageList,
InterRAT-ChangeFailureCause,
InterRAT-HO-Failure,
InterRAT-UE-RadioAccessCapabilityList,
InterRATMessage,
IntraDomainNasNodeSelector,
ProtocolErrorInformation,
ProtocolErrorMoreInformation,
Rplmn-Information,
SegCount,
SegmentIndex,
SFN-Prime,
SIB-Data-fixed,
SIB-Data-variable,
SIB-Type

```

```

FROM InformationElements

    maxSIBperMsg,
    maxSystemCapability
FROM Constant-definitions;

-- *****
--
-- ACTIVE SET UPDATE (FDD only)
--
-- *****

ActiveSetUpdate-r3 ::= CHOICE {
    r3
        activeSetUpdate-r3          SEQUENCE {
            activeSetUpdate-r3-IEs,
            nonCriticalExtensions    SEQUENCE {} OPTIONAL
        },
        criticalExtensions          SEQUENCE {}
    }

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
    cipheringModeInfo              CipheringModeInfo                OPTIONAL,
    activationTime                  ActivationTime                    OPTIONAL,
    newU-RNTI                       U-RNTI                        OPTIONAL,
    -- Core network IEs
    cn-InformationInfo              CN-InformationInfo              OPTIONAL,
    -- Radio bearer IEs
    rb-WithPDCP-InfoList            RB-WithPDCP-InfoList        OPTIONAL,
    -- Physical channel IEs
    maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power      OPTIONAL,
    rl-AdditionInformationList       RL-AdditionInformationList  OPTIONAL,
    rl-RemovalInformationList        RL-RemovalInformationList   OPTIONAL,
    tx-DiversityMode                 TX-DiversityMode            OPTIONAL,
    ssdt-Information                 SSDT-Information            OPTIONAL
}

-- *****
--
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- *****

ActiveSetUpdateComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo  OPTIONAL,
    -- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo    RB-ActivationTimeInfoList  OPTIONAL,
    rb-WithPDCP-InfoList            RB-WithPDCP-InfoList        OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- ACTIVE SET UPDATE FAILURE (FDD only)
--
-- *****

ActiveSetUpdateFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                    FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- Assistance Data Delivery
--
-- *****

AssistanceDataDelivery-r3 ::= CHOICE {
    r3
        SEQUENCE {

```

```

        assistanceDataDelivery-r3      AssistanceDataDelivery-r3-IEs,
        nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions                 SEQUENCE {}
}

AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
    --Assistance Data Information Elements
    up-GPS-AssistanceData              UP-GPS-AssistanceData              OPTIONAL,
    up-OTDOA-AssistanceData            UP-OTDOA-AssistanceData            OPTIONAL
}

-- *****
--
-- CELL CHANGE ORDER FROM UTRAN
--
-- *****

CellChangeOrderFromUTRAN-r3 ::= CHOICE {
    r3                                  SEQUENCE {
        cellChangeOrderFromUTRAN-IEs  CellChangeOrderFromUTRAN-r3-IEs,
        nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions                 SEQUENCE {}
}

CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo        IntegrityProtectionModeInfo        OPTIONAL,
    activationTime                     ActivationTime                     OPTIONAL,
    rab-InformationList                 RAB-InformationList                 OPTIONAL,
    interRAT-TargetCellDescription     InterRAT-TargetCellDescription
}

-- *****
--
-- CELL CHANGE FAILURE FROM UTRAN
--
-- *****

CellChangeFailureFromUTRAN ::= CHOICE {
    r3                                  SEQUENCE {
        r3-IEs                          CellChangeFailureFromUTRAN-r3-IEs,
        nonCriticalExtensions            SEQUENCE {} OPTIONAL
    },
    criticalExtensions                 SEQUENCE {}
}

CellChangeFailureFromUTRAN-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo        IntegrityProtectionModeInfo        OPTIONAL,
    interRAT-ChangeFailureCause        InterRAT-ChangeFailureCause
}

-- *****
--
-- CELL UPDATE
--
-- *****

CellUpdate ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI                              U-RNTI,
    startList                            STARTList,
    am-RLC-ErrorIndicationC-plane        BOOLEAN,
    am-RLC-ErrorIndicationU-plane        BOOLEAN,
    cellUpdateCause                      CellUpdateCause,
    failureCause                          FailureCauseWithProtErrTrId        OPTIONAL,
    -- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
    rb-timer-indicator                   Rb-timer-indicator,
    -- Measurement IEs
    measuredResultsOnRACH                 MeasuredResultsOnRACH              OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions                 SEQUENCE {} OPTIONAL
}

-- *****
--

```



```

-- CELL UPDATE CONFIRM
--
-- *****

CellUpdateConfirm-r3 ::= CHOICE {
  r3
    cellUpdateConfirm-r3      SEQUENCE {
      nonCriticalExtensions   CellUpdateConfirm-r3-IEs,
                              SEQUENCE {} OPTIONAL
    },
    criticalExtensions        SEQUENCE {}
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier   RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo           CipheringModeInfo                 OPTIONAL,
  activationTime               ActivationTime                    OPTIONAL,
  new-U-RNTI                   U-RNTI                           OPTIONAL,
  new-C-RNTI                   C-RNTI                           OPTIONAL,
  rrc-StateIndicator           RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  rlc-ResetIndicatorC-Plane     BOOLEAN,
  rlc-ResetIndicatorU-Plane     BOOLEAN,
  -- CN information elements
  cn-InformationInfo           CN-InformationInfo                 OPTIONAL,
  -- UTRAN mobility IES
  ura-Identity                 URA-Identity                     OPTIONAL,
  -- Radio bearer IES
  rb-InformationReleaseList     RB-InformationReleaseList   OPTIONAL,
  rb-InformationReconfigList    RB-InformationReconfigList  OPTIONAL,
  rb-InformationAffectedList    RB-InformationAffectedList  OPTIONAL,
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList        OPTIONAL,
  -- Transport channel IES
  ul-CommonTransChInfo         UL-CommonTransChInfo          OPTIONAL,
  ul-deletedTransChInfoList     UL-DeletedTransChInfoList    OPTIONAL,
  ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList  OPTIONAL,
  modeSpecificTransChInfo       CHOICE {
    fdd
      cpch-SetID                CPCH-SetID                    OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList    OPTIONAL
    },
    tdd                          NULL
  },
  dl-CommonTransChInfo         DL-CommonTransChInfo          OPTIONAL,
  dl-DeletedTransChInfoList     DL-DeletedTransChInfoList    OPTIONAL,
  dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList  OPTIONAL,
  -- Physical channel IES
  frequencyInfo                 FrequencyInfo                    OPTIONAL,
  maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power        OPTIONAL,
  ul-ChannelRequirement         UL-ChannelRequirement        OPTIONAL,
  modeSpecificPhysChInfo        CHOICE {
    fdd
      dl-PDSCH-Information       DL-PDSCH-Information        OPTIONAL
    },
    tdd                          NULL
  },
  dl-CommonInformation         DL-CommonInformation          OPTIONAL,
  dl-InformationPerRL-List      DL-InformationPerRL-List    OPTIONAL
}

-- *****
--
-- CELL UPDATE CONFIRM for CCCH
--
-- *****

CellUpdateConfirm-CCCH-r3 ::= CHOICE {
  r3
    -- User equipment IES
    u-RNTI                       U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    cellUpdateConfirm-r3         CellUpdateConfirm-r3-IEs,
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
  },
  criticalExtensions             SEQUENCE {}
}

```

```

-- *****
--
-- COUNTER CHECK
--
-- *****

CounterCheck-r3 ::= CHOICE {
  r3 SEQUENCE {
    counterCheck-r3 CounterCheck-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

CounterCheck-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  -- Radio bearer IEs
  rb-COUNT-C-MSB-InformationList RB-COUNT-C-MSB-InformationList
}

-- *****
--
-- COUNTER CHECK RESPONSE
--
-- *****

CounterCheckResponse ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  -- Radio bearer IEs
  rb-COUNT-C-InformationList RB-COUNT-C-InformationList OPTIONAL,
  -- Extension mechanism for non-release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- DOWNLINK DIRECT TRANSFER
--
-- *****

DownlinkDirectTransfer-r3 ::= CHOICE {
  r3 SEQUENCE {
    downlinkDirectTransfer-r3 DownlinkDirectTransfer-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  -- Core network IEs
  cn-DomainIdentity CN-DomainIdentity,
  nas-Message NAS-Message
}

-- *****
--
-- HANDOVER TO UTRAN COMMAND
--
-- *****

HandoverToUTRANCommand-r3 ::= CHOICE {
  r3 SEQUENCE {
    handoverToUTRANCommand-r3 HandoverToUTRANCommand-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  new-U-RNTI U-RNTI-Short,
  activationTime ActivationTime OPTIONAL,
}

```

```

    cipheringAlgorithm          CipheringAlgorithm          OPTIONAL,
-- Radio bearer IEs
  rab-Info                      RAB-Info-Post,
-- Specification mode information
  specificationMode             CHOICE {
    complete                     SEQUENCE {
      srb-InformationSetupList    SRB-InformationSetupList,
      rab-InformationSetupList    RAB-InformationSetupList          OPTIONAL,
      ul-CommonTransChInfo       UL-CommonTransChInfo,
      ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
      dl-CommonTransChInfo       DL-CommonTransChInfo,
      dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
      ul-DPCH-Info               UL-DPCH-Info,
      modeSpecificInfo           CHOICE {
        fdd                       SEQUENCE {
          dl-PDSCH-Information    DL-PDSCH-Information OPTIONAL,
          cpch-SetInfo           CPCH-SetInfo          OPTIONAL
        },
        tdd                       NULL
      },
      dl-CommonInformation        DL-CommonInformation,
      dl-InformationPerRL-List    DL-InformationPerRL-List,
      frequencyInfo              FrequencyInfo
    },
    preconfiguration             SEQUENCE {
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
      predefinedConfigIdentity    PredefinedConfigIdentity,
      rab-Info                    RAB-Info-Post          OPTIONAL,
      modeSpecificInfo           CHOICE {
        fdd                       SEQUENCE {
          ul-DPCH-Info           UL-DPCH-InfoPostFDD,
          dl-CommonInformationPost DL-CommonInformationPost,
          dl-InformationPerRL-List DL-InformationPerRL-ListPostFDD,
          frequencyInfo          FrequencyInfoFDD
        },
        tdd                       SEQUENCE {
          ul-DPCH-Info           UL-DPCH-InfoPostTDD,
          dl-InformationPerRL     DL-InformationPerRL-PostTDD,
          frequencyInfo          FrequencyInfoTDD,
          primaryCCPCH-TX-Power  PrimaryCCPCH-TX-Power
        }
      }
    }
  },
-- Physical channel IEs
  maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power
}

-- *****
--
-- HANDOVER TO UTRAN COMPLETE
--
-- *****

HandoverToUTRANComplete ::= SEQUENCE {
--TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
-- TABULAR: the IE below is conditional on history.
  startList                     STARTList          OPTIONAL,
-- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- INITIAL DIRECT TRANSFER
--
-- *****

InitialDirectTransfer ::= SEQUENCE {
-- Core network IEs
  cn-DomainIdentity             CN-DomainIdentity,
  intraDomainNasNodeSelector    IntraDomainNasNodeSelector,
  nas-Message                    NAS-Message,
-- Measurement IEs

```

```

        measuredResultsOnRACH          MeasuredResultsOnRACH          OPTIONAL,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    }
-- *****
--
-- HANOVER FROM UTRAN COMMAND
--
-- *****

HandoverFromUTRANCommand-GSM-r3 ::= CHOICE {
    r3          SEQUENCE {
        handoverFromUTRANCommand-GSM-r3
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

HandoverFromUTRANCommand-GSM-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    activationTime                      ActivationTime          OPTIONAL,
-- Radio bearer IEs
    remainingRAB-Info                  RAB-Info          OPTIONAL,
-- Other IEs
    message-and-extension              CHOICE {
        gsm-Message                    SEQUENCE {},
        -- In this case, what follows the basic production is a variable length bit string
        -- with no length field, containing the GSM message including GSM padding up to end
        -- of container, to be analysed according to GSM specifications
        with-extension                  SEQUENCE {
            messages                    GSM-MessageList
        }
    }
}

HandoverFromUTRANCommand-CDMA2000-r3 ::= CHOICE {
    r3          SEQUENCE {
        handoverFromUTRANCommand-CDMA2000-r3
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    activationTime                      ActivationTime          OPTIONAL,
-- Radio bearer IEs
    remainingRAB-Info                  RAB-Info          OPTIONAL,
-- Other IEs
    cdma2000-MessageList              CDMA2000-MessageList
}
-- *****
--
-- HANOVER FROM UTRAN FAILURE
--
-- *****

HandoverFromUTRANFailure ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
-- Other IEs
    interRAT-HO-Failure                InterRAT-HO-Failure          OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}
-- *****
--
-- MEASUREMENT CONTROL
--
-- *****

```

```

MeasurementControl-r3 ::= CHOICE {
  r3
    measurementControl-r3      SEQUENCE {
      measurementControl-r3    MeasurementControl-r3-IEs,
      nonCriticalExtensions     SEQUENCE {} OPTIONAL
    },
    criticalExtensions         SEQUENCE {}
}

MeasurementControl-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  -- Measurement IEs
  measurementIdentity          MeasurementIdentity,
  measurementCommand           MeasurementCommand,
  -- TABULAR: The measurement type is included in MeasurementCommand.
  measurementReportingMode     MeasurementReportingMode    OPTIONAL,
  additionalMeasurementList     AdditionalMeasurementID-List OPTIONAL,
  -- Physical channel IEs
  dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo OPTIONAL
}

-- *****
--
-- MEASUREMENT CONTROL FAILURE
--
-- *****

MeasurementControlFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  failureCause                 FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions        SEQUENCE {}    OPTIONAL
}

-- *****
--
-- MEASUREMENT REPORT
--
-- *****

MeasurementReport ::= SEQUENCE {
  -- Measurement IEs
  measurementIdentity          MeasurementIdentity,
  measuredResults              MeasuredResults    OPTIONAL,
  measuredResultsOnRACH        MeasuredResultsOnRACH OPTIONAL,
  additionalMeasuredResults     MeasuredResultsList OPTIONAL,
  eventResults                  EventResults      OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions        SEQUENCE {}    OPTIONAL
}

-- *****
--
-- PAGING TYPE 1
--
-- *****

PagingType1 ::= SEQUENCE {
  -- User equipment IEs
  pagingRecordList             PagingRecordList    OPTIONAL,
  -- Other IEs
  bcch-ModificationInfo        BCCH-ModificationInfo OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions        SEQUENCE {}    OPTIONAL
}

-- *****
--
-- PAGING TYPE 2
--
-- *****

PagingType2 ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier     RRC-TransactionIdentifier,
  pagingCause                   PagingCause,
  -- Core network IEs

```

```

        cn-DomainIdentity          CN-DomainIdentity,
        pagingRecordTypeID         PagingRecordTypeID,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions      SEQUENCE {} OPTIONAL
    }
-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION
--
-- *****

PhysicalChannelReconfiguration-r3 ::= CHOICE {
    r3                               SEQUENCE {
        physicalChannelReconfiguration-r3
        nonCriticalExtensions        PhysicalChannelReconfiguration-r3-IEs,
        criticalExtensions           SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
    cipheringModeInfo              CipheringModeInfo              OPTIONAL,
    activationTime                  ActivationTime                  OPTIONAL,
    new-U-RNTI                      U-RNTI                      OPTIONAL,
    new-C-RNTI                      C-RNTI                      OPTIONAL,
    rrc-StateIndicator              RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- Core network IEs
    cn-InformationInfo              CN-InformationInfo              OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity                    URA-Identity                    OPTIONAL,
-- Radio bearer IEs
    rb-WithPDCP-InfoList            RB-WithPDCP-InfoList            OPTIONAL,
-- Physical channel IEs
    frequencyInfo                   FrequencyInfo                   OPTIONAL,
    maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power           OPTIONAL,
    ul-ChannelRequirement            UL-ChannelRequirementWithCPCH-SetID OPTIONAL,
-- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
-- between UL DPCH info, CPCH SET info and CPCH set ID.
    modeSpecificInfo                CHOICE {
        fdd                          SEQUENCE {
            dl-PDSCH-Information      DL-PDSCH-Information      OPTIONAL
        },
        tdd                          NULL
    },
    dl-CommonInformation            DL-CommonInformation            OPTIONAL,
    dl-InformationPerRL-List        DL-InformationPerRL-List        OPTIONAL
}
-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
--
-- *****

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo      IntegrityProtActivationInfo    OPTIONAL,
-- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance                UL-TimingAdvance                OPTIONAL,
-- Radio bearer IEs
    count-C-ActivationTime          ActivationTime                    OPTIONAL,
    rb-UL-CiphActivationTimeInfo     RB-ActivationTimeInfoList      OPTIONAL,
    rb-WithPDCP-InfoList            RB-WithPDCP-InfoList            OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions           SEQUENCE {} OPTIONAL
}
-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

```

```

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
    failureCause                    FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions            SEQUENCE {} OPTIONAL
}

-- *****
--
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
--
-- *****

PhysicalSharedChannelAllocation-r3 ::= CHOICE {
    r3                                SEQUENCE {
        physicalSharedChannelAllocation-r3
        nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

PhysicalSharedChannelAllocation-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    c-RNTI                            C-RNTI                            OPTIONAL,
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    -- Physical channel IEs
    ul-TimingAdvance                  UL-TimingAdvanceControl            OPTIONAL,
    pusch-CapacityAllocationInfo      PUSCH-CapacityAllocationInfo      OPTIONAL,
    pdsch-CapacityAllocationInfo      PDSCH-CapacityAllocationInfo      OPTIONAL,
    confirmRequest                     ENUMERATED {
        confirmPDSCH, confirmPUSCH } OPTIONAL,
    -- TABULAR: If the above value is not present, the default value "No Confirm"
    -- shall be used as specified in 10.2.25.
    iscpTimeslotList                  TimeslotList                        OPTIONAL
}

-- *****
--
-- PUSCH CAPACITY REQUEST (TDD only)
--
-- *****

PUSCHCapacityRequest ::= SEQUENCE {
    -- User equipment IEs
    c-RNTI                            C-RNTI                            OPTIONAL,
    -- Measurement IEs
    trafficVolumeMeasuredResultsList  TrafficVolumeMeasuredResultsList,
    timeslotListWithISCP              TimeslotListWithISCP              OPTIONAL,
    primaryCCPCH-RSCP                 PrimaryCCPCH-RSCP                 OPTIONAL,
    allocationConfirmation             CHOICE {
        pdschConfirmation             PDSCH-Identity,
        puschConfirmation             PUSCH-Identity
    } OPTIONAL,
    protocolErrorIndicator            ProtocolErrorIndicatorWithMoreInfo,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RECONFIGURATION
--
-- *****

RadioBearerReconfiguration-r3 ::= CHOICE {
    r3                                SEQUENCE {
        radioBearerReconfiguration-r3  RadioBearerReconfiguration-r3-IEs,
        nonCriticalExtensions           SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {

```

```

-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
  cipheringModeInfo              CipheringModeInfo                OPTIONAL,
  activationTime                  ActivationTime                      OPTIONAL,
  new-U-RNTI                      U-RNTI                          OPTIONAL,
  new-C-RNTI                      C-RNTI                          OPTIONAL,
  rrc-StateIndicator              RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff      UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
-- Core network IEs
  cn-InformationInfo              CN-InformationInfo                OPTIONAL,
-- UTRAN mobility IEs
  ura-Identity                    URA-Identity                      OPTIONAL,
-- Radio bearer IEs
  rab-InformationReconfigList     RAB-InformationReconfigList     OPTIONAL,
  rb-InformationReconfigList      RB-InformationReconfigList,
  rb-InformationAffectedList      RB-InformationAffectedList       OPTIONAL,
-- Transport channel IEs
  ul-CommonTransChInfo            UL-CommonTransChInfo            OPTIONAL,
  ul-deletedTransChInfoList       UL-DeletedTransChInfoList       OPTIONAL,
  ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList     OPTIONAL,
  modeSpecificTransChInfo         CHOICE {
    fdd                            SEQUENCE {
      cpch-SetID                   CPCH-SetID                       OPTIONAL,
      addReconfTransChDRAC-Info    DRAC-StaticInformationList       OPTIONAL
    },
    tdd                            NULL
  }
  dl-CommonTransChInfo            DL-CommonTransChInfo            OPTIONAL,
  dl-DeletedTransChInfoList       DL-DeletedTransChInfoList       OPTIONAL,
  dl-AddReconfTransChInfoList     DL-AddReconfTransChInfo2List    OPTIONAL,
-- Physical channel IEs
  frequencyInfo                   FrequencyInfo                      OPTIONAL,
  maxAllowedUL-TX-Power            MaxAllowedUL-TX-Power            OPTIONAL,
  ul-ChannelRequirement            UL-ChannelRequirement            OPTIONAL,
  modeSpecificPhysChInfo          CHOICE {
    fdd                            SEQUENCE {
      dl-PDSCH-Information         DL-PDSCH-Information            OPTIONAL
    },
    tdd                            NULL
  },
  dl-CommonInformation            DL-CommonInformation            OPTIONAL,
  dl-InformationPerRL-List        DL-InformationPerRL-List
}

-- *****
--
-- RADIO BEARER RECONFIGURATION COMPLETE
--
-- *****

RadioBearerReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo      IntegrityProtActivationInfo      OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance               UL-TimingAdvance                 OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo    RB-ActivationTimeInfoList       OPTIONAL,
  rb-WithPDCP-InfoList           RB-WithPDCP-InfoList            OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions           SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RECONFIGURATION FAILURE
--
-- *****

RadioBearerReconfigurationFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Radio bearer IEs
  potentiallySuccessfulBearerList RB-IdentityList                 OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions           SEQUENCE {} OPTIONAL
}

```



```

}
-- *****
--
-- RADIO BEARER RELEASE
--
-- *****

RadioBearerRelease-r3 ::= CHOICE {
  r3
    radioBearerRelease-r3      SEQUENCE {
      nonCriticalExtensions    RadioBearerRelease-r3-IEs,
                              SEQUENCE {} OPTIONAL
    },
    criticalExtensions         SEQUENCE {}
}

RadioBearerRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo           CipheringModeInfo                OPTIONAL,
  activationTime               ActivationTime                   OPTIONAL,
  new-U-RNTI                   U-RNTI                          OPTIONAL,
  new-C-RNTI                   C-RNTI                          OPTIONAL,
  rrc-StateIndicator           RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- Core network IES
  cn-InformationInfo           CN-InformationInfo               OPTIONAL,
  signallingConnectionRelIndication CN-DomainIdentity          OPTIONAL,
  -- UTRAN mobility IES
  ura-Identity                 URA-Identity                     OPTIONAL,
  -- Radio bearer IES
  rab-InformationReconfigList  RAB-InformationReconfigList   OPTIONAL,
  rb-InformationReleaseList    RB-InformationReleaseList    OPTIONAL,
  rb-InformationAffectedList   RB-InformationAffectedList    OPTIONAL,
  rb-WithPDCP-InfoList        RB-WithPDCP-InfoList         OPTIONAL,
  -- Transport channel IES
  ul-CommonTransChInfo        UL-CommonTransChInfo           OPTIONAL,
  ul-deletedTransChInfoList    UL-DeletedTransChInfoList     OPTIONAL,
  ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList   OPTIONAL,
  modeSpecificTransChInfo      CHOICE {
    fdd
      cpch-SetID                CPCH-SetID                    OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList    OPTIONAL
    },
    tdd                          NULL
  }
  dl-CommonTransChInfo        DL-CommonTransChInfo           OPTIONAL,
  dl-DeletedTransChInfoList    DL-DeletedTransChInfoList     OPTIONAL,
  dl-AddReconfTransChInfoList  DL-AddReconfTransChInfo2List   OPTIONAL,
  -- Physical channel IES
  frequencyInfo               FrequencyInfo                   OPTIONAL,
  maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power         OPTIONAL,
  ul-ChannelRequirement       UL-ChannelRequirement           OPTIONAL,
  modeSpecificPhysChInfo      CHOICE {
    fdd
      dl-PDSCH-Information      DL-PDSCH-Information       OPTIONAL
    },
    tdd                          NULL
  },
  dl-CommonInformation        DL-CommonInformation           OPTIONAL,
  dl-InformationPerRL-List    DL-InformationPerRL-List     OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE COMPLETE
--
-- *****

RadioBearerReleaseComplete ::= SEQUENCE {
  -- User equipment IES
  rrc-TransactionIdentifier    RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo   IntegrityProtActivationInfo    OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance            UL-TimingAdvance                OPTIONAL,
  -- Radio bearer IES
  rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList     OPTIONAL,

```

```

-- Extension mechanism for non- release99 information
nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE FAILURE
--
-- *****

RadioBearerReleaseFailure ::= SEQUENCE {
-- User equipment IEs
rrc-TransactionIdentifier      RRC-TransactionIdentifier,
failureCause                   FailureCauseWithProtErr,
-- Radio bearer IEs
potentiallySuccessfulBearerList RB-IdentityList          OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP
--
-- *****

RadioBearerSetup-r3 ::= CHOICE {
r3                               SEQUENCE {
radioBearerSetup-r3            RadioBearerSetup-r3-IEs,
nonCriticalExtensions          SEQUENCE {}          OPTIONAL
},
criticalExtensions             SEQUENCE {}
}

RadioBearerSetup-r3-IEs ::= SEQUENCE {
-- User equipment IEs
rrc-TransactionIdentifier      RRC-TransactionIdentifier,
integrityProtectionModeInfo    IntegrityProtectionModeInfo    OPTIONAL,
cipheringModeInfo              CipheringModeInfo              OPTIONAL,
activationTime                  ActivationTime                  OPTIONAL,
new-U-RNTI                      U-RNTI                        OPTIONAL,
new-C-RNTI                      C-RNTI                        OPTIONAL,
rrc-StateIndicator              RRC-StateIndicator,
utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- UTRAN mobility IEs
ura-Identity                    URA-Identity                  OPTIONAL,
-- Core network IEs
cn-InformationInfo              CN-InformationInfo            OPTIONAL,
-- Radio bearer IEs
srb-InformationSetupList        SRB-InformationSetupList      OPTIONAL,
rab-InformationSetupList        RAB-InformationSetupList      OPTIONAL,
rb-InformationAffectedList      RB-InformationAffectedList    OPTIONAL,
-- Transport channel IEs
ul-CommonTransChInfo            UL-CommonTransChInfo          OPTIONAL,
ul-deletedTransChInfoList       UL-DeletedTransChInfoList     OPTIONAL,
ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList   OPTIONAL,
modeSpecificTransChInfo         CHOICE {
fdd                               SEQUENCE {
cpch-SetID                       CPCH-SetID                    OPTIONAL,
addReconfTransChDRAC-Info        DRAC-StaticInformationList    OPTIONAL
},
tdd                               NULL
}
dl-CommonTransChInfo            DL-CommonTransChInfo          OPTIONAL,
dl-DeletedTransChInfoList       DL-DeletedTransChInfoList     OPTIONAL,
dl-AddReconfTransChInfoList     DL-AddReconfTransChInfoList   OPTIONAL,
-- Physical channel IEs
frequencyInfo                   FrequencyInfo                  OPTIONAL,
maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power         OPTIONAL,
ul-ChannelRequirement           UL-ChannelRequirement         OPTIONAL,
modeSpecificPhysChInfo          CHOICE {
fdd                               SEQUENCE {
dl-PDSCH-Information             DL-PDSCH-Information         OPTIONAL
},
tdd                               NULL
},
dl-CommonInformation            DL-CommonInformation          OPTIONAL,
dl-InformationPerRL-List        DL-InformationPerRL-List      OPTIONAL
}
}

```

```

}

-- *****
--
-- RADIO BEARER SETUP COMPLETE
--
-- *****

RadioBearerSetupComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo      IntegrityProtActivationInfo      OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance               UL-TimingAdvance                OPTIONAL,
  start-Value                     START-Value                    OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime          ActivationTime                OPTIONAL,
  rb-UL-CiphActivationTimeInfo     RB-ActivationTimeInfoList  OPTIONAL,
  rb-WithPDCP-InfoList            RB-WithPDCP-InfoList      OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions           SEQUENCE {}                    OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP FAILURE
--
-- *****

RadioBearerSetupFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Radio bearer IEs
  potentiallySuccessfulBearerList RB-IdentityList                OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions           SEQUENCE {}                    OPTIONAL
}

-- *****
--
-- RRC CONNECTION REJECT
--
-- *****

RRCConnectionReject-r3 ::= CHOICE {
  r3                               SEQUENCE {
    rrcConnectionReject-r3        RRCConnectionReject-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionReject-r3-IEs ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  initialUE-Identity              InitialUE-Identity,
  rrc-TransactionIdentifier        RRC-TransactionIdentifier,
  rejectionCause                  RejectionCause,
  waitTime                        WaitTime,
  redirectionInfo                 RedirectionInfo                OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE
--
-- *****

RRCConnectionRelease-r3 ::= CHOICE {
  r3                               SEQUENCE {
    rrcConnectionRelease-r3        RRCConnectionRelease-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionRelease-r3-IEs ::= SEQUENCE {

```

```

-- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  n-308                          N-308                                OPTIONAL,
  -- The IE above is conditional on the UE state.
  releaseCause                   ReleaseCause,
  rplmn-information               Rplmn-Information                OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE for CCCH
--
-- *****

RRCConnectionRelease-CCCH-r3 ::= CHOICE {
  r3                               SEQUENCE {
    rrcConnectionRelease-CCCH-r3  RRCConnectionRelease-CCCH-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                          U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease            RRCConnectionRelease-r3-IEs
}

-- *****
--
-- RRC CONNECTION RELEASE COMPLETE
--
-- *****

RRCConnectionReleaseComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  errorIndication                FailureCauseWithProtErr          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RRC CONNECTION REQUEST
--
-- *****

RRCConnectionRequest ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  initialUE-Identity             InitialUE-Identity,
  establishmentCause              EstablishmentCause,
  protocolErrorIndicator         ProtocolErrorIndicator,
  -- The IE above is MD, but for compactness reasons no default value
  -- has been assigned to it.
  -- Measurement IEs
  measuredResultsOnRACH          MeasuredResultsOnRACH          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RRC CONNECTION SETUP
--
-- *****

RRCConnectionSetup-r3 ::= CHOICE {
  r3                               SEQUENCE {
    rrcConnectionSetup-r3        RRCConnectionSetup-r3-IEs,
    nonCriticalExtensions         SEQUENCE {
      rrcConnectionSetup-r4Ext   RRCConnectionSetup-r4Ext-IEs,
      -- Extension mechanism for non- release99 information
      nonCriticalExtensions      SEQUENCE {}          OPTIONAL
    }
  },
  }

```

```

    criticalExtensions          SEQUENCE {}
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
    initialUE-Identity          InitialUE-Identity,
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    activationTime              ActivationTime          OPTIONAL,
    new-U-RNTI                  U-RNTI,
    new-c-RNTI                  C-RNTI              OPTIONAL,
    rrc-StateIndicator          RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient,
    capabilityUpdateRequirement CapabilityUpdateRequirement OPTIONAL,
-- TABULAR: If the IE is not present, the default value defined in 10.3.3.2 shall
-- be used.
-- Radio bearer IEs
    srb-InformationSetupList    SRB-InformationSetupList2,
-- Transport channel IEs
    ul-CommonTransChInfo        UL-CommonTransChInfo          OPTIONAL,
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo        DL-CommonTransChInfo          OPTIONAL,
    dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
-- Physical channel IEs
    frequencyInfo               FrequencyInfo              OPTIONAL,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power    OPTIONAL,
    ul-ChannelRequirement        UL-ChannelRequirement    OPTIONAL,
    dl-CommonInformation         DL-CommonInformation     OPTIONAL,
    dl-InformationPerRL-List     DL-InformationPerRL-List OPTIONAL
}

RRCConnectionSetup-r4Ext-IEs ::= SEQUENCE {
    capabilityUpdateRequirement-r4Ext  CapabilityUpdateRequirement-r4Ext  OPTIONAL
}

-- *****
--
-- RRC CONNECTION SETUP COMPLETE
--
-- *****

RRCConnectionSetupComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    startList                   STARTList,
    ue-RadioAccessCapability     UE-RadioAccessCapability          OPTIONAL,
-- Other IEs
    ue-RATSpecificCapability     InterRAT-UE-RadioAccessCapabilityList OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {
        ue-RadioAccessCapability-r4Ext  UE-RadioAccessCapability-r4Ext  OPTIONAL,
        nonCriticalExtensions           SEQUENCE {}          OPTIONAL
    }
}

-- *****
--
-- RRC STATUS
--
-- *****

RRCStatus ::= SEQUENCE {
-- Other IEs
    protocolErrorInformation     ProtocolErrorMoreInformation,
-- TABULAR: Identification of received message is nested in
-- ProtocolErrorMoreInformation
-- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}          OPTIONAL
}

SecurityModeCommand-r3 ::= CHOICE {
    r3                            SEQUENCE {
        securityModeCommand-r3      SecurityModeCommand-r3-IEs,
        nonCriticalExtensions        SEQUENCE {}          OPTIONAL
    },
    criticalExtensions            SEQUENCE {}
}

```

```

-- *****
--
-- SECURITY MODE COMMAND
--
-- *****

SecurityModeCommand-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    securityCapability              SecurityCapability,
    cipheringModeInfo              CipheringModeInfo              OPTIONAL,
    integrityProtectionModeInfo    IntegrityProtectionModeInfo  OPTIONAL,
  -- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SECURITY MODE COMPLETE
--
-- *****

SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.

  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo  OPTIONAL,
  -- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList   OPTIONAL,
  -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}                    OPTIONAL
}

-- *****
--
-- SECURITY MODE FAILURE
--
-- *****

SecurityModeFailure ::= SEQUENCE {
  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}                    OPTIONAL
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE
--
-- *****

SignallingConnectionRelease-r3 ::= CHOICE {
  r3                               SEQUENCE {
    signallingConnectionRelease-r3 SignallingConnectionRelease-r3-IEs,
    nonCriticalExtensions          SEQUENCE {}                    OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE REQUEST
--
-- *****

SignallingConnectionReleaseRequest ::= SEQUENCE {

```

```

-- Core network IEs
  cn-DomainIdentity          CN-DomainIdentity,
-- Extension mechanism for non-release99 information
  nonCriticalExtensions     SEQUENCE {} OPTIONAL
}

-- *****
--
-- SYSTEM INFORMATION for BCH
--
-- *****

SystemInformation-BCH ::= SEQUENCE {
  -- Other information elements
  sfm-Prime                  SFM-Prime,
  payload                    CHOICE {
    noSegment                NULL,
    firstSegment             FirstSegment,
    subsequentSegment        SubsequentSegment,
    lastSegmentShort         LastSegmentShort,
    lastAndFirst             SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      firstSegment           FirstSegmentShort
    },
    lastAndComplete          SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List
    },
    lastAndCompleteAndFirst  SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List,
      firstSegment           FirstSegmentShort
    },
    completeSIB-List         CompleteSIB-List,
    completeAndFirst         SEQUENCE {
      completeSIB-List       CompleteSIB-List,
      firstSegment           FirstSegmentShort
    },
    completeSIB              CompleteSIB,
    lastSegment              LastSegment
  }
}

-- *****
--
-- SYSTEM INFORMATION for FACH
--
-- *****

SystemInformation-FACH ::= SEQUENCE {
  -- Other information elements
  payload                    CHOICE {
    noSegment                NULL,
    firstSegment             FirstSegment,
    subsequentSegment        SubsequentSegment,
    lastSegmentShort         LastSegmentShort,
    lastAndFirst             SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      firstSegment           FirstSegmentShort
    },
    lastAndComplete          SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List
    },
    lastAndCompleteAndFirst  SEQUENCE {
      lastSegmentShort       LastSegmentShort,
      completeSIB-List       CompleteSIB-List,
      firstSegment           FirstSegmentShort
    },
    completeSIB-List         CompleteSIB-List,
    completeAndFirst         SEQUENCE {
      completeSIB-List       CompleteSIB-List,
      firstSegment           FirstSegmentShort
    },
    completeSIB              CompleteSIB,
    lastSegment              LastSegment
  }
}

```

```

-- *****
--
-- First segment
--
-- *****

FirstSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        seg-Count         SegCount,
        sib-Data-fixed    SIB-Data-fixed
    }

-- *****
--
-- First segment (short)
--
-- *****

FirstSegmentShort ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        seg-Count         SegCount,
        sib-Data-variable SIB-Data-variable
    }

-- *****
--
-- Subsequent segment
--
-- *****

SubsequentSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex     SegmentIndex,
        sib-Data-fixed    SIB-Data-fixed
    }

-- *****
--
-- Last segment
--
-- *****

LastSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex     SegmentIndex,
        sib-Data-fixed    SIB-Data-fixed
        -- In case the SIB data is less than 222 bits, padding shall be used
        -- The same padding bits shall be used as defined in clause 12.1
    }

LastSegmentShort ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex     SegmentIndex,
        sib-Data-variable SIB-Data-variable
    }

-- *****
--
-- Complete SIB
--
-- *****

CompleteSIB-List ::=
    SEQUENCE (SIZE (1..maxSIBperMsg)) OF
        CompleteSIBshort

CompleteSIB ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        sib-Data-fixed    BIT STRING (SIZE (226))
        -- In case the SIB data is less than 226 bits, padding shall be used
        -- The same padding bits shall be used as defined in clause 12.1
    }

```



```

CompleteSIBshort ::= SEQUENCE {
  -- Other information elements
  sib-Type          SIB-Type,
  sib-Data-variable SIB-Data-variable
}

-- *****
--
-- SYSTEM INFORMATION CHANGE INDICATION
--
-- *****

SystemInformationChangeIndication ::= SEQUENCE {
  -- Other IEs
  bcch-ModificationInfo          BCCH-ModificationInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION
--
-- *****

TransportChannelReconfiguration-r3 ::= CHOICE {
  r3 SEQUENCE {
    transportChannelReconfiguration-r3
    TransportChannelReconfiguration-r3-IEs,
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo   IntegrityProtectionModeInfo          OPTIONAL,
  cipheringModeInfo             CipheringModeInfo                      OPTIONAL,
  activationTime                 ActivationTime                        OPTIONAL,
  new-U-RNTI                     U-RNTI                               OPTIONAL,
  new-C-RNTI                     C-RNTI                               OPTIONAL,
  rrc-StateIndicator             RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- Core network IEs
  cn-InformationInfo             CN-InformationInfo                  OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                   URA-Identity                        OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList                OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo          UL-CommonTransChInfo                OPTIONAL,
  ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList          OPTIONAL,
  modeSpecificTransChInfo       CHOICE {
    fdd SEQUENCE {
      cpch-SetID                CPCH-SetID                OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList  OPTIONAL
    },
    tdd NULL
  } OPTIONAL,
  dl-CommonTransChInfo          DL-CommonTransChInfo                OPTIONAL,
  dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList          OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                 FrequencyInfo                        OPTIONAL,
  maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power                OPTIONAL,
  ul-ChannelRequirement         UL-ChannelRequirement                OPTIONAL,
  modeSpecificPhysChInfo        CHOICE {
    fdd SEQUENCE {
      dl-PDSCH-Information      DL-PDSCH-Information      OPTIONAL
    },
    tdd NULL
  },
  dl-CommonInformation          DL-CommonInformation                OPTIONAL,
  dl-InformationPerRL-List      DL-InformationPerRL-List            OPTIONAL
}

-- *****

```

```

--
-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
--
-- *****

TransportChannelReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo      OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance               UL-TimingAdvance                OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime         ActivationTime                OPTIONAL,
  rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList   OPTIONAL,
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList       OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}                OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
--
-- *****

TransportChannelReconfigurationFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}                OPTIONAL
}

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL
--
-- *****

TransportFormatCombinationControl ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message when transmitting this
  message
  -- on the transparent mode signalling DCCH.
  rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
  -- The information element is not included when transmitting the message
  -- on the transparent mode signalling DCCH
  modeSpecificInfo              CHOICE {
    fdd                          NULL,
    tdd                          SEQUENCE {
      tfcs-ID                    TFCS-Identity          OPTIONAL
    }
  },
  dpch-TFCS-InUplink            TFC-Subset,
  tfc-ControlDuration            TFC-ControlDuration      OPTIONAL,
  -- The information element is not included when transmitting the message
  -- on the transparent mode signalling DCCH and is optional otherwise
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}                OPTIONAL
}

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
--
-- *****

TransportFormatCombinationControlFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}                OPTIONAL
}

-- *****
--
-- UE CAPABILITY ENQUIRY
--

```

```

-- *****

UECapabilityEnquiry-r3 ::= CHOICE {
  r3 SEQUENCE {
    ueCapabilityEnquiry-r3 UECapabilityEnquiry-r3-IEs,
    nonCriticalExtensions SEQUENCE {
      ueCapabilityEnquiry-r4ext UECapabilityEnquiry-r4Ext-IEs,
      nonCriticalExtensions SEQUENCE {} OPTIONAL
    } OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  capabilityUpdateRequirement CapabilityUpdateRequirement
}

UECapabilityEnquiry-r4Ext-IEs ::= SEQUENCE {
  capabilityUpdateRequirement-r4ext CapabilityUpdateRequirement-r4Ext
}

-- *****
--
-- UE CAPABILITY INFORMATION
--
-- *****

UECapabilityInformation ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier OPTIONAL,
  ue-RadioAccessCapability UE-RadioAccessCapability OPTIONAL,
  -- Other IEs
  ue-RATSpecificCapability InterRAT-UE-RadioAccessCapabilityList
  OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {
    ue-RadioAccessCapability-r4Ext UE-RadioAccessCapability-r4Ext OPTIONAL,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  } OPTIONAL
}

-- *****
--
-- UE CAPABILITY INFORMATION CONFIRM
--
-- *****

UECapabilityInformationConfirm-r3 ::= CHOICE {
  r3 SEQUENCE {
    ueCapabilityInformationConfirm-r3 UECapabilityInformationConfirm-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

UECapabilityInformationConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier
}

-- *****
--
-- UPLINK DIRECT TRANSFER
--
-- *****

UplinkDirectTransfer ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity CN-DomainIdentity,
  nas-Message NAS-Message,
  -- Measurement IEs
  measuredResultsOnRACH MeasuredResultsOnRACH OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

```

```

-- *****
--
-- UPLINK PHYSICAL CHANNEL CONTROL
--
-- *****

UplinkPhysicalChannelControl-r3 ::= CHOICE {
  r3 SEQUENCE {
    uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

UplinkPhysicalChannelControl-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  -- Physical channel IEs
  ccTrCH-PowerControlInfo CCTrCH-PowerControlInfo OPTIONAL,
  timingAdvance UL-TimingAdvanceControl OPTIONAL,
  alpha Alpha OPTIONAL,
  prach-ConstantValue ConstantValue OPTIONAL,
  pusch-ConstantValue ConstantValue OPTIONAL
}

-- *****
--
-- URA UPDATE
--
-- *****

URAUUpdate ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI U-RNTI,
  ura-UpdateCause URA-UpdateCause,
  protocolErrorIndicator ProtocolErrorIndicatorWithMoreInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- URA UPDATE CONFIRM
--
-- *****

URAUUpdateConfirm-r3 ::= CHOICE {
  r3 SEQUENCE {
    uraUpdateConfirm-r3 URAUpdateConfirm-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

URAUUpdateConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo CipheringModeInfo OPTIONAL,
  new-U-RNTI U-RNTI OPTIONAL,
  new-C-RNTI C-RNTI OPTIONAL,
  rrc-StateIndicator RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- CN information elements
  cn-InformationInfo CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity URA-Identity OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL
}

-- *****
--
-- URA UPDATE CONFIRM for CCCH
--
-- *****

```

```

URAUUpdateConfirm-CCCH-r3 ::= CHOICE {
  r3 SEQUENCE {
    uraUpdateConfirm-CCCH-r3 URAUpdateConfirm-CCCH-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

URAUUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  uraUpdateConfirm URAUpdateConfirm-r3-IEs
}

-- *****
--
-- UTRAN MOBILITY INFORMATION
--
-- *****

UTRANMobilityInformation ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo CipheringModeInfo OPTIONAL,
  new-U-RNTI U-RNTI OPTIONAL,
  new-C-RNTI C-RNTI OPTIONAL,
  ue-ConnTimersAndConstants UE-ConnTimersAndConstants OPTIONAL,
  -- CN information elements
  cn-InformationInfo CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity URA-Identity OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime ActivationTime OPTIONAL,
  rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION CONFIRM
--
-- *****

UTRANMobilityInformationConfirm ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo IntegrityProtActivationInfo OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL,
  rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION FAILURE
--
-- *****

UTRANMobilityInformationFailure ::= SEQUENCE {
  -- UE information elements
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  failureCause FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}
}
END

```

## 11.3 Information element definitions

InformationElements DEFINITIONS AUTOMATIC TAGS ::=

```
-- *****  
--  
-- CORE NETWORK INFORMATION ELEMENTS (10.3.1)  
--  
-- *****  
  
BEGIN  
  
IMPORTS  
  
    hiPDSCHidentities,  
    hiPUSCHidentities,  
    hiRM,  
    maxAC,  
    maxAdditionalMeas,  
    maxASC,  
    maxASCmap,  
    maxASCpersist,  
    maxCCTrCH,  
    maxCellMeas,  
    maxCellMeas-1,  
    maxCNdomains,  
    maxCPCHsets,  
    maxDPCH-DLchan,  
    maxDPCHcodesPerTS,  
    maxDPDCH-UL,  
    maxDRACclasses,  
    maxFACH,  
    maxFreq,  
    maxFrequencybands,  
    maxInterSysMessages,  
    maxLoCHperRLC,  
    maxMeasEvent,  
    maxMeasIntervals,  
    maxMeasParEvent,  
    maxNumCDMA2000Freqs,  
    maxNumFDDFreqs,  
    maxNumGSMFreqRanges,  
    maxNumTDDFreqs,  
    maxOtherRAT,  
    maxPage1,  
    maxPCPCH-APsig,  
    maxPCPCH-APsubCh,  
    maxPCPCH-CDsig,  
    maxPCPCH-CDsubCh,  
    maxPCPCH-SF,  
    maxPCPCHs,  
    maxPDCPAlgoType,  
    maxPDSCH,  
    maxPDSCH-TFCIgroups,  
    maxPRACH,  
    maxPUSCH,  
    maxRABsetup,  
    maxRAT,  
    maxRB,  
    maxRBallRABs,  
    maxRBMuxOptions,  
    maxRBperRAB,  
    maxReportedGSMCells,  
    maxSRBsetup,  
    maxRL,  
    maxRL-1,  
    maxSCCPCH,  
    maxSat,  
    maxSIB,  
    maxSIB-FACH,  
    maxSig,  
    maxSubCh,  
    maxSystemCapability,  
    maxTF,  
    maxTF-CPCH,  
    maxTFC,  
    maxTFCI-2-Combs,  
    maxTGPS,  
    maxTrCH,  
    maxTS,  
    maxTS-1,  
    maxURA
```

```

FROM Constant-definitions;

CN-DomainIdentity ::=
    ENUMERATED {
        cs-domain,
        ps-domain }

CN-DomainInformation ::=
    SEQUENCE {
        cn-DomainIdentity
        cn-DomainSpecificNAS-Info
    }

CN-DomainInformationList ::=
    SEQUENCE (SIZE (1..maxCNdomains)) OF
        CN-DomainInformation

CN-DomainSysInfo ::=
    SEQUENCE {
        cn-DomainIdentity
        cn-Type
            gsm-MAP
            ansi-41
        },
        cn-DRX-CycleLengthCoeff
    }

CN-DomainSysInfoList ::=
    SEQUENCE (SIZE (1..maxCNdomains)) OF
        CN-DomainSysInfo

CN-InformationInfo ::=
    SEQUENCE {
        plmn-Identity
        cn-CommonGSM-MAP-NAS-SysInfo
        cn-DomainInformationList
    }
    OPTIONAL,
    OPTIONAL,
    OPTIONAL

Digit ::=
    INTEGER (0..9)

IMEI ::=
    SEQUENCE (SIZE (15)) OF
        IMEI-Digit

IMEI-Digit ::=
    INTEGER (0..15)

IMSI-GSM-MAP ::=
    SEQUENCE (SIZE (6..15)) OF
        Digit

IntraDomainNasNodeSelector ::=
    BIT STRING (SIZE (16))

LAI ::=
    SEQUENCE {
        plmn-Identity
        lac
    }

MCC ::=
    SEQUENCE (SIZE (3)) OF
        Digit

MNC ::=
    SEQUENCE (SIZE (2..3)) OF
        Digit

NAS-Message ::=
    OCTET STRING (SIZE (1..4095))

NAS-Synchronisation-Indicator ::=
    BIT STRING(SIZE(4))

NAS-SystemInformationGSM-MAP ::=
    OCTET STRING (SIZE (1..8))

P-TMSI-GSM-MAP ::=
    BIT STRING (SIZE (32))

PagingRecordTypeID ::=
    ENUMERATED {
        imsi-GSM-MAP,
        tmsi-GSM-MAP-P-TMSI,
        imsi-DS-41,
        tmsi-DS-41 }

PLMN-Identity ::=
    SEQUENCE {
        mcc
        mnc
    }

PLMN-Type ::=
    CHOICE {
        gsm-MAP
            SEQUENCE {
                plmn-Identity
            },
        ansi-41
    }
    SEQUENCE {

```





```

    tdd
        s-Intrasearch
        s-Intersearch
        s-SearchHCS
        rat-List
        q-RxlevMin
    },
    q-Hyst-l-S
    t-Reselection-S
    hcs-ServingCellInformation
    maxAllowedUL-TX-Power
}

MapParameter ::=
    INTEGER (0..99)

Mapping ::=
    SEQUENCE {
        rat
        mappingFunctionParameterList
    }

MappingFunctionParameter ::=
    SEQUENCE {
        functionType
        mapParameter1
        mapParameter2
        upperLimit
        -- The parameter is conditional on the number of repetition
    }

MappingFunctionParameterList ::=
    SEQUENCE (SIZE (1..maxMeasIntervals)) OF
        MappingFunctionParameter

MappingFunctionType ::=
    ENUMERATED {
        linear,
        functionType2,
        functionType3,
        functionType4 }

MappingInfo ::=
    SEQUENCE (SIZE (1..maxRAT)) OF
        Mapping

-- Actual value = IE value * 2
Q-Hyst-S ::=
    INTEGER (0..20)

RAT ::=
    ENUMERATED {
        ultra-FDD,
        ultra-TDD,
        gsm,
        cdma2000 }

RAT-FDD-Info ::=
    SEQUENCE {
        rat-Identifier
        s-SearchRAT
        s-HCS-RAT
        s-Limit-SearchRAT
    }

RAT-FDD-InfoList ::=
    SEQUENCE (SIZE (1..maxOtherRAT)) OF
        RAT-FDD-Info

RAT-Identifier ::=
    ENUMERATED {
        gsm, cdma2000 }

RAT-TDD-Info ::=
    SEQUENCE {
        rat-Identifier
        s-SearchRAT
        s-HCS-RAT
        s-Limit-SearchRAT
    }

RAT-TDD-InfoList ::=
    SEQUENCE (SIZE (1..maxOtherRAT)) OF
        RAT-TDD-Info

ReservedIndicator ::=
    ENUMERATED {
        reserved,
        notReserved }

-- Actual value = IE value * 2

```

```

S-SearchQual ::=                               INTEGER (-16..10)

-- Actual value = (IE value * 2) + 1
S-SearchRXLEV ::=                              INTEGER (-53..45)

T-Barred ::=                                   ENUMERATED {
                                                s10, s20, s40, s80,
                                                s160, s320, s640, s1280 }

T-Reselection-S ::=                           INTEGER (0..31)

-- The used range depends on the RAT used.
UpperLimit ::=                                INTEGER (1..91)

URA-Identity ::=                              BIT STRING (SIZE (16))

URA-IdentityList ::=                          SEQUENCE (SIZE (1..maxURA)) OF
                                                URA-Identity

-- *****
--
--     USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
--
-- *****

ActivationTime ::=                             INTEGER (0..255)
-- TABULAR : value 'now' always appear as default, and is encoded by absence of the field

BackoffControlParams ::=                       SEQUENCE {
  n-AP-RetransMax                             N-AP-RetransMax,
  n-AccessFails                               N-AccessFails,
  nf-BO-NoAICH                                NF-BO-NoAICH,
  ns-BO-Busy                                  NS-BO-Busy,
  nf-BO-AllBusy                               NF-BO-AllBusy,
  nf-BO-Mismatch                              NF-BO-Mismatch,
  t-CPCH                                       T-CPCH
}

C-RNTI ::=                                    BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::=                SEQUENCE {
  ue-RadioCapabilityUpdateRequirement-FDD      BOOLEAN,
  -- The following is for 3.84Mcps TDD update requirement
  ue-RadioCapabilityUpdateRequirement-TDD      BOOLEAN,
  systemSpecificCapUpdateReqList              SystemSpecificCapUpdateReqList      OPTIONAL
}

CapabilityUpdateRequirement-r4Ext ::= SEQUENCE {
  ue-RadioCapabilityUpdateRequirement-TDD128  BOOLEAN
}

CellUpdateCause ::=                           ENUMERATED {
                                                cellReselection,
                                                periodicalCellUpdate,
                                                uplinkDataTransmission,
                                                utran-pagingResponse,
                                                re-enteredServiceArea,
                                                radiolinkFailure,
                                                rlc-unrecoverableError,
                                                spare1 }

ChipRateCapability ::=                         ENUMERATED {
                                                mcps3-84, mcps1-28 }

CipheringAlgorithm ::=                         ENUMERATED {
                                                uea0, uea1 }

CipheringModeCommand ::=                       CHOICE {
  startRestart                                CipheringAlgorithm,
  stopCiphering                                NULL
}

CipheringModeInfo ::=                          SEQUENCE {
  cipheringModeCommand                        CipheringModeCommand,
  -- TABULAR: The ciphering algorithm is included in
  -- the CipheringModeCommand.
  activationTimeForDPCH                       ActivationTime      OPTIONAL,
  rb-DL-CiphActivationTimeInfo                RB-ActivationTimeInfoList  OPTIONAL
}

```

```

}

CN-DRX-CycleLengthCoefficient ::= INTEGER (6..9)

CN-PagedUE-Identity ::= CHOICE {
    imsi-GSM-MAP          IMSI-GSM-MAP,
    tmsi-GSM-MAP          TMSI-GSM-MAP,
    p-TMSI-GSM-MAP       P-TMSI-GSM-MAP,
    imsi-DS-41            IMSI-DS-41,
    tmsi-DS-41            TMSI-DS-41
}

CompressedModeMeasCapability ::= SEQUENCE {
    fdd-Measurements      BOOLEAN,
    -- TABULAR: The IEs below are made optional since they are conditional based
    -- on another information element. Their absence corresponds to the case where
    -- the condition is not true.
    -- tdd-Measurements indicates need for compressed mode for 3.84Mcps TDD measurements
    tdd-Measurements      BOOLEAN OPTIONAL,
    gsm-Measurements      GSM-Measurements OPTIONAL,
    multiCarrierMeasurements  BOOLEAN OPTIONAL
}

CompressedModeMeasCapability-PCR ::= SEQUENCE {
    tddl28-Measurements  BOOLEAN OPTIONAL
}

CPCH-Parameters ::= SEQUENCE {
    initialPriorityDelayList  InitialPriorityDelayList OPTIONAL,
    backoffControlParams     BackoffControlParams,
    powerControlAlgorithm    PowerControlAlgorithm,
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    dl-DPCCH-BER            DL-DPCCH-BER
}

DL-DPCCH-BER ::= INTEGER (0..63)

DL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPCH-PDSCH-Codes   INTEGER (1..8),
    maxNoPhysChBitsReceived MaxNoPhysChBitsReceived,
    supportForSF-512        BOOLEAN,
    supportOfPDSCH          BOOLEAN,
    simultaneousSCCPCH-DPCH-Reception SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame          MaxTS-PerFrame,
    maxPhysChPerFrame       MaxPhysChPerFrame,
    minimumSF               MinimumSF-DL,
    supportOfPDSCH          BOOLEAN,
    maxPhysChPerTS          MaxPhysChPerTS
}

DL-PhysChCapabilityTDD-PCR ::= SEQUENCE {
    maxTS-PerSubFrame       MaxTS-PerSubFrame,
    maxPhysChPerFrame       MaxPhysChPerSubFrame,
    minimumSF               MinimumSF-DL,
    supportOfPDSCH          BOOLEAN,
    maxPhysChPerTS          MaxPhysChPerTS,
    supportOf8PSK           BOOLEAN
}

DL-TransChCapability ::= SEQUENCE {
    maxNoBitsReceived       MaxNoBits,
    maxConvCodeBitsReceived MaxNoBits,
    turboDecodingSupport    TurboSupport,
    maxSimultaneousTransChs MaxSimultaneousTransChsDL,
    maxSimultaneousCCTrCH-Count MaxSimultaneousCCTrCH-Count,
    maxReceivedTransportBlocks MaxTransportBlocksDL,
    maxNumberOfTFC-InTFCS   MaxNumberOfTFC-InTFCS-DL,
    maxNumberOfTF           MaxNumberOfTF
}

DRAC-SysInfo ::= SEQUENCE {
    transmissionProbability TransmissionProbability,
    maximumBitRate          MaximumBitRate
}

```

```

DRAC-SysInfoList ::= SEQUENCE (SIZE (1..maxDRACclasses)) OF
                    DRAC-SysInfo

ESN-DS-41 ::= BIT STRING (SIZE (32))

EstablishmentCause ::= ENUMERATED {
    originatingConversationalCall,
    originatingStreamingCall,
    originatingInteractiveCall,
    originatingBackgroundCall,
    originatingSubscribedTrafficCall,
    terminatingConversationalCall,
    terminatingStreamingCall,
    terminatingInteractiveCall,
    terminatingBackgroundCall,
    emergencyCall,
    interRAT-CellReselection,
    interRAT-CellChangeOrder,
    registration,
    detach,
    highPrioritySignalling,
    lowPrioritySignalling,
    callRe-establishment,
    spare1 }

FailureCauseWithProtErr ::= CHOICE {
    configurationUnsupported          NULL,
    physicalChannelFailure           NULL,
    incompatibleSimultaneousReconfiguration
                                     NULL,
    compressedModeRuntimeError      TGPSI,
    protocolError                   ProtocolErrorInformation,
    cellReselection                 NULL,
    invalidConfiguration            NULL,
    configurationIncomplete         NULL,
    unsupportedMeasurement          NULL,
    spare1                          NULL,
    spare2                          NULL,
    spare3                          NULL,
    spare4                          NULL,
    spare5                          NULL,
    spare6                          NULL,
    spare7                          NULL
}

FailureCauseWithProtErrTrId ::= SEQUENCE {
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    failureCause                    FailureCauseWithProtErr
}

GSM-Measurements ::= SEQUENCE {
    gsm900                          BOOLEAN,
    dcs1800                         BOOLEAN,
    gsm1900                         BOOLEAN
}

-- If ICS-Version-r4 is included, the following IE shall be ignored.
ICS-Version ::= ENUMERATED {
    r99 }

ICS-Version-r4 ::= ENUMERATED {
    rel-4 }

IMSI-and-ESN-DS-41 ::= SEQUENCE {
    imsi-DS-41                     IMSI-DS-41,
    esn-DS-41                       ESN-DS-41
}

IMSI-DS-41 ::= OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::= SEQUENCE (SIZE (maxASC)) OF
                             NS-IP

InitialUE-Identity ::= CHOICE {
    imsi                           IMSI-GSM-MAP,
    tmsi-and-LAI                   TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI                 P-TMSI-and-RAI-GSM-MAP,

```

```

    imei                IMEI,
    esn-DS-41           ESN-DS-41,
    imsi-DS-41          IMSI-DS-41,
    imsi-and-ESN-DS-41 IMSI-and-ESN-DS-41,
    tmsi-DS-41          TMSI-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode MessageAuthenticationCode,
    rrc-MessageSequenceNumber RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList RRC-MessageSequenceNumberList
}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uial }

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection SEQUENCE {
        integrityProtInitNumber IntegrityProtInitNumber
    },
    modify dl-IntegrityProtActivationInfo SEQUENCE {
        IntegrityProtActivationInfo
    }
}

IntegrityProtectionModeInfo ::= SEQUENCE {
    integrityProtectionModeCommand IntegrityProtectionModeCommand,
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionAlgorithm IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MaxHcContextSpace ::= ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192 }

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am32 }

-- Actual value = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600 }

MaxNoBits ::= ENUMERATED {
    b640, b1280, b2560, b3840, b5120,
    b6400, b7680, b8960, b10240,
    b20480, b40960, b81920, b163840 }

MaxNoPhysChBitsReceived ::= ENUMERATED {
    b600, b1200, b2400, b3600,
    b4800, b7200, b9600, b14400,
    b19200, b28800, b38400, b48000,
    b57600, b72000, b76800 }

MaxNoSCCPCH-RL ::= ENUMERATED {
    r11 }

MaxNumberOfTF ::= ENUMERATED {
    tf32, tf64, tf128, tf256,
    tf512, tf1024 }

MaxNumberOfTFC-InTFCS-DL ::= ENUMERATED {
    tfc16, tfc32, tfc48, tfc64, tfc96,

```

```

        tfc128, tfc256, tfc512, tfc1024 }

MaxNumberOfTFC-InTFCS-UL ::=          ENUMERATED {
        tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
        tfc96, tfc128, tfc256, tfc512, tfc1024 }

MaxPhysChPerFrame ::=                 INTEGER (1..224)

MaxPhysChPerSubFrame ::=              INTEGER (1..96)

MaxPhysChPerTimeslot ::=              ENUMERATED {
        ts1, ts2 }

MaxPhysChPerTS ::=                   INTEGER (1..16)

MaxSimultaneousCCTrCH-Count ::=       INTEGER (1..8)

MaxSimultaneousTransChsDL ::=         ENUMERATED {
        e4, e8, e16, e32 }

MaxSimultaneousTransChsUL ::=         ENUMERATED {
        e2, e4, e8, e16, e32 }

MaxTransportBlocksDL ::=              ENUMERATED {
        tb4, tb8, tb16, tb32, tb48,
        tb64, tb96, tb128, tb256, tb512 }

MaxTransportBlocksUL ::=              ENUMERATED {
        tb2, tb4, tb8, tb16, tb32, tb48,
        tb64, tb96, tb128, tb256, tb512 }

MaxTS-PerFrame ::=                   INTEGER (1..14)

MaxTS-PerSubFrame ::=                 INTEGER (1..6)

-- TABULAR: This IE contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.
MeasurementCapability ::=              SEQUENCE {
        downlinkCompressedMode          CompressedModeMeasCapability,
        uplinkCompressedMode            CompressedModeMeasCapability
}

MeasurementCapability-r4Ext ::=        SEQUENCE {
        downlinkCompressedMode-LCR      CompressedModeMeasCapability-LCR,
        uplinkCompressedMode-LCR        CompressedModeMeasCapability-LCR
}

MessageAuthenticationCode ::=         BIT STRING (SIZE (32))

MinimumSF-DL ::=                       ENUMERATED {
        sf1, sf16 }

MinimumSF-UL ::=                       ENUMERATED {
        sf1, sf2, sf4, sf8, sf16 }

MultiModeCapability ::=               ENUMERATED {
        tdd, fdd, fdd-tdd }

MultiRAT-Capability ::=               SEQUENCE {
        supportOfGSM                    BOOLEAN,
        supportOfMulticarrier           BOOLEAN
}

N-300 ::=                              INTEGER (0..7)

N-301 ::=                              INTEGER (0..7)

N-302 ::=                              INTEGER (0..7)

N-304 ::=                              INTEGER (0..7)

N-308 ::=                              INTEGER (1..8)

N-310 ::=                              INTEGER (0..7)

N-312 ::=                              ENUMERATED {
        s1, s50, s100, s200, s400,
        s600, s800, s1000 }

```

```

N-313 ::=
    ENUMERATED {
        s1, s2, s4, s10, s20,
        s50, s100, s200 }

N-315 ::=
    ENUMERATED {
        s1, s50, s100, s200, s400,
        s600, s800, s1000 }

N-AccessFails ::=
    INTEGER (1..64)

N-AP-RetransMax ::=
    INTEGER (1..64)

NetworkAssistedGPS-Supported ::=
    ENUMERATED {
        networkBased,
        ue-Based,
        bothNetworkAndUE-Based,
        noNetworkAssistedGPS }

NF-BO-AllBusy ::=
    INTEGER (0..31)

NF-BO-NoAICH ::=
    INTEGER (0..31)

NF-BO-Mismatch ::=
    INTEGER (0..127)

NS-BO-Busy ::=
    INTEGER (0..63)

NS-IP ::=
    INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::=
    SEQUENCE {
        p-TMSI
        rai
    }

PagingCause ::=
    ENUMERATED {
        terminatingConversationalCall,
        terminatingStreamingCall,
        terminatingInteractiveCall,
        terminatingBackgroundCall,
        highPrioritySignalling,
        lowPrioritySignalling
    }

PagingRecord ::=
    CHOICE {
        cn-Identity
            SEQUENCE {
                pagingCause
                cn-DomainIdentity
                cn-pagedUE-Identity
            },
        utran-Identity
            SEQUENCE {
                u-RNTI
                cn-OriginatedPage-connectedMode-UE
                pagingCause
                cn-DomainIdentity
                pagingRecordTypeID
            }
    }
    OPTIONAL

PagingRecordList ::=
    SEQUENCE (SIZE (1..maxPage1)) OF
        PagingRecord

PDCP-Capability ::=
    SEQUENCE {
        losslessSRNS-RelocationSupport
        supportForRfc2507
        notSupported
        supported
    }
    BOOLEAN,
    CHOICE {
        NULL,
        MaxHcContextSpace
    }

PhysicalChannelCapability ::=
    SEQUENCE {
        fddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                uplinkPhysChCapability
            }
            DL-PhysChCapabilityFDD,
            UL-PhysChCapabilityFDD
            OPTIONAL,
        tddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
            }
            DL-PhysChCapabilityTDD,
    }

```

```

        uplinkPhysChCapability          UL-PhysChCapabilityTDD
    }                                  OPTIONAL
}

-- The following describes the 1.28Mcps TDD physical channel capability
PhysicalChannelCapability-LCR ::= SEQUENCE {
    tdd128-PhysChCapability            SEQUENCE {
        downlinkPhysChCapability      DL-PhysChCapabilityTDD-LCR,
        uplinkPhysChCapability        UL-PhysChCapabilityTDD-LCR
    }
}

ProtocolErrorCause ::= ENUMERATED {
    asn1-ViolationOrEncodingError,
    messageTypeNonexistent,
    messageNotCompatibleWithReceiverState,
    ie-ValueNotComprehended,
    conditionalInformationElementError,
    messageExtensionNotComprehended,
    spare1, spare2 }

ProtocolErrorIndicator ::= ENUMERATED {
    noError, errorOccurred }

ProtocolErrorIndicatorWithMoreInfo ::= CHOICE {
    noError NULL,
    errorOccurred SEQUENCE {
        rrc-TransactionIdentifier RRC-TransactionIdentifier,
        protocolErrorInformation ProtocolErrorInformation
    }
}

ProtocolErrorMoreInformation ::= SEQUENCE {
    diagnosticsType CHOICE {
        type1 CHOICE {
            asn1-ViolationOrEncodingError NULL,
            messageTypeNonexistent NULL,
            messageNotCompatibleWithReceiverState
                IdentificationOfReceivedMessage,
            ie-ValueNotComprehended IdentificationOfReceivedMessage,
            conditionalInformationElementError IdentificationOfReceivedMessage,
            messageExtensionNotComprehended IdentificationOfReceivedMessage,
            spare1 NULL,
            spare2 NULL
        },
        spare NULL
    }
}

RadioFrequencyBand ::= ENUMERATED {
    a, b, c, ab, ac, bc, abc }

Rb-timer-indicator ::= SEQUENCE {
    t314-expired BOOLEAN,
    t315-expired BOOLEAN }

Re-EstablishmentTimer ::= ENUMERATED {
    useT314, useT315
}

RedirectionInfo ::= CHOICE {
    frequencyInfo FrequencyInfo,
    interRATInfo InterRATInfo
}

RejectionCause ::= ENUMERATED {
    congestion,
    unspecified }

ReleaseCause ::= ENUMERATED {
    normalEvent,
    unspecified,
    pre-emptiveRelease,
    congestion,
    re-establishmentReject,
    directedsignallingconnectionre-establishment,
    userInactivity }

```



```

RF-Capability ::=
    fddRF-Capability          SEQUENCE {
        ue-PowerClass          UE-PowerClass,
        txRxFrequencySeparation TxRxFrequencySeparation
    } OPTIONAL,
    tddRF-Capability          SEQUENCE {
        ue-PowerClass          UE-PowerClass,
        radioFrequencyBandList RadioFrequencyBand,
        chipRateCapability      ChipRateCapability
    } OPTIONAL
}

RF-Capability-r4Ext ::= SEQUENCE {
    tddRF-Capability          SEQUENCE {
        ue-PowerClass          UE-PowerClass,
        radioFrequencyBandList RadioFrequencyBand,
        chipRateCapability      ChipRateCapability
    } OPTIONAL
}

RLC-Capability ::= SEQUENCE {
    totalRLC-AM-BufferSize    TotalRLC-AM-BufferSize,
    maximumRLC-WindowSize     MaximumRLC-WindowSize,
    maximumAM-EntityNumber    MaximumAM-EntityNumberRLC-Cap
}

RRC-MessageSequenceNumber ::= INTEGER (0..15)

RRC-MessageSequenceNumberList ::= SEQUENCE (SIZE (4..5)) OF
    RRC-MessageSequenceNumber

RRC-StateIndicator ::= ENUMERATED {
    cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::= INTEGER (0..3)

S-RNTI ::= BIT STRING (SIZE (20))

S-RNTI-2 ::= BIT STRING (SIZE (10))

SecurityCapability ::= SEQUENCE {
    cipheringAlgorithmCap      BIT STRING (SIZE (16)),
    integrityProtectionAlgorithmCap BIT STRING (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported              NULL,
    supported                  SEQUENCE {
        maxNoSCCPCH-RL        MaxNoSCCPCH-RL,
        simultaneousSCCPCH-DPCH-DPDCH-Reception
                                BOOLEAN
        -- The IE above is applicable only if IE Support of PDSCH = TRUE
    }
}

SRNC-Identity ::= BIT STRING (SIZE (12))

START-Value ::= BIT STRING (SIZE (20))

STARTList ::= SEQUENCE (SIZE (1..maxCNdomains)) OF
    STARTSingle

STARTSingle ::= SEQUENCE {
    cn-DomainIdentity          CN-DomainIdentity,
    start-Value                START-Value
}

SystemSpecificCapUpdateReq ::= ENUMERATED {
    gsm }

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    SystemSpecificCapUpdateReq

```

```

T-300 ::=
    ENUMERATED {
        ms100, ms200, ms400, ms600, ms800,
        ms1000, ms1200, ms1400, ms1600,
        ms1800, ms2000, ms3000, ms4000,
        ms6000, ms8000 }

T-301 ::=
    ENUMERATED {
        ms100, ms200, ms400, ms600, ms800,
        ms1000, ms1200, ms1400, ms1600,
        ms1800, ms2000, ms3000, ms4000,
        ms6000, ms8000 }

T-302 ::=
    ENUMERATED {
        ms100, ms200, ms400, ms600, ms800,
        ms1000, ms1200, ms1400, ms1600,
        ms1800, ms2000, ms3000, ms4000,
        ms6000, ms8000 }

T-304 ::=
    ENUMERATED {
        ms100, ms200, ms400,
        ms1000, ms2000 }

T-305 ::=
    ENUMERATED {
        noUpdate, m5, m10, m30,
        m60, m120, m360, m720 }

T-307 ::=
    ENUMERATED {
        s5, s10, s15, s20,
        s30, s40, s50 }

T-308 ::=
    ENUMERATED {
        ms40, ms80, ms160, ms320 }

T-309 ::=
    INTEGER (1..8)

T-310 ::=
    ENUMERATED {
        ms40, ms80, ms120, ms160,
        ms200, ms240, ms280, ms320 }

T-311 ::=
    ENUMERATED {
        ms250, ms500, ms750, ms1000,
        ms1250, ms1500, ms1750, ms2000 }

T-312 ::=
    INTEGER (0..15)

T-313 ::=
    INTEGER (0..15)

T-314 ::=
    ENUMERATED {
        s0, s2, s4, s6, s8,
        s12, s16, s20 }

T-315 ::=
    ENUMERATED {
        s0, s10, s30, s60, s180,
        s600, s1200, s1800 }

T-316 ::=
    ENUMERATED {
        s0, s10, s20, s30, s40,
        s50, s-inf }

T-317 ::=
    ENUMERATED {
        s0, s10, s30, s60, s180,
        s600, s1200, s1800 }

T-CPCH ::=
    ENUMERATED {
        ct0, ct1 }

TMSI-and-LAI-GSM-MAP ::=
    SEQUENCE {
        tmsi
        lai
    }

TMSI-DS-41 ::=
    OCTET STRING (SIZE (2..12))

TotalRLC-AM-BufferSize ::=
    ENUMERATED {
        kb2, kb10, kb50, kb100,
        kb150, kb500, kb1000 }

```

-- Actual value = IE value \* 0.125

```

TransmissionProbability ::=          INTEGER (1..8)

TransportChannelCapability ::=       SEQUENCE {
    dl-TransChCapability             DL-TransChCapability,
    ul-TransChCapability             UL-TransChCapability
}

TurboSupport ::=                    CHOICE {
    notSupported                     NULL,
    supported                         MaxNoBits
}

TxRxFrequencySeparation ::=         ENUMERATED {
    mhz190, mhz174-8-205-2,
    mhz134-8-245-2 }

U-RNTI ::=                           SEQUENCE {
    srnc-Identity                    SRNC-Identity,
    s-RNTI                            S-RNTI
}

U-RNTI-Short ::=                     SEQUENCE {
    srnc-Identity                    SRNC-Identity,
    s-RNTI-2                          S-RNTI-2
}

UE-ConnTimersAndConstants ::=       SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
    t-301                             T-301                DEFAULT ms2000,
    n-301                             N-301                DEFAULT 2,
    t-302                             T-302                DEFAULT ms4000,
    n-302                             N-302                DEFAULT 3,
    t-304                             T-304                OPTIONAL,
    n-304                             N-304                OPTIONAL,
    t-305                             T-305                DEFAULT m30,
    t-307                             T-307                DEFAULT s30,
    t-308                             T-308                OPTIONAL,
    t-309                             T-309                OPTIONAL,
    t-310                             T-310                DEFAULT ms160,
    n-310                             N-310                DEFAULT 4,
    t-311                             T-311                DEFAULT ms2000,
    t-312                             T-312                DEFAULT 1,
    n-312                             N-312                DEFAULT s1,
    t-313                             T-313                OPTIONAL,
    n-313                             N-313                OPTIONAL,
    t-314                             T-314                OPTIONAL,
    t-315                             T-315                OPTIONAL,
    n-315                             N-315                OPTIONAL,
    t-316                             T-316                OPTIONAL,
    t-317                             T-317                OPTIONAL
}

UE-IdleTimersAndConstants ::=       SEQUENCE {
    t-300                             T-300,
    n-300                             N-300,
    t-312                             T-312,
    n-312                             N-312
}

UE-MultiModeRAT-Capability ::=     SEQUENCE {
    multiRAT-CapabilityList           MultiRAT-Capability,
    multiModeCapability               MultiModeCapability
}

UE-PowerClass ::=                   INTEGER (1..4)

UE-RadioAccessCapability ::=        SEQUENCE {
    ics-Version                        ICS-Version,
    pdcp-Capability                   PDCP-Capability,
    rlc-Capability                    RLC-Capability,
    transportChannelCapability        TransportChannelCapability,
    rf-Capability                     RF-Capability,
    physicalChannelCapability          PhysicalChannelCapability,
    ue-MultiModeRAT-Capability        UE-MultiModeRAT-Capability,
    securityCapability                SecurityCapability,
    up-Capability                     UP-Capability,
    measurementCapability              MeasurementCapability    OPTIONAL
}

```

```

UE-RadioAccessCapability-r4Ext ::= SEQUENCE {
    ics-Version-r4                ICS-Version-r4,
    rf-Capability                 RF-Capability-r4Ext,
    physicalChannelCapability-LCR  PhysicalChannelCapability-LCR,
    measurementCapability-r4Ext   MeasurementCapability-r4Ext OPTIONAL
}

UL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPDCH-BitsTransmitted    MaxNoDPDCH-BitsTransmitted,
    supportOfPCPCH                BOOLEAN
}

UL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame                MaxTS-PerFrame,
    maxPhysChPerTimeslot         MaxPhysChPerTimeslot,
    minimumSF                     MinimumSF-UL,
    supportOfPUSCH                BOOLEAN
}

UL-PhysChCapabilityTDD-LCR ::= SEQUENCE {
    maxTS-PerSubFrame            MaxTS-PerSubFrame,
    maxPhysChPerTimeslot         MaxPhysChPerTimeslot,
    minimumSF                     MinimumSF-UL,
    supportOfPUSCH                BOOLEAN,
    supportOf8PSK                 BOOLEAN
}

UL-TransChCapability ::= SEQUENCE {
    maxNoBitsTransmitted          MaxNoBits,
    maxConvCodeBitsTransmitted    MaxNoBits,
    turboDecodingSupport          TurboSupport,
    maxSimultaneousTransChs       MaxSimultaneousTransChsUL,
    modeSpecificInfo              CHOICE {
        fdd                        NULL,
        tdd                        SEQUENCE {
            maxSimultaneousCCTrCH-Count    MaxSimultaneousCCTrCH-Count
        }
    },
    maxTransmittedBlocks          MaxTransportBlocksUL,
    maxNumberOfTFC-InTFCS         MaxNumberOfTFC-InTFCS-UL,
    maxNumberOfTF                 MaxNumberOfTF
}

UP-Capability ::= SEQUENCE {
    standaloneLocMethodsSupported    BOOLEAN,
    ue-BasedOTDOA-Supported          BOOLEAN,
    networkAssistedGPS-Supported     NetworkAssistedGPS-Supported,
    gps-ReferenceTimeCapable         BOOLEAN,
    supportForIDL                    BOOLEAN
}

URA-UpdateCause ::= ENUMERATED {
    changeOfURA,
    periodicURAUpdate,
    re-enteredServiceArea,
    spare1 }

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::= INTEGER (0..15)

-- *****
--
-- RADIO BEARER INFORMATION ELEMENTS (10.3.4)
--
-- *****

AlgorithmSpecificInfo ::= CHOICE {
    rfc2507-Info          RFC2507-Info
}

-- Upper limit is 2^32 - 1
COUNT-C ::= INTEGER (0..4294967295)

-- Upper limit is 2^25 - 1
COUNT-C-MSB ::= INTEGER (0..33554431)

```

```

DL-AM-RLC-Mode ::=                               SEQUENCE {
    inSequenceDelivery                            BOOLEAN,
    receivingWindowSize                          ReceivingWindowSize,
    dl-RLC-StatusInfo                           DL-RLC-StatusInfo
}

DL-LogicalChannelMapping ::=                     SEQUENCE {
    -- TABULAR: DL-TransportChannelType contains TransportChannelIdentity as well.
    dl-TransportChannelType                      DL-TransportChannelType,
    logicalChannelIdentity                       LogicalChannelIdentity           OPTIONAL
}

DL-LogicalChannelMappingList ::=                 SEQUENCE (SIZE (1..maxLoCHperRLC)) OF
    DL-LogicalChannelMapping

DL-RLC-Mode ::=                                 CHOICE {
    dl-AM-RLC-Mode                              DL-AM-RLC-Mode,
    dl-UM-RLC-Mode                              NULL,
    dl-TM-RLC-Mode                              DL-TM-RLC-Mode
}

DL-RLC-StatusInfo ::=                          SEQUENCE {
    timerStatusProhibit                         TimerStatusProhibit             OPTIONAL,
    timerEPC                                    TimerEPC                        OPTIONAL,
    missingPU-Indicator                         BOOLEAN,
    timerStatusPeriodic                         TimerStatusPeriodic            OPTIONAL
}

DL-TM-RLC-Mode ::=                             SEQUENCE {
    segmentationIndication                      BOOLEAN
}

DL-TransportChannelType ::=                     CHOICE {
    dch                                          TransportChannelIdentity,
    fach                                        NULL,
    dsch                                        TransportChannelIdentity
}

ExpectReordering ::=                            ENUMERATED {
    reorderingNotExpected,
    reorderingExpected }

ExplicitDiscard ::=                             SEQUENCE {
    timerMRW                                     TimerMRW,
    timerDiscard                                TimerDiscard,
    maxMRW                                       MaxMRW
}

HeaderCompressionInfo ::=                       SEQUENCE {
    algorithmSpecificInfo                       AlgorithmSpecificInfo
}

HeaderCompressionInfoList ::=                   SEQUENCE (SIZE (1..maxPDCPALgoType)) OF
    HeaderCompressionInfo

LogicalChannelIdentity ::=                       INTEGER (1..15)

LosslessSRNS-RelocSupport ::=                   CHOICE {
    supported                                    MaxPDCP-SN-WindowSize,
    notSupported                                NULL
}

MAC-LogicalChannelPriority ::=                   INTEGER (1..8)

MaxDAT ::=                                      ENUMERATED {
    dat1, dat2, dat3, dat4, dat5, dat6,
    dat7, dat8, dat9, dat10, dat15, dat20,
    dat25, dat30, dat35, dat40 }

MaxDAT-Retransmissions ::=                       SEQUENCE {
    maxDAT                                       MaxDAT,
    timerMRW                                    TimerMRW,
    maxMRW                                       MaxMRW
}

MaxMRW ::=                                      ENUMERATED {
    mm1, mm4, mm6, mm8, mm12, mm16,

```

```

mm24, mm32 }

MaxPDCP-SN-WindowSize ::=      ENUMERATED {
                                sn255, sn65535 }

MaxRST ::=                      ENUMERATED {
                                rst1, rst4, rst6, rst8, rst12,
                                rst16, rst24, rst32 }

NoExplicitDiscard ::=          ENUMERATED {
                                dt10, dt20, dt30, dt40, dt50,
                                dt60, dt70, dt80, dt90, dt100 }

PDCP-Info ::=                  SEQUENCE {
    losslessSRNS-RelocSupport    LosslessSRNS-RelocSupport    OPTIONAL,
    pdcp-PDU-Header              PDCP-PDU-Header,
    -- TABULAR: The IE above is MD in the tabular format and it can be encoded
    -- in one bit, so the OPTIONAL is removed for compactness.
    headerCompressionInfoList    HeaderCompressionInfoList    OPTIONAL
}

PDCP-InfoReconfig ::=          SEQUENCE {
    pdcp-Info                    PDCP-Info,
    pdcp-SN-Info                 PDCP-SN-Info
}

PDCP-PDU-Header ::=            ENUMERATED {
                                present, absent }

PDCP-SN-Info ::=               INTEGER (0..65535)

Poll-PU ::=                     ENUMERATED {
                                pu1, pu2, pu4, pu8, pu16,
                                pu32, pu64, pu128 }

Poll-SDU ::=                    ENUMERATED {
                                sdu1, sdu4, sdu16, sdu64 }

PollingInfo ::=                 SEQUENCE {
    timerPollProhibit            TimerPollProhibit            OPTIONAL,
    timerPoll                    TimerPoll                            OPTIONAL,
    poll-PU                      Poll-PU                            OPTIONAL,
    poll-SDU                     Poll-SDU                            OPTIONAL,
    lastTransmissionPU-Poll      BOOLEAN,
    lastRetransmissionPU-Poll    BOOLEAN,
    pollWindow                   PollWindow                            OPTIONAL,
    timerPollPeriodic            TimerPollPeriodic            OPTIONAL
}

PollWindow ::=                  ENUMERATED {
                                pw50, pw60, pw70, pw80, pw85,
                                pw90, pw95, pw99 }

PredefinedConfigIdentity ::=    INTEGER (0..15)

PredefinedConfigValueTag ::=    INTEGER (0..15)

PredefinedRB-Configuration ::=  SEQUENCE {
    srb-InformationList          SRB-InformationSetupList,
    rb-InformationList           RB-InformationSetupList
}

PreDefRadioConfiguration ::=    SEQUENCE {
    -- User equipment IEs
    re-EstablishmentTimer        Re-EstablishmentTimer,
    -- Radio bearer IEs
    predefinedRB-Configuration    PredefinedRB-Configuration,
    -- Transport channel IEs
    preDefTransChConfiguration    PreDefTransChConfiguration,
    -- Physical channel IEs
    preDefPhyChConfiguration      PreDefPhyChConfiguration
}

RAB-Info ::=                    SEQUENCE {
    rab-Identity                 RAB-Identity,
    cn-DomainIdentity            CN-DomainIdentity,
    nas-Synchronisation-Indicator NAS-Synchronisation-Indicator    OPTIONAL,
    re-EstablishmentTimer        Re-EstablishmentTimer
}

```

```

}
RAB-InformationList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
    RAB-Info

RAB-InformationReconfigList ::= SEQUENCE (SIZE (1.. maxRABsetup)) OF
    RAB-InformationReconfig

RAB-InformationReconfig ::= SEQUENCE {
    rab-Identity RAB-Identity,
    cn-DomainIdentity CN-DomainIdentity,
    nas-Synchronisation-Indicator NAS-Synchronisation-Indicator
}

RAB-Info-Post ::= SEQUENCE {
    rab-Identity RAB-Identity,
    cn-DomainIdentity CN-DomainIdentity,
    nas-Synchronisation-Indicator NAS-Synchronisation-Indicator OPTIONAL
}

RAB-InformationSetup ::= SEQUENCE {
    rab-Info RAB-Info,
    rb-InformationSetupList RB-InformationSetupList
}

RAB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
    RAB-InformationSetup

RB-ActivationTimeInfo ::= SEQUENCE {
    rb-Identity RB-Identity,
    rlc-SequenceNumber RLC-SequenceNumber
}

RB-ActivationTimeInfoList ::= SEQUENCE (SIZE (1..maxRB)) OF
    RB-ActivationTimeInfo

RB-COUNT-C-Information ::= SEQUENCE {
    rb-Identity RB-Identity,
    count-C-UL COUNT-C,
    count-C-DL COUNT-C
}

RB-COUNT-C-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
    RB-COUNT-C-Information

RB-COUNT-C-MSB-Information ::= SEQUENCE {
    rb-Identity RB-Identity,
    count-C-MSB-UL COUNT-C-MSB,
    count-C-MSB-DL COUNT-C-MSB
}

RB-COUNT-C-MSB-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
    RB-COUNT-C-MSB-Information

RB-Identity ::= INTEGER (1..32)

RB-IdentityList ::= SEQUENCE (SIZE (1..maxRB)) OF
    RB-Identity

RB-InformationAffected ::= SEQUENCE {
    rb-Identity RB-Identity,
    rb-MappingInfo RB-MappingInfo
}

RB-InformationAffectedList ::= SEQUENCE (SIZE (1..maxRB)) OF
    RB-InformationAffected

RB-InformationReconfig ::= SEQUENCE {
    rb-Identity RB-Identity,
    pdcp-Info PDCP-InfoReconfig OPTIONAL,
    rlc-Info RLC-Info OPTIONAL,
    rb-MappingInfo RB-MappingInfo OPTIONAL,
    rb-StopContinue RB-StopContinue OPTIONAL
}

RB-InformationReconfigList ::= SEQUENCE (SIZE (1..maxRB)) OF
    RB-InformationReconfig

RB-InformationReleaseList ::= SEQUENCE (SIZE (1..maxRB)) OF

```

```

        RB-Identity
RB-InformationSetup ::= SEQUENCE {
    rb-Identity          RB-Identity,
    pdcp-Info           PDCP-Info           OPTIONAL,
    rlc-Info            RLC-Info,
    rb-MappingInfo     RB-MappingInfo
}

RB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRBperRAB)) OF
    RB-InformationSetup

RB-MappingInfo ::= SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
    RB-MappingOption

RB-MappingOption ::= SEQUENCE {
    ul-LogicalChannelMappings UL-LogicalChannelMappings OPTIONAL,
    dl-LogicalChannelMappingList DL-LogicalChannelMappingList OPTIONAL
}

RB-StopContinue ::= ENUMERATED {
    stopRB, continueRB }

RB-WithPDCP-Info ::= SEQUENCE {
    rb-Identity          RB-Identity,
    pdcp-SN-Info        PDCP-SN-Info
}

RB-WithPDCP-InfoList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
    RB-WithPDCP-Info

ReceivingWindowSize ::= ENUMERATED {
    rw1, rw8, rw16, rw32, rw64, rw128, rw256,
    rw512, rw768, rw1024, rw1536, rw2047,
    rw2560, rw3072, rw3584, rw4095 }

RFC2507-Info ::= SEQUENCE {
    f-MAX-PERIOD          INTEGER (1..65535)           DEFAULT 256,
    f-MAX-TIME            INTEGER (1..255)           DEFAULT 5,
    max-HEADER            INTEGER (60..65535)        DEFAULT 168,
    tcp-SPACE              INTEGER (3..255)          DEFAULT 15,
    non-TCP-SPACE         INTEGER (3..65535)        DEFAULT 15,
    expectReordering      ExpectReordering
    -- TABULAR: The IE above has only two possible values, so using Optional or Default
    -- would be wasteful
}

RLC-Info ::= SEQUENCE {
    ul-RLC-Mode           UL-RLC-Mode           OPTIONAL,
    dl-RLC-Mode           DL-RLC-Mode           OPTIONAL
}

RLC-SequenceNumber ::= INTEGER (0..4095)

RLC-SizeInfo ::= SEQUENCE {
    rlc-SizeIndex         INTEGER (1..maxTF)
}

RLC-SizeExplicitList ::= SEQUENCE (SIZE (1..maxTF)) OF
    RLC-SizeInfo

SRB-InformationSetup ::= SEQUENCE {
    rb-Identity          RB-Identity           OPTIONAL,
    -- The default value for the IE above is the smallest value not used yet.
    rlc-Info             RLC-Info,
    rb-MappingInfo     RB-MappingInfo
}

SRB-InformationSetupList ::= SEQUENCE (SIZE (1..maxSRBsetup)) OF
    SRB-InformationSetup

SRB-InformationSetupList2 ::= SEQUENCE (SIZE (3..4)) OF
    SRB-InformationSetup

TimerDiscard ::= ENUMERATED {
    td0-1, td0-25, td0-5, td0-75,
    td1, td1-25, td1-5, td1-75,
    td2, td2-5, td3, td3-5, td4,
}

```



```

        td4-5, td5, td7-5 }

TimerEPC ::=
ENUMERATED {
    te50, te60, te70, te80, te90,
    te100, te120, te140, te160, te180,
    te200, te300, te400, te500, te700,
    te900 }

TimerMRW ::=
ENUMERATED {
    te50, te60, te70, te80, te90, te100,
    te120, te140, te160, te180, te200,
    te300, te400, te500, te700, te900 }

TimerPoll ::=
ENUMERATED {
    tp10, tp20, tp30, tp40, tp50,
    tp60, tp70, tp80, tp90, tp100,
    tp110, tp120, tp130, tp140, tp150,
    tp160, tp170, tp180, tp190, tp200,
    tp210, tp220, tp230, tp240, tp250,
    tp260, tp270, tp280, tp290, tp300,
    tp310, tp320, tp330, tp340, tp350,
    tp360, tp370, tp380, tp390, tp400,
    tp410, tp420, tp430, tp440, tp450,
    tp460, tp470, tp480, tp490, tp500,
    tp510, tp520, tp530, tp540, tp550,
    tp600, tp650, tp700, tp750, tp800,
    tp850, tp900, tp950, tp1000 }

TimerPollPeriodic ::=
ENUMERATED {
    tper100, tper200, tper300, tper400,
    tper500, tper750, tper1000, tper2000 }

TimerPollProhibit ::=
ENUMERATED {
    tpp10, tpp20, tpp30, tpp40, tpp50,
    tpp60, tpp70, tpp80, tpp90, tpp100,
    tpp110, tpp120, tpp130, tpp140, tpp150,
    tpp160, tpp170, tpp180, tpp190, tpp200,
    tpp210, tpp220, tpp230, tpp240, tpp250,
    tpp260, tpp270, tpp280, tpp290, tpp300,
    tpp310, tpp320, tpp330, tpp340, tpp350,
    tpp360, tpp370, tpp380, tpp390, tpp400,
    tpp410, tpp420, tpp430, tpp440, tpp450,
    tpp460, tpp470, tpp480, tpp490, tpp500,
    tpp510, tpp520, tpp530, tpp540, tpp550,
    tpp600, tpp650, tpp700, tpp750, tpp800,
    tpp850, tpp900, tpp950, tpp1000 }

TimerRST ::=
ENUMERATED {
    tr50, tr100, tr150, tr200, tr250, tr300,
    tr350, tr400, tr450, tr500, tr550,
    tr600, tr700, tr800, tr900, tr1000 }

TimerStatusPeriodic ::=
ENUMERATED {
    tsp100, tsp200, tsp300, tsp400, tsp500,
    tsp750, tsp1000, tsp2000 }

TimerStatusProhibit ::=
ENUMERATED {
    tsp10, tsp20, tsp30, tsp40, tsp50,
    tsp60, tsp70, tsp80, tsp90, tsp100,
    tsp110, tsp120, tsp130, tsp140, tsp150,
    tsp160, tsp170, tsp180, tsp190, tsp200,
    tsp210, tsp220, tsp230, tsp240, tsp250,
    tsp260, tsp270, tsp280, tsp290, tsp300,
    tsp310, tsp320, tsp330, tsp340, tsp350,
    tsp360, tsp370, tsp380, tsp390, tsp400,
    tsp410, tsp420, tsp430, tsp440, tsp450,
    tsp460, tsp470, tsp480, tsp490, tsp500,
    tsp510, tsp520, tsp530, tsp540, tsp550,
    tsp600, tsp650, tsp700, tsp750, tsp800,
    tsp850, tsp900, tsp950, tsp1000 }

TransmissionRLC-Discard ::=
    timerBasedExplicit
    timerBasedNoExplicit
    maxDAT-Retransmissions
    noDiscard
}
CHOICE {
    ExplicitDiscard,
    NoExplicitDiscard,
    MaxDAT-Retransmissions,
    MaxDAT
}

```

```

TransmissionWindowSize ::=          ENUMERATED {
    tw1, tw8, tw16, tw32, tw64, tw128, tw256,
    tw512, tw768, tw1024, tw1536, tw2047,
    tw2560, tw3072, tw3584, tw4095 }

UL-AM-RLC-Mode ::=                  SEQUENCE {
    transmissionRLC-Discard          TransmissionRLC-Discard,
    transmissionWindowSize          TransmissionWindowSize,
    timerRST                         TimerRST,
    max-RST                          MaxRST,
    pollingInfo                      PollingInfo
}

UL-LogicalChannelMapping ::=        SEQUENCE {
    -- TABULAR: UL-TransportChannelType contains TransportChannelIdentity as well.
    ul-TransportChannelType          UL-TransportChannelType,
    logicalChannelIdentity           LogicalChannelIdentity           OPTIONAL,
    rlc-SizeList                     CHOICE {
        allSizes                     NULL,
        configured                   NULL,
        explicitList                 RLC-SizeExplicitList
    },
    mac-LogicalChannelPriority        MAC-LogicalChannelPriority
}

UL-LogicalChannelMappingList ::=     SEQUENCE {
    rlc-LogicalChannelMappingIndicator  BOOLEAN,
    ul-LogicalChannelMapping           SEQUENCE (SIZE (maxLoChperRLC)) OF
                                        UL-LogicalChannelMapping
}

UL-LogicalChannelMappings ::=        CHOICE {
    oneLogicalChannel                UL-LogicalChannelMapping,
    twoLogicalChannels               UL-LogicalChannelMappingList
}

UL-RLC-Mode ::=                     CHOICE {
    ul-AM-RLC-Mode                  UL-AM-RLC-Mode,
    ul-UM-RLC-Mode                  UL-UM-RLC-Mode,
    ul-TM-RLC-Mode                  UL-TM-RLC-Mode,
    spare                            NULL
}

UL-TM-RLC-Mode ::=                  SEQUENCE {
    transmissionRLC-Discard          TransmissionRLC-Discard           OPTIONAL,
    segmentationIndication          BOOLEAN
}

UL-UM-RLC-Mode ::=                  SEQUENCE {
    transmissionRLC-Discard          TransmissionRLC-Discard           OPTIONAL
}

UL-TransportChannelType ::=          CHOICE {
    dch                              TransportChannelIdentity,
    rach                              NULL,
    cpch                              NULL,
    usch                              NULL
}

-- *****
--
--     TRANSPORT CHANNEL INFORMATION ELEMENTS (10.3.5)
--
-- *****

AllowedTFC-List ::=                  SEQUENCE (SIZE (1..maxTFC)) OF
    TFC-Value

AllowedTFI-List ::=                  SEQUENCE (SIZE (1..maxTF)) OF
    INTEGER (0..31)

BitModeRLC-SizeInfo ::=              CHOICE {
    sizeType1                        INTEGER (1..127),
    sizeType2                        SEQUENCE {
        part1                        INTEGER (0..15),
        part2                        INTEGER (1..7)           OPTIONAL
    }
    -- Actual size = (part1 * 8) + 128 + part2
}

```

```

    },
    sizeType3
        SEQUENCE {
            part1
                INTEGER (0..47),
            part2
                INTEGER (1..15)
            -- Actual size = (part1 * 16) + 256 + part2
        },
    sizeType4
        SEQUENCE {
            part1
                INTEGER (0..62),
            part2
                INTEGER (1..63)
            -- Actual size = (part1 * 64) + 1024 + part2
        }
}
-- Actual value = IE value * 0.1
BLER-QualityValue ::=
    INTEGER (-63..0)

ChannelCodingType ::=
    CHOICE {
        noCoding
            NULL,
        convolutional
            CodingRate,
        turbo
            NULL
    }

CodingRate ::=
    ENUMERATED {
        half,
        third }

CommonDynamicTF-Info ::=
    SEQUENCE {
        rlc-Size
            CHOICE {
                fdd
                    SEQUENCE {
                        octetModeRLC-SizeInfoType2
                            OctetModeRLC-SizeInfoType2
                    },
                tdd
                    SEQUENCE {
                        commonTDD-Choice
                            CHOICE {
                                bitModeRLC-SizeInfo
                                    BitModeRLC-SizeInfo,
                                octetModeRLC-SizeInfoType1
                                    OctetModeRLC-SizeInfoType1
                            }
                    }
            },
        numberOfTbSizeList
            SEQUENCE (SIZE (1..maxTF)) OF
                NumberOfTransportBlocks,
        logicalChannelList
            LogicalChannelList
    }

CommonDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    commonTDD-Choice
        CHOICE {
            bitModeRLC-SizeInfo
                BitModeRLC-SizeInfo,
            octetModeRLC-SizeInfoType1
                OctetModeRLC-SizeInfoType1
        },
    numberOfTbSizeAndTTIList
        NumberOfTbSizeAndTTIList,
    logicalChannelList
        LogicalChannelList
}

CommonDynamicTF-InfoList ::=
    SEQUENCE (SIZE (1..maxTF)) OF
        CommonDynamicTF-Info

CommonDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    CommonDynamicTF-Info-DynamicTTI

CommonTransChTFS ::=
    SEQUENCE {
        tti
            CHOICE {
                tti10
                    CommonDynamicTF-InfoList,
                tti20
                    CommonDynamicTF-InfoList,
                tti40
                    CommonDynamicTF-InfoList,
                tti80
                    CommonDynamicTF-InfoList,
                dynamic
                    CommonDynamicTF-InfoList-DynamicTTI
            },
        semistaticTF-Information
            SemistaticTF-Information
    }

CPCH-SetID ::=
    INTEGER (1..maxCPCHsets)

CRC-Size ::=
    ENUMERATED {
        crc0, crc8, crc12, crc16, crc24 }

DedicatedDynamicTF-Info ::=
    SEQUENCE {
        rlc-Size
            CHOICE {
                bitMode
                    BitModeRLC-SizeInfo,
                octetModeType1
                    OctetModeRLC-SizeInfoType1
            },
    }

```

```

    numberOfTbSizeList          SEQUENCE (SIZE (1..maxTF)) OF
    NumberOfTransportBlocks,    LogicalChannelList
    logicalChannelList
}

DedicatedDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    rlc-Size                     CHOICE {
        bitMode                   BitModeRLC-SizeInfo,
        octetModeType1           OctetModeRLC-SizeInfoType1
    },
    numberOfTbSizeAndTTIList     NumberOfTbSizeAndTTIList,
    logicalChannelList           LogicalChannelList
}

DedicatedDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info

DedicatedDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info-DynamicTTI

DedicatedTransChTFS ::= SEQUENCE {
    tti                          CHOICE {
        tti10                    DedicatedDynamicTF-InfoList,
        tti20                    DedicatedDynamicTF-InfoList,
        tti40                    DedicatedDynamicTF-InfoList,
        tti80                    DedicatedDynamicTF-InfoList,
        dynamic                   DedicatedDynamicTF-InfoList-DynamicTTI
    },
    semistaticTF-Information     SemistaticTF-Information
}

DL-AddReconfTransChInfo2List ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation2

DL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of messages other than: Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation ::= SEQUENCE {
    dl-transportChannelIdentity  TransportChannelIdentity,
    tfs-SignallingMode          CHOICE {
        explicit                 TransportFormatSet,
        sameAsULTrCH           TransportChannelIdentity
    },
    dch-QualityTarget           QualityTarget                OPTIONAL,
    tm-SignallingInfo           TM-SignallingInfo           OPTIONAL
}

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation2 ::= SEQUENCE {
    transportChannelIdentity     TransportChannelIdentity,
    tfs-SignallingMode          CHOICE {
        explicit                 TransportFormatSet,
        sameAsULTrCH           TransportChannelIdentity
    },
    qualityTarget               QualityTarget                OPTIONAL
}

DL-CommonTransChInfo ::= SEQUENCE {
    sccpch-TFCS                 TFCS                OPTIONAL,
    modeSpecificInfo            CHOICE {
        fdd                     SEQUENCE {
            tfcs-SignallingMode CHOICE {
                explicit         TFCS,
                sameAsUL        NULL
            }
        }
        OPTIONAL
    },
    tdd                         SEQUENCE {
        individualDL-CCTrCH-InfoList IndividualDL-CCTrCH-InfoList
    }
    OPTIONAL
}
}

```

```

DL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

DRAC-ClassIdentity ::= INTEGER (1..maxDRACclasses)

DRAC-StaticInformation ::= SEQUENCE {
    transmissionTimeValidity
    timeDurationBeforeRetry
    drac-ClassIdentity
}

DRAC-StaticInformationList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DRAC-StaticInformation

ExplicitTFCS-Configuration ::= CHOICE {
    complete
    addition
    removal
    replacement
        tfcsRemoval
        tfcsAdd
    }

GainFactor ::= INTEGER (0..15)

GainFactorInformation ::= CHOICE {
    signalledGainFactors
    computedGainFactors
}

IndividualDL-CCTrCH-Info ::= SEQUENCE {
    dl-TFCS-Identity
    tfcs-SignallingMode
        explicit
        sameAsUL
    }

IndividualDL-CCTrCH-InfoList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
    IndividualDL-CCTrCH-Info

IndividualUL-CCTrCH-Info ::= SEQUENCE {
    ul-TFCS-Identity
    ul-TFCS
}

IndividualUL-CCTrCH-InfoList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
    IndividualUL-CCTrCH-Info

LogicalChannelByRB ::= SEQUENCE {
    rb-Identity
    logChOfRb
} OPTIONAL

LogicalChannelList ::= CHOICE {
    allSizes
    configured
    explicitList
}

NumberOfTbSizeAndTTIList ::= SEQUENCE (SIZE (1..maxTF)) OF SEQUENCE {
    numberOfTransportBlocks
    transmissionTimeInterval
}

MessType ::= ENUMERATED {
    transportFormatCombinationControl }

Non-allowedTFC-List ::= SEQUENCE (SIZE (1..maxTFC)) OF
    TFC-Value

NumberOfTransportBlocks ::= CHOICE {
    zero
    one
    small
    large
    NULL,
    NULL,
    INTEGER (2..17),
    INTEGER (18..512)
}

```

```

}

OctetModeRLC-SizeInfoType1 ::= CHOICE {
  sizeType1          INTEGER (0..31),
  -- Actual size = (8 * sizeType1) + 16
  sizeType2          SEQUENCE {
    part1            INTEGER (0..23),
    part2            INTEGER (1..3)           OPTIONAL
    -- Actual size = (32 * part1) + 272 + (part2 * 8)
  },
  sizeType3          SEQUENCE {
    part1            INTEGER (0..61),
    part2            INTEGER (1..7)           OPTIONAL
    -- Actual size = (64 * part1) + 1040 + (part2 * 8)
  }
}

OctetModeRLC-SizeInfoType2 ::= CHOICE {
  sizeType1          INTEGER (0..31),
  -- Actual size = (sizeType1 * 8) + 48
  sizeType2          INTEGER (0..63),
  -- Actual size = (sizeType2 * 16) + 312
  sizeType3          INTEGER (0..56)
  -- Actual size = (sizeType3 * 64) + 1384
}

PowerOffsetInformation ::= SEQUENCE {
  gainFactorInformation GainFactorInformation,
  -- PowerOffsetPp-m is always absent in TDD
  powerOffsetPp-m      PowerOffsetPp-m           OPTIONAL
}

PowerOffsetPp-m ::= INTEGER (-5..10)

PreDefTransChConfiguration ::= SEQUENCE {
  ul-CommonTransChInfo      UL-CommonTransChInfo,
  ul-AddReconfTrChInfoList  UL-AddReconfTransChInfoList,
  dl-CommonTransChInfo      DL-CommonTransChInfo,
  dl-TrChInfoList           DL-AddReconfTransChInfoList
}

QualityTarget ::= SEQUENCE {
  bler-QualityValue         BLER-QualityValue
}

RateMatchingAttribute ::= INTEGER (1..hiRM)

ReferenceTFC-ID ::= INTEGER (0..3)

RestrictedTrChInfo ::= SEQUENCE {
  restrictedTrChIdentity     TransportChannelIdentity,
  allowedTFI-List           AllowedTFI-List           OPTIONAL
}

RestrictedTrChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
  RestrictedTrChInfo

SemistaticTF-Information ::= SEQUENCE {
  -- TABULAR: Transmission time interval has been included in the IE CommonTransChTFS.
  channelCodingType         ChannelCodingType,
  rateMatchingAttribute     RateMatchingAttribute,
  crc-Size                  CRC-Size
}

SignalledGainFactors ::= SEQUENCE {
  modeSpecificInfo          CHOICE {
    fdd                      SEQUENCE {
      gainFactorBetaC        GainFactor
    },
    tdd                      NULL
  },
  gainFactorBetaD           GainFactor,
  referenceTFC-ID           ReferenceTFC-ID           OPTIONAL
}

SplitTFI-Signalling ::= SEQUENCE {
  splitType                 SplitType           OPTIONAL,

```

```

    tfci-Field2-Length                INTEGER (1..10)                OPTIONAL,
    tfci-Field1-Information            ExplicitTFCS-Configuration    OPTIONAL,
    tfci-Field2-Information            TFCI-Field2-Information        OPTIONAL
}

SplitType ::=                        ENUMERATED {
    hardSplit, logicalSplit }

TFC-Subset ::=                       CHOICE {
    minimumAllowedTFC-Number          TFC-Value,
    allowedTFC-List                   AllowedTFC-List,
    non-allowedTFC-List               Non-allowedTFC-List,
    restrictedTrChInfoList            RestrictedTrChInfoList,
    fullTFCS                          NULL
}

TFC-Value ::=                        INTEGER (0..1023)

TFCI-Field2-Information ::=          CHOICE {
    tfci-Range                        TFCI-RangeList,
    explicit                          ExplicitTFCS-Configuration
}

TFCI-Range ::=                      SEQUENCE {
    maxTFCIField2Value                INTEGER (1..1023),
    tfcs-InfoForDSCH                 TFCI-InfoForDSCH
}

TFCI-RangeList ::=                 SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    TFCI-Range

TFCS ::=                            CHOICE {
    normalTFCI-Signalling              ExplicitTFCS-Configuration,
    splitTFCI-Signalling               SplitTFCI-Signalling
}

TFCS-Identity ::=                  SEQUENCE {
    tfcs-ID                            INTEGER (1..8)                DEFAULT 1,
    sharedChannelIndicator              BOOLEAN
}

TFCS-IdentityPlain ::=              INTEGER (1..8)

TFCS-InfoForDSCH ::=              CHOICE {
    ctfc2bit                           INTEGER (0..3),
    ctfc4bit                           INTEGER (0..15),
    ctfc6bit                           INTEGER (0..63),
    ctfc8bit                           INTEGER (0..255),
    ctfc12bit                          INTEGER (0..4095),
    ctfc16bit                          INTEGER (0..65535),
    ctfc24bit                          INTEGER (0..16777215)
}

TFCS-ReconfAdd ::=                 SEQUENCE{
    ctfcSize                            CHOICE{
        ctfc2Bit                       SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc2                       INTEGER (0..3),
            gainFactorInformation        PowerOffsetInformation        OPTIONAL
        },
        ctfc4Bit                       SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc4                       INTEGER (0..15),
            gainFactorInformation        PowerOffsetInformation        OPTIONAL
        },
        ctfc6Bit                       SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc6                       INTEGER (0..63),
            gainFactorInformation        PowerOffsetInformation        OPTIONAL
        },
        ctfc8Bit                       SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc8                       INTEGER (0..255),
            gainFactorInformation        PowerOffsetInformation        OPTIONAL
        },
        ctfc12Bit                      SEQUENCE (SIZE(1..maxTFC)) OF SEQUENCE {
            ctfc12                      INTEGER (0..4095),
            gainFactorInformation        PowerOffsetInformation        OPTIONAL
        },
        ctfc16Bit                      SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            ctfc16                      INTEGER(0..65535),
            gainFactorInformation        PowerOffsetInformation        OPTIONAL
        }
    }
}

```

```

    },
    ctfc24Bit                SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
        ctfc24                INTEGER(0..16777215),
        gainFactorInformation  PowerOffsetInformation           OPTIONAL
    }
}

TFCS-Removal ::=
    tfci                    SEQUENCE {
                                INTEGER (0..1023)
    }

TFCS-RemovalList ::=
    SEQUENCE (SIZE (1..maxTFC)) OF
    TFCS-Removal

TimeDurationBeforeRetry ::=
    INTEGER (1..256)

TM-SignallingInfo ::=
    messType                MessType,
    tm-SignallingMode        CHOICE {
        model                NULL,
        mode2                SEQUENCE {
            ul-controlledTrChList  UL-ControlledTrChList
        }
    }
}

TransmissionTimeInterval ::=
    ENUMERATED {
        tti10, tti20, tti40, tti80 }

TransmissionTimeValidity ::=
    INTEGER (1..256)

TransportChannelIdentity ::=
    INTEGER (1..32)

TransportFormatSet ::=
    CHOICE {
        dedicatedTransChTFS  DedicatedTransChTFS,
        commonTransChTFS     CommonTransChTFS
    }

UL-AddReconfTransChInfoList ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
    UL-AddReconfTransChInformation

UL-AddReconfTransChInformation ::= SEQUENCE {
    transportChannelIdentity  TransportChannelIdentity,
    transportFormatSet        TransportFormatSet
}

UL-CommonTransChInfo ::=
    SEQUENCE {
        tfc-Subset            TFC-Subset                OPTIONAL,
        prach-TFCS            TFCS                      OPTIONAL,
        modeSpecificInfo      CHOICE {
            fdd                SEQUENCE {
                ul-TFCS        TFCS
            },
            tdd                SEQUENCE {
                individualUL-CCTrCH-InfoList  IndividualUL-CCTrCH-InfoList  OPTIONAL,
                ul-TFCS            TFCS
            }
        }
    }
}

UL-ControlledTrChList ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

UL-DeletedTransChInfoList ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

-- *****
--
--     PHYSICAL CHANNEL INFORMATION ELEMENTS (10.3.6)
--
-- *****

AC-To-ASC-Mapping ::=
    INTEGER (0..7)

AC-To-ASC-MappingTable ::=
    SEQUENCE (SIZE (maxASCmap)) OF

```



## AC-To-ASC-Mapping

```

AccessServiceClass ::=
    availableSignatureStartIndex
    availableSignatureEndIndex
    assignedSubChannelNumber
}
SEQUENCE {
    INTEGER (0..15),
    INTEGER (0..15),
    BIT STRING (SIZE(4))
}

AccessServiceClassIndex ::=
    INTEGER (1..8)

AICH-Info ::=
    channelisationCode256
    sttd-Indicator
    aich-TransmissionTiming
}
SEQUENCE {
    ChannelisationCode256,
    BOOLEAN,
    AICH-TransmissionTiming
}

AICH-PowerOffset ::=
    INTEGER (-22..5)

AICH-TransmissionTiming ::=
    ENUMERATED {
        e0, e1
    }

AllocationPeriodInfo ::=
    allocationActivationTime
    allocationDuration
}
SEQUENCE {
    INTEGER (1..256),
    INTEGER (1..256)
}

Alpha ::=
    INTEGER (0..8)

AP-AICH-ChannelisationCode ::=
    INTEGER (0..255)

AP-PreambleScramblingCode ::=
    INTEGER (0..79)

AP-Signature ::=
    INTEGER (0..15)

AP-Signature-VCAM ::=
    ap-Signature
    availableAP-SubchannelList
}
SEQUENCE {
    AP-Signature,
    AvailableAP-SubchannelList OPTIONAL
}

AP-Subchannel ::=
    INTEGER (0..11)

ASC ::=
    accessServiceClass
    repetitionPeriodAndOffset
    -- TABULAR: The offset is nested in the repetition period
}
SEQUENCE {
    AccessServiceClassIndex,
    ASC-RepetitionPeriodAndOffset OPTIONAL
}

ASC-RepetitionPeriodAndOffset ::=
    rp1
    rp2
    rp4
    rp8
}
CHOICE {
    NULL,
    INTEGER (0..1),
    INTEGER (0..3),
    INTEGER (0..7)
}

ASCSetting ::=
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available signature and sub-channels
    accessServiceClass
}
SEQUENCE {
    AccessServiceClass OPTIONAL
}

AvailableAP-Signature-VCAMList ::=
    SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
        AP-Signature-VCAM

AvailableAP-SignatureList ::=
    SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
        AP-Signature

AvailableAP-SubchannelList ::=
    SEQUENCE (SIZE (1..maxPCPCH-APsubCh)) OF
        AP-Subchannel

AvailableMinimumSF-ListVCAM ::=
    SEQUENCE (SIZE (1..maxPCPCH-SF)) OF
        AvailableMinimumSF-VCAM

AvailableMinimumSF-VCAM ::=
    minimumSpreadingFactor
    nf-Max
    maxAvailablePCPCH-Number
    availableAP-Signature-VCAMList
}
SEQUENCE {
    MinimumSpreadingFactor,
    NF-Max,
    MaxAvailablePCPCH-Number,
    AvailableAP-Signature-VCAMList
}

```

```

}
AvailableSignatures ::=          BIT STRING(SIZE(16))
AvailableSubChannelNumbers ::=   BIT STRING(SIZE(12))
BurstType ::=                   ENUMERATED {
                                short1, long2 }
BurstType1 ::=                  ENUMERATED { ms4, ms8, ms16 }
BurstType2 ::=                  ENUMERATED { ms3, ms6 }
CCTrCH-PowerControlInfo ::=     SEQUENCE {
    tfcs-Identity                TFCS-Identity                OPTIONAL,
    ul-DPCH-PowerControlInfo     UL-DPCH-PowerControlInfo
}
CD-AccessSlotSubchannel ::=      INTEGER (0..11)
CD-AccessSlotSubchannelList ::=  SEQUENCE (SIZE (1..maxPCPCH-CDsubCh)) OF
    CD-AccessSlotSubchannel
CD-CA-ICH-ChannelisationCode ::= INTEGER (0..255)
CD-PreambleScramblingCode ::=   INTEGER (0..79)
CD-SignatureCode ::=            INTEGER (0..15)
CD-SignatureCodeList ::=        SEQUENCE (SIZE (1..maxPCPCH-CDsig)) OF
    CD-SignatureCode
CellParametersID ::=            INTEGER (0..127)
Cfntargetsfmframeoffset ::=     INTEGER(0..255)
ChannelAssignmentActive ::=      CHOICE {
    notActive                    NULL,
    isActive                    AvailableMinimumSF-ListVCAM
}
ChannelisationCode256 ::=       INTEGER (0..255)
ChannelReqParamsForUCSM ::=     SEQUENCE {
    availableAP-SignatureList     AvailableAP-SignatureList,
    availableAP-SubchannelList    AvailableAP-SubchannelList    OPTIONAL
}
ClosedLoopTimingAdjMode ::=     ENUMERATED {
    slot1, slot2 }
CodeNumberDSCH ::=             INTEGER (0..255)
CodeRange ::=                  SEQUENCE {
    pdsch-CodeMapList            PDSCH-CodeMapList,
    codeNumberStart              CodeNumberDSCH,
    codeNumberStop               CodeNumberDSCH
}
CodeWordSet ::=                ENUMERATED {
    longCWS,
    mediumCWS,
    shortCWS,
    ssdtOff }
CommonTimeslotInfo ::=         SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode       SecondInterleavingMode,
    tfci-Coding                  TFCI-Coding                OPTIONAL,
    puncturingLimit              PuncturingLimit,
    repetitionPeriodAndLength     RepetitionPeriodAndLength    OPTIONAL
}
CommonTimeslotInfoSCCPCH ::=    SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode       SecondInterleavingMode,
}

```

```

    tfci-Coding                TFCI-Coding                OPTIONAL,
    puncturingLimit            PuncturingLimit,
    repetitionPeriodLengthAndOffset  RepetitionPeriodLengthAndOffset  OPTIONAL
}

ConstantValue ::=                INTEGER (-35..10)

CPCH-PersistenceLevels ::=        SEQUENCE {
    cpch-SetID                    CPCH-SetID,
    dynamicPersistenceLevelTF-List  DynamicPersistenceLevelTF-List
}

CPCH-PersistenceLevelsList ::=    SEQUENCE (SIZE (1..maxCPCHsets)) OF
    CPCH-PersistenceLevels

CPCH-SetInfo ::=                  SEQUENCE {
    cpch-SetID                    CPCH-SetID,
    transportFormatSet            TransportFormatSet,
    tfcs                          TFCS,
    ap-PreambleScramblingCode     AP-PreambleScramblingCode,
    ap-AICH-ChannelisationCode    AP-AICH-ChannelisationCode,
    cd-PreambleScramblingCode     CD-PreambleScramblingCode,
    cd-CA-ICH-ChannelisationCode  CD-CA-ICH-ChannelisationCode,
    cd-AccessSlotSubchannelList   CD-AccessSlotSubchannelList   OPTIONAL,
    cd-SignatureCodeList          CD-SignatureCodeList          OPTIONAL,
    deltaPp-m                     DeltaPp-m,
    ul-DPCCH-SlotFormat           UL-DPCCH-SlotFormat,
    n-StartMessage                N-StartMessage,
    n-EOT                          N-EOT,
    channelAssignmentActive        ChannelAssignmentActive,
    -- TABULAR: VCAM info has been nested inside ChannelAssignmentActive,
    -- which in turn is mandatory since it's only a binary choice.
    cpch-StatusIndicationMode     CPCH-StatusIndicationMode,
    pcpch-ChannelInfoList         PCPCH-ChannelInfoList
}

CPCH-SetInfoList ::=              SEQUENCE (SIZE (1..maxCPCHsets)) OF
    CPCH-SetInfo

CPCH-StatusIndicationMode ::=    ENUMERATED {
    pa-mode,
    pamsf-mode }

CSICH-PowerOffset ::=            INTEGER (-10..5)

-- DefaultDPCH-OffsetValueFDD and DefaultDPCH-OffsetValueTDD corresponds to
-- IE "Default DPCH Offset Value" depending on the mode.
-- Actual value = IE value * 512
DefaultDPCH-OffsetValueFDD ::=    INTEGER (0..599)

DefaultDPCH-OffsetValueTDD ::=    INTEGER (0..7)

DeltaPp-m ::=                     INTEGER (-10..10)

-- Actual value = IE value * 0.1
DeltaSIR ::=                       INTEGER (0..30)

DL-CCTrCh ::=                     SEQUENCE {
    tfcs-Identity                  TFCS-IdentityPlain            OPTIONAL,
    timeInfo                       TimeInfo,
    dl-CCTrCH-TimeslotsCodes       DownlinkTimeslotsCodes        OPTIONAL,
    ul-CCTrChTPCList              UL-CCTrChTPCList              OPTIONAL
}

DL-CCTrChList ::=                 SEQUENCE (SIZE (1..maxCCTrCH)) OF
    DL-CCTrCh

DL-ChannelisationCode ::=         SEQUENCE {
    secondaryScramblingCode        SecondaryScramblingCode        OPTIONAL,
    sf-AndCodeNumber              SF512-AndCodeNumber,
    scramblingCodeChange           ScramblingCodeChange          OPTIONAL
}

DL-ChannelisationCodeList ::=     SEQUENCE (SIZE (1..maxDPCH-DLchan)) OF
    DL-ChannelisationCode

DL-CommonInformation ::=         SEQUENCE {
    dl-DPCH-InfoCommon            DL-DPCH-InfoCommon            OPTIONAL,

```

```

modeSpecificInfo          CHOICE {
  fdd                     SEQUENCE {
    defaultDPCH-OffsetValue      DefaultDPCH-OffsetValueFDD  OPTIONAL,
    dpch-CompressedModeInfo      DPCH-CompressedModeInfo    OPTIONAL,
    tx-DiversityMode             TX-DiversityMode          OPTIONAL,
    ssdt-Information             SSDT-Information          OPTIONAL
  },
  tdd                     SEQUENCE {
    defaultDPCH-OffsetValue      DefaultDPCH-OffsetValueTDD  OPTIONAL
  }
}

DL-CommonInformationPost ::= SEQUENCE {
  dl-DPCH-InfoCommon          DL-DPCH-InfoCommonPost
}

DL-CommonInformationPredef ::= SEQUENCE {
  dl-DPCH-InfoCommon          DL-DPCH-InfoCommonPredef  OPTIONAL,
  modeSpecificInfo            CHOICE {
    fdd                       SEQUENCE {
      defaultDPCH-OffsetValue  DefaultDPCH-OffsetValueFDD
    },
    tdd                       SEQUENCE {
      defaultDPCH-OffsetValue  DefaultDPCH-OffsetValueTDD
    }
  }
}

DL-CompressedModeMethod ::= ENUMERATED {
  puncturing, sf-2,
  higherLayerScheduling }

DL-DPCH-InfoCommon ::= SEQUENCE {
  cfnHandling                CHOICE {
    maintain                  NULL,
    initialise                 SEQUENCE {
      cfntargetsfnsframeoffset  Cfntargetsfnsframeoffset  OPTIONAL
    }
  },
  modeSpecificInfo            CHOICE {
    fdd                       SEQUENCE {
      dl-DPCH-PowerControlInfo  DL-DPCH-PowerControlInfo  OPTIONAL,
      dl-rate-matching-restriction  Dl-rate-matching-restriction  OPTIONAL,
      spreadingFactorAndPilot      SF512-AndPilot,
      -- TABULAR: The number of pilot bits is nested inside the spreading factor.
      positionFixedOrFlexible      PositionFixedOrFlexible,
      tfci-Existence              BOOLEAN
    },
    tdd                       SEQUENCE {
      commonTimeslotInfo        CommonTimeslotInfo        OPTIONAL
    }
  }
}

DL-DPCH-InfoCommonPost ::= SEQUENCE {
  dl-DPCH-PowerControlInfo    DL-DPCH-PowerControlInfo    OPTIONAL
}

DL-DPCH-InfoCommonPredef ::= SEQUENCE {
  modeSpecificInfo            CHOICE {
    fdd                       SEQUENCE {
      spreadingFactorAndPilot      SF512-AndPilot,
      -- TABULAR: The number of pilot bits is nested inside the spreading factor.
      positionFixedOrFlexible      PositionFixedOrFlexible,
      tfci-Existence              BOOLEAN
    },
    tdd                       SEQUENCE {
      commonTimeslotInfo        CommonTimeslotInfo
    }
  }
}

DL-DPCH-InfoPerRL ::= CHOICE {
  fdd                         SEQUENCE {
    pCPICH-UsageForChannelEst      PCPICH-UsageForChannelEst,
    dcph-FrameOffset              DPCH-FrameOffset,
    secondaryCPICH-Info            SecondaryCPICH-Info          OPTIONAL,

```

<pre> dl-ChannelisationCodeList tpc-CombinationIndex ssdt-CellIdentity closedLoopTimingAdjMode }, tdd } </pre>	<pre> DL-ChannelisationCodeList, TPC-CombinationIndex, SSDT-CellIdentity ClosedLoopTimingAdjMode </pre>	<pre> OPTIONAL, OPTIONAL </pre>
<pre> DL-DPCH-InfoPerRL-PostFDD ::=   pCPICH-UsageForChannelEst   dl-ChannelisationCode   tpc-CombinationIndex } </pre>	<pre> DL-CCTrChList  SEQUENCE {   PCPICH-UsageForChannelEst,   DL-ChannelisationCode,   TPC-CombinationIndex } </pre>	
<pre> DL-DPCH-InfoPerRL-PostTDD ::=   dl-CCTrCH-TimeslotsCodes } </pre>	<pre> SEQUENCE {   DownlinkTimeslotsCodes } </pre>	
<pre> DL-DPCH-PowerControlInfo ::=   modeSpecificInfo   fdd     dpc-Mode   },   tdd     tpc-StepSizeTDD   } } </pre>	<pre> SEQUENCE {   CHOICE {     SEQUENCE {       DPC-Mode     }     SEQUENCE {       TPC-StepSizeTDD     }   } } </pre>	<pre> OPTIONAL </pre>
<pre> DL-FrameType ::= </pre>	<pre> ENUMERATED {   dl-FrameTypeA, dl-FrameTypeB } </pre>	
<pre> DL-InformationPerRL ::=   modeSpecificInfo   fdd     primaryCPICH-Info     pdsch-SHO-DCH-Info     pdsch-CodeMapping   },   tdd     PrimaryCCPCH-Info   },   dl-DPCH-InfoPerRL   secondaryCCPCH-Info } </pre>	<pre> SEQUENCE {   CHOICE {     SEQUENCE {       PrimaryCPICH-Info,       PDSCH-SHO-DCH-Info     }     PrimaryCCPCH-Info   }   DL-DPCH-InfoPerRL   SecondaryCCPCH-Info } </pre>	<pre> OPTIONAL, OPTIONAL OPTIONAL, OPTIONAL </pre>
<pre> DL-InformationPerRL-List ::= </pre>	<pre> SEQUENCE (SIZE (1..maxRL)) OF   DL-InformationPerRL </pre>	
<pre> DL-InformationPerRL-ListPostFDD ::= </pre>	<pre> SEQUENCE (SIZE (1..maxRL)) OF   DL-InformationPerRL-PostFDD </pre>	
<pre> DL-InformationPerRL-PostFDD ::=   primaryCPICH-Info   dl-DPCH-InfoPerRL } </pre>	<pre> SEQUENCE {   PrimaryCPICH-Info,   DL-DPCH-InfoPerRL-PostFDD } </pre>	
<pre> DL-InformationPerRL-PostTDD ::=   primaryCCPCH-Info   dl-DPCH-InfoPerRL } </pre>	<pre> SEQUENCE {   PrimaryCCPCH-InfoPost,   DL-DPCH-InfoPerRL-PostTDD } </pre>	
<pre> DL-PDSCH-Information ::=   pdsch-SHO-DCH-Info   pdsch-CodeMapping } </pre>	<pre> SEQUENCE {   PDSCH-SHO-DCH-Info   PDSCH-CodeMapping } </pre>	<pre> OPTIONAL, OPTIONAL </pre>
<pre> DL-rate-matching-restriction ::=   restrictedTrCH-InfoList } </pre>	<pre> SEQUENCE {   RestrictedTrCH-InfoList } </pre>	<pre> OPTIONAL </pre>
<pre> DL-TS-ChannelisationCode ::= </pre>	<pre> ENUMERATED {   cc16-1, cc16-2, cc16-3, cc16-4,   cc16-5, cc16-6, cc16-7, cc16-8,   cc16-9, cc16-10, cc16-11, cc16-12,   cc16-13, cc16-14, cc16-15, cc16-16 } </pre>	
<pre> DL-TS-ChannelisationCodesShort ::=   codesRepresentation </pre>	<pre> SEQUENCE {   CHOICE { </pre>	

```

        consecutive
            firstChannelisationCode
            lastChannelisationCode
        },
        bitmap
    }
}

DownlinkAdditionalTimeslots ::= SEQUENCE {
    parameters CHOICE {
        sameAsLast SEQUENCE {
            timeslotNumber
        },
        newParameters SEQUENCE {
            individualTimeslotInfo
            dl-TS-ChannelisationCodesShort
        }
    }
}

DownlinkTimeslotsCodes ::= SEQUENCE {
    firstIndividualTimeslotInfo IndividualTimeslotInfo,
    dl-TS-ChannelisationCodesShort DL-TS-ChannelisationCodesShort,
    moreTimeslots CHOICE {
        noMore NULL,
        additionalTimeslots CHOICE {
            consecutive INTEGER (1..maxTS-1),
            timeslotList SEQUENCE (SIZE (1..maxTS-1)) OF
                DownlinkAdditionalTimeslots
        }
    }
}

DPC-Mode ::= ENUMERATED {
    singleTPC,
    tpcTripletInSoft }

-- The actual value of DPCCH power offset is the value of this IE * 2.
DPCCH-PowerOffset ::= INTEGER (-82..-3)

DPCH-CompressedModeInfo ::= SEQUENCE {
    tgp-SequenceList
}

DPCH-CompressedModeStatusInfo ::= SEQUENCE (SIZE (1..maxTGPS)) OF
    TGP-SequenceShort

-- TABULAR: Actual value = IE value * 256
DPCH-FrameOffset ::= INTEGER (0..149)

DSCH-Mapping ::= SEQUENCE {
    maxTFCI-Field2Value MaxTFCI-Field2Value,
    spreadingFactor SF-PDSCH,
    codeNumber CodeNumberDSCH,
    multiCodeInfo MultiCodeInfo
}

DSCH-MappingList ::= SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    DSCH-Mapping

DSCH-RadioLinkIdentifier ::= INTEGER (0..511)

DurationTimeInfo ::= INTEGER (1..4096)

-- TABULAR : value [Duration = infinite] is the value by default,
-- and is encoded by absence of the full sequence. If the sequence is present,
-- thefield is absent, the default is respectivelyinfinite. Presence of the
-- field absent should not be used, but shall be understood as if the
-- sequence was absent.

DynamicPersistenceLevel ::= INTEGER (1..8)

DynamicPersistenceLevelList ::= SEQUENCE (SIZE (1..maxPRACH)) OF
    DynamicPersistenceLevel

DynamicPersistenceLevelTF-List ::= SEQUENCE (SIZE (1..maxTF-CPCH)) OF
    DynamicPersistenceLevel

```

```

FACH-PCH-Information ::=
    transportFormatSet
    transportChannelIdentity
    ctch-Indicator
}
SEQUENCE {
    TransportFormatSet,
    TransportChannelIdentity,
    BOOLEAN
}

FACH-PCH-InformationList ::=
SEQUENCE (SIZE (1..maxFACH)) OF
    FACH-PCH-Information

FrequencyInfo ::=
    modeSpecificInfo
    fdd
    tdd
}
SEQUENCE {
    CHOICE {
        FrequencyInfoFDD,
        FrequencyInfoTDD
    }
}

FrequencyInfoFDD ::=
    uarfcn-UL
    uarfcn-DL
}
SEQUENCE {
    UARFCN
    UARFCN
    OPTIONAL,
}

FrequencyInfoTDD ::=
    uarfcn-Nt
}
SEQUENCE {
    UARFCN
}

IndividualTimeslotInfo ::=
    timeslotNumber
    tfci-Existence
    midambleShiftAndBurstType
}
SEQUENCE {
    TimeslotNumber,
    BOOLEAN,
    MidambleShiftAndBurstType
}

IndividualTS-Interference ::=
    timeslot
    ul-TimeslotInterference
}
SEQUENCE {
    TimeslotNumber,
    UL-Interference
}

IndividualTS-InterferenceList ::=
SEQUENCE (SIZE (1..maxTS)) OF
    IndividualTS-Interference

ITP ::=
ENUMERATED {
    mode0, mode1
}

MaxAllowedUL-TX-Power ::=
INTEGER (-50..33)

MaxAvailablePCPCH-Number ::=
INTEGER (1..64)

MaxTFCI-Field2Value ::=
INTEGER (1..1023)

MidambleConfiguration ::=
    burstType1
    -- TABULAR: The default value for BurstType2 has not been specified due to
    -- compactness reasons.
    burstType2
}
SEQUENCE {
    BurstType1
    BurstType2
    DEFAULT ms8,
}

MidambleShiftAndBurstType ::=
    burstType
    type1
        midambleAllocationMode
        defaultMidamble
        commonMidamble
        ueSpecificMidamble
        midambleShift
    },
    type2
        midambleAllocationMode
        defaultMidamble
        commonMidamble
        ueSpecificMidamble
        midambleShift
    },
    type3
        midambleAllocationMode
        defaultMidamble
}
SEQUENCE {
    CHOICE {
        SEQUENCE {
            CHOICE {
                NULL,
                NULL,
                SEQUENCE {
                    MidambleShiftLong
                }
            }
        }
        SEQUENCE {
            CHOICE {
                NULL,
                NULL,
                SEQUENCE {
                    MidambleShiftShort
                }
            }
        }
        SEQUENCE {
            CHOICE {
                NULL,
            }
        }
    }
}

```

```

        ueSpecificMidamble
        midambleShift
    }
}
}
}
}

MidambleShiftLong ::=
    INTEGER (0..15)

MidambleShiftShort ::=
    INTEGER (0..5)

MinimumSpreadingFactor ::=
    ENUMERATED {
        sf4, sf8, sf16, sf32,
        sf64, sf128, sf256 }

MultiCodeInfo ::=
    INTEGER (1..16)

N-EOT ::=
    INTEGER (0..7)

N-GAP ::=
    ENUMERATED {
        f2, f4, f8 }

N-PCH ::=
    INTEGER (1..8)

N-StartMessage ::=
    INTEGER (1..8)

NB01 ::=
    INTEGER (0..50)

NF-Max ::=
    INTEGER (1..64)

NumberOfDPDCH ::=
    INTEGER (1..maxDPDCH-UL)

NumberOfFBI-Bits ::=
    INTEGER (1..2)

OpenLoopPowerControl-TDD ::=
    SEQUENCE {
        primaryCCPCH-TX-Power
        alpha
        prach-ConstantValue
        dpch-ConstantValue
        pusoch-ConstantValue
    }
    PrimaryCCPCH-TX-Power,
    Alpha
    ConstantValue,
    ConstantValue,
    ConstantValue
    OPTIONAL,
    OPTIONAL

PagingIndicatorLength ::=
    ENUMERATED {
        pi4, pi8, pi16 }

PC-Preamble ::=
    ENUMERATED {
        pcp0, pcp15 }

PCP-Length ::=
    ENUMERATED {
        as0, as8 }

PCPCH-ChannelInfo ::=
    SEQUENCE {
        pcpch-UL-ScramblingCode
        pcpch-DL-ChannelisationCode
        pcpch-DL-ScramblingCode
        pcp-Length
        ucsch-Info
    }
    INTEGER (0..79),
    INTEGER (0..511),
    SecondaryScramblingCode
    PCP-Length,
    UCSCH-Info
    OPTIONAL,
    OPTIONAL

PCPCH-ChannelInfoList ::=
    SEQUENCE (SIZE (1..maxPCPCHs)) OF
        PCPCH-ChannelInfo

PCPICH-UsageForChannelEst ::=
    ENUMERATED {
        mayBeUsed,
        shallNotBeUsed }

PDSCH-CapacityAllocationInfo ::=
    SEQUENCE {
        pdsch-PowerControlInfo
        pdsch-AllocationPeriodInfo
        tfcs-Identity
        configuration
        old-Configuration
        pdsch-Identity
    },
    new-Configuration
    pdsch-Info
    PDSCH-PowerControlInfo
    AllocationPeriodInfo,
    TFCS-IdentityPlain
    CHOICE {
        SEQUENCE {
            PDSCH-Identity
        }
        SEQUENCE {
            PDSCH-Info,
    }
    OPTIONAL,
    OPTIONAL,

```



<pre>         pdsch-Identity       }     }   } </pre>	<pre> PDSCH-Identity </pre>	<pre> OPTIONAL </pre>
<pre> PDSCH-CodeInfo ::=   spreadingFactor   codeNumber   multiCodeInfo } </pre>	<pre> SEQUENCE {   SF-PDSCH,   CodeNumberDSCH,   MultiCodeInfo } </pre>	
<pre> PDSCH-CodeInfoList ::= </pre>	<pre> SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF   PDSCH-CodeInfo </pre>	
<pre> PDSCH-CodeMap ::=   spreadingFactor   multiCodeInfo } </pre>	<pre> SEQUENCE {   SF-PDSCH,   MultiCodeInfo } </pre>	
<pre> PDSCH-CodeMapList ::= </pre>	<pre> SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF   PDSCH-CodeMap </pre>	
<pre> PDSCH-CodeMapping ::=   dl-ScramblingCode   signallingMethod   codeRange   tfci-Range   explicit   replace } </pre>	<pre> SEQUENCE {   SecondaryScramblingCode   CHOICE {     CodeRange,     DSCH-MappingList,     PDSCH-CodeInfoList,     ReplacedPDSCH-CodeInfoList   } } </pre>	<pre> OPTIONAL, </pre>
<pre> PDSCH-Identity ::= </pre>	<pre> INTEGER (1..hiPDSCHidentities) </pre>	
<pre> PDSCH-Info ::=   tfcs-Identity   commonTimeslotInfo   pdsch-TimeslotsCodes } </pre>	<pre> SEQUENCE {   TFCS-IdentityPlain   CommonTimeslotInfo   DownlinkTimeslotsCodes } </pre>	<pre> OPTIONAL, OPTIONAL, OPTIONAL </pre>
<pre> PDSCH-PowerControlInfo ::=   tpc-StepSizeTDD   ul-CCTrChTPCList } </pre>	<pre> SEQUENCE {   TPC-StepSizeTDD   UL-CCTrChTPCList } </pre>	<pre> OPTIONAL, OPTIONAL </pre>
<pre> PDSCH-SHO-DCH-Info ::=   dsch-RadioLinkIdentifier   tfci-CombiningSet   rl-IdentifierList } </pre>	<pre> SEQUENCE {   DSCH-RadioLinkIdentifier,   TFCI-CombiningSet   RL-IdentifierList } </pre>	<pre> OPTIONAL, OPTIONAL </pre>
<pre> PDSCH-SysInfo ::=   pdsch-Identity   pdsch-Info   dsch-TFS   dsch-TFCS } </pre>	<pre> SEQUENCE {   PDSCH-Identity,   PDSCH-Info,   TransportFormatSet   TFCS } </pre>	<pre> OPTIONAL, OPTIONAL </pre>
<pre> PDSCH-SysInfoList ::= </pre>	<pre> SEQUENCE (SIZE (1..maxPDSCH)) OF   PDSCH-SysInfo </pre>	
<pre> PDSCH-SysInfoList-SFN ::=   pdsch-SysInfo   sfm-TimeInfo } </pre>	<pre> SEQUENCE (SIZE (1..maxPDSCH)) OF   SEQUENCE {     PDSCH-SysInfo,     SFN-TimeInfo   } </pre>	<pre> OPTIONAL </pre>
<pre> PersistenceScalingFactor ::= </pre>	<pre> ENUMERATED {   psf0-9, psf0-8, psf0-7, psf0-6,   psf0-5, psf0-4, psf0-3, psf0-2 } </pre>	
<pre> PersistenceScalingFactorList ::= </pre>	<pre> SEQUENCE (SIZE (1..maxASCPersist)) OF   PersistenceScalingFactor </pre>	
<pre> PI-CountPerFrame ::= </pre>	<pre> ENUMERATED {   e18, e36, e72, e144 } </pre>	

```

PICH-Info ::=
  fdd
    channelisationCode256
    pi-CountPerFrame
    sttd-Indicator
  },
  tdd
    channelisationCode
    timeslot
    burstType
      type-1
      type-2
    }
    repetitionPeriodLengthOffset
    pagingIndicatorLength
    n-GAP
    n-PCH
  }
}

PICH-PowerOffset ::=
  INTEGER (-10..5)

PilotBits128 ::=
  ENUMERATED {
    pb4, pb8 }

PilotBits256 ::=
  ENUMERATED {
    pb2, pb4, pb8 }

PositionFixedOrFlexible ::=
  ENUMERATED {
    fixed,
    flexible }

PowerControlAlgorithm ::=
  algorithm1
  algorithm2
}

PowerRampStep ::=
  INTEGER (1..8)

PRACH-Midamble ::=
  ENUMERATED {
    direct,
    direct-Inverted }

PRACH-Partitioning ::=
  fdd
  tdd
}

PRACH-PowerOffset ::=
  powerRampStep
  preambleRetransMax
}

PRACH-RACH-Info ::=
  modeSpecificInfo
  fdd
    availableSignatures
    availableSF
    preambleScramblingCodeWordNumber
    puncturingLimit
    availableSubChannelNumbers
  },
  tdd
    timeslot
    channelisationCode
    prach-Midamble
  }
}

PRACH-SystemInformation ::=
  prach-RACH-Info
  transportChannelIdentity
  rach-TransportFormatSet
  rach-TFCS
  prach-Partitioning
}

CHOICE {
  SEQUENCE {
    ChannelisationCode256,
    PI-CountPerFrame,
    BOOLEAN
  }
  SEQUENCE {
    TDD-PICH-CCode
    TimeslotNumber
    CHOICE {
      MidambleShiftLong,
      MidambleShiftShort
    }
    RepPerLengthOffset-PICH
    PagingIndicatorLength
    N-GAP
    N-PCH
  }
  OPTIONAL,
  OPTIONAL,
  OPTIONAL,
  DEFAULT pi4,
  DEFAULT f4,
  DEFAULT 2
}

INTEGER (-10..5)

ENUMERATED {
  pb4, pb8 }

ENUMERATED {
  pb2, pb4, pb8 }

ENUMERATED {
  fixed,
  flexible }

CHOICE {
  TPC-StepSizeFDD,
  NULL
}

INTEGER (1..8)

ENUMERATED {
  direct,
  direct-Inverted }

CHOICE {
  SEQUENCE (SIZE (1..maxASC)) OF
  ASCSetting,
  SEQUENCE (SIZE (1..maxASC)) OF
  ASC
}

SEQUENCE {
  PowerRampStep,
  PreambleRetransMax
}

SEQUENCE {
  CHOICE {
    SEQUENCE {
      AvailableSignatures,
      SF-PRACH,
      PreambleScramblingCodeWordNumber,
      PuncturingLimit,
      AvailableSubChannelNumbers
    }
    SEQUENCE {
      TimeslotNumber,
      TDD-PRACH-CCodeList,
      PRACH-Midamble
    }
  }
  OPTIONAL
}

SEQUENCE {
  PRACH-RACH-Info,
  TransportChannelIdentity,
  TransportFormatSet
  TFCS
  PRACH-Partitioning
  OPTIONAL,
  OPTIONAL,
  OPTIONAL,
}

```

<pre> persistenceScalingFactorList ac-To-ASC-MappingTable modeSpecificInfo   fdd     primaryCPICH-TX-Power     constantValue     prach-PowerOffset     rach-TransmissionParameters     aich-Info   },   tdd } </pre>	<pre> PersistenceScalingFactorList AC-To-ASC-MappingTable CHOICE {   SEQUENCE {     PrimaryCPICH-TX-Power     ConstantValue     PRACH-PowerOffset     RACH-TransmissionParameters     AICH-Info   },   NULL } </pre>	<pre> OPTIONAL, OPTIONAL, OPTIONAL, OPTIONAL, OPTIONAL, OPTIONAL </pre>
<pre> PRACH-SystemInformationList ::= </pre>	<pre> SEQUENCE (SIZE (1..maxPRACH)) OF   PRACH-SystemInformation </pre>	
<pre> PreambleRetransMax ::= </pre>	<pre> INTEGER (1..64) </pre>	
<pre> PreambleScramblingCodeWordNumber ::= </pre>	<pre> INTEGER (0..15) </pre>	
<pre> PreDefPhyChConfiguration ::=   ul-DPCH-InfoPredef   dl-CommonInformationPredef } </pre>	<pre> SEQUENCE {   UL-DPCH-InfoPredef,   DL-CommonInformationPredef } </pre>	<pre> OPTIONAL </pre>
<pre> PrimaryCCPCH-Info ::=   fdd     tx-DiversityIndicator   },   tdd     syncCase       syncCase1         timeslot       },       syncCase2         timeslotSync2     }     cellParametersID     blockSTTD-Indicator } </pre>	<pre> CHOICE {   SEQUENCE {     BOOLEAN   },   SEQUENCE {     CHOICE {       SEQUENCE {         TimeslotNumber       },       SEQUENCE {         TimeslotSync2       }     }     CellParametersID     BOOLEAN   } } </pre>	<pre> OPTIONAL, OPTIONAL, </pre>
<pre> PrimaryCCPCH-InfoPost ::=   syncCase     syncCase1       timeslot     },     syncCase2       timeslotSync2   },   cellParametersID   blockSTTD-Indicator } </pre>	<pre> SEQUENCE {   CHOICE {     SEQUENCE {       TimeslotNumber     },     SEQUENCE {       TimeslotSync2     }   },   CellParametersID,   BOOLEAN } </pre>	
<pre> PrimaryCCPCH-TX-Power ::= </pre>	<pre> INTEGER (6..43) </pre>	
<pre> PrimaryCPICH-Info ::=   primaryScramblingCode } </pre>	<pre> SEQUENCE {   PrimaryScramblingCode } </pre>	
<pre> PrimaryCPICH-TX-Power ::= </pre>	<pre> INTEGER (-10..50) </pre>	
<pre> PrimaryScramblingCode ::= </pre>	<pre> INTEGER (0..511) </pre>	
<pre> PuncturingLimit ::= </pre>	<pre> ENUMERATED {   p10-40, p10-44, p10-48, p10-52, p10-56,   p10-60, p10-64, p10-68, p10-72, p10-76,   p10-80, p10-84, p10-88, p10-92, p10-96, p11 } </pre>	
<pre> PUSCH-CapacityAllocationInfo ::=   pusch-Allocation   pusch-AllocationPending   pusch-AllocationAssignment   pdsch-AllocationPeriodInfo   pusch-PowerControlInfo } </pre>	<pre> SEQUENCE {   CHOICE {     NULL,     SEQUENCE {       AllocationPeriodInfo,       UL-TargetSIR     }   } } </pre>	<pre> OPTIONAL, </pre>

```

        tfcs-Identity                TFCS-IdentityPlain        OPTIONAL,
        configuration                 CHOICE {
            old-Configuration         SEQUENCE {
                pusch-Identity
            },
            new-Configuration         SEQUENCE {
                pusch-Info,
                pusch-Identity
            }
        }
    }
}

PUSCH-Identity ::=                INTEGER (1..hiPUSCHidentities)

PUSCH-Info ::=                    SEQUENCE {
    tfcs-Identity                TFCS-IdentityPlain        OPTIONAL,
    commonTimeslotInfo           CommonTimeslotInfo        OPTIONAL,
    pusch-TimeslotsCodes         UplinkTimeslotsCodes    OPTIONAL
}

PUSCH-SysInfo ::=                SEQUENCE {
    pusch-Identity                PUSCH-Identity,
    pusch-Info                    PUSCH-Info,
    usch-TFS                      TransportFormatSet        OPTIONAL,
    usch-TFCS                     TFCS                      OPTIONAL
}

PUSCH-SysInfoList ::=            SEQUENCE (SIZE (1..maxPUSCH)) OF
    PUSCH-SysInfo

PUSCH-SysInfoList-SFN ::=        SEQUENCE (SIZE (1..maxPDSCH)) OF
    SEQUENCE {
        pusch-SysInfo             PUSCH-SysInfo,
        sfn-TimeInfo              SFN-TimeInfo
    }
}

RACH-TransmissionParameters ::=  SEQUENCE {
    mmax                          INTEGER (1..32),
    nb01Min                       NB01,
    nb01Max                       NB01
}

ReducedScramblingCodeNumber ::=  INTEGER (0..8191)

RepetitionPeriodAndLength ::=    CHOICE {
    repetitionPeriod1             NULL,
    repetitionPeriod2             INTEGER (1..1),
    -- repetitionPeriod2 could just as well be NULL also.
    repetitionPeriod4             INTEGER (1..3),
    repetitionPeriod8             INTEGER (1..7),
    repetitionPeriod16            INTEGER (1..15),
    repetitionPeriod32            INTEGER (1..31),
    repetitionPeriod64            INTEGER (1..63)
}

RepetitionPeriodLengthAndOffset ::= CHOICE {
    repetitionPeriod1             NULL,
    repetitionPeriod2             SEQUENCE {
        length                    NULL,
        offset                     INTEGER (0..1)
    },
    repetitionPeriod4             SEQUENCE {
        length                    INTEGER (1..3),
        offset                     INTEGER (0..3)
    },
    repetitionPeriod8             SEQUENCE {
        length                    INTEGER (1..7),
        offset                     INTEGER (0..7)
    },
    repetitionPeriod16            SEQUENCE {
        length                    INTEGER (1..15),
        offset                     INTEGER (0..15)
    },
    repetitionPeriod32            SEQUENCE {
        length                    INTEGER (1..31),
        offset                     INTEGER (0..31)
    }
}

```

```

    },
    repetitionPeriod64
    length
    offset
  }
}

ReplacedPDSCH-CodeInfo ::= SEQUENCE {
    tfci-Field2           MaxTFCI-Field2Value,
    spreadingFactor      SF-PDSCH,
    codeNumber           CodeNumberDSCH,
    multiCodeInfo       MultiCodeInfo
}

ReplacedPDSCH-CodeInfoList ::= SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
    ReplacedPDSCH-CodeInfo

RepPerLengthOffset-PICH ::= CHOICE {
    rpp4-2           INTEGER (0..3),
    rpp8-2           INTEGER (0..7),
    rpp8-4           INTEGER (0..7),
    rpp16-2          INTEGER (0..15),
    rpp16-4          INTEGER (0..15),
    rpp32-2          INTEGER (0..31),
    rpp32-4          INTEGER (0..31),
    rpp64-2          INTEGER (0..63),
    rpp64-4          INTEGER (0..63)
}

RestrictedTrCH ::= SEQUENCE {
    restrictedDL-TrCH-Identity
    allowedTFIList
}

RestrictedTrCH-InfoList ::= SEQUENCE (SIZE(1..maxTrCH)) OF
    RestrictedTrCH

RL-AdditionInformation ::= SEQUENCE {
    primaryCPICH-Info
    dl-DPCH-InfoPerRL
    tfci-CombiningIndicator
    sccpch-InfoForFACH
} OPTIONAL

RL-AdditionInformationList ::= SEQUENCE (SIZE (1..maxRL)) OF
    RL-AdditionInformation

RL-IdentifierList ::= SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RL-RemovalInformationList ::= SEQUENCE (SIZE (1..maxRL-1)) OF
    PrimaryCPICH-Info

RPP ::= ENUMERATED {
    mode0, mode1
}

S-Field ::= ENUMERATED {
    e1bit, e2bits
}

SCCPCH-ChannelisationCode ::= ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16
}

SCCPCH-ChannelisationCodeList ::= SEQUENCE (SIZE (1..16)) OF
    SCCPCH-ChannelisationCode

SCCPCH-InfoForFACH ::= SEQUENCE {
    secondaryCCPCH-Info
    tfcs
    fach-PCH-InformationList
    sib-ReferenceListFACH
}

SCCPCH-SystemInformation ::= SEQUENCE {
    secondaryCCPCH-Info
    tfcs
} OPTIONAL,

```

```

    fach-PCH-InformationList          FACH-PCH-InformationList          OPTIONAL,
    pich-Info                          PICH-Info                          OPTIONAL
}

SCCPCH-SystemInformationList ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
    SCCPCH-SystemInformation

ScramblingCodeChange ::= ENUMERATED {
    codeChange, noCodeChange }

ScramblingCodeType ::= ENUMERATED {
    shortSC,
    longSC }

SecondaryCCPCH-Info ::= SEQUENCE {
    modeSpecificInfo          CHOICE {
        fdd                    SEQUENCE {
            pCPICH-UsageForChannelEst    PCPICH-UsageForChannelEst,
            secondaryCPICH-Info          SecondaryCPICH-Info          OPTIONAL,
            secondaryScramblingCode      SecondaryScramblingCode      OPTIONAL,
            sttG-Indicator                BOOLEAN,
            sf-AndCodeNumber              SF256-AndCodeNumber,
            pilotSymbolExistence          BOOLEAN,
            tfci-Existence                BOOLEAN,
            positionFixedOrFlexible        PositionFixedOrFlexible,
            timingOffset                   TimingOffset                   DEFAULT 0
        },
        tdd                    SEQUENCE {
            -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
            commonTimeslotInfo          CommonTimeslotInfoSCCPCH,
            individualTimeslotInfo      IndividualTimeslotInfo,
            channelisationCode          SCCPCH-ChannelisationCodeList
        }
    }
}

SecondaryCPICH-Info ::= SEQUENCE {
    secondaryDL-ScramblingCode          SecondaryScramblingCode          OPTIONAL,
    channelisationCode                  ChannelisationCode256
}

SecondaryScramblingCode ::= INTEGER (1..15)

SecondInterleavingMode ::= ENUMERATED {
    frameRelated, timeslotRelated }

-- SF256-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF256-AndCodeNumber ::= CHOICE {
    sf4            INTEGER (0..3),
    sf8            INTEGER (0..7),
    sf16           INTEGER (0..15),
    sf32           INTEGER (0..31),
    sf64           INTEGER (0..63),
    sf128          INTEGER (0..127),
    sf256          INTEGER (0..255)
}

-- SF512-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF512-AndCodeNumber ::= CHOICE {
    sf4            INTEGER (0..3),
    sf8            INTEGER (0..7),
    sf16           INTEGER (0..15),
    sf32           INTEGER (0..31),
    sf64           INTEGER (0..63),
    sf128          INTEGER (0..127),
    sf256          INTEGER (0..255),
    sf512          INTEGER (0..511)
}

-- SF512-AndPilot encodes both "Spreading factor" and "Number of bits for Pilot bits"
SF512-AndPilot ::= CHOICE {
    sfd4           NULL,
    sfd8           NULL,
    sfd16          NULL,
    sfd32          NULL,
    sfd64          NULL,
    sfd128         PilotBits128,
    sfd256         PilotBits256,
}

```

```

    sfd512                NULL
}
SF-PDSCH ::=             ENUMERATED {
    sfp4, sfp8, sfp16, sfp32,
    sfp64, sfp128, sfp256 }

SF-PRACH ::=             ENUMERATED {
    sfpr32, sfpr64, sfpr128, sfpr256 }

SFN-TimeInfo ::=         SEQUENCE {
    activationTimeSFN      INTEGER (0..4095),
    physChDuration         DurationTimeInfo
}

SpreadingFactor ::=      ENUMERATED {
    sf4, sf8, sf16, sf32,
    sf64, sf128, sf256 }

SSDT-CellIdentity ::=    ENUMERATED {
    ssdt-id-a, ssdt-id-b, ssdt-id-c,
    ssdt-id-d, ssdt-id-e, ssdt-id-f,
    ssdt-id-g, ssdt-id-h }

SSDT-Information ::=     SEQUENCE {
    s-Field                S-Field,
    codeWordSet            CodeWordSet
}

TDD-PICH-CCode ::=      ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCode8 ::=    ENUMERATED {
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8 }

TDD-PRACH-CCode16 ::=   ENUMERATED {
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCodeList ::= CHOICE {
    sf8                    SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode8,
    sf16                   SEQUENCE (SIZE (1..8)) OF
        TDD-PRACH-CCode16
}

TFC-ControllDuration ::= ENUMERATED {
    tfc-cd1, tfc-cd2, tfc-cd4, tfc-cd8,
    tfc-cd16, tfc-cd24, tfc-cd32,
    tfc-cd48, tfc-cd64, tfc-cd128,
    tfc-cd192, tfc-cd256, tfc-cd512 }

TFCI-Coding ::=         ENUMERATED {
    tfci-bits-4, tfci-bits-8,
    tfci-bits-16, tfci-bits-32 }

-- **TODO**, not defined
TFCI-CombiningSet ::=   SEQUENCE {
}

TGCFN ::=                INTEGER (0..255)

-- The value 270 represents "undefined" in the tabular description.
TGD ::=                  INTEGER (15..270)

TGL ::=                  INTEGER (1..14)

TGMP ::=                 ENUMERATED {
    tdd-Measurement, fdd-Measurement,
    gsm-CarrierRSSIMeasurement,
    gsm-initialBSICIdentification, gsmBSICReconfirmation }

TGP-Sequence ::=        SEQUENCE {

```

```

    tgpsi                TGPSI,
    tgps-StatusFlag     TGPS-StatusFlag,
    tgcfm                TGCFM,
    tgps-ConfigurationParams  TGPS-ConfigurationParams      OPTIONAL
}

TGP-SequenceList ::=          SEQUENCE (SIZE (1..maxTGPS)) OF
                               TGP-Sequence

TGP-SequenceShort ::=        SEQUENCE {
    tgpsi                TGPSI,
    tgps-StatusFlag     TGPS-StatusFlag,
    tgcfm                TGCFM
}

TGPL ::=                    INTEGER (1..144)

-- TABULAR: The value 0 represents "infinity" in the tabular description.
TGPRC ::=                    INTEGER (0..63)

TGPS-ConfigurationParams ::= SEQUENCE {
    tgmp                TGMP,
    tgprc                TGPRC,
    tgsn                TGSN,
    tgl1                TGL,
    tgl2                TGL,
    tgd                TGD,
    tgpl1                TGPL,
    tgpl2                TGPL,
    rpp                RPP,
    itp                ITP,
    ul-DL-Mode          UL-DL-Mode,
    -- TABULAR: Compressed mode method is nested inside UL-DL-Mode
    dl-FrameType        DL-FrameType,
    deltaSIR1            DeltaSIR,
    deltaSIRAfter1      DeltaSIR,
    deltaSIR2            DeltaSIR,
    deltaSIRAfter2      DeltaSIR
}
OPTIONAL,
OPTIONAL,
OPTIONAL,
OPTIONAL

TGPS-StatusFlag ::=          ENUMERATED {
    tgpsActive, tgpsInactive }

TGPSI ::=                    INTEGER (1..maxTGPS)

TGSN ::=                      INTEGER (0..14)

TimeInfo ::=                  SEQUENCE {
    activationTime       ActivationTime,
    durationTimeInfo    DurationTimeInfo
}
OPTIONAL,
OPTIONAL

TimeslotList ::=             SEQUENCE (SIZE (1..maxTS)) OF
                               TimeslotNumber

TimeslotNumber ::=           INTEGER (0..14)

TimeslotSync2 ::=            INTEGER (0..6)

-- Actual value = IE value * 256
TimingOffset ::=             INTEGER (0..149)

TPC-CombinationIndex ::=     INTEGER (0..5)

TPC-StepSizeFDD ::=          INTEGER (0..1)

TPC-StepSizeTDD ::=          INTEGER (1..3)

TX-DiversityMode ::=         ENUMERATED {
    noDiversity,
    sttd,
    closedLoopMode1,
    closedLoopMode2 }

UARFCN ::=                   INTEGER (0..16383)

UCSM-Info ::=                SEQUENCE {
    minimumSpreadingFactor  MinimumSpreadingFactor,

```



```

    nf-Max
    channelReqParamsForUCSM
}
NF-Max,
ChannelReqParamsForUCSM

UL-CCTrCH ::=
    tfcs-Identity
    timeInfo
    commonTimeslotInfo
    ul-CCTrCH-TimeslotsCodes
}
SEQUENCE {
    TFCS-IdentityPlain
    TimeInfo,
    CommonTimeslotInfo
    UplinkTimeslotsCodes
}
OPTIONAL,
OPTIONAL,
OPTIONAL

UL-CCTrCHList ::=
SEQUENCE (SIZE (1..maxCCTrCH)) OF
    UL-CCTrCH

UL-CCTrChTPCList ::=
SEQUENCE (SIZE (0..maxCCTrCH)) OF
    TFCS-Identity

UL-ChannelRequirement ::=
    ul-DPCH-Info
    cpch-SetInfo
}
CHOICE {
    UL-DPCH-Info,
    CPCH-SetInfo
}

UL-ChannelRequirementWithCPCH-SetID ::= CHOICE {
    ul-DPCH-Info
    cpch-SetInfo
    cpch-SetID
}
CHOICE {
    UL-DPCH-Info,
    CPCH-SetInfo,
    CPCH-SetID
}

UL-CompressedModeMethod ::=
ENUMERATED {
    sf-2,
    higherLayerScheduling }

UL-DL-Mode ::=
    ul
    dl
}
CHOICE {
    UL-CompressedModeMethod,
    DL-CompressedModeMethod
}

UL-DPCCH-SlotFormat ::=
ENUMERATED {
    slf0, slf1, slf2 }

UL-DPCH-Info ::=
    ul-DPCH-PowerControlInfo
    modeSpecificInfo
    fdd
        scramblingCodeType
        scramblingCode
        numberOfDPDCH
        spreadingFactor
        tfci-Existence
        numberOfFBI-Bits
        -- The IE above is conditional based on history
        puncturingLimit
    },
    tdd
        ul-TimingAdvance
        ul-CCTrCHList
}
}
SEQUENCE {
    UL-DPCH-PowerControlInfo
    CHOICE {
        SEQUENCE {
            ScramblingCodeType,
            UL-ScramblingCode,
            NumberOfDPDCH
            SpreadingFactor,
            BOOLEAN,
            NumberOfFBI-Bits
            PuncturingLimit
        }
        SEQUENCE {
            UL-TimingAdvanceControl
            UL-CCTrCHList
        }
    }
}
OPTIONAL,
DEFAULT 1,
OPTIONAL,
OPTIONAL,
OPTIONAL,
OPTIONAL,

UL-DPCH-InfoPostFDD ::=
    ul-DPCH-PowerControlInfo
    scramblingCodeType
    reducedScramblingCodeNumber
    spreadingFactor
}
SEQUENCE {
    UL-DPCH-PowerControlInfoPostFDD,
    ScramblingCodeType,
    ReducedScramblingCodeNumber,
    SpreadingFactor
}

UL-DPCH-InfoPostTDD ::=
    ul-DPCH-PowerControlInfo
    ul-TimingAdvance
    ul-CCTrCH-TimeslotsCodes
}
SEQUENCE {
    UL-DPCH-PowerControlInfoPostTDD,
    UL-TimingAdvanceControl
    UplinkTimeslotsCodes
}
OPTIONAL,

UL-DPCH-InfoPredef ::=
    ul-DPCH-PowerControlInfo
    modeSpecificInfo
    fdd
}
SEQUENCE {
    UL-DPCH-PowerControlInfoPredef,
    CHOICE {
        SEQUENCE {

```

```

        tfci-Existence                BOOLEAN,
        puncturingLimit                PuncturingLimit
    },
    tdd                                SEQUENCE {
        commonTimeslotInfo              CommonTimeslotInfo
    }
}

UL-DPCH-PowerControlInfo ::=          CHOICE {
    fdd                                SEQUENCE {
        dpcch-PowerOffset                DPCCH-PowerOffset,
        pc-Preamble                       PC-Preamble,
        powerControlAlgorithm              PowerControlAlgorithm
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    },
    tdd                                SEQUENCE {
        ul-TargetSIR                      UL-TargetSIR,
        ul-OL-PC-Signalling                 CHOICE {
            broadcast-UL-OL-PC-info         NULL,
            handoverGroup                   SEQUENCE {
                individualTS-InterferenceList IndividualTS-InterferenceList,
                dpch-ConstantValue           ConstantValue,
                primaryCCPCH-TX-Power        PrimaryCCPCH-TX-Power
            }
        }
    }
}
OPTIONAL

UL-DPCH-PowerControlInfoPostFDD ::= SEQUENCE {
    powerControlAlgorithm                PowerControlAlgorithm
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
}

UL-DPCH-PowerControlInfoPostTDD ::= SEQUENCE {
    ul-TargetSIR                        UL-TargetSIR,
    ul-TimeslotInterference              UL-Interference
}

UL-DPCH-PowerControlInfoPredef ::=    CHOICE {
    fdd                                SEQUENCE {
        dpcch-PowerOffset                DPCCH-PowerOffset,
        pc-Preamble                       PC-Preamble
    },
    tdd                                SEQUENCE {
        dpch-ConstantValue                ConstantValue
    }
}

UL-Interference ::=                   INTEGER (-110..-70)

UL-ScramblingCode ::=                 INTEGER (0..16777215)

-- Actual value = (IE value * 0.5) - 11
UL-TargetSIR ::=                       INTEGER (0..62)

UL-TimingAdvance ::=                  INTEGER (0..63)

UL-TimingAdvanceControl ::=            CHOICE {
    disabled                             NULL,
    enabled                               SEQUENCE {
        ul-TimingAdvance                  UL-TimingAdvance          OPTIONAL,
        activationTime                     ActivationTime             OPTIONAL
    }
}

UL-TS-ChannelisationCode ::=           ENUMERATED {
    cc1-1, cc2-1, cc2-2,
    cc4-1, cc4-2, cc4-3, cc4-4,
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8,
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

UL-TS-ChannelisationCodeList ::=       SEQUENCE (SIZE (1..2)) OF
    UL-TS-ChannelisationCode

```

```

UplinkAdditionalTimeslots ::=          SEQUENCE {
  parameters                          CHOICE {
    sameAsLast                         SEQUENCE {
      timeslotNumber                   TimeslotNumber
    },
    newParameters                       SEQUENCE {
      individualTimeslotInfo           IndividualTimeslotInfo,
      ul-TS-ChannelisationCodeList    UL-TS-ChannelisationCodeList
    }
  }
}

UplinkTimeslotsCodes ::=              SEQUENCE {
  dynamicSFusage                       BOOLEAN,
  firstIndividualTimeslotInfo           IndividualTimeslotInfo,
  ul-TS-ChannelisationCodeList         UL-TS-ChannelisationCodeList,
  moreTimeslots                        CHOICE {
    noMore                             NULL,
    additionalTimeslots                CHOICE {
      consecutive                      SEQUENCE {
        numAdditionalTimeslots         INTEGER (1..maxTS-1)
      },
      timeslotList                    SEQUENCE (SIZE (1..maxTS-1)) OF
        UplinkAdditionalTimeslots
    }
  }
}

-- *****
--
--   MEASUREMENT INFORMATION ELEMENTS (10.3.7)
--
-- *****

AcquisitionSatInfo ::=                SEQUENCE {
  satID                                SatID,
  doppler0thOrder                      INTEGER (-2048..2047),
  extraDopplerInfo                     ExtraDopplerInfo                       OPTIONAL,
  codePhase                             INTEGER (0..1022),
  integerCodePhase                      INTEGER (0..19),
  gps-BitNumber                         INTEGER (0..3),
  codePhaseSearchWindow                 CodePhaseSearchWindow,
  azimuthAndElevation                  AzimuthAndElevation                       OPTIONAL
}

AcquisitionSatInfoList ::=            SEQUENCE (SIZE (1..maxSat)) OF
  AcquisitionSatInfo

AdditionalAssistanceData ::=          OCTET STRING (SIZE (1..38))

AdditionalMeasurementID-List ::=      SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
  MeasurementIdentity

AlmanacSatInfo ::=                   SEQUENCE {
  satID                                  SatID,
  e                                       BIT STRING (SIZE (16)),
  t-0a                                    BIT STRING (SIZE (8)),
  deltaI                                  BIT STRING (SIZE (16)),
  omegaDot                                BIT STRING (SIZE (16)),
  satHealth                               BIT STRING (SIZE (8)),
  a-Sqrt                                  BIT STRING (SIZE (24)),
  omega0                                  BIT STRING (SIZE (24)),
  m0                                       BIT STRING (SIZE (24)),
  omega                                    BIT STRING (SIZE (24)),
  af0                                      BIT STRING (SIZE (11)),
  af1                                      BIT STRING (SIZE (11))
}

AlmanacSatInfoList ::=               SEQUENCE (SIZE (1..maxSat)) OF
  AlmanacSatInfo

AverageRLC-BufferPayload ::=         ENUMERATED {
  pla0, pla4, pla8, pla16, pla32,
  pla64, pla128, pla256, pla512,
  pla1024, pla2k, pla4k, pla8k, pla16k,
  pla32k, pla64k, pla128k, pla256k,
  pla512k, pla1024k }

```

```

AzimuthAndElevation ::=
    azimuth
    elevation
}
SEQUENCE {
    INTEGER (0..31),
    INTEGER (0..7)
}

BadSatList ::=
SEQUENCE (SIZE (1..maxSat)) OF
    INTEGER (0..63)

BCCH-ARFCN ::=
INTEGER (0..1023)

BLER-MeasurementResults ::=
    transportChannelIdentity
    dl-TransportChannelBLER
}
SEQUENCE {
    TransportChannelIdentity,
    DL-TransportChannelBLER
    OPTIONAL

BLER-MeasurementResultsList ::=
SEQUENCE (SIZE (1..maxTrCH)) OF
    BLER-MeasurementResults

BLER-TransChIdList ::=
SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

BSIC-VerificationRequired ::=
ENUMERATED {
    required, notRequired }

BSICReported ::=
    verifiedBSIC
    nonVerifiedBSIC
}
CHOICE {
    INTEGER (0..maxCellMeas),
    BCCH-ARFCN

BurstModeParameters ::=
SEQUENCE {
    burstStart
    burstLength
    burstFreq
}
INTEGER (0..15),
INTEGER (10..25),
INTEGER (1..16)

CellDCH-ReportCriteria ::=
    intraFreqReportingCriteria
    periodicalReportingCriteria
}
CHOICE {
    IntraFreqReportingCriteria,
    PeriodicalReportingCriteria

-- Actual value = IE value * 0.5
CellIndividualOffset ::=
INTEGER (-20..20)

CellInfo ::=
    cellIndividualOffset
    referenceTimeDifferenceToCell
    modeSpecificInfo
    fdd
        primaryCPICH-Info
        primaryCPICH-TX-Power
        readSFN-Indicator
        tx-DiversityIndicator
    },
    tdd
        primaryCCPCH-Info
        primaryCCPCH-TX-Power
        timeslotInfoList
}
}
SEQUENCE {
    CellIndividualOffset
    ReferenceTimeDifferenceToCell
    CHOICE {
        SEQUENCE {
            PrimaryCPICH-Info
            PrimaryCPICH-TX-Power
            BOOLEAN,
            BOOLEAN
        }
        SEQUENCE {
            PrimaryCCPCH-Info,
            PrimaryCCPCH-TX-Power
            TimeslotInfoList
        }
    }
    OPTIONAL,
    OPTIONAL,
    OPTIONAL,
    OPTIONAL

CellInfoSI-RSCP ::=
    cellIndividualOffset
    referenceTimeDifferenceToCell
    modeSpecificInfo
    fdd
        primaryCPICH-Info
        primaryCPICH-TX-Power
        readSFN-Indicator
        tx-DiversityIndicator
    },
    tdd
        primaryCCPCH-Info
        primaryCCPCH-TX-Power
        timeslotInfoList
}
}
SEQUENCE {
    CellIndividualOffset
    ReferenceTimeDifferenceToCell
    CHOICE {
        SEQUENCE {
            PrimaryCPICH-Info
            PrimaryCPICH-TX-Power
            BOOLEAN,
            BOOLEAN
        }
        SEQUENCE {
            PrimaryCCPCH-Info,
            PrimaryCCPCH-TX-Power
            TimeslotInfoList
        }
    }
    OPTIONAL,
    OPTIONAL,
    OPTIONAL,
    OPTIONAL

```

```

    },
    cellSelectionReselectionInfo          CellSelectReselectInfoSIB-11-12-RSCP          OPTIONAL
}

CellInfoSI-ECN0 ::=
cellIndividualOffset                    SEQUENCE {
referenceTimeDifferenceToCell            CellIndividualOffset                    DEFAULT 0,
modeSpecificInfo                        ReferenceTimeDifferenceToCell          OPTIONAL,
    CHOICE {
        fdd                               SEQUENCE {
            primaryCPICH-Info              PrimaryCPICH-Info                    OPTIONAL,
            primaryCPICH-TX-Power          PrimaryCPICH-TX-Power                OPTIONAL,
            readSFN-Indicator              BOOLEAN,
            tx-DiversityIndicator          BOOLEAN
        },
        tdd                               SEQUENCE {
            primaryCCPCH-Info              PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power          PrimaryCCPCH-TX-Power                OPTIONAL,
            timeslotInfoList               TimeslotInfoList                    OPTIONAL
        }
    }
},
cellSelectionReselectionInfo          CellSelectReselectInfoSIB-11-12-ECN0    OPTIONAL
}

CellInfoSI-HCS-RSCP ::=
cellIndividualOffset                    SEQUENCE {
referenceTimeDifferenceToCell            CellIndividualOffset                    DEFAULT 0,
modeSpecificInfo                        ReferenceTimeDifferenceToCell          OPTIONAL,
    CHOICE {
        fdd                               SEQUENCE {
            primaryCPICH-Info              PrimaryCPICH-Info                    OPTIONAL,
            primaryCPICH-TX-Power          PrimaryCPICH-TX-Power                OPTIONAL,
            readSFN-Indicator              BOOLEAN,
            tx-DiversityIndicator          BOOLEAN
        },
        tdd                               SEQUENCE {
            primaryCCPCH-Info              PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power          PrimaryCCPCH-TX-Power                OPTIONAL,
            timeslotInfoList               TimeslotInfoList                    OPTIONAL
        }
    }
},
cellSelectionReselectionInfo          CellSelectReselectInfoSIB-11-12-HCS-RSCP  OPTIONAL
}

CellInfoSI-HCS-ECN0 ::=
cellIndividualOffset                    SEQUENCE {
referenceTimeDifferenceToCell            CellIndividualOffset                    DEFAULT 0,
modeSpecificInfo                        ReferenceTimeDifferenceToCell          OPTIONAL,
    CHOICE {
        fdd                               SEQUENCE {
            primaryCPICH-Info              PrimaryCPICH-Info                    OPTIONAL,
            primaryCPICH-TX-Power          PrimaryCPICH-TX-Power                OPTIONAL,
            readSFN-Indicator              BOOLEAN,
            tx-DiversityIndicator          BOOLEAN
        },
        tdd                               SEQUENCE {
            primaryCCPCH-Info              PrimaryCCPCH-Info,
            primaryCCPCH-TX-Power          PrimaryCCPCH-TX-Power                OPTIONAL,
            timeslotInfoList               TimeslotInfoList                    OPTIONAL
        }
    }
},
cellSelectionReselectionInfo          CellSelectReselectInfoSIB-11-12-HCS-ECN0  OPTIONAL
}

CellMeasuredResults ::=
cellIdentity                            SEQUENCE {
sfn-SFN-ObsTimeDifference                CellIdentity                            OPTIONAL,
cellSynchronisationInfo                 SFN-SFN-ObsTimeDifference              OPTIONAL,
modeSpecificInfo                        CellSynchronisationInfo                 OPTIONAL,
    CHOICE {
        fdd                               SEQUENCE {
            primaryCPICH-Info              PrimaryCPICH-Info,
            cpich-Ec-N0                    CPICH-Ec-N0                            OPTIONAL,
            cpich-RSCP                      CPICH-RSCP                              OPTIONAL,
            pathloss                        Pathloss                                OPTIONAL
        },
        tdd                               SEQUENCE {
            cellParametersID               CellParametersID,
            proposedTGSN                   TGSN                                    OPTIONAL,
            primaryCCPCH-RSCP              PrimaryCCPCH-RSCP                      OPTIONAL,
            timeslotISCP-List              TimeslotISCP-List                     OPTIONAL
        }
    }
}

```

```

    }
}

CellMeasurementEventResults ::= CHOICE {
    fdd SEQUENCE (SIZE (1..maxCellMeas)) OF
        PrimaryCPICH-Info,
    tdd SEQUENCE (SIZE (1..maxCellMeas)) OF
        PrimaryCCPCH-Info
}

CellPosition ::= SEQUENCE {
    relativeNorth INTEGER (-32767..32767),
    relativeEast INTEGER (-32767..32767),
    relativeAltitude INTEGER (-4095..4095)
}

CellReportingQuantities ::= SEQUENCE {
    sfn-SFN-OTD-Type SFN-SFN-OTD-Type,
    cellIdentity-reportingIndicator BOOLEAN,
    cellSynchronisationInfoReportingIndicator BOOLEAN,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            cpich-Ec-N0-reportingIndicator BOOLEAN,
            cpich-RSCP-reportingIndicator BOOLEAN,
            pathloss-reportingIndicator BOOLEAN
        },
        tdd SEQUENCE {
            timeslotISCP-reportingIndicator BOOLEAN,
            proposedTGSN-ReportingRequired BOOLEAN,
            primaryCCPCH-RSCP-reportingIndicator BOOLEAN,
            pathloss-reportingIndicator BOOLEAN
        }
    }
}

CellSelectReselectInfoSIB-11-12 ::= SEQUENCE {
    q-Offset1S-N Q-OffsetS-N DEFAULT 0,
    q-Offset2S-N Q-OffsetS-N OPTIONAL,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            q-QualMin Q-QualMin OPTIONAL,
            q-RxlevMin Q-RxlevMin OPTIONAL
        },
        tdd SEQUENCE {
            q-RxlevMin Q-RxlevMin OPTIONAL
        },
        gsm SEQUENCE {
            q-RxlevMin Q-RxlevMin OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-RSCP ::= SEQUENCE {
    q-OffsetS-N Q-OffsetS-N DEFAULT 0,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            q-QualMin Q-QualMin OPTIONAL,
            q-RxlevMin Q-RxlevMin OPTIONAL
        },
        tdd SEQUENCE {
            q-RxlevMin Q-RxlevMin OPTIONAL
        },
        gsm SEQUENCE {
            q-RxlevMin Q-RxlevMin OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-ECN0 ::= SEQUENCE {
    q-Offset1S-N Q-OffsetS-N DEFAULT 0,
    q-Offset2S-N Q-OffsetS-N DEFAULT 0,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {

```

```

        q-QualMin                Q-QualMin                OPTIONAL,
        q-RxlevMin                Q-RxlevMin                OPTIONAL
    },
    tdd                            SEQUENCE {
        q-RxlevMin                Q-RxlevMin                OPTIONAL
    },
    gsm                            SEQUENCE {
        q-RxlevMin                Q-RxlevMin                OPTIONAL
    }
}

CellSelectReselectInfoSIB-11-12-HCS-RSCP ::= SEQUENCE {
    q-OffsetS-N                    Q-OffsetS-N                    DEFAULT 0,
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            q-QualMin                Q-QualMin                OPTIONAL,
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        tdd                            SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        gsm                            SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-ECN0 ::= SEQUENCE {
    q-Offset1S-N                  Q-OffsetS-N                    DEFAULT 0,
    q-Offset2S-N                  Q-OffsetS-N                    DEFAULT 0,
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
    hcs-NeighbouringCellInformation-ECN0 HCS-NeighbouringCellInformation-ECN0
    OPTIONAL,
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            q-QualMin                Q-QualMin                OPTIONAL,
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        tdd                            SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        gsm                            SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        }
    }
}

CellSynchronisationInfo ::= SEQUENCE {
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            countC-SFN-Frame-difference CountC-SFN-Frame-difference OPTIONAL,
            tm                        INTEGER(0..38399)
        },
        tdd                            SEQUENCE {
            countC-SFN-Frame-difference CountC-SFN-Frame-difference
        }
    }
}

CellToMeasure ::= SEQUENCE {
    sfn-sfn-Drift                  INTEGER (0..30)                OPTIONAL,
    primaryCPICH-Info              PrimaryCPICH-Info,
    frequencyInfo                  FrequencyInfo                    OPTIONAL,
    sfn-SFN-ObservedTimeDifference SFN-SFN-ObsTimeDifference1,
    fineSFN-SFN                    FineSFN-SFN,
    cellPosition                    CellPosition                    OPTIONAL
}

CellToMeasureInfoList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToMeasure

CellToReport ::= SEQUENCE {
    bsicReported                    BSICReported
}

```

```

CellToReportList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToReport

CodePhaseSearchWindow ::= ENUMERATED {
    w1023, w1, w2, w3, w4, w6, w8,
    w12, w16, w24, w32, w48, w64,
    w96, w128, w192 }

CountC-SFN-Frame-difference ::= SEQUENCE {
    countC-SFN-High INTEGER(0..15), -- Actual value = IE value * 256
    off INTEGER(0..255)
}

CPICH-Ec-N0 ::= INTEGER (-20..0)

-- IE value 0 = <-24 dB, 1 = between -24 and -23 and so on
CPICH-Ec-N0-OTDOA ::= INTEGER (0..26)

CPICH-RSCP ::= INTEGER (-115..-40)

DeltaPRC ::= INTEGER (-127..127)

DeltaRRC ::= INTEGER (-7..7)

DGPS-CorrectionSatInfo ::= SEQUENCE {
    satID SatID,
    iode BIT STRING (SIZE (8)),
    udre UDRE,
    prc PRC,
    rrc RRC,
    deltaPRC2 DeltaPRC,
    deltaRRC2 DeltaRRC,
    deltaPRC3 DeltaPRC,
    deltaRRC3 DeltaRRC
}

DGPS-CorrectionSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
    DGPS-CorrectionSatInfo

DGPS-Information ::= SEQUENCE {
    satID SatID,
    iode IOE,
    udre UDRE,
    prc PRC,
    rrc RRC,
    deltaPRC2 DeltaPRC,
    deltaRRC2 DeltaRRC
}

DGPS-InformationList ::= SEQUENCE (SIZE (1..maxSat)) OF
    DGPS-Information

DiffCorrectionStatus ::= ENUMERATED {
    udre-1-0, udre-0-75, udre-0-5, udre-0-3,
    udre-0-2, udre-0-1, noData, invalidData }

-- Actual value = IE value * 0.02
DL-PhysicalChannelBER ::= INTEGER (0..255)

DL-TransportChannelBLER ::= INTEGER (0..63)

DopplerUncertainty ::= ENUMERATED {
    hz12-5, hz25, hz50, hz100, hz200 }

EllipsoidPoint ::= OCTET STRING (SIZE (7))

EllipsoidPointAltitude ::= OCTET STRING (SIZE (9))

EllipsoidPointAltitudeEllipse ::= OCTET STRING (SIZE (14))

EllipsoidPointUncertCircle ::= OCTET STRING (SIZE (8))

EllipsoidPointUncertEllipse ::= OCTET STRING (SIZE (11))

EnvironmentCharacterisation ::= ENUMERATED {
    possibleHeavyMultipathNLOS,

```



```

        lightMultipathLOS,
        notDefined }

Event1a ::=
    triggeringCondition
    reportingRange
    forbiddenAffectCellList
    w
    reportDeactivationThreshold
    reportingAmount
    reportingInterval
}

SEQUENCE {
    TriggeringCondition2,
    ReportingRange,
    ForbiddenAffectCellList
    w,
    ReportDeactivationThreshold,
    ReportingAmount,
    ReportingInterval
}
OPTIONAL,

Event1b ::=
    triggeringCondition
    reportingRange
    forbiddenAffectCellList
    w
}

SEQUENCE {
    TriggeringCondition1,
    ReportingRange,
    ForbiddenAffectCellList
    W
}
OPTIONAL,

Event1c ::=
    replacementActivationThreshold
    reportingAmount
    reportingInterval
}

SEQUENCE {
    ReplacementActivationThreshold,
    ReportingAmount,
    ReportingInterval
}

Event1e ::=
    triggeringCondition
    thresholdUsedFrequency
}

SEQUENCE {
    TriggeringCondition2,
    ThresholdUsedFrequency
}

Event1f ::=
    triggeringCondition
    thresholdUsedFrequency
}

SEQUENCE {
    TriggeringCondition1,
    ThresholdUsedFrequency
}

Event2a ::=
    usedFreqThreshold
    usedFreqW
    hysteresis
    timeToTrigger
    reportingCellStatus
    nonUsedFreqParameterList
}

SEQUENCE {
    Threshold,
    W,
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
    NonUsedFreqParameterList
}
OPTIONAL,
OPTIONAL

Event2b ::=
    usedFreqThreshold
    usedFreqW
    hysteresis
    timeToTrigger
    reportingCellStatus
    nonUsedFreqParameterList
}

SEQUENCE {
    Threshold,
    W,
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
    NonUsedFreqParameterList
}
OPTIONAL,
OPTIONAL

Event2c ::=
    hysteresis
    timeToTrigger
    reportingCellStatus
    nonUsedFreqParameterList
}

SEQUENCE {
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
    NonUsedFreqParameterList
}
OPTIONAL,
OPTIONAL

Event2d ::=
    usedFreqThreshold
    usedFreqW
    hysteresis
    timeToTrigger
    reportingCellStatus
}

SEQUENCE {
    Threshold,
    W,
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
}
OPTIONAL

Event2e ::=
    hysteresis
    timeToTrigger
    reportingCellStatus
    nonUsedFreqParameterList
}

SEQUENCE {
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
    NonUsedFreqParameterList
}
OPTIONAL,
OPTIONAL

Event2f ::=
    usedFreqThreshold
}

SEQUENCE {
    Threshold,
}

```

```

    usedFreqW                W,
    hysteresis                HysteresisInterFreq,
    timeToTrigger            TimeToTrigger,
    reportingCellStatus      ReportingCellStatus                OPTIONAL
}

Event3a ::=
    thresholdOwnSystem      W,
    w                        Threshold,
    thresholdOtherSystem    W,
    hysteresis                Hysteresis,
    timeToTrigger            TimeToTrigger,
    reportingCellStatus      ReportingCellStatus                OPTIONAL
}

Event3b ::=
    thresholdOtherSystem    Threshold,
    hysteresis                Hysteresis,
    timeToTrigger            TimeToTrigger,
    reportingCellStatus      ReportingCellStatus                OPTIONAL
}

Event3c ::=
    thresholdOtherSystem    Threshold,
    hysteresis                Hysteresis,
    timeToTrigger            TimeToTrigger,
    reportingCellStatus      ReportingCellStatus                OPTIONAL
}

Event3d ::=
    hysteresis                Hysteresis,
    timeToTrigger            TimeToTrigger,
    reportingCellStatus      ReportingCellStatus                OPTIONAL
}

EventIDInterFreq ::=
    ENUMERATED {
        e2a, e2b, e2c, e2d, e2e, e2f }

EventIDInterRAT ::=
    ENUMERATED {
        e3a, e3b, e3c, e3d }

EventIDIntraFreq ::=
    ENUMERATED {
        e1a, e1b, e1c, e1d, e1e,
        e1f, e1g, e1h, e1i }

EventResults ::=
    intraFreqEventResults    IntraFreqEventResults,
    interFreqEventResults    InterFreqEventResults,
    interRATEventResults     InterRATEventResults,
    trafficVolumeEventResults TrafficVolumeEventResults,
    qualityEventResults       QualityEventResults,
    ue-InternalEventResults   UE-InternalEventResults,
    up-MeasurementEventResults UP-MeasurementEventResults
}

ExtraDopplerInfo ::=
    doppler1stOrder          INTEGER (-42..21),
    dopplerUncertainty        DopplerUncertainty
}

FACH-MeasurementOccasionInfo ::=
    FACH-meas-occasion-coeff  INTEGER (1..12)                OPTIONAL,
    inter-freq-FDD-meas-ind   BOOLEAN,
    inter-freq-TDD-meas-ind   BOOLEAN,
    inter-RAT-meas-ind        SEQUENCE (SIZE (1..maxOtherRAT)) OF
                                RAT-Type                OPTIONAL
}

FilterCoefficient ::=
    ENUMERATED {
        fc0, fc1, fc2, fc3, fc4, fc5,
        fc6, fc7, fc8, fc9, fc11, fc13,
        fc15, fc17, fc19, spare1 }

FineSFN-SFN ::=
    ENUMERATED {
        fs0, fs0-25, fs0-5, fs0-75 }

ForbiddenAffectCell ::=
    CHOICE {

```

```

    fdd                PrimaryCPICH-Info,
    tdd                PrimaryCCPCH-Info
}

ForbiddenAffectCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    ForbiddenAffectCell

FreqQualityEstimateQuantity-FDD ::= ENUMERATED {
    cpich-Ec-N0,
    cpich-RSCP }

FreqQualityEstimateQuantity-TDD ::= ENUMERATED {
    primaryCCPCH-RSCP }

GPS-MeasurementParam ::= SEQUENCE {
    satelliteID        INTEGER (0..63),
    c-N0                INTEGER (0..63),
    doppler             INTEGER (-32768..32768),
    wholeGPS-Chips      INTEGER (0..1023),
    fractionalGPS-Chips INTEGER (0..1023),
    multipathIndicator MultipathIndicator,
    pseudorangeRMS-Error INTEGER (0..63)
}

GPS-MeasurementParamList ::= SEQUENCE (SIZE (1..maxSat)) OF
    GPS-MeasurementParam

GSM-CarrierRSSI ::= BIT STRING (SIZE (6))

GSM-MeasuredResults ::= SEQUENCE {
    gsm-CarrierRSSI    GSM-CarrierRSSI                OPTIONAL,
    pathloss           Pathloss                        OPTIONAL,
    bsicReported       BSICReported,
    observedTimeDifferenceToGSM ObservedTimeDifferenceToGSM OPTIONAL
}

GSM-MeasuredResultsList ::= SEQUENCE (SIZE (1..maxReportedGSMCells)) OF
    GSM-MeasuredResults

-- **TODO**, not defined yet
GSM-OutputPower ::= SEQUENCE {
}

GPS-TOW-lmsec ::= INTEGER (0..604799999)

GPS-TOW-lusec ::= SEQUENCE {
    tow-lmsec          GPS-TOW-lmsec,
    tow-rem-usec       GPS-TOW-rem-usec
}

GPS-TOW-Assist ::= SEQUENCE {
    satID              SatID,
    tlm-Message        BIT STRING (SIZE (14)),
    antiSpoof          BOOLEAN,
    alert              BOOLEAN,
    tlm-Reserved       BIT STRING (SIZE (2))
}

GPS-TOW-AssistList ::= SEQUENCE (SIZE (1..maxSat)) OF
    GPS-TOW-Assist

GPS-TOW-rem-usec ::= INTEGER (0..999)

HCS-CellReselectInformation-RSCP ::= SEQUENCE {
    penaltyTime        PenaltyTime-RSCP
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-CellReselectInformation-ECNO ::= SEQUENCE {
    penaltyTime        PenaltyTime-ECNO
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-NeighbouringCellInformation-RSCP ::= SEQUENCE {
    hcs-PRIO           HCS-PRIO                DEFAULT 0,
    q-HCS              Q-HCS                   DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-RSCP
}

```

```

}

HCS-NeighbouringCellInformation-ECNO ::= SEQUENCE {
    hcs-PRIO                HCS-PRIO                DEFAULT 0,
    q-HCS                   Q-HCS                   DEFAULT 0,
    hcs-CellReselectInformation HCS-CellReselectInformation-ECNO
}

HCS-PRIO ::= INTEGER (0..7)

HCS-ServingCellInformation ::= SEQUENCE {
    hcs-PRIO                HCS-PRIO                DEFAULT 0,
    q-HCS                   Q-HCS                   DEFAULT 0,
    t-CR-Max                T-CR-Max                OPTIONAL
}

-- Actual value = IE value * 0.5
Hysteresis ::= INTEGER (0..15)

-- Actual value = IE value * 0.5
HysteresisInterFreq ::= INTEGER (0..29)

InterFreqCell ::= SEQUENCE {
    frequencyInfo           FrequencyInfo,
    nonFreqRelatedEventResults CellMeasurementEventResults
}

InterFreqCellID ::= INTEGER (0..maxCellMeas-1)

InterFreqCellInfoList ::= SEQUENCE {
    removedInterFreqCellList   OPTIONAL,
    newInterFreqCellList       OPTIONAL
}

InterFreqCellInfoSI-List-RSCP ::= SEQUENCE {
    removedInterFreqCellList   OPTIONAL,
    newInterFreqCellList       OPTIONAL,
    NewInterFreqCellSI-List-RSCP
}

InterFreqCellInfoSI-List-ECNO ::= SEQUENCE {
    removedInterFreqCellList   OPTIONAL,
    newInterFreqCellList       OPTIONAL,
    NewInterFreqCellSI-List-ECNO
}

InterFreqCellInfoSI-List-HCS-RSCP ::= SEQUENCE {
    removedInterFreqCellList   OPTIONAL,
    newInterFreqCellList       OPTIONAL,
    NewInterFreqCellSI-List-HCS-RSCP
}

InterFreqCellInfoSI-List-HCS-ECNO ::= SEQUENCE {
    removedInterFreqCellList   OPTIONAL,
    newInterFreqCellList       OPTIONAL,
    NewInterFreqCellSI-List-HCS-ECNO
}

InterFreqCellList ::= SEQUENCE (SIZE (1..maxFreq)) OF
    InterFreqCell

InterFreqCellMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellMeasuredResults

InterFreqEvent ::= CHOICE {
    event2a                Event2a,
    event2b                Event2b,
    event2c                Event2c,
    event2d                Event2d,
    event2e                Event2e,
    event2f                Event2f
}

InterFreqEventList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    InterFreqEvent

InterFreqEventResults ::= SEQUENCE {
    eventID                EventIDInterFreq,
    interFreqCellList       InterFreqCellList
}

```

```

InterFreqMeasQuantity ::= SEQUENCE {
    reportingCriteria CHOICE {
        intraFreqReportingCriteria SEQUENCE {
            intraFreqMeasQuantity IntraFreqMeasQuantity
        },
        interFreqReportingCriteria SEQUENCE {
            filterCoefficient FilterCoefficient DEFAULT fc0,
            modeSpecificInfo CHOICE {
                fdd SEQUENCE {
                    freqQualityEstimateQuantity-FDD FreqQualityEstimateQuantity-FDD
                },
                tdd SEQUENCE {
                    freqQualityEstimateQuantity-TDD FreqQualityEstimateQuantity-TDD
                }
            }
        }
    }
}

InterFreqMeasuredResults ::= SEQUENCE {
    frequencyInfo FrequencyInfo OPTIONAL,
    ultra-CarrierRSSI UTRA-CarrierRSSI OPTIONAL,
    interFreqCellMeasuredResultsList InterFreqCellMeasuredResultsList OPTIONAL
}

InterFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxFreq)) OF
    InterFreqMeasuredResults

InterFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-RSCP OPTIONAL
}

InterFreqMeasurementSysInfo-ECN0 ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-ECN0 OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-RSCP OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECN0 ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-ECN0 OPTIONAL
}

InterFreqReportCriteria ::= CHOICE {
    intraFreqReportingCriteria IntraFreqReportingCriteria,
    interFreqReportingCriteria InterFreqReportingCriteria,
    periodicalReportingCriteria PeriodicalWithReportingCellStatus,
    noReporting ReportingCellStatusOpt
}

InterFreqReportingCriteria ::= SEQUENCE {
    interFreqEventList InterFreqEventList OPTIONAL
}

InterFreqReportingQuantity ::= SEQUENCE {
    ultra-Carrier-RSSI BOOLEAN,
    frequencyQualityEstimate BOOLEAN,
    nonFreqRelatedQuantities CellReportingQuantities
}

InterFrequencyMeasurement ::= SEQUENCE {
    interFreqCellInfoList InterFreqCellInfoList,
    interFreqMeasQuantity InterFreqMeasQuantity OPTIONAL,
    interFreqReportingQuantity InterFreqReportingQuantity OPTIONAL,
    measurementValidity MeasurementValidity OPTIONAL,
    interFreqSetUpdate UE-AutonomousUpdateMode OPTIONAL,
    reportCriteria InterFreqReportCriteria
}

InterRAT-TargetCellDescription ::= SEQUENCE {
    technologySpecificInfo CHOICE {
        gsm SEQUENCE {
            bsic BSIC,
            bcch-ARFCN BCCH-ARFCN,
            ncMode NC-Mode OPTIONAL
        },
        is-2000 NULL,
    }
}

```

```

    spare                NULL
  }
}

InterRATCellID ::=          INTEGER (0..maxCellMeas-1)

InterRATCellInfoList ::=    SEQUENCE {
  removedInterRATCellList   RemovedInterRATCellList,
  newInterRATCellList       NewInterRATCellList
}

InterRATCellInfoList-HCS ::= SEQUENCE {
  removedInterRATCellList   RemovedInterRATCellList,
  newInterRATCellList       NewInterRATCellList-HCS
}

InterRATEvent ::=          CHOICE {
  event3a                   Event3a,
  event3b                   Event3b,
  event3c                   Event3c,
  event3d                   Event3d
}

InterRATEventList ::=      SEQUENCE (SIZE (1..maxMeasEvent)) OF
  InterRATEvent

InterRATEventResults ::=   SEQUENCE {
  eventID                   EventIDInterRAT,
  cellToReportList         CellToReportList
}

InterRATInfo ::=           ENUMERATED {
  gsm
}

InterRATMeasQuantity ::=   SEQUENCE {
  measQuantityUTRAN-QualityEstimate  IntraFreqMeasQuantity          OPTIONAL,
  ratSpecificInfo                    CHOICE {
    gsm                               SEQUENCE {
      measurementQuantity             MeasurementQuantityGSM,
      filterCoefficient               FilterCoefficient          DEFAULT fcl,
      bsic-VerificationRequired       BSIC-VerificationRequired
    },
    is-2000                           SEQUENCE {
      tadd-EcIo                       INTEGER (0..63),
      tcomp-EcIo                      INTEGER (0..15),
      softSlope                       INTEGER (0..63)          OPTIONAL,
      addIntercept                    INTEGER (0..63)          OPTIONAL
    }
  }
}

InterRATMeasuredResults ::= CHOICE {
  gsm                             GSM-MeasuredResultsList,
  spare                            NULL
}

InterRATMeasuredResultsList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
  InterRATMeasuredResults

InterRATMeasurement ::=    SEQUENCE {
  interRATCellInfoList         InterRATCellInfoList          OPTIONAL,
  interRATMeasQuantity         InterRATMeasQuantity            OPTIONAL,
  interRATReportingQuantity    InterRATReportingQuantity        OPTIONAL,
  reportCriteria               InterRATReportCriteria
}

InterRATMeasurementSysInfo ::= SEQUENCE {
  interRATCellInfoList         InterRATCellInfoList          OPTIONAL
}

InterRATMeasurementSysInfo-HCS ::= SEQUENCE {
  interRATCellInfoList         InterRATCellInfoList-HCS        OPTIONAL
}

InterRATReportCriteria ::= CHOICE {
  interRATReportingCriteria    InterRATReportingCriteria,
  periodicalReportingCriteria  PeriodicalWithReportingCellStatus,
  noReporting                  ReportingCellStatusOpt
}

```

```

}

InterRATReportingCriteria ::= SEQUENCE {
    interRATEventList      InterRATEventList      OPTIONAL
}

InterRATReportingQuantity ::= SEQUENCE {
    utran-EstimatedQuality  BOOLEAN,
    ratSpecificInfo        CHOICE {
        gsm                 SEQUENCE {
            pathloss        BOOLEAN,
            observedTimeDifferenceGSM  BOOLEAN,
            gsm-Carrier-RSSI  BOOLEAN
        }
    }
}

IntraFreqCellID ::= INTEGER (0..maxCellMeas-1)

IntraFreqCellInfoList ::= SEQUENCE {
    removedIntraFreqCellList  RemovedIntraFreqCellList  OPTIONAL,
    newIntraFreqCellList      NewIntraFreqCellList      OPTIONAL
}

IntraFreqCellInfoSI-List-RSCP ::= SEQUENCE {
    removedIntraFreqCellList  RemovedIntraFreqCellList  OPTIONAL,
    newIntraFreqCellList      NewIntraFreqCellSI-List-RSCP
}

IntraFreqCellInfoSI-List-ECNO ::= SEQUENCE {
    removedIntraFreqCellList  RemovedIntraFreqCellList  OPTIONAL,
    newIntraFreqCellList      NewIntraFreqCellSI-List-ECNO
}

IntraFreqCellInfoSI-List-HCS-RSCP ::= SEQUENCE {
    removedIntraFreqCellList  RemovedIntraFreqCellList  OPTIONAL,
    newIntraFreqCellList      NewIntraFreqCellSI-List-HCS-RSCP
}

IntraFreqCellInfoSI-List-HCS-ECNO ::= SEQUENCE {
    removedIntraFreqCellList  RemovedIntraFreqCellList  OPTIONAL,
    newIntraFreqCellList      NewIntraFreqCellSI-List-HCS-ECNO
}

IntraFreqEvent ::= CHOICE {
    e1a      Event1a,
    e1b      Event1b,
    e1c      Event1c,
    e1d      NULL,
    e1e      Event1e,
    e1f      Event1f,
    e1g      NULL,
    e1h      ThresholdUsedFrequency,
    e1i      ThresholdUsedFrequency
}

IntraFreqEventCriteria ::= SEQUENCE {
    event          IntraFreqEvent,
    hysteresis     Hysteresis,
    timeToTrigger  TimeToTrigger,
    reportingCellStatus  ReportingCellStatus      OPTIONAL
}

IntraFreqEventCriteriaList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    IntraFreqEventCriteria

IntraFreqEventResults ::= SEQUENCE {
    eventID        EventIDIntraFreq,
    cellMeasurementEventResults  CellMeasurementEventResults
}

IntraFreqMeasQuantity ::= SEQUENCE {
    filterCoefficient  FilterCoefficient      DEFAULT fc1,
    modeSpecificInfo   CHOICE {
        fdd            SEQUENCE {
            intraFreqMeasQuantity-FDD  IntraFreqMeasQuantity-FDD
        },
        tdd            SEQUENCE {

```

```

        intraFreqMeasQuantity-TDDList  IntraFreqMeasQuantity-TDDList
    }
}
}

IntraFreqMeasQuantity-FDD ::=      ENUMERATED {
    cpich-EC-NO,
    cpich-RSCP,
    pathloss,
    ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDD ::=      ENUMERATED {
    primaryCCPCH-RSCP,
    pathloss,
    timeslotISCP,
    ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDDList ::=  SEQUENCE (SIZE (1..4)) OF
    IntraFreqMeasQuantity-TDD

IntraFreqMeasuredResultsList ::=   SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellMeasuredResults

IntraFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
    intraFreqMeasurementID           MeasurementIdentity           DEFAULT 1,
    intraFreqCellInfoSI-List         IntraFreqCellInfoSI-List-RSCP OPTIONAL,
    intraFreqMeasQuantity            IntraFreqMeasQuantity        OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH           MaxReportedCellsOnRACH       OPTIONAL,
    reportingInfoForCellDCH          ReportingInfoForCellDCH       OPTIONAL
}

IntraFreqMeasurementSysInfo-ECNO ::= SEQUENCE {
    intraFreqMeasurementID           MeasurementIdentity           DEFAULT 1,
    intraFreqCellInfoSI-List         IntraFreqCellInfoSI-List-ECNO OPTIONAL,
    intraFreqMeasQuantity            IntraFreqMeasQuantity        OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH           MaxReportedCellsOnRACH       OPTIONAL,
    reportingInfoForCellDCH          ReportingInfoForCellDCH       OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
    intraFreqMeasurementID           MeasurementIdentity           DEFAULT 1,
    intraFreqCellInfoSI-List         IntraFreqCellInfoSI-List-HCS-RSCP OPTIONAL,
    intraFreqMeasQuantity            IntraFreqMeasQuantity        OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH           MaxReportedCellsOnRACH       OPTIONAL,
    reportingInfoForCellDCH          ReportingInfoForCellDCH       OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECNO ::= SEQUENCE {
    intraFreqMeasurementID           MeasurementIdentity           DEFAULT 1,
    intraFreqCellInfoSI-List         IntraFreqCellInfoSI-List-HCS-ECNO OPTIONAL,
    intraFreqMeasQuantity            IntraFreqMeasQuantity        OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH           MaxReportedCellsOnRACH       OPTIONAL,
    reportingInfoForCellDCH          ReportingInfoForCellDCH       OPTIONAL
}

IntraFreqReportCriteria ::=         CHOICE {
    intraFreqReportingCriteria       IntraFreqReportingCriteria,
    periodicalReportingCriteria       PeriodicalWithReportingCellStatus,
    noReporting                       ReportingCellStatusOpt
}

IntraFreqReportingCriteria ::=      SEQUENCE {
    eventCriteriaList                IntraFreqEventCriteriaList   OPTIONAL
}

IntraFreqReportingQuantity ::=      SEQUENCE {
    activeSetReportingQuantities      CellReportingQuantities,
    monitoredSetReportingQuantities    CellReportingQuantities,
    detectedSetReportingQuantities     CellReportingQuantities       OPTIONAL
}

IntraFreqReportingQuantityForRACH ::= SEQUENCE {
    sfn-SFN-OTD-Type                 SFN-SFN-OTD-Type,
    modeSpecificInfo                  CHOICE {

```



```

    fdd
        intraFreqRepQuantityRACH-FDD SEQUENCE {
            IntraFreqRepQuantityRACH-FDD
        },
    tdd
        intraFreqRepQuantityRACH-TDDList SEQUENCE {
            IntraFreqRepQuantityRACH-TDDList
        }
}

IntraFreqRepQuantityRACH-FDD ::= ENUMERATED {
    cpich-EcN0, cpich-RSCP,
    pathloss, noReport }

IntraFreqRepQuantityRACH-TDD ::= ENUMERATED {
    timeslotISCP,
    primaryCCPCH-RSCP,
    noReport }

IntraFreqRepQuantityRACH-TDDList ::= SEQUENCE (SIZE (1..2)) OF
    IntraFreqRepQuantityRACH-TDD

IntraFrequencyMeasurement ::= SEQUENCE {
    intraFreqCellInfoList IntraFreqCellInfoList OPTIONAL,
    intraFreqMeasQuantity IntraFreqMeasQuantity OPTIONAL,
    intraFreqReportingQuantity IntraFreqReportingQuantity OPTIONAL,
    measurementValidity MeasurementValidity OPTIONAL,
    reportCriteria IntraFreqReportCriteria OPTIONAL
}

IODE ::= INTEGER (0..255)

IP-Length ::= ENUMERATED {
    ip15, ip110 }

IP-Spacing ::= ENUMERATED {
    e5, e7, e10, e15, e20,
    e30, e40, e50 }

IS-2000SpecificMeasInfo ::= ENUMERATED {
    frequency, timeslot, colourcode,
    outputpower, pn-Offset }

MaxNumberOfReportingCellsType1 ::= ENUMERATED {
    e1, e2, e3, e4, e5, e6}

MaxNumberOfReportingCellsType2 ::= ENUMERATED {
    e1, e2, e3, e4, e5, e6, e7, e8, e9, e10, e11, e12}

MaxNumberOfReportingCellsType3 ::= ENUMERATED {
    viactCellsPlus1,
    viactCellsPlus2,
    viactCellsPlus3,
    viactCellsPlus4,
    viactCellsPlus5,
    viactCellsPlus6 }

MaxReportedCellsOnRACH ::= ENUMERATED {
    noReport,
    currentCell,
    currentAnd-1-BestNeighbour,
    currentAnd-2-BestNeighbour,
    currentAnd-3-BestNeighbour,
    currentAnd-4-BestNeighbour,
    currentAnd-5-BestNeighbour,
    currentAnd-6-BestNeighbour }

MeasuredResults ::= CHOICE {
    intraFreqMeasuredResultsList IntraFreqMeasuredResultsList,
    interFreqMeasuredResultsList InterFreqMeasuredResultsList,
    interRATMeasuredResultsList InterRATMeasuredResultsList,
    trafficVolumeMeasuredResultsList TrafficVolumeMeasuredResultsList,
    qualityMeasuredResults QualityMeasuredResults,
    ue-InternalMeasuredResults UE-InternalMeasuredResults,
    up-MeasuredResults UP-MeasuredResults
}

MeasuredResultsList ::= SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
    MeasuredResults

```

```

MeasuredResultsOnRACH ::= SEQUENCE {
    currentCell SEQUENCE {
        modeSpecificInfo CHOICE {
            fdd SEQUENCE {
                measurementQuantity CHOICE {
                    cpich-Ec-NO CPICH-Ec-NO,
                    cpich-RSCP CPICH-RSCP,
                    pathloss Pathloss
                }
            },
            tdd SEQUENCE {
                timeslotISCP TimeslotISCP-List OPTIONAL,
                primaryCCPCH-RSCP PrimaryCCPCH-RSCP OPTIONAL
            }
        }
    },
    monitoredCells MonitoredCellRACH-List OPTIONAL
}

MeasurementCommand ::= CHOICE {
    setup MeasurementType,
    modify SEQUENCE {
        measurementType MeasurementType OPTIONAL
    },
    release NULL
}

MeasurementControlSysInfo ::= SEQUENCE {
    use-of-HCS CHOICE {
        hcs-not-used SEQUENCE {
            cellSelectQualityMeasure CHOICE {
                cpich-RSCP SEQUENCE {
                    intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-RSCP
                },
                interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-RSCP OPTIONAL
            },
            cpich-Ec-NO SEQUENCE {
                intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-ECNO
            },
            interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-ECNO OPTIONAL
        }
    },
    interRATMeasurementSysInfo InterRATMeasurementSysInfo-HCS OPTIONAL
},
    hcs-used SEQUENCE {
        cellSelectQualityMeasure CHOICE {
            cpich-RSCP SEQUENCE {
                intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-RSCP
            },
            interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-RSCP
        },
        cpich-Ec-NO SEQUENCE {
            intraFreqMeasurementSysInfo IntraFreqMeasurementSysInfo-HCS-ECNO
            interFreqMeasurementSysInfo InterFreqMeasurementSysInfo-HCS-ECNO
        }
    },
    interRATMeasurementSysInfo InterRATMeasurementSysInfo OPTIONAL
},
    trafficVolumeMeasSysInfo TrafficVolumeMeasSysInfo OPTIONAL,
    ue-InternalMeasurementSysInfo UE-InternalMeasurementSysInfo OPTIONAL
}

MeasurementIdentity ::= INTEGER (1..16)

MeasurementQuantityGSM ::= ENUMERATED {
    gsm-CarrierRSSI,
    pathloss
}

MeasurementReportingMode ::= SEQUENCE {
    measurementReportTransferMode TransferMode,
    periodicalOrEventTrigger PeriodicalOrEventTrigger
}

```

```

MeasurementType ::=
    intraFrequencyMeasurement
    interFrequencyMeasurement
    interRATMeasurement
    up-Measurement
    trafficVolumeMeasurement
    qualityMeasurement
    ue-InternalMeasurement
}

MeasurementValidity ::=
    ue-State
}

MonitoredCellRACH-List ::=
SEQUENCE (SIZE (1..7)) OF
    MonitoredCellRACH-Result

MonitoredCellRACH-Result ::=
    sfn-SFN-ObsTimeDifference
    modeSpecificInfo
        fdd
            primaryCPICH-Info
            measurementQuantity
                cpich-Ec-NO
                cpich-RSCP
                pathloss
            }
        },
        tdd
            cellParametersID
            primaryCCPCH-RSCP
        }
    }
}

MultipathIndicator ::=
    ENUMERATED {
        nm,
        low,
        medium,
        high }

N-CR-T-CRMaxHyst ::=
    n-CR
    t-CRMaxHyst
}

NavigationModelSatInfo ::=
    satID
    satelliteStatus
    navModel
}

NavigationModelSatInfoList ::=
SEQUENCE (SIZE (1..maxSat)) OF
    NavigationModelSatInfo

NavModel ::=
    codeOnL2
    uraIndex
    satHealth
    iodc
    l2Pflag
    sflRevd
    t-GD
    t-oc
    af2
    af1
    af0
    c-rs
    delta-n
    m0
    c-uc
    e
    c-us
    a-Sqrt
    t-oe
    fitInterval
    aodo
    CHOICE {
        IntraFrequencyMeasurement,
        InterFrequencyMeasurement,
        InterRATMeasurement,
        UP-Measurement,
        TrafficVolumeMeasurement,
        QualityMeasurement,
        UE-InternalMeasurement
    }

SEQUENCE {
    ENUMERATED {
        cell-DCH, all-But-Cell-DCH, all-States }
}

SEQUENCE (SIZE (1..7)) OF
    MonitoredCellRACH-Result

SEQUENCE {
    SFN-SFN-ObsTimeDifference
    CHOICE {
        SEQUENCE {
            PrimaryCPICH-Info,
            CHOICE {
                CPICH-Ec-NO,
                CPICH-RSCP,
                Pathloss
            }
        }
        SEQUENCE {
            CellParametersID,
            PrimaryCCPCH-RSCP
        }
    }
}

OPTIONAL,

OPTIONAL

DEFAULT 8,

```

```

    c-ic                BIT STRING (SIZE (16)),
    omega0              BIT STRING (SIZE (32)),
    c-is                BIT STRING (SIZE (16)),
    i0                  BIT STRING (SIZE (32)),
    c-rc                BIT STRING (SIZE (16)),
    omega               BIT STRING (SIZE (32)),
    omegaDot            BIT STRING (SIZE (24)),
    iDot                BIT STRING (SIZE (14))
}
NC-Mode ::=           BIT STRING (SIZE (3))

Neighbour ::=        SEQUENCE {
    neighbourIdentity  PrimaryCPICH-Info           OPTIONAL,
    neighbourQuantity  NeighbourQuantity,
    sfm-SFN-ObsTimeDifference2 SFN-SFN-ObsTimeDifference2
}

NeighbourList ::=    SEQUENCE (SIZE (1..maxCellMeas)) OF
    Neighbour

-- **TODO**, to be defined fully
NeighbourQuantity ::= SEQUENCE {
}

NewInterFreqCell ::= SEQUENCE {
    interFreqCellID   InterFreqCellID           OPTIONAL,
    frequencyInfo     FrequencyInfo             OPTIONAL,
    cellInfo           CellInfo
}

NewInterFreqCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCell

NewInterFreqCellSI-RSCP ::= SEQUENCE {
    interFreqCellID   InterFreqCellID           OPTIONAL,
    frequencyInfo     FrequencyInfo             OPTIONAL,
    cellInfo           CellInfoSI-RSCP
}

NewInterFreqCellSI-ECN0 ::= SEQUENCE {
    interFreqCellID   InterFreqCellID           OPTIONAL,
    frequencyInfo     FrequencyInfo             OPTIONAL,
    cellInfo           CellInfoSI-ECN0
}

NewInterFreqCellSI-HCS-RSCP ::= SEQUENCE {
    interFreqCellID   InterFreqCellID           OPTIONAL,
    frequencyInfo     FrequencyInfo             OPTIONAL,
    cellInfo           CellInfoSI-HCS-RSCP
}

NewInterFreqCellSI-HCS-ECN0 ::= SEQUENCE {
    interFreqCellID   InterFreqCellID           OPTIONAL,
    frequencyInfo     FrequencyInfo             OPTIONAL,
    cellInfo           CellInfoSI-HCS-ECN0
}

NewInterFreqCellSI-List-ECN0 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-ECN0

NewInterFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-HCS-RSCP

NewInterFreqCellSI-List-HCS-ECN0 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-HCS-ECN0

NewInterFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-RSCP

NewInterRATCell ::= SEQUENCE {
    interRATCellID    InterRATCellID           OPTIONAL,
    technologySpecificInfo CHOICE {
        gsm           SEQUENCE {
            cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12  OPTIONAL,
            bsic        BSIC,
            bcch-ARFCN  BCCH-ARFCN,
            gsm-OutputPower GSM-OutputPower           OPTIONAL
        }
    },

```

```

        is-2000                SEQUENCE {
            is-2000SpecificMeasInfo    IS-2000SpecificMeasInfo
        },
        spare1                NULL,
        spare2                NULL
    }
}

NewInterRATCell-HCS ::=          SEQUENCE {
    interRATCellID            InterRATCellID                OPTIONAL,
    technologySpecificInfo    CHOICE {
        gsm                    SEQUENCE {
            cellSelectionReselectionInfo    CellSelectReselectInfoSIB-11-12    OPTIONAL,
            bsic                 BSIC,
            bcch-ARFCN           BCCH-ARFCN,
            gsm-OutputPower      GSM-OutputPower                OPTIONAL
        },
        is-2000                SEQUENCE {
            is-2000SpecificMeasInfo    IS-2000SpecificMeasInfo
        },
        spare1                NULL,
        spare2                NULL
    }
}

NewInterRATCellList ::=          SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterRATCell

NewInterRATCellList-HCS ::=      SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterRATCell-HCS

NewIntraFreqCell ::=            SEQUENCE {
    intraFreqCellID           IntraFreqCellID                OPTIONAL,
    cellInfo                   CellInfo
}

NewIntraFreqCellList ::=        SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCell

NewIntraFreqCellSI-RSCP ::=      SEQUENCE {
    intraFreqCellID           IntraFreqCellID                OPTIONAL,
    cellInfo                   CellInfoSI-RSCP
}

NewIntraFreqCellSI-ECN0 ::=      SEQUENCE {
    intraFreqCellID           IntraFreqCellID                OPTIONAL,
    cellInfo                   CellInfoSI-ECN0
}

NewIntraFreqCellSI-HCS-RSCP ::=  SEQUENCE {
    intraFreqCellID           IntraFreqCellID                OPTIONAL,
    cellInfo                   CellInfoSI-HCS-RSCP
}

NewIntraFreqCellSI-HCS-ECN0 ::=  SEQUENCE {
    intraFreqCellID           IntraFreqCellID                OPTIONAL,
    cellInfo                   CellInfoSI-HCS-ECN0
}

NewIntraFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-RSCP

NewIntraFreqCellSI-List-ECN0 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-ECN0

NewIntraFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-HCS-RSCP

NewIntraFreqCellSI-List-HCS-ECN0 ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewIntraFreqCellSI-HCS-ECN0

NodeB-ClockDrift ::=            INTEGER (0..15)

NonUsedFreqParameter ::=        SEQUENCE {
    nonUsedFreqThreshold       Threshold,
    nonUsedFreqW               W
}

NonUsedFreqParameterList ::=    SEQUENCE (SIZE (1..maxFreq)) OF

```

```

NonUsedFreqParameter

ObservedTimeDifferenceToGSM ::= INTEGER (0..4095)

OTDOA-SearchWindowSize ::= ENUMERATED {
    c10, c20, c30, c40, c50,
    c60, c70, moreThan70 }

Pathloss ::= INTEGER (46..158)

PenaltyTime-RSCP ::= CHOICE {
    notUsed
    pt10
    pt20
    pt30
    pt40
    pt50
    pt60
}

PenaltyTime-ECNO ::= CHOICE {
    notUsed
    pt10
    pt20
    pt30
    pt40
    pt50
    pt60
}

PendingTimeAfterTrigger ::= ENUMERATED {
    ptat0-25, ptat0-5, ptat1,
    ptat2, ptat4, ptat8, ptat16 }

PeriodicalOrEventTrigger ::= ENUMERATED {
    periodical,
    eventTrigger }

PeriodicalReportingCriteria ::= SEQUENCE {
    reportingAmount
    reportingInterval
}
                                DEFAULT ra-Infinity,

PeriodicalWithReportingCellStatus ::= SEQUENCE {
    periodicalReportingCriteria
    reportingCellStatus
}
                                OPTIONAL

PositionEstimate ::= CHOICE {
    ellipsoidPoint
    ellipsoidPointUncertCircle
    ellipsoidPointUncertEllipse
    ellipsoidPointAltitude
    ellipsoidPointAltitudeEllipse
}

PositioningMethod ::= ENUMERATED {
    otdoa,
    gps,
    otdoaOrGPS }

PRC ::= INTEGER (-2047..2047)

PrimaryCCPCH-RSCP ::= INTEGER (-115..-25)

Q-HCS ::= INTEGER (0..99)

Q-OffsetS-N ::= INTEGER (-50..50)

Q-QualMin ::= INTEGER (-20..0)

-- Actual value = (IE value * 2) + 1
Q-RxlevMin ::= INTEGER (-58..-13)

QualityEventResults ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

```

```

QualityMeasuredResults ::=
  blerMeasurementResultsList
  modeSpecificInfo
    fdd
    tdd
    sir-MeasurementResults
  }
}

QualityMeasurement ::=
  qualityReportingQuantity
  reportCriteria
}

QualityReportCriteria ::=
  qualityReportingCriteria
  periodicalReportingCriteria
  noReporting
}

QualityReportingCriteria ::=
  SEQUENCE (SIZE (1..maxTrCH)) OF
  QualityReportingCriteriaSingle

QualityReportingCriteriaSingle ::=
  SEQUENCE {
    transportChannelIdentity
    totalCRC
    badCRC
    pendingAfterTrigger
  }

QualityReportingQuantity ::=
  dl-TransChBLER
  bler-dl-TransChIdList
  modeSpecificInfo
    fdd
    tdd
    sir-TFCS-List
  }
}

QualityType ::=
  ENUMERATED {
    std-10, std-50, cpich-Ec-N0 }

RAT-Type ::=
  ENUMERATED {
    gsm, is2000 }

ReferenceCellPosition ::=
  CHOICE {
    ellipsoidPoint
    ellipsoidPointWithAltitude
  }

ReferenceCellRelation ::=
  ENUMERATED {
    first-12-second-3,
    first-13-second-2,
    first-1-second-23 }

-- As defined in 23.032 (2D with 24bits for each coordinate)
ReferenceLocationforSIB ::=
  SEQUENCE {
    ellipsoidPoint
  }

ReferenceQuality ::=
  ENUMERATED {
    m0-19, m20-39, m40-79,
    m80-159, m160-319, m320-639,
    m640-1319, m1320Plus }

-- Actual value = IE value * 10
ReferenceQuality10 ::=
  INTEGER (1..32)

-- Actual value = IE value * 50
ReferenceQuality50 ::=
  INTEGER (1..32)

ReferenceSFN ::=
  INTEGER (0..4095)

-- Actual value = IE value * 512
ReferenceTimeDifferenceToCell ::=
  CHOICE {

```

```

-- Actual value = IE value * 40
accuracy40                INTEGER (0..960),
-- Actual value = IE value * 256
accuracy256               INTEGER (0..150),
-- Actual value = IE value * 2560
accuracy2560              INTEGER (0..15)
}

RemovedInterFreqCellList ::= CHOICE {
    removeAllInterFreqCells    NULL,
    removeSomeInterFreqCells   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                InterFreqCellID,
    removeNoInterFreqCells     NULL
}

RemovedInterRATCellList ::= CHOICE {
    removeAllInterRATCells     NULL,
    removeSomeInterRATCells    SEQUENCE (SIZE (1..maxCellMeas)) OF
                                InterRATCellID,
    removeNoInterRATCells      NULL
}

RemovedIntraFreqCellList ::= CHOICE {
    removeAllIntraFreqCells    NULL,
    removeSomeIntraFreqCells   SEQUENCE (SIZE (1..maxCellMeas)) OF
                                IntraFreqCellID,
    removeNoIntraFreqCells     NULL
}

ReplacementActivationThreshold ::= ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportDeactivationThreshold ::= ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportingAmount ::= ENUMERATED {
    ra1, ra2, ra4, ra8, ra16, ra32,
    ra64, ra-Infinity }

ReportingCellStatus ::= CHOICE{
    withinActiveSet                MaxNumberOfReportingCellsType1,
    withinMonitoredSetUsedFreq     MaxNumberOfReportingCellsType1,
    withinActiveAndOrMonitoredUsedFreq MaxNumberOfReportingCellsType1,
    withinDetectedSetUsedFreq     MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrDetectedUsedFreq MaxNumberOfReportingCellsType1,
    allActiveplusMonitoredSet      MaxNumberOfReportingCellsType3,
    allActivePlusDetectedSet       MaxNumberOfReportingCellsType3,
    allActivePlusMonitoredAndOrDetectedSet MaxNumberOfReportingCellsType3,
    withinVirtualActSet            MaxNumberOfReportingCellsType1,
    withinMonitoredSetNonUsedFreq  MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrActiveSetNonUsedFreq MaxNumberOfReportingCellsType1,
    allVirtualActSetplusMonitoredSetNonUsedFreq MaxNumberOfReportingCellsType3,
    withinActSetOrVirtualActSet    MaxNumberOfReportingCellsType2,
    withinActSetAndOrMonitoredUsedFreqOrMonitoredNonUsedFreq MaxNumberOfReportingCellsType2
}

ReportingCellStatusOpt ::= SEQUENCE {
    reportingCellStatus ReportingCellStatus OPTIONAL
}

ReportingInfoForCellDCH ::= SEQUENCE {
    intraFreqReportingQuantity IntraFreqReportingQuantity,
    measurementReportingMode MeasurementReportingMode,
    reportCriteria CellDCH-ReportCriteria
}

ReportingInterval ::= ENUMERATED {
    noPeriodicalreporting, ri0-25,
    ri0-5, ri1, ri2, ri4, ri8, ri16 }

```



```

ReportingIntervalLong ::=          ENUMERATED {
                                     ril0, ril0-25, ril0-5, ril1,
                                     ril2, ril3, ril4, ril6, ril8,
                                     ril12, ril16, ril20, ril24,
                                     ril28, ril32, ril64 }

-- Actual value = IE value * 0.5
ReportingRange ::=                INTEGER (0..29)

RL-AdditionInfoList ::=          SEQUENCE (SIZE (1..maxRL)) OF
                                   PrimaryCPICH-Info

RL-InformationLists ::=          SEQUENCE {
                                   rl-AdditionInfoList          OPTIONAL,
                                   rl-RemovalInfoList           OPTIONAL
                                }

RL-RemovalInfoList ::=          SEQUENCE (SIZE (1..maxRL)) OF
                                   PrimaryCPICH-Info

RLC-BuffersPayload ::=          ENUMERATED {
                                   pl0, pl4, pl8, pl16, pl32, pl64, pl128,
                                   pl256, pl512, pl1024, pl2k, pl4k,
                                   pl8k, pl16k, pl32k, pl64k, pl128k,
                                   pl256k, pl512k, pl1024k }

RRC ::=                          INTEGER (-127..127)

SatelliteStatus ::=            ENUMERATED {
                                   ns-NN-U,
                                   es-SN,
                                   es-NN-U,
                                   es-NN-C }

SatID ::=                      INTEGER (0..63)

SFN-SFN-ObsTimeDifference ::=    CHOICE {
                                   type1          SFN-SFN-ObsTimeDifference1,
                                   -- Actual value for type2 = IE value * 0.0625 - 1280
                                   type2          SFN-SFN-ObsTimeDifference2
                                }

SFN-SFN-ObsTimeDifference1 ::=   INTEGER (0..9830399)

SFN-SFN-ObsTimeDifference2 ::=   INTEGER (0..40961)

SFN-SFN-OTD-Type ::=           ENUMERATED {
                                   noReport,
                                   type1,
                                   type2 }

SIR ::=                        INTEGER (-10..20)

SIR-MeasurementList ::=         SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                   SIR-MeasurementResults

SIR-MeasurementResults ::=      SEQUENCE {
                                   tfcs-ID          TFCS-IdentityPlain,
                                   sir-TimeslotList
                                }

SIR-TFCS ::=                   TFCS-IdentityPlain

SIR-TFCS-List ::=              SEQUENCE (SIZE (1..maxCCTrCH)) OF
                                   SIR-TFCS

SIR-TimeslotList ::=           SEQUENCE (SIZE (1..maxTS)) OF
                                   SIR

-- Reserved bits in subframe 1 of the GPS navigation message
SubFrame1Reserved ::=          SEQUENCE {
                                   reserved1        BIT STRING (SIZE (23)),
                                   reserved2        BIT STRING (SIZE (24)),
                                   reserved3        BIT STRING (SIZE (24)),
                                   reserved4        BIT STRING (SIZE (16))
                                }

```

```

}

T-CRMax ::=
    notUsed
    t30
    t60
    t120
    t180
    t240
}

CHOICE {
    NULL,
    N-CR-T-CRMaxHyst,
    N-CR-T-CRMaxHyst,
    N-CR-T-CRMaxHyst,
    N-CR-T-CRMaxHyst,
    N-CR-T-CRMaxHyst
}

T-CRMaxHyst ::=
    ENUMERATED {
        notUsed, t10, t20, t30,
        t40, t50, t60, t70 }

TemporaryOffset ::=
    ENUMERATED {
        to10, to20, to30, to40, to50,
        to60, to70, infinite }

TemporaryOffsetList ::=
    SEQUENCE {
        temporaryOffset1
        temporaryOffset2
    }

Threshold ::=
    INTEGER (-115..0)

ThresholdPositionChange ::=
    ENUMERATED {
        pc10, pc20, pc30, pc40, pc50,
        pc100, pc200, pc300, pc500,
        pc1000, pc2000, pc5000, pc10000,
        pc20000, pc50000, pc100000 }

ThresholdSFN-GPS-TOW ::=
    ENUMERATED {
        ms1, ms2, ms3, ms5, ms10,
        ms20, ms50, ms100 }

ThresholdSFN-SFN-Change ::=
    ENUMERATED {
        c0-25, c0-5, c1, c2, c3, c4, c5,
        c10, c20, c50, c100, c200, c500,
        c1000, c2000, c5000 }

ThresholdUsedFrequency ::=
    INTEGER (-115..165)

-- Actual value = IE value * 20.
TimeInterval ::=
    INTEGER (1..13)

TimeslotInfo ::=
    SEQUENCE {
        timeslotNumber
        burstType
    }

TimeslotInfoList ::=
    SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotInfo

TimeslotISCP ::=
    INTEGER (-115..-25)

TimeslotISCP-List ::=
    SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotISCP

TimeslotListWithISCP ::=
    SEQUENCE (SIZE (1..maxTS)) OF
        TimeslotWithISCP

TimeslotWithISCP ::=
    SEQUENCE {
        timeslot
        timeslotISCP
    }

TimeToTrigger ::=
    ENUMERATED {
        ttt0, ttt10, ttt20, ttt40, ttt60,
        ttt80, ttt100, ttt120, ttt160,
        ttt200, ttt240, ttt320, ttt640,
        ttt1280, ttt2560, ttt5000 }

TrafficVolumeEventParam ::=
    SEQUENCE {
        eventID
        TrafficVolumeEventType,

```

```

reportingThreshold          TrafficVolumeThreshold,
timeToTrigger              TimeToTrigger              OPTIONAL,
pendingTimeAfterTrigger    PendingTimeAfterTrigger    OPTIONAL,
tx-InterruptionAfterTrigger TX-InterruptionAfterTrigger OPTIONAL
}

TrafficVolumeEventResults ::= SEQUENCE {
  ul-transportChannelCausingEvent TransportChannelIdentity,
  trafficVolumeEventIdentity      TrafficVolumeEventType
}

TrafficVolumeEventType ::= ENUMERATED {
  e4a,
  e4b }

TrafficVolumeMeasQuantity ::= CHOICE {
  rlc-BufferPayload          NULL,
  averageRLC-BufferPayload   TimeInterval,
  varianceOfRLC-BufferPayload TimeInterval
}

TrafficVolumeMeasSysInfo ::= SEQUENCE {
  trafficVolumeMeasurementID      MeasurementIdentity          DEFAULT 4,
  trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
  trafficVolumeMeasQuantity       TrafficVolumeMeasQuantity    OPTIONAL,
  trafficVolumeReportingQuantity  TrafficVolumeReportingQuantity OPTIONAL,
  trafficVolumeMeasRepCriteria    TrafficVolumeReportingCriteria OPTIONAL,
  measurementValidity            MeasurementValidity          OPTIONAL,
  measurementReportingMode        MeasurementReportingMode,
  reportCriteriaSysInf           TrafficVolumeReportCriteriaSysInfo
}

TrafficVolumeMeasuredResults ::= SEQUENCE {
  rb-Identity                RB-Identity,
  rlc-BuffersPayload         RLC-BuffersPayload          OPTIONAL,
  averageRLC-BufferPayload   AverageRLC-BufferPayload    OPTIONAL,
  varianceOfRLC-BufferPayload VarianceOfRLC-BufferPayload OPTIONAL
}

TrafficVolumeMeasuredResultsList ::= SEQUENCE (SIZE (1..maxRB)) OF
  TrafficVolumeMeasuredResults

TrafficVolumeMeasurement ::= SEQUENCE {
  trafficVolumeMeasurementObjectList TrafficVolumeMeasurementObjectList OPTIONAL,
  trafficVolumeMeasQuantity         TrafficVolumeMeasQuantity    OPTIONAL,
  trafficVolumeReportingQuantity    TrafficVolumeReportingQuantity OPTIONAL,
  measurementValidity              MeasurementValidity          OPTIONAL,
  reportCriteria                   TrafficVolumeReportCriteria
}

TrafficVolumeMeasurementObjectList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
  TransportChannelIdentity

TrafficVolumeReportCriteria ::= CHOICE {
  trafficVolumeReportingCriteria TrafficVolumeReportingCriteria,
  periodicalReportingCriteria   PeriodicalReportingCriteria,
  noReporting                   NULL
}

TrafficVolumeReportCriteriaSysInfo ::= CHOICE {
  trafficVolumeReportingCriteria TrafficVolumeReportingCriteria,
  periodicalReportingCriteria   PeriodicalReportingCriteria
}

TrafficVolumeReportingCriteria ::= SEQUENCE {
  transChCriteriaList          TransChCriteriaList          OPTIONAL
}

TrafficVolumeReportingQuantity ::= SEQUENCE {
  rlc-RB-BufferPayload         BOOLEAN,
  rlc-RB-BufferPayloadAverage  BOOLEAN,
  rlc-RB-BufferPayloadVariance BOOLEAN
}

TrafficVolumeThreshold ::= ENUMERATED {
  th8, th16, th32, th64, th128,
  th256, th512, th1024, th2k, th3k,

```

```

th4k, th6k, th8k, th12k, th16k,
th24k, th32k, th48k, th64k, th96k,
th128k, th192k, th256k, th384k,
th512k, th768k }

TransChCriteria ::=
    ul-transportChannelID
    eventSpecificParameters
}
SEQUENCE {
    TransportChannelIdentity OPTIONAL,
    SEQUENCE (SIZE (1..maxMeasParEvent)) OF
        TrafficVolumeEventParam OPTIONAL
}

TransChCriteriaList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransChCriteria

TransferMode ::= ENUMERATED {
    acknowledgedModeRLC,
    unacknowledgedModeRLC }

TransmittedPowerThreshold ::= INTEGER (-50..33)

TriggeringCondition1 ::= ENUMERATED {
    activeSetCellsOnly,
    monitoredSetCellsOnly,
    activeSetAndMonitoredSetCells }

TriggeringCondition2 ::= ENUMERATED {
    activeSetCellsOnly,
    monitoredSetCellsOnly,
    activeSetAndMonitoredSetCells,
    detectedSetCellsOnly,
    detectedSetAndMonitoredSetCells }

TX-InterruptionAfterTrigger ::= ENUMERATED {
    txiat0-25, txiat0-5, txiat1,
    txiat2, txiat4, txiat8, txiat16 }

UDRE ::= ENUMERATED {
    lessThan1,
    between1-and-4,
    between4-and-8,
    over8 }

UE-6AB-Event ::= SEQUENCE {
    timeToTrigger
    transmittedPowerThreshold
}
    TimeToTrigger,
    TransmittedPowerThreshold

UE-6FG-Event ::= SEQUENCE {
    timeToTrigger
    ue-RX-TX-TimeDifferenceThreshold
}
    TimeToTrigger,
    UE-RX-TX-TimeDifferenceThreshold

UE-AutonomousUpdateMode ::= CHOICE {
    on
    onWithNoReporting
    off
}
    NULL,
    NULL,
    RL-InformationLists

UE-InternalEventParam ::= CHOICE {
    event6a
    event6b
    event6c
    event6d
    event6e
    event6f
    event6g
}
    UE-6AB-Event,
    UE-6AB-Event,
    TimeToTrigger,
    TimeToTrigger,
    TimeToTrigger,
    UE-6FG-Event,
    UE-6FG-Event

UE-InternalEventParamList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    UE-InternalEventParam

UE-InternalEventResults ::= CHOICE {
    event6a
    event6b
    event6c
    event6d
    event6e
    event6f
}
    NULL,
    NULL,
    NULL,
    NULL,
    NULL,
    PrimaryCPICH-Info,

```

```

    event6g                                PrimaryCPICH-Info
  }

UE-InternalMeasQuantity ::=                SEQUENCE {
  measurementQuantity                      UE-MeasurementQuantity,
  filterCoefficient                        FilterCoefficient                DEFAULT fc1
}

UE-InternalMeasuredResults ::=            SEQUENCE {
  modeSpecificInfo                        CHOICE {
    fdd                                     SEQUENCE {
      ue-TransmittedPowerFDD              UE-TransmittedPower              OPTIONAL,
      ue-RX-TX-ReportEntryList           UE-RX-TX-ReportEntryList        OPTIONAL
    },
    tdd                                     SEQUENCE {
      ue-TransmittedPowerTDD-List         UE-TransmittedPowerTDD-List     OPTIONAL,
      appliedTA                           UL-TimingAdvance                 OPTIONAL
    }
  }
}

UE-InternalMeasurement ::=                SEQUENCE {
  ue-InternalMeasQuantity                  UE-InternalMeasQuantity          OPTIONAL,
  ue-InternalReportingQuantity             UE-InternalReportingQuantity     OPTIONAL,
  reportCriteria                           UE-InternalReportCriteria
}

UE-InternalMeasurementSysInfo ::=         SEQUENCE {
  ue-InternalMeasurementID                 MeasurementIdentity                DEFAULT 5,
  ue-InternalMeasQuantity                  UE-InternalMeasQuantity
}

UE-InternalReportCriteria ::=             CHOICE {
  ue-InternalReportingCriteria             UE-InternalReportingCriteria,
  periodicalReportingCriteria              PeriodicalReportingCriteria,
  noReporting                              NULL
}

UE-InternalReportingCriteria ::=          SEQUENCE {
  ue-InternalEventParamList               UE-InternalEventParamList        OPTIONAL
}

UE-InternalReportingQuantity ::=          SEQUENCE {
  ue-TransmittedPower                      BOOLEAN,
  modeSpecificInfo                        CHOICE {
    fdd                                     SEQUENCE {
      ue-RX-TX-TimeDiffererece            BOOLEAN
    },
    tdd                                     SEQUENCE {
      appliedTA                           BOOLEAN
    }
  }
}

-- TABULAR: For TDD only the first two values are used.
UE-MeasurementQuantity ::=                ENUMERATED {
  ue-TransmittedPower,
  ultra-Carrier-RSSI,
  ue-RX-TX-TimeDifference }

UE-RX-TX-ReportEntry ::=                  SEQUENCE {
  primaryCPICH-Info                       PrimaryCPICH-Info,
  ue-RX-TX-TimeDifferenceType1              UE-RX-TX-TimeDifferenceType1
}

UE-RX-TX-ReportEntryList ::=              SEQUENCE (SIZE (1..maxRL)) OF
  UE-RX-TX-ReportEntry

UE-RX-TX-TimeDifferenceType1 ::=          INTEGER (768..1280)

-- Actual value = IE value * 0.0625 + 768
UE-RX-TX-TimeDifferenceType2 ::=          INTEGER (0..8191)

UE-RX-TX-TimeDifferenceThreshold ::=      INTEGER (768..1280)

UE-TransmittedPower ::=                   INTEGER (-50..33)

UE-TransmittedPowerTDD-List ::=           SEQUENCE (SIZE (1..maxTS)) OF

```

## UE-TransmittedPower

```

UP-Accuracy ::=          BIT STRING (SIZE (7))

-- For sfID=0 (sf4), pageNo=18, and sfID=0 & sfID=1 (sf4 & sf5), pageNo=25,
-- the IE fields for word3 - word110 are the same as UP-GPS-IonosphericModel
-- and UP-GPS-UTC-Model. For the rest of the pages, they are the same as
-- UP-GPS-Almanac.
UP-Alma-SIB-Data ::=    SEQUENCE {
  sfID                INTEGER (0..1),
  dataID              INTEGER (0..3),
  pageNo              INTEGER (0..63),
  word3                BIT STRING (SIZE (16)),
  word4                BIT STRING (SIZE (24)),
  word5                BIT STRING (SIZE (24)),
  word6                BIT STRING (SIZE (24)),
  word7                BIT STRING (SIZE (24)),
  word8                BIT STRING (SIZE (24)),
  word9                BIT STRING (SIZE (24)),
  word10              BIT STRING (SIZE (22))
}

UP-Alma-SIB-DataList ::= SEQUENCE (SIZE (1..3)) OF
  UP-Alma-SIB-Data

UP-CipherParameters ::= SEQUENCE {
  cipheringKeyFlag    BIT STRING (SIZE (1)),
  cipheringSerialNumber INTEGER (0..65535)
}

UP-DGPS-SIB-Data ::= SEQUENCE {
  nodeBClockDrift      NodeB-ClockDrift                OPTIONAL,
  referenceLocationforSIB ReferenceLocationforSIB,      OPTIONAL,
  referenceSFN          ReferenceSFN
  referenceGPS-TOW      GPS-TOW-lusec,
  statusHealth          DiffCorrectionStatus,
  dgps-InformationList  DGPS-InformationList
}

UP-Ephe-SIB-Data ::= SEQUENCE {
  transmissionTOW      INTEGER (0..1048575),
  satID                SatID,
  tlmMessage           BIT STRING (SIZE (14)),
  tlmRevd              BIT STRING (SIZE (2)),
  how                  BIT STRING (SIZE (22)),
  wn                    BIT STRING (SIZE (10)),
  navModel             NavModel
}

UP-Error ::= SEQUENCE {
  errorReason          UP-ErrorCause,
  additionalAssistanceData AdditionalAssistanceData
}

UP-ErrorCause ::= ENUMERATED {
  notEnoughOTDOA-Cells,
  notEnoughGPS-Satellites,
  assistanceDataMissing,
  methodNotSupported,
  undefinedError,
  requestDeniedByUser,
  notProcessedAndTimeout }

UP-EventID ::= ENUMERATED {
  e7a, e7b, e7c }

UP-EventParam ::= SEQUENCE {
  reportingAmount      ReportingAmount,
  reportFirstFix       BOOLEAN,
  measurementInterval  UP-MeasurementInterval,
  eventSpecificInfo    UP-EventSpecificInfo
}

UP-EventParamList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
  UP-EventParam

UP-EventSpecificInfo ::= CHOICE {
  e7a                  ThresholdPositionChange,

```

```

    e7b          ThresholdSFN-SFN-Change,
    e7c          ThresholdSFN-GPS-TOW
  }

UP-GPS-AcquisitionAssistance ::= SEQUENCE {
  referenceTime CHOICE {
    utran-ReferenceTime      UTRAN-ReferenceTime,
    gps-ReferenceTimeOnly    INTEGER (0..60479999)
  },
  satelliteInformationList AcquisitionSatInfoList
}

UP-GPS-Almanac ::= SEQUENCE {
  wn-a          BIT STRING (SIZE (8)),
  almanacSatInfoList AlmanacSatInfoList
}

UP-GPS-AssistanceData ::= SEQUENCE {
  up-GPS-ReferenceTime          UP-GPS-ReferenceTime          OPTIONAL,
  up-GPS-ReferenceLocation      EllipsoidPointAltitude          OPTIONAL,
  up-GPS-DGPS-Corrections       UP-GPS-DGPS-Corrections          OPTIONAL,
  up-GPS-NavigationModel        UP-GPS-NavigationModel          OPTIONAL,
  up-GPS-IonosphericModel       UP-GPS-IonosphericModel          OPTIONAL,
  up-GPS-UTC-Model              UP-GPS-UTC-Model                OPTIONAL,
  up-GPS-Almanac                UP-GPS-Almanac                  OPTIONAL,
  up-GPS-AcquisitionAssistance  UP-GPS-AcquisitionAssistance OPTIONAL,
  up-GPS-Real-timeIntegrity      BadSatList                      OPTIONAL
}

UP-Cipher-GPS-Data-Indicator ::= SEQUENCE {
  up-CipherParameters           UP-CipherParameters          OPTIONAL
}

UP-GPS-DGPS-Corrections ::= SEQUENCE {
  gps-TOW          INTEGER (0..604799),
  statusHealth     DiffCorrectionStatus,
  dgps-CorrectionSatInfoList DGPS-CorrectionSatInfoList
}

UP-GPS-IonosphericModel ::= SEQUENCE {
  alfa0          BIT STRING (SIZE (8)),
  alfa1          BIT STRING (SIZE (8)),
  alfa2          BIT STRING (SIZE (8)),
  alfa3          BIT STRING (SIZE (8)),
  beta0          BIT STRING (SIZE (8)),
  beta1          BIT STRING (SIZE (8)),
  beta2          BIT STRING (SIZE (8)),
  beta3          BIT STRING (SIZE (8))
}

UP-GPS-Measurement ::= SEQUENCE {
  referenceSFN          ReferenceSFN          OPTIONAL,
  gps-TOW-1msec        GPS-TOW-1msec,
  gps-TOW-rem-usec     GPS-TOW-rem-usec      OPTIONAL,
  gps-MeasurementParamList GPS-MeasurementParamList
}

UP-GPS-NavigationModel ::= SEQUENCE {
  n-SAT          INTEGER (1..16),
  navigationModelSatInfoList NavigationModelSatInfoList
}

UP-GPS-ReferenceTime ::= SEQUENCE {
  gps-Week        INTEGER (0..1023),
  gps-TOW         GPS-TOW-lusec,
  sfn            INTEGER (0..4095),
  gps-TOW-AssistList GPS-TOW-AssistList          OPTIONAL
}

UP-GPS-UTC-Model ::= SEQUENCE {
  al          BIT STRING (SIZE (24)),
  a0         BIT STRING (SIZE (32)),
  t-ot       BIT STRING (SIZE (8)),
  wn-t       BIT STRING (SIZE (8)),
  delta-t-LS BIT STRING (SIZE (8)),
  wn-lsf     BIT STRING (SIZE (8)),
  dn         BIT STRING (SIZE (8)),
  delta-t-LSF BIT STRING (SIZE (8))
}

```

```

}

UP-IPDL-Parameters ::= SEQUENCE {
    ip-Spacing          IP-Spacing,
    ip-Length           IP-Length,
    ip-Offset          INTEGER (0..9),
    seed               INTEGER (0..63),
    burstModeParameters BurstModeParameters
}

UP-MeasuredResults ::= SEQUENCE {
    up-MultipleSets      UP-MultipleSets          OPTIONAL,
    up-ReferenceCellIdentity PrimaryCPICH-Info      OPTIONAL,
    up-OTDOA-Measurement UP-OTDOA-Measurement  OPTIONAL,
    up-Position          UP-Position            OPTIONAL,
    up-GPS-Measurement  UP-GPS-Measurement  OPTIONAL,
    up-Error             UP-Error              OPTIONAL
}

UP-Measurement ::= SEQUENCE {
    up-ReportingQuantity UP-ReportingQuantity,
    reportCriteria       UP-ReportCriteria,
    up-OTDOA-AssistanceData UP-OTDOA-AssistanceData  OPTIONAL,
    up-GPS-AssistanceData UP-GPS-AssistanceData  OPTIONAL
}

UP-MeasurementEventResults ::= CHOICE {
    event7a      UP-Position,
    event7b      UP-OTDOA-Measurement,
    event7c      UP-GPS-Measurement
}

UP-MeasurementInterval ::= ENUMERATED {
    e5, e15, e60, e300,
    e900, e1800, e3600, e7200 }

UP-MethodType ::= ENUMERATED {
    ue-Assisted,
    ue-Based,
    ue-BasedPreferred,
    ue-AssistedPreferred }

UP-MultipleSets ::= SEQUENCE {
    numberOfOTDOA-IPDL-GPS-Sets INTEGER (2..3),
    numberOfReferenceCells      INTEGER (1..3),
    referenceCellRelation       ReferenceCellRelation
}

UP-OTDOA-AssistanceData ::= SEQUENCE {
    up-OTDOA-ReferenceCell      UP-OTDOA-ReferenceCell      OPTIONAL,
    up-OTDOA-MeasurementAssistDataList UP-OTDOA-MeasurementAssistDataList  OPTIONAL,
    up-IPDL-Parameters          UP-IPDL-Parameters          OPTIONAL
}

UP-OTDOA-AssistanceSIB ::= SEQUENCE {
    up-CipherParameters      UP-CipherParameters          OPTIONAL,
    searchWindowSize         OTDOA-SearchWindowSize,
    referenceCellPosition    ReferenceCellPosition,
    up-IPDL-Parameters       UP-IPDL-Parameters          OPTIONAL,
    cellToMeasureInfoList    CellToMeasureInfoList
}

UP-OTDOA-Measurement ::= SEQUENCE {
    sfn                INTEGER (0..4095),
    ue-RX-TX-TimeDifferenceType2 UE-RX-TX-TimeDifferenceType2,
    qualityChoice      CHOICE {
        std-10      ReferenceQuality10,
        std-50      ReferenceQuality50,
        cpich-EcN0  CPICH-Ec-N0-OTDOA,
        defaultQuality ReferenceQuality
    },
    neighbourList      NeighbourList          OPTIONAL
}

UP-OTDOA-MeasurementAssistData ::= SEQUENCE {
    primaryCPICH-Info PrimaryCPICH-Info,
    frequencyInfo     FrequencyInfo          OPTIONAL,
    sfn-SFN-ObsTimeDifference SFN-SFN-ObsTimeDifference1,

```



```

    fineSFN-SFN                FineSFN-SFN                OPTIONAL,
    searchWindowSize           OTDOA-SearchWindowSize,
    relativeNorth              INTEGER (-20000..20000)        OPTIONAL,
    relativeEast               INTEGER (-20000..20000)        OPTIONAL,
    relativeAltitude           INTEGER (-4000..4000)          OPTIONAL
}

UP-OTDOA-MeasurementAssistDataList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    UP-OTDOA-MeasurementAssistData

UP-OTDOA-ReferenceCell ::= SEQUENCE {
    primaryCPICH-Info          PrimaryCPICH-Info,
    frequencyInfo              FrequencyInfo                OPTIONAL,
    cellPosition               ReferenceCellPosition        OPTIONAL
}

UP-Position ::= SEQUENCE {
    referenceSFN               ReferenceSFN,
    gps-TOW                    GPS-TOW-lusec,
    positionEstimate           PositionEstimate
}

UP-ReportCriteria ::= CHOICE {
    up-ReportingCriteria       UP-EventParamList,
    periodicalReportingCriteria PeriodicalReportingCriteria,
    noReporting                NULL
}

UP-ReportingQuantity ::= SEQUENCE {
    methodType                 UP-MethodType,
    positioningMethod          PositioningMethod,
    responseTime               UP-ResponseTime,
    accuracy                   UP-Accuracy                OPTIONAL,
    gps-TimingOfCellWanted     BOOLEAN,
    multipleSets               BOOLEAN,
    environmentCharacterisation EnvironmentCharacterisation    OPTIONAL
}

UP-ResponseTime ::= ENUMERATED {
    s1, s2, s4, s8, s16,
    s32, s64, s128 }

UTRA-CarrierRSSI ::= INTEGER (-95..-30)

UTRAN-ReferenceTime ::= SEQUENCE {
    gps-TOW                    GPS-TOW-lusec,
    sfn                        INTEGER (0..4095)
}

VarianceOfRLC-BufferPayload ::= ENUMERATED {
    plv0, plv4, plv8, plv16, plv32, plv64,
    plv128, plv256, plv512, plv1024,
    plv2k, plv4k, plv8k, plv16k }

-- Actual value = IE value * 0.1
W ::= INTEGER (0..20)

-- *****
--
-- OTHER INFORMATION ELEMENTS (10.3.8)
--
-- *****

BCC ::= INTEGER (0..7)

BCCH-ModificationInfo ::= SEQUENCE {
    mib-ValueTag              MIB-ValueTag,
    bcch-ModificationTime     BCCH-ModificationTime    OPTIONAL
}

-- Actual value = IE value * 8
BCCH-ModificationTime ::= INTEGER (0..511)

BSIC ::= SEQUENCE {
    ncc                       NCC,
    bcc                       BCC
}

```

```

CBS-DRX-Level1Information ::= SEQUENCE {
    ctch-AllocationPeriod      INTEGER (1..256),
    cbs-FrameOffset           INTEGER (0..255)
}

CDMA2000-Message ::= SEQUENCE {
    msg-Type                  BIT STRING (SIZE (8)),
    payload                   BIT STRING (SIZE (1..512))
}

CDMA2000-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    CDMA2000-Message

CDMA2000-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumCDMA2000Freqs)) OF
    FrequencyInfoCDMA2000

CellValueTag ::= INTEGER (1..4)

--Actual value = 2^(IE value)
ExpirationTimerFactor ::= INTEGER (1..8)

FDD-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumFDDFreqs)) OF
    FrequencyInfoFDD

FrequencyInfoCDMA2000 ::= SEQUENCE {
    band-Class                BIT STRING (SIZE (5)),
    cdma-Freq                 BIT STRING (SIZE(11))
}

GSM-BA-Range ::= SEQUENCE {
    gsmLowRangeUARFCN         UARFCN,
    gsmUpRangeUARFCN          UARFCN
}

GSM-BA-Range-List ::= SEQUENCE (SIZE (1..maxNumGSMFreqRanges)) OF
    GSM-BA-Range

GSM-Classmark2 ::= OCTET STRING (SIZE (5))

GSM-Classmark3 ::= OCTET STRING

GSM-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    BIT STRING (SIZE (1..512))

IdentificationOfReveivedMessage ::= SEQUENCE {
    rrc-TransactionIdentifier  RRC-TransactionIdentifier,
    receivedMessageType        ReceivedMessageType
}

InterRAT-ChangeFailureCause ::= CHOICE {
    configurationUnacceptable  NULL,
    physicalChannelFailure     NULL,
    protocolError              ProtocolErrorInformation,
    unspecified                NULL,
    spare1                     NULL,
    spare2                     NULL,
    spare3                     NULL
}

InterRAT-UE-RadioAccessCapability ::= CHOICE {
    gsm                        SEQUENCE {
        gsm-Classmark2        GSM-Classmark2,
        gsm-Classmark3        GSM-Classmark3
    },
    cdma2000                   SEQUENCE {
        cdma2000-MessageList  CDMA2000-MessageList
    }
}

InterRAT-UE-RadioAccessCapabilityList ::= SEQUENCE (SIZE(1..maxInterSysMessages)) OF
    InterRAT-UE-RadioAccessCapability

InterRAT-HO-Failure ::= SEQUENCE {
    interRAT-HO-FailureCause  InterRAT-HO-FailureCause OPTIONAL,
    interRATMessage           InterRATMessage           OPTIONAL
}

```

```

InterRAT-HO-FailureCause ::= CHOICE {
    configurationUnacceptable    NULL,
    physicalChannelFailure      NULL,
    protocolError               ProtocolErrorInformation,
    interRAT-ProtocolError      NULL,
    unspecified                  NULL,
    spare1                       NULL,
    spare2                       NULL,
    spare3                       NULL,
    spare4                       NULL
}

InterRATMessage ::= CHOICE {
    gsm                           SEQUENCE {
        gsm-MessageList          GSM-MessageList
    },
    cdma2000                       SEQUENCE {
        cdma2000-MessageList     CDMA2000-MessageList
    }
}

InterRATMessageList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    InterRATMessage

MasterInformationBlock ::= SEQUENCE {
    mib-ValueTag                 MIB-ValueTag,
    plmn-Type                    PLMN-Type,
    -- TABULAR: The PLMN identity and ANSI-41 core network information
    -- are included in PLMN-Type.
    sibSb-ReferenceList          SIBSb-ReferenceList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
}

MIB-ValueTag ::= INTEGER (1..8)

NCC ::= INTEGER (0..7)

PLMN-ValueTag ::= INTEGER (1..256)

PredefinedConfigIdentityAndValueTag ::= SEQUENCE {
    predefinedConfigIdentity      PredefinedConfigIdentity,
    predefinedConfigValueTag      PredefinedConfigValueTag OPTIONAL
}

ProtocolErrorInformation ::= SEQUENCE {
    diagnosticsType              CHOICE {
        type1                     SEQUENCE {
            protocolErrorCause    ProtocolErrorCause
        },
        spare                      NULL
    }
}

ReceivedMessageType ::= ENUMERATED {
    activeSetUpdate,
    cellUpdateConfirm,
    counterCheck,
    downlinkDirectTransfer,
    interRATHandoverCommand,
    measurementControl,
    pagingType2,
    physicalChannelReconfiguration,
    physicalSharedChannelAllocation,
    radioBearerReconfiguration,
    radioBearerRelease,
    radioBearerSetup,
    rrcConnectionRelease,
    rrcConnectionReject,
    rrcConnectionSetup,
    securityModeCommand,
    signallingConnectionRelease,
    transportChannelReconfiguration,
    transportFormatCombinationControl,
    ueCapabilityEnquiry,
    ueCapabilityInformationConfirm,
    uplinkPhysicalChannelControl,
}

```

```

uraUpdateConfirm,
utranMobilityInformation,
spare1, spare2, spare3, spare4,
spare5, spare6, spare7
}

Rplmn-Information ::= SEQUENCE {
    gsm-BA-Range-List GSM-BA-Range-List OPTIONAL,
    fdd-UMTS-Frequency-List FDD-UMTS-Frequency-List
    OPTIONAL,
    tdd-UMTS-Frequency-List FDD-UMTS-Frequency-List
    OPTIONAL,
    cdma2000-UMTS-Frequency-List CDMA2000-UMTS-Frequency-
List OPTIONAL
}

SchedulingInformation ::= SEQUENCE {
    scheduling SEQUENCE {
        segCount SegCount DEFAULT 1,
        sib-Pos CHOICE {
            -- The element name indicates the repetition period and the value
            -- (multiplied by two) indicates the position of the first segment.
            rep4 INTEGER (0..1),
            rep8 INTEGER (0..3),
            rep16 INTEGER (0..7),
            rep32 INTEGER (0..15),
            rep64 INTEGER (0..31),
            rep128 INTEGER (0..63),
            rep256 INTEGER (0..127),
            rep512 INTEGER (0..255),
            rep1024 INTEGER (0..511),
            rep2048 INTEGER (0..1023),
            rep4096 INTEGER (0..2047)
        },
        sib-PosOffsetInfo SibOFF-List OPTIONAL
    }
}

SchedulingInformationSIB ::= SEQUENCE {
    sib-Type SIB-TypeAndTag,
    scheduling SchedulingInformation
}

SchedulingInformationSIBSb ::= SEQUENCE {
    sibSb-Type SIBSb-TypeAndTag,
    scheduling SchedulingInformation
}

SegCount ::= INTEGER (1..16)

SegmentIndex ::= INTEGER (1..15)

-- Actual value = 2 * IE value
SFN-Prime ::= INTEGER (0..2047)

SIB-Data-fixed ::= BIT STRING (SIZE (222))

SIB-Data-variable ::= BIT STRING (SIZE (1..214))

SIB-ReferenceList ::= SEQUENCE (SIZE (1..maxSIB)) OF
SchedulingInformationSIB

SIBSb-ReferenceList ::= SEQUENCE (SIZE (1..maxSIB)) OF
SchedulingInformationSIBSb

SIB-ReferenceListFACH ::= SEQUENCE (SIZE (1..maxSIB-FACH)) OF
SchedulingInformationSIB

SIB-Type ::= ENUMERATED {
    masterInformationBlock,
    systemInformationBlockType1,
    systemInformationBlockType2,
    systemInformationBlockType3,
    systemInformationBlockType4,
    systemInformationBlockType5,
    systemInformationBlockType6,

```

```

systemInformationBlockType7,
systemInformationBlockType8,
systemInformationBlockType9,
systemInformationBlockType10,
systemInformationBlockType11,
systemInformationBlockType12,
systemInformationBlockType13,
systemInformationBlockType13-1,
systemInformationBlockType13-2,
systemInformationBlockType13-3,
systemInformationBlockType13-4,
systemInformationBlockType14,
systemInformationBlockType15,
systemInformationBlockType15-1,
systemInformationBlockType15-2,
systemInformationBlockType15-3,
systemInformationBlockType16,
systemInformationBlockType17,
spare1, spare2, spare3, spare4,
spare5, spare6, spare7 }

SIB-TypeAndTag ::=
  sysInfoType1
  sysInfoType2
  sysInfoType3
  sysInfoType4
  sysInfoType5
  sysInfoType6
  sysInfoType7
  sysInfoType8
  sysInfoType9
  sysInfoType10
  sysInfoType11
  sysInfoType12
  sysInfoType13
  sysInfoType13-1
  sysInfoType13-2
  sysInfoType13-3
  sysInfoType13-4
  sysInfoType14
  sysInfoType15
  sysInfoType16
  sysInfoType17
}

CHOICE {
  PLMN-ValueTag,
  PLMN-ValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  NULL,
  NULL,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  PredefinedConfigIdentityAndValueTag,
  NULL
}

SIBSb-TypeAndTag ::=
  sysInfoType1
  sysInfoType2
  sysInfoType3
  sysInfoType4
  sysInfoType5
  sysInfoType6
  sysInfoType7
  sysInfoType8
  sysInfoType9
  sysInfoType10
  sysInfoType11
  sysInfoType12
  sysInfoType13
  sysInfoType13-1
  sysInfoType13-2
  sysInfoType13-3
  sysInfoType13-4
  sysInfoType14
  sysInfoType15
  sysInfoType16
  sysInfoType17
  sysInfoTypeSB1
  sysInfoTypeSB2
}

CHOICE {
  PLMN-ValueTag,
  PLMN-ValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  NULL,
  NULL,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  CellValueTag,
  NULL,
  CellValueTag,
  PredefinedConfigIdentityAndValueTag,
  NULL,
  CellValueTag,
  CellValueTag
}

SibOFF ::=
  ENUMERATED {
    so2, so4, so6, so8, so10,
    so12, so14, so16, so18,
    so20, so22, so24, so26,
    so28, so30, so32 }

SibOFF-List ::=
  SEQUENCE (SIZE (1..15)) OF

```

```

        SibOFF

SysInfoType1 ::=          SEQUENCE {
  -- Core network IEs
  cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
  cn-DomainSysInfoList            CN-DomainSysInfoList,
  -- User equipment IEs
  ue-ConnTimersAndConstants        UE-ConnTimersAndConstants,
  ue-IdleTimersAndConstants        UE-IdleTimersAndConstants,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}
}

SysInfoType2 ::=          SEQUENCE {
  -- UTRAN mobility IEs
  ura-IdentityList                URA-IdentityList,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}
}

SysInfoType3 ::=          SEQUENCE {
  sib4indicator                   BOOLEAN,
  -- UTRAN mobility IEs
  cellIdentity                    CellIdentity,
  cellSelectReselectInfo          CellSelectReselectInfoSIB-3-4,
  cellAccessRestriction          CellAccessRestriction,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}
}

SysInfoType4 ::=          SEQUENCE {
  -- UTRAN mobility IEs
  cellIdentity                    CellIdentity,
  cellSelectReselectInfo          CellSelectReselectInfoSIB-3-4,
  cellAccessRestriction          CellAccessRestriction,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}
}

SysInfoType5 ::=          SEQUENCE {
  sib6indicator                   BOOLEAN,
  -- Physical channel IEs
  pich-PowerOffset               PICH-PowerOffset,
  modeSpecificInfo               CHOICE {
    fdd                           SEQUENCE {
      aich-PowerOffset            AICH-PowerOffset
    },
    tdd                           SEQUENCE {
      pusch-SysInfoList-SFN       PUSCH-SysInfoList-SFN       OPTIONAL,
      pdsch-SysInfoList-SFN       PDSCH-SysInfoList-SFN       OPTIONAL,
      midambleConfiguration       MidambleConfiguration       OPTIONAL,
      openLoopPowerControl-TDD     OpenLoopPowerControl-TDD
    }
  },
  primaryCCPCH-Info              PrimaryCCPCH-Info              OPTIONAL,
  prach-SystemInformationList     PRACH-SystemInformationList,
  sccpch-SystemInformationList     SCCPCH-SystemInformationList,
  cbs-DRX-LevellInformation       CBS-DRX-LevellInformation       OPTIONAL,
  -- Conditional on any of the CTCH indicator IEs in
  -- sCCPCH-SystemInformationList
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}
}

SysInfoType6 ::=          SEQUENCE {
  -- Physical channel IEs
  pich-PowerOffset               PICH-PowerOffset,
  modeSpecificInfo               CHOICE {
    fdd                           SEQUENCE {
      aich-PowerOffset            AICH-PowerOffset,
      csich-PowerOffset           CSICH-PowerOffset           OPTIONAL
    },
    tdd                           SEQUENCE {
      pusch-SysInfoList-SFN       PUSCH-SysInfoList-SFN       OPTIONAL,
      pdsch-SysInfoList-SFN       PDSCH-SysInfoList-SFN       OPTIONAL,
      midambleConfiguration       MidambleConfiguration       OPTIONAL,
      openLoopPowerControl-TDD     OpenLoopPowerControl-TDD
    }
  }
}

```

```

    },
    primaryCCPCH-Info          PrimaryCCPCH-Info          OPTIONAL,
    prach-SystemInformationList PRACH-SystemInformationList OPTIONAL,
    sCCPCH-SystemInformationList SCCPCH-SystemInformationList OPTIONAL,
    cbs-DRX-Level1Information  CBS-DRX-Level1Information  OPTIONAL,
    -- Conditional on any of the CTCH indicator IEs in
    -- sCCPCH-SystemInformationList
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}
}

SysInfoType7 ::=              SEQUENCE {
    -- Physical channel IEs
    modeSpecificInfo          CHOICE {
        fdd                    SEQUENCE {
            ul-Interference    UL-Interference
        },
        tdd                    NULL
    },
    prach-Information-SIB5-List DynamicPersistenceLevelList,
    prach-Information-SIB6-List DynamicPersistenceLevelList  OPTIONAL,
    expirationTimeFactor      ExpirationTimerFactor  OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}
}

SysInfoType8 ::=              SEQUENCE {
    -- User equipment IEs
    cpch-Parameters           CPCH-Parameters,
    -- Physical channel IEs
    cpch-SetInfoList          CPCH-SetInfoList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}
}

SysInfoType9 ::=              SEQUENCE {
    -- Physical channel IEs
    cpch-PersistenceLevelsList CPCH-PersistenceLevelsList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}
}

SysInfoType10 ::=             SEQUENCE {
    -- User equipment IEs
    drac-SysInfoList          DRAC-SysInfoList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}
}

SysInfoType11 ::=             SEQUENCE {
    sib12indicator            BOOLEAN,
    -- Measurement IEs
    fach-MeasurementOccasionInfo FACH-MeasurementOccasionInfo  OPTIONAL,
    measurementControlSysInfo    MeasurementControlSysInfo,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}
}

SysInfoType12 ::=             SEQUENCE {
    -- Measurement IEs
    fach-MeasurementOccasionInfo FACH-MeasurementOccasionInfo  OPTIONAL,
    measurementControlSysInfo    MeasurementControlSysInfo,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}
}

SysInfoType13 ::=             SEQUENCE {
    -- Core network IEs
    cn-DomainSysInfoList      CN-DomainSysInfoList,
    -- User equipment IEs
    ue-IdleTimersAndConstants  UE-IdleTimersAndConstants  OPTIONAL,
    capabilityUpdateRequirement CapabilityUpdateRequirement  OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {
        capabilityUpdateRequirement-r4Ext CapabilityUpdateRequirement-r4Ext  OPTIONAL,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions      SEQUENCE {}
    }
}

```

```

}

SysInfoType13-1 ::=                               SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-RAND-Information      ANSI-41-RAND-Information,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

SysInfoType13-2 ::=                               SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-UserZoneID-Information ANSI-41-UserZoneID-Information,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

SysInfoType13-3 ::=                               SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-PrivateNeighbourListInfo ANSI-41-PrivateNeighbourListInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

SysInfoType13-4 ::=                               SEQUENCE {
  -- ANSI-41 IEs
  ansi-41-GlobalServiceRedirectInfo
                                ANSI-41-GlobalServiceRedirectInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

SysInfoType14 ::=                               SEQUENCE {
  -- Physical channel IEs
  individualTS-InterferenceList IndividualTS-InterferenceList,
  expirationTimeFactor          ExpirationTimerFactor                OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

SysInfoType15 ::=                               SEQUENCE {
  -- Measurement IEs
  up-GPS-Assistance             UP-Cipher-GPS-Data-Indicator        OPTIONAL,
  up-OTDOA-Assistance           UP-OTDOA-AssistanceSIB              OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

SysInfoType15-1 ::=                             SEQUENCE {
  -- DGPS corrections
  up-DGPS-SIB-Data              UP-DGPS-SIB-Data
}

SysInfoType15-2 ::=                             SEQUENCE {
  -- Ephemeris and clock corrections
  up-Ephe-SIB-Data              UP-Ephe-SIB-Data
}

SysInfoType15-3 ::=                             SEQUENCE {
  -- Almanac and other data
  transmissionTOW                INTEGER (0..1048575),
  satMask                         BIT STRING (SIZE (1..32)),
  lsbTOW                          BIT STRING (SIZE (8)),
  up-Alma-SIB-DataList            UP-Alma-SIB-DataList
}

SysInfoType16 ::=                               SEQUENCE {
  -- Radio bearer IEs
  preDefinedRadioConfiguration PreDefRadioConfiguration,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

SysInfoType17 ::=                               SEQUENCE {
  -- Physical channel IEs
  pusch-SysInfoList              PUSCH-SysInfoList          OPTIONAL,
  pdsch-SysInfoList              PDSCH-SysInfoList          OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}
}

```



```

}

SysInfoTypeSB1 ::=                               SEQUENCE {
  -- Other IEs
  sib-ReferenceList                             SIB-ReferenceList           OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                          SEQUENCE {}
}

SysInfoTypeSB2 ::=                               SEQUENCE {
  -- Other IEs
  sib-ReferenceList                             SIB-ReferenceList           OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions                          SEQUENCE {}
}

TDD-UMTS-Frequency-List ::=                     SEQUENCE (SIZE (1..maxNumTDDFreqs)) OF
                                                FrequencyInfoTDD

-- *****
--
-- ANSI-41 INFORMATION ELEMENTS (10.3.9)
--
-- *****

ANSI-41-GlobalServiceRedirectInfo ::=           ANSI-41-NAS-Parameter
ANSI-41-PrivateNeighbourListInfo ::=           ANSI-41-NAS-Parameter
ANSI-41-RAND-Information ::=                   ANSI-41-NAS-Parameter
ANSI-41-UserZoneID-Information ::=             ANSI-41-NAS-Parameter
ANSI-41-NAS-Parameter ::=                     BIT STRING (SIZE (1..2048))

Min-P-REV ::=                                  BIT STRING (SIZE (8))

NAS-SystemInformationANSI-41 ::=               ANSI-41-NAS-Parameter
NID ::=                                        BIT STRING (SIZE (16))

P-REV ::=                                      BIT STRING (SIZE (8))

SID ::=                                        BIT STRING (SIZE (15))

END

```

## 11.4 Constant definitions

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```

hiPDSCHidentities          INTEGER ::= 64
hiPUSCHidentities          INTEGER ::= 64
hiRM                        INTEGER ::= 256
maxAC                       INTEGER ::= 16
maxAdditionalMeas           INTEGER ::= 4
maxASC                      INTEGER ::= 8
maxASCmap                   INTEGER ::= 7
maxASCpersist              INTEGER ::= 6
maxCCTrCH                   INTEGER ::= 8
maxCellMeas                 INTEGER ::= 32
maxCellMeas-1              INTEGER ::= 31
maxCNdomains                INTEGER ::= 4
maxCPCHsets                 INTEGER ::= 16
maxDPCH-DLchan              INTEGER ::= 8
maxDPCHcodesPerTS          INTEGER ::= 16
-- **TODO**
maxDPDCH-UL                 INTEGER ::= 6
maxDRACclasses              INTEGER ::= 8
-- **TODO**
maxFACH                     INTEGER ::= 8
maxFreq                     INTEGER ::= 8
maxFrequencybands           INTEGER ::= 4
maxInterSysMessages         INTEGER ::= 4
maxLoCHperRLC               INTEGER ::= 2
maxMeasEvent                INTEGER ::= 8
maxMeasIntervals            INTEGER ::= 3
maxMeasParEvent             INTEGER ::= 2
maxNumCDMA2000Freqs         INTEGER ::= 8
maxNumGSMFreqRanges         INTEGER ::= 32
maxNumFDDFreqs              INTEGER ::= 8

```

```

maxNumTDDFreqs          INTEGER ::= 8
maxNoOfMeas             INTEGER ::= 16
maxOtherRAT             INTEGER ::= 15
maxPagel                INTEGER ::= 8
maxPCPCH-APsig         INTEGER ::= 16
maxPCPCH-APsubCh       INTEGER ::= 12
maxPCPCH-CDsig         INTEGER ::= 16
maxPCPCH-CDsubCh       INTEGER ::= 12
maxPCPCH-SF            INTEGER ::= 7
maxPCPCHs              INTEGER ::= 64
maxPDCPAlgoType        INTEGER ::= 8
maxPDSCH               INTEGER ::= 8
maxPDSCH-TFCIgroups    INTEGER ::= 256
maxPRACH               INTEGER ::= 16
maxPredefConfig        INTEGER ::= 16
maxPUSCH               INTEGER ::= 8
maxRABsetup            INTEGER ::= 16
maxRAT                 INTEGER ::= 16
maxRB                  INTEGER ::= 32
maxRBallRABs           INTEGER ::= 27
maxRBMuxOptions        INTEGER ::= 8
maxRbperRAB            INTEGER ::= 8
maxReportedGSMCells    INTEGER ::= 6
maxRL                  INTEGER ::= 8
maxRL-1                INTEGER ::= 7
maxSat                 INTEGER ::= 16
maxSCCPCH              INTEGER ::= 16
maxSIB                 INTEGER ::= 32
-- **TODO**
maxSIB-FACH            INTEGER ::= 8
maxSIBperMsg           INTEGER ::= 16
maxSig                 INTEGER ::= 16
maxSRBsetup           INTEGER ::= 8
maxSubCh               INTEGER ::= 12
maxSystemCapability    INTEGER ::= 16
maxTF                  INTEGER ::= 32
maxTF-CPCH            INTEGER ::= 16
maxTFC                 INTEGER ::= 1024
maxTFCI-2-Combs        INTEGER ::= 512
maxTGPS                INTEGER ::= 6
maxTrCH                INTEGER ::= 32
maxTrCHpreconf         INTEGER ::= 16
maxTS                  INTEGER ::= 14
maxTS-1                INTEGER ::= 13
maxURA                 INTEGER ::= 8

```

END

## 11.5 RRC information between network nodes

Internode-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS

```

    HandoverToUTRANCommand-r3,
    MeasurementReport,
    PhysicalChannelReconfiguration-r3,
    RadioBearerReconfiguration-r3,
    RadioBearerRelease-r3,
    RadioBearerSetup-r3,
    TransportChannelReconfiguration-r3,
    UECapabilityInformation
FROM PDU-definitions

```

```

-- Core Network IEs :
    CN-DomainInformationList,
    NAS-SystemInformationGSM-MAP,
-- UTRAN Mobility IEs :
    CellIdentity,
    URA-Identity,
-- User Equipment IEs :
    C-RNTI,
    RRC-MessageSequenceNumber,
    START-Value,
    STARTList,

```

```

    U-RNTI,
    UE-RadioAccessCapability,
-- Radio Bearer IEs :
    PDCP-InfoReconfig,
    PredefinedConfigValueTag,
    RAB-InformationSetupList,
    RB-Identity,
    RB-MappingInfo,
    RLC-Info,
    RLC-SequenceNumber,
    SRB-InformationSetupList,
-- Transport Channel IEs :
    CPCH-SetID,
    DL-CommonTransChInfo,
    DL-AddReconfTransChInfoList,
    DRAC-StaticInformationList,
    UL-CommonTransChInfo,
    UL-AddReconfTransChInfoList,
-- Measurement IEs :
    MeasurementIdentity,
    MeasurementReportingMode,
    MeasurementType,
    AdditionalMeasurementID-List,
-- Other IEs :
    InterRATMessage
FROM InformationElements

    maxNoOfMeas,
    maxPredefConfig,
    maxRABsetup,
    maxRB,
    maxSRBsetup,
    maxTrCH
FROM Constant-definitions;

-- RRC information transferred between network nodes,
-- per group of information transfers having same endpoint
-- Alike class definitions for RRC PDUs

-- *****
--
-- RRC information, to target RNC
--
-- *****

-- *****
--
-- RRC information, target RNC to source RNC
--
-- *****

T-RNC-ToSRNC-Container ::= SEQUENCE {
    message          T-RNC-ToSRNC-ContainerType
}

T-RNC-ToSRNC-ContainerType ::= CHOICE {
    radioBearerSetup          RadioBearerSetup-r3,
    radioBearerReconfiguration RadioBearerReconfiguration-r3,
    radioBearerRelease        RadioBearerRelease-r3,
    transportChannelReconfiguration TransportChannelReconfiguration-r3,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
    extension                  NULL
}

-- *****
--
-- RRC information, target RNC to source RAT
--
-- *****

-- Container definitions, alike PDU definitions
-- RRC Container definition, to target RNC

-- *****
--
-- SRNC Relocation information
--

```

```

-- *****
SRNC-RelocationInfo ::= SEQUENCE {
  -- Non-RRC IEs
  stateOfRRC StateOfRRC,
  stateOfRRC-Procedure StateOfRRC-Procedure,
  cipheringStatus CipheringStatus,
  calculationTimeForCiphering CalculationTimeForCiphering OPTIONAL,
  cipheringInfoPerRB-List CipheringInfoPerRB-List OPTIONAL,
  integrityProtectionStatus IntegrityProtectionStatus,
  srb-SpecificIntegrityProtInfo SRB-SpecificIntegrityProtInfoList,
  implementationSpecificParams ImplementationSpecificParams OPTIONAL,
  -- User equipment IEs
  u-RNTI U-RNTI,
  c-RNTI C-RNTI OPTIONAL,
  ue-RadioAccessCapability UE-RadioAccessCapability,
  -- Other IEs
  interRATMessage InterRATMessage OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity URA-Identity OPTIONAL,
  -- Core network IEs
  cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP,
  cn-DomainInformationList CN-DomainInformationList OPTIONAL,
  -- Measurement IEs
  ongoingMeasRepList OngoingMeasRepList OPTIONAL,
  -- Radio bearer IEs
  preConfigStatusInfo PreConfigStatusInfo,
  srb-InformationList SRB-InformationSetupList,
  rab-InformationList RAB-InformationSetupList OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo UL-CommonTransChInfo OPTIONAL,
  ul-TransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
  modeSpecificInfo CHOICE {
    fdd SEQUENCE {
      cpch-SetID CPCH-SetID OPTIONAL,
      transChDRAC-Info DRAC-StaticInformationList OPTIONAL
    },
    tdd NULL
  },
  dl-CommonTransChInfo DL-CommonTransChInfo OPTIONAL,
  dl-TransChInfoList DL-AddReconfTransChInfoList OPTIONAL,
  -- Measurement report
  measurementReport MeasurementReport OPTIONAL
}

-- RRC Container definition, target RNC to source RNC
-- Nothing new, only re-using RRC PDUs
--
-- RRC Container definition, target RNC to source system
-- Nothing new, re-using RRC PDUs (HandoverToUTRANCommand)

-- IE definitions

CalculationTimeForCiphering ::= SEQUENCE {
  cell-Id CellIdentity,
  sfn INTEGER (0..4095)
}

CipheringInfoPerRB ::= SEQUENCE {
  dl-START START-Value,
  ul-START START-Value
}

-- TABULAR: Multiplicity value numberOfRadioBearers has been replaced
-- with maxRB.
CipheringInfoPerRB-List ::= SEQUENCE (SIZE (1..maxRB)) OF
  CipheringInfoPerRB

CipheringStatus ::= ENUMERATED {
  started, notStarted }

ImplementationSpecificParams ::= BIT STRING (SIZE (1..512))

IntegrityProtectionStatus ::= ENUMERATED {
  started, notStarted }

MeasurementCommandWithType ::= CHOICE {

```

```

    setup                MeasurementType,
    modify               NULL,
    release              NULL
}

OngoingMeasRep ::=          SEQUENCE {
    measurementIdentity    MeasurementIdentity,
    measurementCommandWithType MeasurementCommandWithType,
    -- TABULAR: The CHOICE Measurement in the tabular description is included
    -- in the IE above.
    measurementReportingMode MeasurementReportingMode          OPTIONAL,
    additionalMeasurementID-List AdditionalMeasurementID-List  OPTIONAL
}

OngoingMeasRepList ::=      SEQUENCE (SIZE (1..maxNoOfMeas)) OF
    OngoingMeasRep

PreConfigStatusInfo ::=     SEQUENCE (SIZE (1..maxPredefConfig)) OF
    PredefinedConfigValueTag

SRB-SpecificIntegrityProtInfo ::= SEQUENCE {
    rb-Identity            RB-Identity                        OPTIONAL,
    ul-RRC-HFN            BIT STRING (SIZE (28)),
    dl-RRC-HFN            BIT STRING (SIZE (28)),
    ul-RRC-SequenceNumber RRC-MessageSequenceNumber,
    dl-RRC-SequenceNumber RRC-MessageSequenceNumber
}

SRB-SpecificIntegrityProtInfoList ::= SEQUENCE (SIZE (4..maxSRBsetup)) OF
    SRB-SpecificIntegrityProtInfo

StateOfRRC ::=             ENUMERATED {
    cell-DCH, cell-FACH,
    cell-PCH, ura-PCH }

StateOfRRC-Procedure ::=   ENUMERATED {
    awaitNoRRC-Message,
    awaitRRC-ConnectionRe-establishmentComplete,
    awaitRB-SetupComplete,
    awaitRB-ReconfigurationComplete,
    awaitTransportCH-ReconfigurationComplete,
    awaitPhysicalCH-ReconfigurationComplete,
    awaitActiveSetUpdateComplete,
    awaitHandoverComplete,
    sendCellUpdateConfirm,
    sendUraUpdateConfirm,
    sendRrcConnectionReestablishment,
    otherStates }

END

```

## CHANGE REQUEST

⌘ **25.834** **CR** **001** ⌘ rev **-** ⌘ Current version: **4.0.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Tx Diversity		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ 18 Jan. 2001
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
Use <u>one</u> of the following categories: <b>F</b> (essential correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (Addition of feature), <b>C</b> (Functional modification of feature) <b>D</b> (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		Use <u>one</u> of the following releases: <b>2</b> (GSM Phase 2) <b>R96</b> (Release 1996) <b>R97</b> (Release 1997) <b>R98</b> (Release 1998) <b>R99</b> (Release 1999) <b>REL-4</b> (Release 4) <b>REL-5</b> (Release 5)	

<b>Reason for change:</b>	⌘ In last RAN1#17, TSTD is agreed to be applied to P-CCPCH, DwPCH, and DPCH. And UE must have the knowledge about the usage of TSTD for the appropriate power control of DPCH.
<b>Summary of change:</b>	⌘ New information element "TSTD indicator" is defined and also is included in IE "downlink DPCH info for each RL"
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 13.3.2.x (new), 13.3.3.x (new)		
<b>Other specs Affected:</b>	<input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications	⌘	
<b>Other comments:</b>	⌘		

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

### 13.3.2.6 Additional parameters to be broadcast

This section identifies parameters that additionally need to be broadcast to support 1.28Mcps TDD.

Depending on the size of the cell a different amount of users can be supported in one timeslot. In order to improve the configuration of the receiver in the UE it is beneficial to provide these information in the system information. It is proposed to include the parameter  $W$  in system information block type 5. This parameter provides information about the maximum channel impulse response. This parameter depends on the amount of users that can be served and the environment. This parameter is foreseen to be cell specific.

The allowed values are  $W=8, 9, 12, 16, 21, 32, 64$  (cp [1]). The predefined association of Midamble to Channelisation Codes depends on this parameter (cp. [1]).

1.28Mcps TDD has higher requirements on the uplink timing of transmissions than 3.84Mcps TDD. The means to preserve uplink synchronization are layer1 bits, the SS bits. The SS bits are transmitted every subframe, however, they are often not required that often. Thus the frequency of the update of the adjustment of uplink transmission can be decreased on a case by case basis. Another advantage of the reduction of the update frequency of the adjustment of the uplink transmission is the averaging effect by jointly evaluating a number of SS bits. Thus the probability of false adjustments is reduced. A parameter "Uplink synchronisation step size" is proposed with a value range (1..8) to achieve this.

Consequently, another parameter is reasonable that allows to adjust the step sizes of the uplink transmission adjustment. By providing this parameter the network can reduce the accuracy requirements on a case by case basis. The parameter "Uplink synchronisation frequency" is proposed to allow this adjustment of the step sizes for the adjustment of the uplink transmissions. A value range of (1..8) is proposed.

### 13.3.2.x Parameter required to inform the usage of TSTD

Depending on the capability of the base station and the characteristics of the physical channels, TSTD can be used to overcome the time varying characteristics of the communication channel. In 1.28Mcps UTRA TDD, TSTD can be applied to P-CCPCH, DwPCH, and DPCH. In case of DPCH, UE shall have the knowledge about the usage of TSTD due to the power control of DPCH. Transmission power control of DPCH is currently discussed for 1.28Mcps in WG1. Similar as for the IE "Tx diversity indicator" for FDD, "TSTD indicator" can be defined and used to inform the application of TSTD to DPCH.

## 13.3.3 Information elements for 1.28Mcps TDD

NOTE: The tabular description in this section is for information only. Change requests on TS 25.331 may follow different methodology to incorporate changes for release 00.

This section contains a tabular description of required information for physical channel description in a 25.331 like format. The hierarchical structure as specified in the RRC specification is not used but could easily be applied. The differences to the 3.84Mcps TDD mode are highlighted with revision marks. The section numbers in the type and reference column refer to 25.331v3.3.0.

### 13.3.3.1 Dedicated physical channel information

#### Uplink DPCH info

Information Element/Group name	Need	Multi	Type and reference	DESCRIPTION
Uplink DPCH power control info	QP		10.3.6.79	Not required in 1.28Mcps TDD
Uplink Timing Advance	QP			This information element is not required in 1.28Mcps TDD
UL CCTrCH List	MP	1..8		
>TFCS Identity	MD		10.3.5.21	Same as 3.84Mcps TDD
>2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
>Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
>Repetition period	MD		Integer(1, 2,4,8,16,32,64)	Same as 3.84Mcps TDD
>Repetition length	MP		Integer(1..Repetition period -1 )	Same as 3.84Mcps TDD
>Time info	MP		10.3.6.71	Same as 3.84Mcps TDD
>TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
>Timeslot list	MP	1..6		
>>Timeslot number	MP		Integer(1..6)	Reduced range compared to 3.84Mcps TDD mode.
>>Burst Type	MP		Enumerated( Type 1, Type 2)	This information is not needed in 1.28Mcps TDD because only one burst type exists.
>>Midamble Shift	MD		Integer(0..15 )	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
>> TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>>CHOICE SF	MP			
>>> SF1			Enumerated( QPSK, 8PSK)	Modulation options in contrast to 3.84Mcps TDD mode
>>> Other				
>>>>Code list	MP	1..2		
>>>>>Channelisation Codes	MP		Enumerated( (1/1),(2/1),(2/2),(4/1)..(4/4),(8/1)..(8/8),(16/1)..(16/16))	Same as in 3.84Mcps TDD.



## Downlink DPCCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UL CCTrCH List	MP	1..8		
>TFCS Identity	MD		10.3.5.21	Same as 3.84Mcps TDD
>2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
>Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
>Repetition period	MD		Integer(1, 2,4,8,16,32,64)	Same as 3.84Mcps TDD
>Repetition length	MP		Integer(1..Repetition period -1 )	Same as 3.84Mcps TDD
>Time info	MP		10.3.6.71	Same as 3.84Mcps TDD
>TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
>Timeslot list	MP	1..6		
>>Timeslot number	MP		Integer(1..6)	Reduced range compared to 3.84Mcps TDD mode.
>>Midamble Shift	MD		Integer(0..15 )	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
>>Burst Type	MP		Enumerated( Type 1, Type 2)	This information is not needed in 1.28Mcps TDD because only one burst type exists.
>> TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>>CHOICE SF	MP			
>>> SF1			Enumerated( QPSK, 8PSK)	Modulation options in contrast to 3.84Mcps TDD mode
>>> Other				
>>>>Code list	MP	1..16		
>>>>>Channelisation Codes	MP		Integer(1..16 )	Same as 3.84Mcps TDD mode.

## 13.3.3.2 Shared channel information

Details of shared channels have not been decided yet for 1.28Mcps TDD. However, it is foreseen that no modifications are required for shared channels except similar changes as for dedicated channels.

### 13.3.3.3 RACH procedure information elements

#### PRACH system information list

Information element	Need	Multi	Type and reference	Semantics description
<u>Sync1 transmission parameters</u>	<u>MP</u>		<u>Sync1 transmission parameters</u>	
PRACH system information	MP	1 .. <maxPRACH>		
>PRACH info	MP		PRACH info <u>See below</u>	
> <u>FPACH info</u>	<u>MP</u>		<u>FPACH info</u> <u>See below</u>	
>Transport channel identity	MP		Transport channel identity 10.3.5.18	
>RACH TFS	MD		Transport format set 10.3.5.23	Default value is the value of "RACH TFS" for the previous PRACH in the list (note : the first occurrence is then MP)
>RACH TFCS	MD		Transport Format Combination Set 10.3.5.20	Default value is the value of "RACH TFCS" for the previous PRACH in the list (note : the first occurrence is then MP)
>PRACH partitioning	MD		PRACH partitioning 10.3.3.45	Default value is the value of "PRACH partitioning" for the previous PRACH in the list (note : the first occurrence is then MP)
>Persistence scaling factors	OP		Persistence scaling factors 10.3.6.40	If this IE is absent, value is the value of "Persistence scaling factors" for the previous PRACH in the list if value exists
>AC-to-ASC mapping	OP		AC-to-ASC mapping 10.3.6.1	Only present in SIB 5 If this IE is absent, value is the value of "Persistence scaling factors" for the previous PRACH in the list if value exists

## PRACH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
Timeslot list	MP	1..6		
>Timeslot number	MP		Integer(1..6)	Reduced range compared to 3.84Mcps TDD mode.
>Midamble Shift	MD		Integer(0..15)	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
>TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>Code list	MP	1..2		
>>Channelisation Codes	MP		Enumerated((1/1),(2/1),(2/2),(4/1)..(4/4),(8/1)..(8/8),(16/1)..(16/16))	Same as in 3.84Mcps TDD.

## FPACH info

This IE is not used in 3.84Mcps TDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Timeslot number	MP		Integer(1..6)	
Midamble Shift	MP		Integer(0..15)	
Channelisation Codes	MP		Integer((16/1)..(16/16))	

## Sync1 transmission parameters

These parameters are not used in 3.84Mcps TDD. There are major similarities to the RACH transmission parameters in FDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Power Increment	MP		Integer(0,1,2,3)	in dB
M	MP		Integer(1,2,4,8)	Max re-transmissions of UpPTS

### 13.3.3.4 Common channel information elements

#### PCCPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Cell parameter Id	MP		Integer(0..127)	
Block STTD indicator	MD		Block STTD indicator 10.3.6.5	Default value is "TRUE" The usage of Block STTD for 1.28 Mcps TDD is currently under discussion in WG1

#### SCCPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
Repetition period	MD		Integer(2,4,8,16,32,64)	Same as 3.84Mcps TDD
Repetition length	MP		Integer(1..Repetition period -1)	Same as 3.84Mcps TDD
Offset	MP		Integer(1..Repetition Period-1)	Same as 3.84Mcps TDD
TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
Timeslot list	MP	<u>1..6</u>		
>Timeslot number	MP		<u>Integer(1..6)</u>	Reduced range compared to 3.84Mcps TDD mode.
>Midamble Shift	MD		Integer(0..15)	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
Burst Type	MP			This information is not needed in 1.28Mcps TDD because only one burst type exists.
> TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>Code list	MP	1..16		
>>Channelisation Codes	MP		Integer(1..16)	Same as 3.84Mcps TDD mode. Only spreading factor 16 is applicable.

PICH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Channelisation code	MD		Enumerated ( (16/1)...(16/16) )	Same as 3.84Mcps TDD.
Timeslot	MD		Timeslot number 10.3.6.72	Same as 3.84Mcps TDD.
Burst type	MP		Enumerated (Typ1,Typ2)	
Midamble shift	MD		Integer(0..15)	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
Repetition period/length	MD		Enumerated( (4/2),(8/2), (8/4),(16/2), (16/4), (32/2),(32/4), (64/2),(64/4) )	Same as 3.84Mcps TDD.
Offset	MP		Integer (0...Repetition period -1)	Same as 3.84Mcps TDD.
Paging indicator length	MD		Integer (2, 4, 8)	Same as 3.84Mcps TDD.
N <sub>GAP</sub>	MD		Integer(2, 4, 8)	Same as 3.84Mcps TDD.
N <sub>PCH</sub>	MD		Integer(1 .. 8)	Same as 3.84Mcps TDD.

### 13.3.3.5 Additional information elements for BCH

These information are proposed to be additionally included in System information block type 5 (in addition to the parameters for common channels)

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Uplink synchronisation step size	MP		Integer(1..8)	This parameter specifies the step size to be used for the adjustment of the uplink transmission timing
Uplink synchronisation frequency	MP		Integer(1..8)	This parameter specifies the frequency of the adjustment of the uplink transmission timing
W	MP		Integer(8, 9, 12, 16, 21, 32, 64)	

### 13.3.3.x Additional information element for TSTD

The following information element is proposed to be additionally included in IE "Downlink DPCH info for each RL".

Information Element/Group name	Need	Multi	Type and reference	Semantics description
TSTD indicator	MD		Boolean	Default value is "TRUE"

### 13.3.4 IE change example for 1.28Mcps TDD

NOTE: The tabular description in this section is for information only. Change requests on TS 25.331 may follow different methodology to incorporate changes for release 00.

It has been decided to distinguish the differences of FDD and TDD with the help of the CHOICE mode notation as described in [5] and [6]. This notation is suitable to both outline the desired commonalities between both modes and shows also the differences in an easy-to-read manner.

In order to include information elements that are specific for 1.28Mcps TDD into the existing [5] a similar principle could be used. An example how the differences between 1.28 Mcps TDD and 1.28 Mcps FDD could be shown is given in the table below.

#### 10.3.6.49 Primary CCPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
CHOICE mode	MP			
>FDD				
>>TX Diversity indicator	MD		Boolean	Default value is "TRUE"
>TDD				
>>CHOICE TDD mode				
>>>3.84Mcps				
>>>>CHOICE SyncCase	OP			
>>>>>Sync Case 1				
>>>>>Timeslot	MP		Integer (0...14)	PCCPCH timeslot
>>>>>Sync Case 2				
>>>>>Timeslot	MP		Integer(0..6)	
>>>1.28Mcps			Null	(No data)
>>Cell parameters ID	OP		Integer (0...127)	The Cell parameters ID is described in 25.223.
>>Block STTD indicator	MD		Block STTD indicator 10.3.6.5	Default value is "TRUE". <u>The usage of Block STTD is currently under discussion in WG1</u>

#### Example for inclusion of 1.28 Mcps TDD in tabular format

The principles how 1.28 Mcps TDD option can be included in the tabular format of [5] have been described. It is proposed to apply a notation as shown in the above example in order to represent 1.28 Mcps TDD in [5] in R2000.

## 14 Key Procedures of TDD Low Chip Rate Option

### 14.1 RACH Procedure

#### 14.1.1 Basic RACH Mechanism

The RACH mechanism that has been defined for the 1.28 Mcps TDD [1] is a two-step process that is similar to the two-step process that has been adopted for UTRA FDD.

Uplink Pilot Timeslot UpPTS is used for transmission of random access signatures, called SYNC1. The UpPTS is located in each 5 ms subframe and it is composed of 128 chips of SYNC1 and 32 chips of guard period. There should be 256 different SYNC1 codes for the whole system and each 8 SYNC1 codes are allocated in a code group. Each 8 SYNC1 codes group corresponds to one SYNC code which is an identity of a cell and used for DL synchronization purpose.

When a RACH access is made with the 1.28 Mcps TDD option the following steps are completed:

i) The UE randomly chooses its SYNC1 code for cell access out of the 8 possible SYNC1 codes of the code group that is indicated through the used SYNC sequence in DwPTS. The UE transmits using this SYNC1 code in the

## CHANGE REQUEST

⌘ **25.834** **CR** **002** ⌘ rev **-** ⌘ Current version: **4.0.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Propagation delay measurement		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCRTDD-L23	<b>Date:</b>	⌘ 18 Jan. 2001
<b>Category:</b>	⌘ <b>B</b>	<b>Release:</b>	⌘ REL-4
	<i>Use one of the following categories:</i> <b>F</b> (essential correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (Addition of feature), <b>C</b> (Functional modification of feature) <b>D</b> (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		<i>Use one of the following releases:</i> <b>2</b> (GSM Phase 2) <b>R96</b> (Release 1996) <b>R97</b> (Release 1997) <b>R98</b> (Release 1998) <b>R99</b> (Release 1999) <b>REL-4</b> (Release 4) <b>REL-5</b> (Release 5)

<b>Reason for change:</b>	⌘ To support the propagation delay measurement, which is already agreed in the RAN1#17, UE must transmit the UpPCH <sub>ADV</sub> to Node B.
<b>Summary of change:</b>	⌘ 1. Information elements for propagation delay measurement (UpPCH <sub>ADV</sub> and UpPCH <sub>POS</sub> ) are defined. 2. UpPCH <sub>ADV</sub> is proposed to be transmitted from UE to Node B together with IE "Measured results on RACH"
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 10.3.x (new), 13.3.2.x (new), 13.3.3.x (new)		
<b>Other specs Affected:</b>	<input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications	⌘	
<b>Other comments:</b>	⌘		

### How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 10.3 UTRAN Measurements

UTRAN measurements specified for 3.84 Mcps TDD are also used in 1.28 Mcps TDD. Ranges and accuracy have to be adapted.

### 10.3.x Received SYNC\_UL Timing Deviation

<u>Definition</u>	'Received SYNC_UL Timing Deviation' is the time difference $UpPCH_{POS} = UpPTS_{Rxpath} - UpPTS_{TS}$
<u>Where</u>	<u>UpPTS<sub>Rxpath</sub>: time of the reception in the Node B of the SYNC_UL to be used in the uplink synchronization process</u> <u>UpPTS<sub>TS</sub>: time instance two symbols prior to the end of the DwPCH according to the Node B internal timing</u>

## 10.4 Compressed Mode to Monitor 1.28Mcps TDD

The parameters currently specified for FDD compressed mode [10] [5] support the monitoring of 1.28 Mcps TDD cells.

The transmission gap pattern length is defined in frames. A frame length of 10ms consists of two 1.28 Mcps TDD subframes of 5ms length. Because it is not possible to shift the transmission gap in consecutive pattern repetitions, it is effective to search with an appropriately long gap.

Using the double frame method [9] a transmission gap length of 14 slots is a suitable parameter setting.

Therefore, this enables UEs in FDD mode to monitor 1.28 Mcps TDD cells by means of FDD compressed mode.

## 11 Primitives of the physical layer

### 11.1 Generic names of primitives between layers 1 and 2

No modifications for UTRA TDD 1.28 Mcps are required compared to UTRA TDD 3.84 Mcps.

### 11.2 Generic names of primitives between layers 1 and 3

No modifications for UTRA TDD 1.28 Mcps are required compared to UTRA TDD 3.84 Mcps.

#### 11.2.1 STATUS PRIMITIVES

No modifications for UTRA TDD 1.28 Mcps are required compared to UTRA TDD 3.84 Mcps.

#### 11.2.2 CONTROL PRIMITIVES

No modifications for UTRA TDD 1.28 Mcps are required compared to UTRA TDD 3.84 Mcps.

### 11.3 Parameter definition

#### 11.3.1 Error code

No modifications for UTRA TDD 1.28 Mcps are required compared to UTRA TDD 3.84 Mcps.



## 11.3.2 Event value

No modifications for UTRA TDD 1.28 Mcps are required compared to UTRA TDD 3.84 Mcps.

## 11.3.3 Access Information

For the UTRA TDD 1.28 Mcps the access information options are:

- Ready for RACH data transmission (when Ack on FPACH has been received);
- No response received in FPACH while maximum number of synchronisation attempts has been performed.

## 11.3.4 Transport Format Subset

No modifications for UTRA TDD 1.28 Mcps are required compared to UTRA TDD 3.84 Mcps.

## 11.3.5 Physical channel description

In addition to the physical channels defined for UTRA TDD, three physical channels are added to support low chip rate TDD option, they are: DwPTS, UpPTS and FPACH. Besides, two physical channels, Primary SCH and Secondary SCH, are not needed in low chip rate TDD option.

Because there is only one burst type in low chip rate TDD option, "burst type" defined as a parameter for physical channel is not necessary.

Due to the different RACH procedure of low chip rate TDD option, the Access Service Class selection applies to UpPTS, rather than PRACH (see section 14.1.4).

Shared channels, PUSCH and PDSCH, will be supported by TDD low chip rate option, but details are f.f.s.

The added physical channels and the modifications for PRACH are described in the following:

### 11.3.5.1 DwPTS

- Tx diversity mode.
- SYNC code ID

### 11.3.5.2 UpPTS

- SYNC1 code ID

### 11.3.5.3 FPACH

- Scrambling code.
- Channelisation code.
- Timeslot
- Midamble shift
- Tx diversity mode.

### 11.3.5.4 PRACH

- Spreading factor for data part
- Power control info:
  - UL target SIR

- Primary CCPCH DL TX power
- UL interference
- Access Service Class Selection:
- Timeslots
- Spreading Codes
- Midamble Shift

---

## 12 Layer 2 Services and Functions

### 12.1 MAC Services and Functions

#### 12.1.1 MAC Services to upper layers

MAC services to upper layers, logical channels and mapping between logical channels and transport channels are identical for UTRA TDD 3.84 Mcps and 1.28 Mcps.

#### 12.1.1 MAC functions

No modifications for 1.28Mcps TDD are required compared to 3.84Mcps TDD.

### 12.2 RLC Services and Functions

No modifications for UTRA TDD low chip rate option are required compared to UTRA TDD 3.84 Mcps

### 12.3 PDCP Services and Functions

No modifications for UTRA TDD low chip rate option are required compared to UTRA TDD 3.84 Mcps

### 12.4 Broadcast/Multicast Control - Services and Functions

No modifications for UTRA TDD low chip rate option are required compared to UTRA TDD 3.84 Mcps

---

## 13 Layer 3 - Uu Stratum Services and Functions

### 13.1 Uu Stratum services

Uu Stratum services are the same as for UTRA FDD / 3.84 Mcps TDD.

### 13.2 RRC functions

RRC functions for 1.28 Mcps TDD are common with 3.84 Mcps TDD, except for timing advance control which is maintained by L1 function Uplink Synchronization in 1.28 Mcps TDD.

## 13.3 RRC Protocol Aspects

### 13.3.1 Discussion on Physical Channel Parameters for 1.28 Mcps TDD

1.28Mcps TDD and 3.84Mcps TDD are both based on CDMA with an additional TDMA component. The most obvious difference is of course the different bandwidth that is used in the both modes. While 3.84Mcps TDD uses a chip rate of 3.84 Mcps the chip rate of 1.28Mcps TDD is 1.28 Mcps. In contrast to 3.84Mcps TDD it is foreseen to be the normal case for 1.28Mcps TDD that several frequency bands are used within one cell. For example if a frequency band of 5 MHz is available it is divided into three frequency bands of 1.6 MHz to be used for 1.28Mcps TDD.

Timing handling is a layer1 functionality due to the high accuracy requirements in 1.28Mcps TDD. Thus timing advance as an RRC functionality is not needed.

Apart from these differences there is a high potential to reuse descriptions of physical channel information in 3.84Mcps TDD for 1.28Mcps TDD mode.

#### 13.3.1.1 Parameters required to define physical channels in 1.28Mcps TDD:

- **Timeslot:** The frame structure defines seven timeslots per subframe. The timeslots of the two subframes in a 10ms frame are always associated to each other (except for the FPACH; this will be described later). The first timeslot (TS0) in a subframe is always dedicated to the downlink and the second timeslot (TS1) is always dedicated to the uplink. Thus at most six timeslots may be allocated in one direction in contrast to fourteen in 3.84Mcps TDD.
- **Channelisation code:** The handling of channelisation codes is exactly the same as in 3.84Mcps TDD.
- **Midamble shift:** The handling of midambles (basic midamble code and applied midamble shift) is basically the same as in 3.84Mcps TDD. The basic midamble code is also acquired during synchronisation process and the midamble shift is either explicitly signalled for a particular physical channel or a predefined association between channelisation codes and midamble shifts is used. This association is defined in WG1 specifications.
- **Frame allocation:** As an option the same multiframe structure (defined by an offset, repetition period and repetition length) as used in 3.84Mcps TDD can be adopted for 1.28Mcps TDD.
- **Burst type:** Only one burst type exists for 1.28Mcps TDD for traffic channels. Therefore no signalling of the used burst type is required.
- **Modulation:** The basic modulation scheme is the same as in 3.84Mcps TDD. However, in case of usage of spreading factor 1 optionally 8 PSK can be used in contrast to 3.84Mcps TDD.

#### 13.3.1.2 Handling of coded composite transport channels of dedicated or shared type in 1.28Mcps TDD:

In 1.28Mcps TDD multiplexing chain defined in [7] can be adopted with minor modifications. These modifications require only changes that are of no importance for layer 2 and layer 3 (i.e. specification of mapping of bits on the two timeslots in the different subframes).

Thus the required parameters for the specification of coded composite transport channels are the same as in 3.84Mcps TDD mode i.e.

- **Multiple CCTrCHs:** A list of up to 8 CCTrCHs can be configured. Thus an identifier for the CCTrCHs is required (TFCS Identity)
- **2nd interleaving mode:** Whether the frame or timeslot related 2nd interleaving mode is used depends on the requirements. Same as in 3.84Mcps TDD mode.
- **Puncturing limit:** Dynamic rate matching is used both in uplink and downlink. Same as in 3.84Mcps TDD mode.
- **TFCI coding:** The channel coding can be adapted to the requirements. Same as in 3.84Mcps TDD mode.
- **TFCI existence per timeslot:** Depending on the requirements a TFCI may or may not be included in particular timeslots. Same as in 3.84Mcps TDD mode.

- **Multiple timeslots per CCTrCH:** A number of timeslots may be allocated for one CCTrCH. Same as in 3.84Mcps TDD mode.
- **Channelisation codes:** In downlink direction rather multicode configuration than variable codes can be configured. In uplink direction both multicode and variable spreading are supported. Same as in 3.84Mcps TDD mode.
- **Time info:** The concept of time limited channels can be adopted from 3.84Mcps TDD mode.

## 13.3.2 Parameter description for 1.28Mcps TDD

### 13.3.2.1 Parameters for RACH procedure specification

The random access procedure for 1.28Mcps TDD is described in detail in [1].

The SYNC1 code transmission is basically the contention based mechanism in 1.28Mcps TDD. Major similarities can be noticed between preamble transmissions in FDD and SYNC1 transmissions in 1.28Mcps TDD. Thus the parameters M (maximum number of SYNC1 transmissions) are broadcast as in FDD to control the RACH procedure. Additionally, a parameter defining the step sizes to be used for the power ramping for successive SYNC1 transmissions is proposed to be included. This gives operators further means to control the RACH procedure.

There is essentially no difference between a PRACH compared to a DPCH since uplink synchronisation is already achieved with the help of the SYNC1 codes. Thus the only difference between the PRACH and the DPCH is that it is assigned to be part of the random access procedure. Since similar procedures are used for 1.28Mcps TDD as for 3.84Mcps TDD similar messages are sent over the RACH transport channel.

In principle the configuration of the PRACH can have the same flexibility as a DPCH.

The FPACH is a physical channel with similarities to the AICH in FDD. It carries only a small number of bits containing information to adjust the uplink transmissions (power control, synchronisation, ...). One FPACH transmission is only comprised of a single sub-frame. Due to the limited amount of required transmission capacity the FPACH uses only spreading factor 16.

When sending a SYNC1 sequence, the UE knows which FPACH, PRACH and S-CCPCH resources will be used for the access. This information is provided in system information on BCCH.

There is a predefined correspondence between a P-RACH and a FPACH, and an implicit correspondence between SYNC1 signatures and FPACHs, according to the following rule:

$$\text{FPACH/PRACH number} = N \bmod M,$$

where FPACH/PRACH number is the FPACH/PRACH description position within the IE 'PRACH system information list', (see section 13.3.3) e.g. the first configured PRACH/FPACH pair gets number 0, the second configured PRACH/FPACH gets number 1 and so on. This number is the parameter M in the equation above.

N is the number of the chosen signature (range 0..7). In a cell, at least one PRACH and one associated FPACH shall be configured. Up to a maximum of 8 PRACH/FPACH pairs can be configured.

The SCCPCH used for one UE is chosen in the same way as in 3.84Mcps TDD and FDD based on the Initial UE Identity in idle mode and based on the old U-RNTI in connected mode.

### 13.3.2.2 Parameters required to define the primary CCPCH

Essentially, the description of the PCCPCH in 1.28Mcps TDD is much simpler than in 3.84Mcps TDD because the timeslot for the PCCPCH is defined to be TS0 in 1.28Mcps TDD while the timeslot is flexible in 3.84Mcps TDD depending on the location of the SCH. Furthermore, in 1.28Mcps TDD there is in contrast to 3.84Mcps TDD only one burst type. Due to the different nature of the synchronization process there are no different synchronization cases. The usage of Block STTD is currently discussed for 1.28Mcps TDD in WG1.

Thus the only parameters describing the PCCPCH is the cell parameter id and Block STTD if it is decided.

The primary CCPCH can be used for cell identification in a similar way for the identification of cells as the Primary CPICH info in FDD and the primary CCPCH info in TDD.

### 13.3.2.3 Parameters required to define the secondary CCPCH

The secondary CCPCH can be described in a similar way as in 3.84Mcps TDD. Essentially, the only difference is the absence of the burst type because there is only one burst type in 1.28Mcps TDD.

### 13.3.2.4 Parameters required to define the PICH

Essentially, the concept for the paging indicator channel can be adopted from the 3.84Mcps TDD mode. Thus there are similar changes needed as for most of the other physical channels, i.e. the burst type is not required as a parameter.

### 13.3.2.5 Parameters required to define shared channels

Similar as for the other physical channels only minor changes can be expected. However, shared channels are out of the scope of this document.

### 13.3.2.6 Additional parameters to be broadcast

This section identifies parameters that additionally need to be broadcast to support 1.28Mcps TDD. Depending on the size of the cell a different amount of users can be supported in one timeslot. In order to improve the configuration of the receiver in the UE it is beneficial to provide these information in the system information. It is proposed to include the parameter  $W$  in system information block type 5. This parameter provides information about the maximum channel impulse response. This parameter depends on the amount of users that can be served and the environment. This parameter is foreseen to be cell specific.

The allowed values are  $W=8, 9, 12, 16, 21, 32, 64$  (cp [1]). The predefined association of Midamble to Channelisation Codes depends on this parameter (cp. [1]).

1.28Mcps TDD has higher requirements on the uplink timing of transmissions than 3.84Mcps TDD. The means to preserve uplink synchronization are layer1 bits, the SS bits. The SS bits are transmitted every subframe, however, they are often not required that often. Thus the frequency of the update of the adjustment of uplink transmission can be decreased on a case by case basis. Another advantage of the reduction of the update frequency of the adjustment of the uplink transmission is the averaging effect by jointly evaluating a number of SS bits. Thus the probability of false adjustments is reduced. A parameter "Uplink synchronisation step size" is proposed with a value range (1..8) to achieve this.

Consequently, another parameter is reasonable that allows to adjust the step sizes of the uplink transmission adjustment. By providing this parameter the network can reduce the accuracy requirements on a case by case basis. The parameter "Uplink synchronisation frequency" is proposed to allow this adjustment of the step sizes for the adjustment of the uplink transmissions. A value range of (1..8) is proposed.

### 13.3.2.x Information element for propagation delay measurement

In 1.28Mcps TDD, knowing the received timing of UpPCH or PRACH does not allow the Node B to measure the propagation delay, because the transmission timing of those physical channels are adjusted by the UE for uplink synchronization. For SRNC to measure the propagation delay when PRACH is sent, the following two measurement values can be used,


- UpPCH<sub>ADV</sub>: Difference between the Rx timing and initial Tx timing of a UE.
- UpPCH<sub>POS</sub>: Received starting position of the UpPCH. The reference time (UpPCH<sub>POS</sub> = 0) is two symbols prior to the end of the DwPCH. Any received starting position of the UpPCH after that point of time is positive.

Then, SRNC can calculate the propagation delay using the above values as follows.

$$\text{Propagation Delay} = (\text{UpPCH}_{\text{ADV}} + \text{UpPCH}_{\text{POS}} - 8 \cdot 16 T_C) / 2$$

To support this propagation delay measurement, the UE shall transmit the UpPCH<sub>ADV</sub> to SRNC.

Following Figure x illustrates the timing of UpPCH transmission.

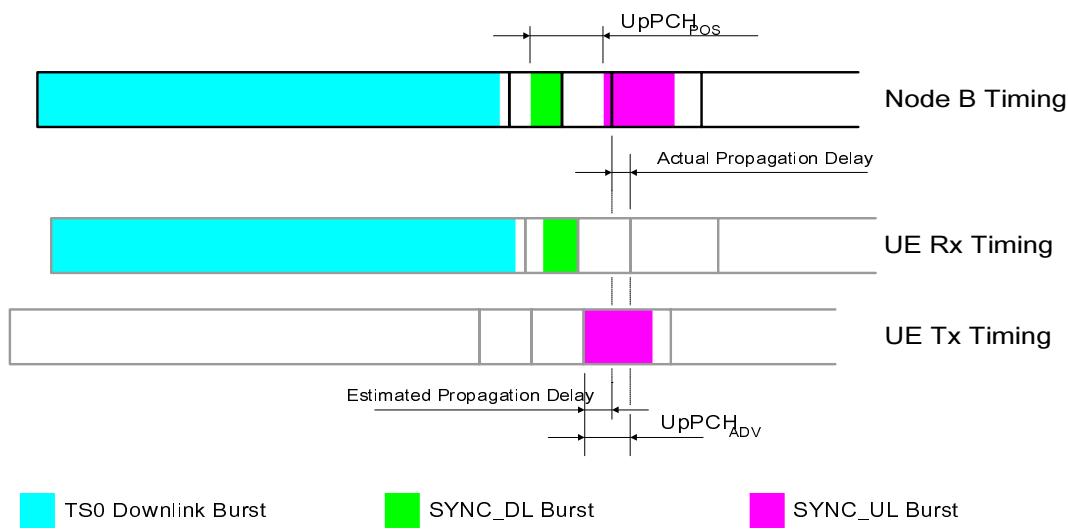

**Figure x: Timing of the UpPCH transmission.**

### 13.3.3 Information elements for 1.28Mcps TDD

NOTE: The tabular description in this section is for information only. Change requests on TS 25.331 may follow different methodology to incorporate changes for release 00.

This section contains a tabular description of required information for physical channel description in a 25.331 like format. The hierarchical structure as specified in the RRC specification is not used but could easily be applied. The differences to the 3.84Mcps TDD mode are highlighted with revision marks. The section numbers in the type and reference column refer to 25.331v3.3.0.

### 13.3.3.1 Dedicated physical channel information

#### Uplink DPCH info

Information Element/Group name	Need	Multi	Type and reference	DESCRIPTION
Uplink DPCH power control info	QP		10.3.6.79	Not required in 1.28Mcps TDD
Uplink Timing Advance	QP			This information element is not required in 1.28Mcps TDD
UL CCTrCH List	MP	1..8		
>TFCS Identity	MD		10.3.5.21	Same as 3.84Mcps TDD
>2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
>Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
>Repetition period	MD		Integer(1, 2,4,8,16,32,64)	Same as 3.84Mcps TDD
>Repetition length	MP		Integer(1.. Repetition period -1 )	Same as 3.84Mcps TDD
>Time info	MP		10.3.6.71	Same as 3.84Mcps TDD
>TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
>Timeslot list	MP	1..6		
>>Timeslot number	MP		Integer(1..6)	Reduced range compared to 3.84Mcps TDD mode.
>>Burst Type	MP		Enumerated( Type 1, Type 2)	This information is not needed in 1.28Mcps TDD because only one burst type exists.
>>Midamble Shift	MD		Integer(0..15 )	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
>> TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>>CHOICE SF	MP			
>>> SF1			Enumerated( QPSK, 8PSK)	Modulation options in contrast to 3.84Mcps TDD mode
>>> Other				
>>>>Code list	MP	1..2		
>>>>>Channelisation Codes	MP		Enumerated( (1/1),(2/1),(2/2),(4/1)..(4/4),(8/1)..(8/8),(16/1)..(16/16))	Same as in 3.84Mcps TDD.

## Downlink DPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
UL CCTrCH List	MP	1..8		
>TFCS Identity	MD		10.3.5.21	Same as 3.84Mcps TDD
>2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
>Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
>Repetition period	MD		Integer(1, 2,4,8,16,32,64)	Same as 3.84Mcps TDD
>Repetition length	MP		Integer(1..Repetition period -1 )	Same as 3.84Mcps TDD
>Time info	MP		10.3.6.71	Same as 3.84Mcps TDD
>TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
>Timeslot list	MP	1..6		
>>Timeslot number	MP		Integer(1..6)	Reduced range compared to 3.84Mcps TDD mode.
>>Midamble Shift	MD		Integer(0..15 )	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
>>Burst Type	MP		Enumerated( Type 1, Type 2)	This information is not needed in 1.28Mcps TDD because only one burst type exists.
>> TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>>CHOICE SF	MP			
>>> SF1			Enumerated( QPSK, 8PSK)	Modulation options in contrast to 3.84Mcps TDD mode
>>> Other				
>>>>Code list	MP	1..16		
>>>>>Channelisation Codes	MP		Integer(1..16 )	Same as 3.84Mcps TDD mode.

### 13.3.3.2 Shared channel information

Details of shared channels have not been decided yet for 1.28Mcps TDD. However, it is foreseen that no modifications are required for shared channels except similar changes as for dedicated channels.



### 13.3.3.3 RACH procedure information elements

#### PRACH system information list

Information element	Need	Multi	Type and reference	Semantics description
<u>Sync1 transmission parameters</u>	<u>MP</u>		<u>Sync1 transmission parameters</u>	
PRACH system information	MP	1 .. <maxPRACH>		
>PRACH info	MP		PRACH info <u>See below</u>	
> <u>FPACH info</u>	<u>MP</u>		<u>FPACH info</u> <u>See below</u>	
>Transport channel identity	MP		Transport channel identity 10.3.5.18	
>RACH TFS	MD		Transport format set 10.3.5.23	Default value is the value of "RACH TFS" for the previous PRACH in the list (note : the first occurrence is then MP)
>RACH TFCS	MD		Transport Format Combination Set 10.3.5.20	Default value is the value of "RACH TFCS" for the previous PRACH in the list (note : the first occurrence is then MP)
>PRACH partitioning	MD		PRACH partitioning 10.3.3.45	Default value is the value of "PRACH partitioning" for the previous PRACH in the list (note : the first occurrence is then MP)
>Persistence scaling factors	OP		Persistence scaling factors 10.3.6.40	If this IE is absent, value is the value of "Persistence scaling factors" for the previous PRACH in the list if value exists
>AC-to-ASC mapping	OP		AC-to-ASC mapping 10.3.6.1	Only present in SIB 5 If this IE is absent, value is the value of "Persistence scaling factors" for the previous PRACH in the list if value exists

## PRACH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
Timeslot list	MP	1..6		
>Timeslot number	MP		Integer(1..6)	Reduced range compared to 3.84Mcps TDD mode.
>Midamble Shift	MD		Integer(0..15)	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
>TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>Code list	MP	1..2		
>>Channelisation Codes	MP		Enumerated((1/1),(2/1),(2/2),(4/1)..(4/4),(8/1)..(8/8),(16/1)..(16/16))	Same as in 3.84Mcps TDD.

## FPACH info

This IE is not used in 3.84Mcps TDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Timeslot number	MP		Integer(1..6)	
Midamble Shift	MP		Integer(0..15)	
Channelisation Codes	MP		Integer((16/1)..(16/16))	

## Sync1 transmission parameters

These parameters are not used in 3.84Mcps TDD. There are major similarities to the RACH transmission parameters in FDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Power Increment	MP		Integer(0,1,2,3)	in dB
M	MP		Integer(1,2,4,8)	Max re-transmissions of UpPTS

### 13.3.3.4 Common channel information elements

#### PCCPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Cell parameter Id	MP		Integer(0..127)	
Block STTD indicator	MD		Block STTD indicator 10.3.6.5	Default value is "TRUE" The usage of Block STTD for 1.28 Mcps TDD is currently under discussion in WG1

#### SCCPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
2nd interleaving mode	MP		Enumerated( Frame, Timeslot)	Same as 3.84Mcps TDD
Puncturing limit	MP		Real(0.40..1.0 by step of 0.04)	Same as 3.84Mcps TDD
Repetition period	MD		Integer(2,4,8,16,32,64)	Same as 3.84Mcps TDD
Repetition length	MP		Integer(1..Repetition period -1 )	Same as 3.84Mcps TDD
Offset	MP		Integer(1..Repetition Period-1)	Same as 3.84Mcps TDD
TFCI coding	MP		Integer(4,8,16,32)	Same as 3.84Mcps TDD
Timeslot list	MP	<u>1..6</u>		
>Timeslot number	MP		<u>Integer(1..6)</u>	Reduced range compared to 3.84Mcps TDD mode.
>Midamble Shift	MD		Integer(0..15)	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
Burst Type	MP			This information is not needed in 1.28Mcps TDD because only one burst type exists.
> TFCI existence	MP		Boolean	Same as 3.84Mcps TDD
>Code list	MP	1..16		
>>Channelisation Codes	MP		Integer(1..16)	Same as 3.84Mcps TDD mode. Only spreading factor 16 is applicable.

PICH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Channelisation code	MD		Enumerated ( (16/1)...(16/16) )	Same as 3.84Mcps TDD.
Timeslot	MD		Timeslot number 10.3.6.72	Same as 3.84Mcps TDD.
Burst type	MP		Enumerated (Typ1,Typ2)	
Midamble shift	MD		Integer(0..15)	Range depends on cell configuration. A fixed association between channelisation codes and midamble shift is described in 25.928.
Repetition period/length	MD		Enumerated( (4/2),(8/2), (8/4),(16/2), (16/4), (32/2),(32/4), (64/2),(64/4) )	Same as 3.84Mcps TDD.
Offset	MP		Integer (0...Repetition period -1)	Same as 3.84Mcps TDD.
Paging indicator length	MD		Integer (2, 4, 8)	Same as 3.84Mcps TDD.
N <sub>GAP</sub>	MD		Integer(2, 4, 8)	Same as 3.84Mcps TDD.
N <sub>PCH</sub>	MD		Integer(1 .. 8)	Same as 3.84Mcps TDD.

### 13.3.3.5 Additional information elements for BCH

These information are proposed to be additionally included in System information block type 5 (in addition to the parameters for common channels)

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Uplink synchronisation step size	MP		Integer(1..8)	This parameter specifies the step size to be used for the adjustment of the uplink transmission timing
Uplink synchronisation frequency	MP		Integer(1..8)	This parameter specifies the frequency of the adjustment of the uplink transmission timing
W	MP		Integer(8, 9, 12, 16, 21, 32, 64)	

### 13.3.3.x Information element for Propagation Delay Measurement

Following information element is proposed to be additionally included in IE "Measured results on RACH" to support the propagation delay measurement.

Information Element/group name	Need	Multi	Type and reference	Semantics description
UpPCH <sub>ADV</sub>	MP		Integer (0..352)	In chips. For 1.28Mcps TDD

### 13.3.4 IE change example for 1.28Mcps TDD

NOTE: The tabular description in this section is for information only. Change requests on TS 25.331 may follow different methodology to incorporate changes for release 00.

It has been decided to distinguish the differences of FDD and TDD with the help of the CHOICE mode notation as described in [5] and [6]. This notation is suitable to both outline the desired commonalities between both modes and shows also the differences in an easy-to-read manner.

In order to include information elements that are specific for 1.28Mcps TDD into the existing [5] a similar principle could be used. An example how the differences between 1.28 Mcps TDD and 1.28 Mcps TDD could be shown is given in the table below.

#### 10.3.6.49 Primary CCPCH info

Information Element/Group name	Need	Multi	Type and reference	Semantics description
CHOICE <i>mode</i>	MP			
>FDD				
>>TX Diversity indicator	MD		Boolean	Default value is "TRUE"
>TDD				
>>CHOICE TDD mode				
>>>3.84Mcps				
>>>>CHOICE SyncCase	OP			
>>>>>Sync Case 1				
>>>>>Timeslot	MP		Integer (0..14)	PCCPCH timeslot
>>>>>Sync Case 2				
>>>>>Timeslot	MP		Integer(0..6)	
>>>1.28Mcps			Null	(No data)
>>Cell parameters ID	OP		Integer (0..127)	The Cell parameters ID is described in 25.223.
>>Block STTD indicator	MD		Block STTD indicator 10.3.6.5	Default value is "TRUE". <u>The usage of Block STTD is currently under discussion in WG1</u>

#### Example for inclusion of 1.28 Mcps TDD in tabular format

The principles how 1.28 Mcps TDD option can be included in the tabular format of [5] have been described. It is proposed to apply a notation as shown in the above example in order to represent 1.28 Mcps TDD in [5] in R2000.

## 14 Key Procedures of TDD Low Chip Rate Option

### 14.1 RACH Procedure

#### 14.1.1 Basic RACH Mechanism

The RACH mechanism that has been defined for the 1.28 Mcps TDD [1] is a two-step process that is similar to the two-step process that has been adopted for UTRA FDD.

Uplink Pilot Timeslot UpPTS is used for transmission of random access signatures, called SYNC1. The UpPTS is located in each 5 ms subframe and it is composed of 128 chips of SYNC1 and 32 chips of guard period. There should be 256 different SYNC1 codes for the whole system and each 8 SYNC1 codes are allocated in a code group. Each 8 SYNC1 codes group corresponds to one SYNC code which is an identity of a cell and used for DL synchronization purpose.

When a RACH access is made with the 1.28 Mcps TDD option the following steps are completed:

## CHANGE REQUEST

⌘ **25.834** **CR** **003** ⌘ rev **r1** ⌘ Current version: **4.0.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘	Update of TR 25.834	
<b>Source:</b>	⌘	TSG-RAN WG2	
<b>Work item code:</b>	⌘	LCRTDD-L23	<b>Date:</b> ⌘ 19 February 2001
<b>Category:</b>	⌘	<b>B</b>	<b>Release:</b> ⌘ REL-4
		<p><i>Use <u>one</u> of the following categories:</i></p> <p><b>F</b> (essential correction)  <b>A</b> (corresponds to a correction in an earlier release)  <b>B</b> (Addition of feature),  <b>C</b> (Functional modification of feature)  <b>D</b> (Editorial modification)</p> <p>Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p>	<p><i>Use <u>one</u> of the following releases:</i></p> <p><b>2</b> (GSM Phase 2)  <b>R96</b> (Release 1996)  <b>R97</b> (Release 1997)  <b>R98</b> (Release 1998)  <b>R99</b> (Release 1999)  <b>REL-4</b> (Release 4)  <b>REL-5</b> (Release 5)</p>

<b>Reason for change:</b>	⌘	TR 25.834 is updated to reflect the latest concepts for 1.28 Mcps TDD.
<b>Summary of change:</b>	⌘	<p>This CR removes USCH/DSCH operation as an ffs item in 25.834.</p> <p>Tables on UE simultaneous physical channel combinations are updated.</p>
<b>Consequences if not approved:</b>	⌘	

<b>Clauses affected:</b>	⌘	8.2, 9.1, 9.2, 9.3, 9.4, 9.5, 11.3.5, 13.3.2.5									
<b>Other specs affected:</b>	⌘	<table style="width: 100%; border: none;"> <tr> <td style="width: 20%;"><input type="checkbox"/></td> <td style="width: 60%;">Other core specifications</td> <td style="width: 20%;">⌘</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Test specifications</td> <td></td> </tr> <tr> <td><input type="checkbox"/></td> <td>O&amp;M Specifications</td> <td></td> </tr> </table>	<input type="checkbox"/>	Other core specifications	⌘	<input type="checkbox"/>	Test specifications		<input type="checkbox"/>	O&M Specifications	
<input type="checkbox"/>	Other core specifications	⌘									
<input type="checkbox"/>	Test specifications										
<input type="checkbox"/>	O&M Specifications										
<b>Other comments:</b>	⌘										

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at:  
[http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

## 8.2 Types of Transport Channels

A general classification of transport channels is into two groups:

- common channels; and
- dedicated channels (where the UEs can be unambiguously identified by the physical channel, i.e. code, frequency and time slot).

Common transport channel types are the same as for UTRA TDD 3.84 Mcps. Details of operation on RACH and FACH are f.f.s, e.g., power control. RACH and FACH are characterized as follows:

1. Random Access Channel(s) (RACH) characterised by:
  - existence in uplink only;
  - limited data field;
  - collision risk;
  - power control.
2. Forward Access Channel(s) (FACH) characterised by:
  - existence in downlink only;
  - possibility to use beam forming;
  - power control;
  - possibility to change rate fast (each 10ms).

The details of shared channels USCH and DSCH are f.f.s.

The shared channels USCH and DSCH are used in the same way as for UTRA TDD 3.84 Mcps.

Dedicated transport channel types are the same as for UTRA TDD 3.84 Mcps. For TDD low chip rate option, DCH has the possibility to use Uplink Synchronisation to maintain timing advance :

1. Dedicated Channel (DCH) characterised by:
  - existing in uplink or downlink;
  - possibility to use beam forming;
  - possibility to change rate fast (each 10ms);
  - fast power control;
  - Possibility to use Uplink Synchronisation



## 9 UE Simultaneous Physical Channels combinations

### 9.1 1.28 Mcps TDD Uplink

The table addresses the possible combinations of 1.28 Mcps TDD physical channels that can be supported in the uplink by one UE simultaneously on the same frequency in the TDD 1.28 Mcps option in any one 5 ms subframe. In 1.28Mcps TDD a physical channel corresponds to one code, one timeslot, one frequency.

**Table 1: 1.28 Mcps TDD Uplink**

	<u>Physical Channel Combination</u>	<u>Transport Channel Combination</u>	<u>Mandatory or dependent on UE radio access capabilities</u>	<u>Comment</u>
1	<u>UpPCH</u>	<u>N/A</u>	<u>Mandatory</u>	<u>UpPCH is used to establish the uplink synchronisation.</u>
2	<u>PRACH</u>	<u>RACH</u>	<u>Mandatory</u>	
3	<u>UpPCH + One DPCH</u>	<u>One or more DCH coded into a single CCTrCH</u>	<u>Mandatory</u>	<u>One DPCH is needed as reference measurement channel. UpPCH transmission to target cell in case of handover.</u>
4	<u>One DPCH</u>	<u>One or more DCH coded into a single CCTrCH</u>	<u>Mandatory</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This combination is required for the reference measurement channel.</u>
5	<u>More than one DPCH</u>	<u>One or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities.</u>
6	<u>UpPCH+ one or more DPCH</u>	<u>One or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities. This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
7	<u>PRACH + one or more DPCHs</u>	<u>RACH + one or more DCH coded into one or more than one CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities. This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
8	<u>One or more PUSCH</u>	<u>One or more USCH coded onto one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is required for UE that operate shared channels.</u>
9	<u>UpPCH + one or more PUSCH</u>	<u>One or more USCH coded onto one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This combination may be used for shared channel operation only.</u>
10	<u>PRACH + one or more PUSCH</u>	<u>RACH + One or more USCH coded onto one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This combination may be used for shared channel operation only</u>

	<u>Physical Channel Combination</u>	<u>Transport Channel Combination</u>	<u>Mandatory or dependent on UE radio access capabilities</u>	<u>Comment</u>
11	<u>One or more PUSCH + one or more DPCH</u>	<u>One or more USCH coded onto one or more CTrCH + one or more DCH coded onto one or more CTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This configuration is required for UE that operate shared channels and dedicated channels simultaneously</u>
12	<u>UpPCH + one or more PUSCH + one or more DPCH</u>	<u>one or more USCH coded onto one or more CTrCH + one or more DCH coded into one or more CTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This combination may be used for shared channel operation.</u>
13	<u>PRACH + one or more PUSCH + one or more DPCH</u>	<u>RACH + one or more USCH coded onto one or more CTrCH + one or more DCH coded into one or more CTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>The maximum number of DCHs and the maximum channel bit rate are dependent on UE radio access capabilities. This combination may be used for shared channel operation.</u>

The following table lists the combinations of 1.28 Mcps TDD physical channels that can be supported in the uplink by one UE in any one 5 ms sub-frame. With the exception of UpPTS, a TDD physical channel corresponds to one code, one timeslot and one frequency. The channel combinations listed are similar to those of TDD 3.84 Mcps, the differences relate to the additional physical channels that are supported by 1.28 Mcps TDD.

The combinations that have to be introduced or modified for 1.28 Mcps TDD are marked with "\*".

Please note that details of using shared channels for 1.28 Mcps TDD are f.f.s.

**Table 1: 1.28 Mcps TDD Uplink**

	<b>Physical Channel Combination</b>	<b>Transport Channel Combination</b>	<b>Baseline Capability or Service-Dependent</b>	<b>Comment</b>
1*	UpPTS	N/A	Baseline	UpPTS is used to obtain permission for RACH access.
2*	PRACH	RACH	Baseline	One RACH transport channel maps to one or more PRACH physical channels.
3	One or more DPCH	One or more DCH coded into one or more CCTrCH	Service dependent	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability.
4*	UpPTS + one or more DPCH	one or more DCH coded into one or more CCTrCH	Service dependent	UpPTS is used to obtain permission for RACH access. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability.
5*	PRACH + one or more DPCH	RACH + one or more DCH coded into one or more CCTrCH	Service dependent	One RACH transport channel maps to one or more PRACH physical channels. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability.
6	One or more PUSCH	One or more USCH coded onto one or more CCTrCH	Service dependent	An USCH transport channel may map to one or more PUSCH physical channels based on system configuration. USCH requires a control channel (RACH/FACH or DCH); however, it is not required to be in the same 10ms frame as the USCH.
7*	UpPTS + one or more PUSCH	One or more USCH coded on to one or more CCTrCH	Service dependent	UpPTS is used to obtain permission for RACH access. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
8*	PRACH + one or more PUSCH	RACH + One or more USCH coded on to one or more CCTrCH	Service dependent	One RACH transport channel maps to one or more PRACH physical channels. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
9	One or more PUSCH + one or more DPCH	One or more USCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service dependent	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
10*	UpPTS + one or more PUSCH + one or more DPCH	one or more USCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service dependent	UpPTS is used to obtain permission for RACH access. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
11*	PRACH + one or more PUSCH + one or more DPCH	RACH + one or more USCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service dependent	One RACH transport channel maps to one or more PRACH physical channels. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.

## 9.2 1.28 Mcps TDD Downlink

The table addresses the possible combinations of 1.28 Mcps TDD physical channels that can be supported in the downlink by one UE simultaneously on the same frequency in any one 5ms subframe. In 1.28Mcps TDD a physical channel corresponds to one code, one timeslot, one frequency.

Depending on UE radio capabilities UEs may be required to occasionally decode P-CCPCH of its own cell in the following Physical Channel Combinations: 5, 11,12,13,14,15,16,17.

To support handover it depends on UE capabilities if a UE can support the occasional decoding of neighbour cell P-CCPCH in the physical channel combinations 8, 9, 10, 11, 15,16, 17

**Table 2: 1.28 Mcps TDD Downlink**

	<u>Physical Channel Combination</u>	<u>Transport Channel Combination</u>	<u>Mandatory or dependent on UE radio access capabilities</u>	<u>Comment</u>
1	FPACH	N/A	Mandatory	FPACH is used to answer the UE and to adjust the timing and synchronization shift of the UE
2	P-CCPCH	BCH	Mandatory	
3	S-CCPCH	FACH or/and PCH	Mandatory	
4	P-CCPCH +S-CCPCH	BCH + (FACH or/and PCH)	Mandatory	
5	More than one S-CCPCH	one or more FACH+ one ore more PCH	Depending on UE capabilities	
6	PICH	N/A	Mandatory	
7	FPACH + P-CCPCH + none, one or more S-CCPCH	BCH + (none,one or more FACH+ none,one ore more PCH)	Depending on UE capabilities	
8	2 DPCH	One or more DCH coded into a single CCTrCH	Mandatory	The maximum number of DCH and the maximum channel bit rate are dependent on UE radio access capabilities This channel is used as reference measurement channel
9	One or more DPCH	One or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities.
10	FPACH + one or more DPCH	One or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	FPACH is used to answer the UE and to adjust the timing and synchronization shift of the UE.  The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities.  This configuration is required for UE that operate shared channels and dedicated channels simultaneously.
11	One or more S-CCPCH + one or more DPCH	(One or more FACH or/and PCH) + one or more DCH coded into one or more CCTrCH	Depending on UE radio access capabilities	The maximum number of DCHs, the maximum number of CCTrCH and the maximum channel bit rate are dependent on UE radio access capabilities. This configuration is required for UE that operate shared channels and dedicated channels simultaneously.
12	One or more PDSCH	One or more DSCH coded onto one or more CCTrCH	Depending on UE radio access capabilities	This configuration is required for UE that operate shared channels.
13	FPACH + one or more PDSCH	One or more DSCH coded onto one or more CCTrCH	Depending on UE radio access capabilities	This configuration is desirable but not essential for UE supporting shared channels.

	<u>Physical Channel Combination</u>	<u>Transport Channel Combination</u>	<u>Mandatory or dependent on UE radio access capabilities</u>	<u>Comment</u>
14	<u>One or more S-CCPCH</u> <u>+ one or more PDSCH</u>	<u>(One or more FACH and/or PCH)</u> <u>+ One or more DSCH coded onto one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is desirable but not essential for UE supporting shared channels.</u>
15	<u>One or more PDSCH</u> <u>+ one or more DPCH</u>	<u>One or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities</u>	<u>This configuration is required for UE that operate shared channels and dedicated channels simultaneously.</u>
16	<u>FPACH</u> <u>+ one or more PDSCH</u> <u>+ one or more DPCH</u>	<u>one or more DSCH coded onto one or more CCTrCH</u> <u>+ one or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities.</u>	<u>FPACH is used to answer the UE and to adjust the timing and synchronization shift of the UE.</u>  <u>This configuration is desirable but not essential for UE supporting shared channels and dedicated channels simultaneously.</u>
17	<u>One or more S-CCPCH</u> <u>+ one or more PDSCH</u> <u>+ one or more DPCH</u>	<u>(One or more FACH and/or PCH)</u> <u>+ one or more DSCH coded onto one or more CCTrCH</u> <u>+ one or more DCH coded into one or more CCTrCH</u>	<u>Depending on UE radio access capabilities.</u>	<u>This configuration is desirable but not essential for UE supporting shared channels and dedicated channels simultaneously.</u>

The table describes the combinations of TDD physical channels that can be supported in the downlink by one UE in any one 5 ms frame. With the exception of DwPTS, a TDD physical channel corresponds to one code, one timeslot and one frequency. The channel combinations listed are similar to those of 3.84 Mcps TDD, the differences relating to the additional physical channels that are supported by the 1.28 Mcps TDD.

The combinations that have to be introduced or modified for 1.28 Mcps TDD are marked with "\*".

Please note that details of using shared channels for 1.28 Mcps TDD are f.f.s.

**Table 2: 1.28 Mcps TDD Downlink**

	<b>Physical Channel Combination</b>	<b>Transport Channel Combination</b>	<b>Baseline Capability or Service-dependent</b>	<b>Comment</b>
1*	DwPTS	N/A	Baseline	DwPTS provides cell synchronisation.
2*	FPACH	N/A	Baseline	FPACH indicates access rights to PRACH.
3	P-CCPCH and/or One or more S-CCPCH + PICH	BCH and/or PCH and/or one or more FACH	Baseline	BCH maps to the P-CCPCH in a frame. FACH can map to multiple S-CCPCH in a frame. PCH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
4*	FPACH+ P-CCPCH and/or One or more S-CCPCH + PICH	BCH and/or PCH and/or one or more FACH	Baseline	FPACH indicates access rights to PRACH. BCH maps to the P-CCPCH in a frame. FACH can map to multiple S-CCPCH in a frame. PCH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
5	One or more DPCH	One or more DCH coded into one or more CCTrCH	Service dependent	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability
6*	FPACH and one or more DPCH	One or more DCH coded into one or more CCTrCH	Service dependent	FPACH indicates access rights to PRACH. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability
7	P-CCPCH and/or one or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH + one or more DCH coded into one or more CCTrCH	Service dependent	The number of DCHs and the maximum channel bit rate are dependent on the UE Service Capability. BCH maps to the P-CCPCH in a frame. FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
8*	FPACH and P-CCPCH and/or one or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH + one or more DCH coded into one or more CCTrCH	Service dependent	FPACH indicates access rights to PRACH. The number of DCHs and the maximum channel bit rate are dependent on the UE Service Capability. BCH maps to the P-CCPCH in a frame. FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
9	One or more PDSCH	One or more DSCH coded onto one or more CCTrCH	Service dependent	A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH) however, it is not required to be in the same 10ms frame as the DSCH.
10*	FPACH + one or more PDSCH	One or more DSCH coded onto one or more CCTrCH	Service dependent	FPACH indicates access rights to PRACH. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.

	<b>Physical-Channel-Combination</b>	<b>Transport-Channel-Combination</b>	<b>Baseline-Capability-or-Service-dependent</b>	<b>Comment</b>
11	One or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH	BCH and/or PCH and/or one or more FACH + one or more DSCH coded onto one or more CCTrCH	Service dependent	BCH maps to the P-CCPCH in a frame. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.
12 *	FPACH + one or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH	BCH and/or PCH and/or one or more FACH + one or more DSCH coded onto one or more CCTrCH	Service dependent	FPACH indicates access rights to PRACH. BCH maps to the P-CCPCH in a frame. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.
13	One or more PDSCH + one or more DPCH	One or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service dependent	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.



	Physical-Channel-Combination	Transport-Channel-Combination	Baseline-Capability-or-Service-dependent	Comment
14 *	FPACH + one or more PDSCH + one or more DPCH	One or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service dependent	FPACH indicates access rights to PRACH. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.
15	One or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH + one or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service dependent	BCH maps to the P-CCPCH in a frame. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.
16 *	FPACH + one or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH + one or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service dependent	FPACH indicates access rights to PRACH. BCH maps to the P-CCPCH in a frame. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.

### 9.3 — 1.28 Mcps TDD Uplink and Downlink Combinations

1.28 Mcps TDD basically supports the same possible uplink and downlink physical channel combinations as 3.84 Mcps TDD within a frame. Due to the use of FPACH, DwPTS and UpPTS, additional combinations are supported as indicated in the tables of this document. Furthermore, the different usage of PRACH in 1.28 Mcps TDD also causes some differences that can be derived from the tables in this document. For simplification, it is therefore omitted here to name all possible UL and DL physical channel combinations.

Please note that details of using shared channels for 1.28 Mcps TDD are f.f.s.

### 9.4 — 1.28 Mcps TDD UE Uplink Timeslot Combinations

This table describes possible uplink physical channels that can be supported by a UE within a specific time slot. UpPTS is not included because it occupies a single use timeslot.

The combinations that have to be introduced or modified for 1.28 Mcps TDD are marked with "\*".

Please note that details of using shared channels for 1.28 Mcps TDD are f.f.s.

**Table 3: 1.28 Mcps TDD UE Uplink Timeslot Combinations**

	<b>Physical Channel Combination</b>	<b>Transport Channel Combination</b>	<b>Baseline Capability or Service-Dependent</b>	<b>Comment</b>
1 *	PRACH	RACH	Baseline	One RACH transport channel maps to one or more PRACH physical channels.
2	One or more DPCH	One or more DCH coded into one or more CCTrCH	Service-dependent	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability.
3 *	PRACH and one or more DPCH	RACH and one or more DCH coded into one or more CCTrCH	Service-dependent	PRACH can be located in the same timeslot as DPCH. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability.
4	One or more PUSCH	One or more USCH coded onto one or more CCTrCH	Service-dependent	An USCH transport channel may map to one or more PUSCH physical channels based on system configuration. USCH requires a control channel (RACH/FACH or DCH); however, it is not required to be in the same 10 ms frame as the USCH.
5 *	PRACH and one or more PUSCH	RACH and one or more USCH coded onto one or more CCTrCH	Service-dependent	PRACH can be located in the same timeslot as PUSCH. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
6	One or more PUSCH + one or more DPCH	One or more USCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service-dependent	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.
7 *	PRACH and one or more PUSCH + one or more DPCH	RACH and one or more USCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service-dependent	PRACH can be located in the same timeslot as both DPCH and PUSCH. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. An USCH transport channel may map to one or more PUSCH physical channels based on system configuration.

## 9.5 1.28 Mcps TDD UE Downlink Timeslot Combinations

This table describes possible downlink physical channels that can be supported by a UE within a specific time slot.

The combinations that have to be introduced or modified for 1.28 Mcps TDD are marked with "\*".

Please note that details of using shared channels for 1.28 Mcps TDD are f.f.s.

**Table 4: 1.28 Mcps TDD UE Downlink Timeslot Combinations**

	<b>Physical Channel Combination</b>	<b>Transport Channel Combination</b>	<b>Baseline Capability or Service-dependent</b>	<b>Comment</b>
1	P-CCPCH and/or one or more S-CCPCH+ PICH	BCH and/or PCH and/or one or more FACH	Baseline	BCH maps to the P-CCPCH. FACH can map to multiple S-CCPCH in a frame. PCH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
2*	FPACH and P-CCPCH and/or one or more S-CCPCH+ PICH	BCH and/or PCH and/or one or more FACH -	Baseline	FPACH assigns PRACH access rights. BCH maps to the P-CCPCH. FACH can map to multiple S-CCPCH in a frame. PCH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
3	One or more DPCH	One or more DCH coded into one or more CCTrCH	Service-dependant	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability
4*	FPACH and one or more DPCH	One or more DCH coded into one or more CCTrCH	Service-dependent	FPACH assigns PRACH access rights. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability.
5	P-CCPCH and/or one or more S-CCPCH+ PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH and one or more DCH coded into one or more CCTrCH	Service-dependent	The number of DCHs and the maximum channel bit rate are dependent on the UE Service Capability. BCH maps to the P-CCPCH. FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
6*	FPACH and P-CCPCH and/or one or more S-CCPCH+ PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH and one or more DCH coded into one or more CCTrCH	Service-dependent	FPACH assigns PRACH access rights. The number of DCHs and the maximum channel bit rate are dependent on the UE Service Capability. BCH maps to the P-CCPCH. FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel.
7	One or more PDSCH	One or more DSCH coded onto one or more CCTrCH	Service-dependent	A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.
8*	FPACH and one or more PDSCH	One or more DSCH coded onto one or more CCTrCH	Service-dependent	FPACH assigns PRACH access rights. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.
9	P-CCPCH and/or one or more PDSCH + one or more S-CCPCH+ PICH	BCH and/or PCH and/or one or more FACH and one or more DSCH coded onto one or more CCTrCH	Service-dependant	BCH maps to the P-CCPCH. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.

	Physical Channel Combination	Transport Channel Combination	Baseline Capability or Service-dependent	Comment
10*	FPACH and P-CCPCH and/or one or more PDSCH + one or more S-CCPCH + PICH	BCH and/or PCH and/or one or more FACH and one or more DSCH coded onto one or more CCTrCH	Service-dependant	FPACH assigns PRACH access rights. BCH maps to the P-CCPCH. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration. DSCH requires a control channel (FACH or DCH); however, it is not required to be in the same 10ms frame as the DSCH.
11	One or more PDSCH + one or more DPCH	One or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service-dependent	The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.
12*	FPACH and one or more PDSCH + one or more DPCH	One or more DSCH coded onto one or more CCTrCH + one or more DCH coded into one or more CCTrCH	Service-dependent	FPACH assigns PRACH access rights. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.
13	One or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH and one or more DSCH coded onto one or more CCTrCH and one or more DCH coded into one or more CCTrCH	Service-dependent	BCH maps to P-CCPCH. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.
14*	FPACH and one or more PDSCH + P-CCPCH and/or one or more S-CCPCH + PICH + one or more DPCH	BCH and/or PCH and/or one or more FACH and one or more DSCH coded onto one or more CCTrCH and one or more DCH coded into one or more CCTrCH	Service-dependent	FPACH assigns PRACH access rights. BCH maps to P-CCPCH. Each FACH can map to multiple S-CCPCH in a frame. PICH substitutes one or more paging sub-channels that are mapped on an S-CCPCH assigned for the PCH transport channel. The maximum number of DCHs and the maximum channel bit rate are dependent on UE Service Capability. A DSCH transport channel may map to one or more PDSCH physical channels based on system configuration.

### 11.3.5 Physical channel description

In addition to the physical channels defined for UTRA TDD, three physical channels are added to support low chip rate TDD option, they are: DwPTS, UpPTS and FPACH. Besides, two physical channels, Primary SCH and Secondary SCH, are not needed in low chip rate TDD option.

Because there is only one burst type in low chip rate TDD option, "burst type" defined as a parameter for physical channel is not necessary.

Due to the different RACH procedure of low chip rate TDD option, the Access Service Class selection applies to UpPTS, rather than PRACH (see section 14.1.4).

Shared channels, PUSCH and PDSCH, will be supported by TDD low chip rate option, ~~but details are f.f.s~~

The added physical channels and the modifications for PRACH are described in the following:

#### 11.3.5.1 DwPTS

- Tx diversity mode.
- SYNC code ID

#### 11.3.5.2 UpPTS

- SYNC1 code ID

#### 11.3.5.3 FPACH

- Scrambling code.
- Channelisation code.
- Timeslot
- Midamble shift
- Tx diversity mode.

#### 11.3.5.4 PRACH

- Spreading factor for data part
- Power control info:
  - UL target SIR
  - Primary CCPCH DL TX power
  - UL interference
- Access Service Class Selection:
- Timeslots
- Spreading Codes
- Midamble Shift

#### 13.3.2.5 Parameters required to define shared channels

~~Similar as for the other physical channels only minor changes can be expected. However, shared channels are out of the scope of this document. The parameters required to define shared channels are essentially the same as those for the TDD 3.84 Mcps option. The differences reflect the differences in the physical layer parameters e.g. 8PSK is available as a modulation option. Their method of use is almost identical to that for the 3.84 Mcps option with the additions that closed loop power and timing correction can be applied to USCH transmissions. In addition the, UE can obtain timing correction before transmitting on the USCH through the completion of a SYNC1/FPACH exchange.~~

