

**TSG-RAN Meeting #11  
Palm Springs, CA, USA, 13 - 16 March 2001**

**RP-010040**

**Title:** Agreed CRs (Release 4) for WI "UE positioning enhancements"

**Source:** TSG-RAN WG2

**Agenda item:** 6.5.2

Doc-1st-	Status-	Spec	CR	Rev	Phase	Subject	Cat	Version	Versio	Workitem
R2-010644	agreed	25.305	048	1	Rel-4	Introduction of IPDLs for TDD	C	3.4.0	4.0.0	LCS1-UEpos-enh
R2-010639	agreed	25.331	722	1	Rel-4	Introduction of IPDLs for TDD	C	3.5.0	4.0.0	LCS1-UEpos-enh

## CHANGE REQUEST

⌘ **25.305 CR 048** ⌘ rev **r1** ⌘ Current version: **3.4.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Introduction of IPDLs for TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCS1-UEpos-enh	<b>Date:</b>	⌘ 19. Feb. 01
<b>Category:</b>	⌘ <b>C</b>	<b>Release:</b>	⌘ REL-4
	<p><i>Use <u>one</u> of the following categories:</i></p> <p><b>F</b> (essential correction)  <b>A</b> (corresponds to a correction in an earlier release)  <b>B</b> (Addition of feature),  <b>C</b> (Functional modification of feature)  <b>D</b> (Editorial modification)</p> <p>Detailed explanations of the above categories can be found in 3GPP TR 21.900.</p>	<p><i>Use <u>one</u> of the following releases:</i></p> <p><b>2</b> (GSM Phase 2)  <b>R96</b> (Release 1996)  <b>R97</b> (Release 1997)  <b>R98</b> (Release 1998)  <b>R99</b> (Release 1999)  <b>REL-4</b> (Release 4)  <b>REL-5</b> (Release 5)</p>	

<b>Reason for change:</b>	⌘ As a result of the WI "UE positioning enhancements" IPDLs are introduced for TDD
<b>Summary of change:</b>	⌘ - Delete restriction of having IPDLs for FDD only - Introduction of additional parameters, necessary for Open Loop Power Control in TDD, when applying IPDLs When IPDLs are applied and occur in slots carrying the PCCPCH, the impact on the Open Loop Power Control has to be taken into account by using another alpha parameter compared to the one used for Open Loop PC without IPDLs. Since there may be R'99 UEs not knowing anything about IPDLs, the "special" alpha parameter needs to be signalled additionally to the already existing alpha parameter, which should be set to 0. Additionally a value for the maximum allowed increase of transmit power needs to be signalled from SRNC to the UE. - Additional reference to the specification containing the IPDL description
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 2.1, 9.1, 9.1.1, 9.5.1		
<b>Other specs affected:</b>	⌘ <input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications	⌘	
<b>Other comments:</b>	⌘		

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ☒ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

### 2.1 Normative references

- [1] 3GPP TS 23.171: "Functional stage 2 description of location services in UMTS".
- [2] 3GPP TS 01.04: "Digital cellular telecommunication system (Phase 2+); Abbreviations and acronyms".
- [3] Technical Specification Group Services and System Aspects Service aspects; Terminology and Vocabulary within TSG-S1: Report and Recommendations, 28.7.99.
- [4] 3GPP TS 02.71: "Digital cellular telecommunications system (Phase 2+); Location Services (LCS); Service description, Stage 1".
- [5] 3GPP TS 03.71: "Digital cellular telecommunications system (Phase 2+); Location Services (LCS); (Functional description) - Stage 2".
- [6] 3GPP TS 03.32: "Universal Geographical Area Description".
- [7] 3GPP TS 22.100: "UMTS phase 1 Release 99".
- [8] 3GPP TS 22.101: "Service principles".
- [9] 3GPP TS 22.105: "Services and Service Capabilities".
- [10] 3GPP TS 22.115: "Charging and Billing".
- [11] 3GPP TS 22.121: "The Virtual Home Environment".
- [12] 3GPP TS 23.110: "UMTS Access Stratum; Services and Functions".
- [13] 3GPP TS 25.413: "UTRAN Iu interface RANAP signalling".
- [14] 3GPP TS 25.423: "UTRAN Iur interface RNSAP signalling".
- [15] 3GPP TS 25.433: "UTRAN Iub interface NBAP signalling".
- [16] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [17] 3GPP TS 25.215: "Physical layer – Measurements (FDD)".
- [18] 3GPP TS 25.225: "Physical layer – Measurements (TDD)".
- [19] 3GPP TS 25.331: "RRC protocol specification".
- [20] 3GPP TS 23.032: "Universal Geographical Description (GAD)".
- [21] 3GPP TS 25.430: "UTRAN Iub interface: General aspects and Principles".
- [22] 3GPP TS 23.171: "Functional stage 2 description of location services in UMTS".

[xx] [3GPP TS 25.224: "Physical layer procedures \(TDD\)".](#)

## 2.2 Informative references

- [23] Third generation (3G) mobile communication system; Technical study report on the location services and technologies, ARIB ST9 December 1998.
- [24] The North American Interest Group of the GSM MoU ASSOCIATION: Location Based Services, Service Requirements Document of the Services Working Group.

# 9 OTDOA positioning method

The primary standard OTDOA measurement is the "SFN-SFN observed time difference" observed at the UE (see [17] and [18]). These measurements, together with other information concerning the surveyed geographic position of the transmitters and the RTD of the actual transmissions of the downlink signals may be used to calculate an estimate of the position of the UE. Each OTDOA measurement for a pair of downlink transmissions describes a line of constant difference (a hyperbola (see note 1)) along which the UE may be located. The UE's position is determined by the intersection of these lines for at least two pairs of Node Bs. The accuracy of the position estimates made with this technique depends on the precision of the timing measurements, the relative position of the Node Bs involved (see note 2), and is also subject to the effects of multipath radio propagation. This is illustrated in the figure 9.1.

NOTE 1: This is really a figure in three dimensions, a hyperboloid. For convenience here, this will be simplified to the hyperbola representing the intersection of this surface with the surface of the earth. For location service in three dimensions the hyperboloid must be considered.

NOTE 2: The geometry of the Node B positions may affect the accuracy of the position estimate. The best results are when the Node Bs equally surround the UE. If they do not, there is a reduction in accuracy, which is sometimes termed the Geometric Dilution of Position (GDP).

The primary OTDOA measurements (made by the UE) are sent to the SRNC. These measures are sent via signalling over the Uu, Iub (and Iur) interfaces between the UE and the SRNC. The calculation function makes use of the measurements, the known positions of the transmitter sites and the RTD of the transmissions to estimate the UE's position.

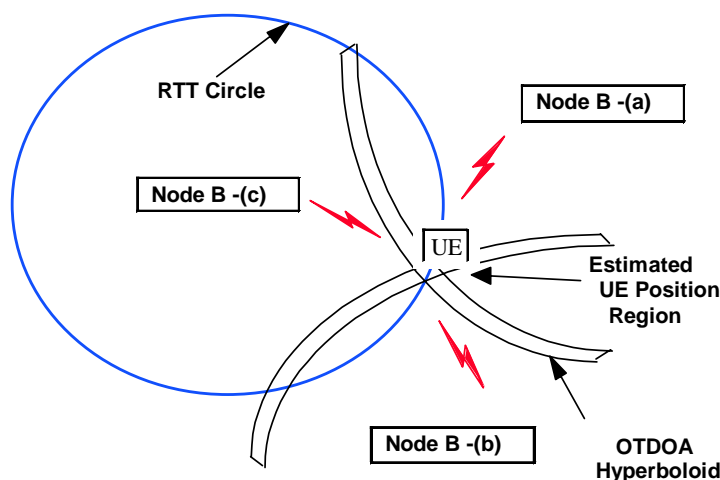


Figure 9.1: OTDOA Positioning Method

The OTDOA method may be operated in two modes: UE-assisted OTDOA and UE-based OTDOA. The two modes differ in where the actual position calculation is carried out.

In the *UE-assisted* mode, the UE measures the difference in time of arrival of several cells and signals the measurement results to the network, where the SRNC carries out the position calculation.

In the *UE-based* mode, the UE makes the measurements and also carries out the position calculation, and thus requires additional information (such as the position of the measured Node Bs) that is required for the position calculation.

The signalling requirements for the two OTDOA modes are described in subclause 9.6. As the UP involves measurements, there is always uncertainty in the results. Physical conditions, errors and resolution limits in the apparatus all contribute to uncertainty. To minimise the uncertainty in the UP result, it is important that as many measurements of OTDOA (and assistance data as RTT in FDD and Rx Timing Deviation in TDD) as are possible for a UE are provided to the UE. Thus it is important that the standard UP method not be restricted to rely on a single measure. The UE thus provides SFN-SFN observed time difference measurements for as many cells as it can receive. The cells to be measured shall include those in the active set and the monitored set.

In order to support the OTDOA method, the positions of the UTRAN transmitters needs to be accurately known by the calculation function in SRNC (for UE-assisted method) or UE (for UE-based method). This information may be measured by appropriate conventional surveying techniques (see note 3). The surveyed position should be the electrical centre of the transmitting antenna (and not the position of the radio equipment building). The use of antenna diversity, beamforming or beam steering techniques may cause the effective antenna position to change with time and this information is also needed to perform calculations. The methods of measuring the position of the UTRAN transmitters are outside the scope of the present document.

NOTE 3: These surveying methods may, for example, make use of a GPS receiver.

In order to support the OTDOA method, the RTD of the DL transmissions must also be known to perform the calculation. If the UTRAN transmitters are unsynchronised, the RTD will change over time as the individual clocks drift. Thus, measurements of RTD may need to be made regularly and the calculation function updated appropriately. The measurement of the RTD is outside the scope of the present document (see note 4).

NOTE 4: One convenient method is to make use of an LMU at a fixed position. This unit measures the observed time differences of all the local transmitters. These measures may then be converted (translated) into the actual (absolute) relative time difference for each of the transmitters by making use of the known position of the LMU and the transmitters.

In some conditions a sufficient number of cells may not be available for measure at the UE. This may occur, for example, if the UE is located quite close to the UTRAN transmitter and its receiver is blocked by the strong local transmissions. This is referred to as the "hearability" problem.

## 9.1 Use of Idle Periods (~~FDD only~~)

Location based services needs the support of physical layer as a prerequisite, so that the measurements required for the UE position calculation can be carried out. In UTRAN there are several factors that must be taken into account while considering the physical layer procedures related to location services:

- hearability: a basic consequence of a CDMA radio system is that a terminal near its serving Node B cannot hear other Node Bs on the same frequency. In order to calculate its position the UE should be able to receive at least three Node Bs. To facilitate this some special means are required;
- asynchronous network causes significant uncertainty to the time-difference-of-arrival (TDOA) measurements. To compensate for the effects of this, the relative time difference (the synchronicity) between Node B transmissions must be measured, and used for correcting OTDOA measurement;
- capacity loss: signalling related to position calculation may take capacity from other services. This capacity loss should be minimised.

Based on the results in [23] a solution for the above mentioned hearability problem is the IPDL method. In this method each Node B ceases its transmission for short periods of time (idle periods). During an idle period of a Node B, terminals within the cell can measure other Node Bs and the hearability problem is reduced. Also, during idle periods the real time difference measurements can be carried out. Because the IPDL method is based on downlink the location service can be provided efficiently to a large number of terminals simultaneously.

The specification and operation of the IPDL technique are provided in the following subclause.

### 9.1.1 Operation and specification of idle periods

The operation and specification of idle periods can be found in [16] and [xx].

## 9.2 Relative Time Difference (RTD)

In order to calculate the estimate of the position of the UE, the calculation function needs to know:

- the OTDOA measurements;
- the surveyed geographic positions of the Node Bs that have had their signals measured; and
- the actual relative time difference between the transmissions of the Node Bs at the time the OTDOA measurements were made.

The accuracy of each of these measurements contributes to the overall accuracy of the position estimate. The measurement of the RTD is described in the following.

There are several approaches to determining the RTD. One is to synchronise the transmissions of Node B. In this technique the RTD are known constant values (see NOTE) that may be entered in the database and used by the calculation function when making a position estimate. The synchronisation must be done to a level of accuracy of the order of tens of nanoseconds (as 10 nanoseconds uncertainty contributes 3 metres error in the position estimate). Drift and jitter in the synchronisation timing must also be well controlled as these also contribute uncertainty in the position estimate. Synchronisation to this level of accuracy is currently only readily available through satellite based time-transfer techniques. Generally in the TDD operating mode, the Node Bs are synchronised.

NOTE: The transmission times may all be aligned to a common reference (such as UTC) in which case all RTD have a common value. However, in a more general case the transmissions may have a fixed offset with reference to UTC, and thus the RTD values are non-zero and may be stored in the database for use by the calculation function.

Alternatively (typically in FDD mode), Node Bs may be left to free run within some constraint of maximum frequency error. In this scenario, the RTD will change (slowly) with time. The rate of change will depend on the frequency difference and jitter between Node Bs. If, for example, the maximum frequency difference between two Node Bs is  $\pm 10^{-9}$ , then the start of transmission of a 10 millisecond code sequence will drift through a cycle in about 1 390 hours (or 57 days). With this relatively slow rate of drift the RTD can be measured by fixed LMUs at known positions and stored in the database for use by the calculation function. The jitter and drift of the individual oscillators in each Node B may cause the change of timing to slow, remain constant or reverse direction over time. Ongoing measurements of the RTD may be made to assure the most current values are available for the calculation function. The RTD measurement units may be co-located with the Node Bs or installed at other convenient positions in the UTRAN coverage area, and report their results through the UTRAN signalling.

The LMUs may directly measure the RTD between neighbouring and reference cells and return the measurements to the CRNC. Alternatively the LMUs may measure the ATD of the neighbouring and reference cells and return the measurements to the CRNC. If the CRNC is not the SRNC the information is also forwarded from CRNC to SRNC. The SRNC then uses the ATD measurements to calculate the RTD values. The information to be transferred in each case are listed in 7.6.3.

## 9.3 Time of Day (ToD)

If there are frequency drifts between the (unsynchronised) Node Bs, as noted in subclause 9.2, the OTDOA measurements must be reported together with the time-of-day they were made (timestamp). This is necessary so that the appropriate value of the RTD may be used by the calculation function.

In order to assure less than a 20 nanosecond uncertainty in the RTD value, the time of day must be known to better than 10 seconds (if the maximum frequency difference between the Node Bs is  $\pm 10^{-9}$ ). The method by which the ToD is measured is the system frame number, which provides a 10 millisecond resolution and can be unambiguous up to 40.95 seconds.

## 9.4 Node B Synchronisation

It is preferable that the positioning methods do not require the Node B to be synchronised. The needed level of synchronisation accuracy for UP is not by any means straightforward to achieve. The necessary information of RTD between Node Bs can be measured by LMU and distributed in the network (e.g. as broadcast information). Also, the measurements of RTD may benefit from the IPDL option.

In the TDD operating mode the Node Bs will typically be synchronised and this may be of assistance to the UP technique.

## 9.5 OTDOA-IPDL and OTDOA Modes

There are two modes of operation for the OTDOA-IPDL and OTDOA methods.

In the *UE-assisted* mode, the UE measures the difference in time of arrival of several cells and signals the measurement results to the network, where the SRNC carries out the position calculation.

In the *UE-based* mode, the UE makes the measurements and also carries out the location calculation, and thus requires additional information (such as the position of the measured Node Bs) that is required for the position calculation. This information is provided by the System Information Broadcast.

### 9.5.1 Information to be transferred between UTRAN elements

Table 9.1 lists the required information for both UE-assisted and UE-based modes that may be sent from SRNC to UE. The required information can be signalled to the UE either in a broadcast channel or partly also as dedicated signalling.

**Table 9.1: Information to be transferred from SRNC to UE ('Yes' = information required, 'No' = Information not required)**

Information	UE-assisted	UE-based
Intra frequency Cell Info (neighbour list)	Yes	Yes
Ciphering information for UP (see note)	No	Yes
Measurement control information (idle period locations)	Yes	Yes
Sectorisation of the neighbouring cells	No	Yes
Measured RTD values for Cells mentioned at Intra frequency Cell Info	No	Yes
RTD accuracy	No	Yes
Measured roundtrip delay for primary serving cell	No	Yes
Geographical position of the primary serving cell	No	Yes
Relative neighbour cell geographical position	No	Yes
Accuracy range of the geographic position values	No	Yes
<u>IPDL-Alpha parameter for Open Loop Power Control when using IPDLs in TDD</u>	<u>Yes</u>	<u>Yes</u>
<u>Maximum Power increase the UE may use when using IPDLs in TDD</u>	<u>Yes</u>	<u>Yes</u>
NOTE:	The idea behind UP specific ciphering information is e.g. that the operator can sell information that the UE needs for calculating its position. For reference in the GSM world see [3].	

When IPDLs for TDD are applied and the IPDLs occur in the slot carrying the PCCPCH, a special alpha parameter needs to be signalled from SRNC to the UE in order to take the impact of the IPDLs on the Open Loop Power Control into account. Additionally the UE shall not increase the transmit power by a certain value between an IPDL slot and the next slot carrying the PCCPCH when IPDLs are applied within a cell.

The information that may be signalled from UE to SRNC is listed in table 9.2.



**Table 9.2: Information to be transferred from UE to SRNC**

Information	UE-assisted	UE-based
OTDOA measurement results	Yes	No
OTDOA measurement accuracy	Yes	No
UE geographical position	No	Yes
Position accuracy indicator (based on the signalled and measurement accuracies)	No	Yes

Table 9.3 shows the information that may be transferred from Node B to its CRNC. If the CRNC is not the SRNC the information is also forwarded from CRNC to SRNC.

**Table 9.3: Information to be transferred from Node B/LMU to CRNC and between RNCs**

Information	UE assisted	UE based
Measured RTD or ATD values for Cells mentioned at Intra frequency Cell Info	Yes	Yes
RTD or ATD accuracy	Yes	Yes

Table 9.4 shows the information that may be transferred between RNCs.


**Table 9.4: Information to be transferred between RNCs**

Information	UE assisted	UE based
Geographical location of the primary serving cell	Yes	Yes
Relative neighbour cell geographical location	Yes	Yes
Accuracy range of the geographic location values	Yes	Yes
<u>IPDL-Alpha parameter for Open Loop Power Control when using IPDLs in TDD</u>	<u>Yes</u>	<u>Yes</u>
<u>Maximum Power the UE may use when using IPDLs in TDD</u>	<u>Yes</u>	<u>Yes</u>

## 9.6 OTDOA network positioning procedures

The following diagram illustrates the operations for the OTDOA method for UP when the request for positioning information is initiated by an LCS application from the CN.

This illustration only includes the information flow related to UP operations and does not indicate other operations that may be required, for example, to establish a signalling connection between the UE and the SRNC. Also not illustrated is the signalling used to initiate the location service request from the CN or a UE-based application.

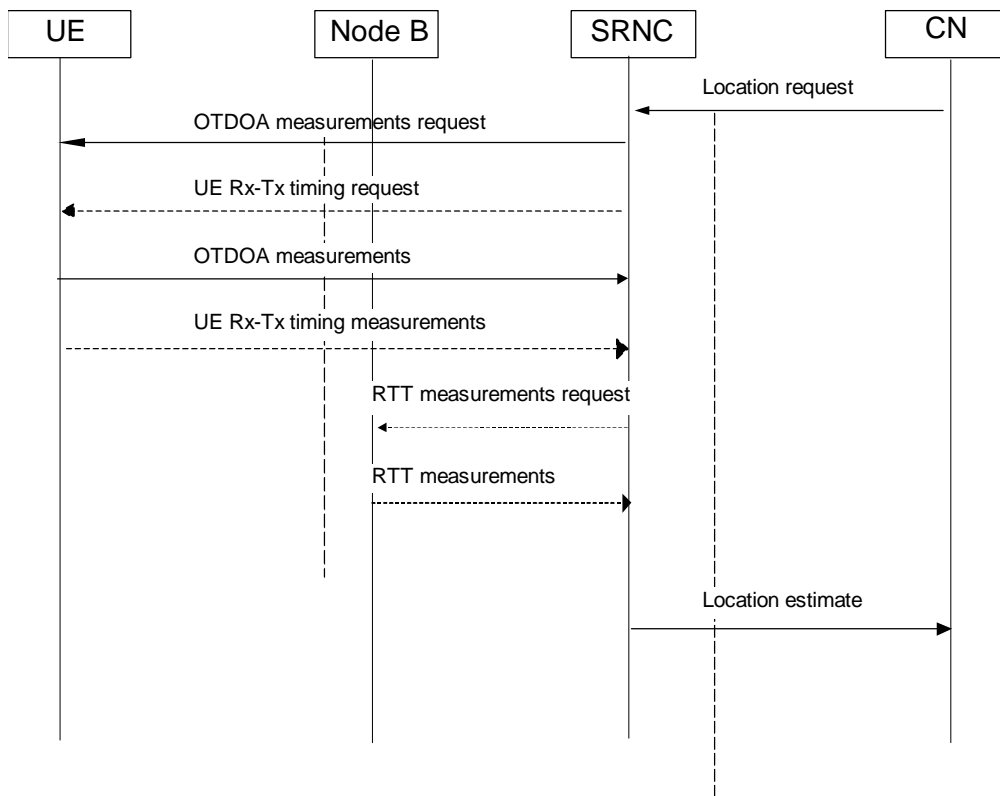

**Figure 9.2: OTDOA Signalling Operations**

1. The operation begins with an authenticated request for positioning information about a UE from an application in the CN being received at the SRNC. The SRNC considers the request and the UTRAN and UE capabilities.
2. The SRNC requests from the UE the measurement of the OTDOA for the signals in the active and neighbourhood sets. These measurements may be made while the UE is in the idle state or while it is connected.
3. If it is considered advantageous to do so, the SRNC requests the UE Rx-Tx timing difference information from the UE.
4. The UE returns the OTDOA measures to the SRNC. The SRNC receives the OTDOA information and co-ordinates obtaining other information to support the calculation request.
5. The UE returns the UE Rx-Tx timing difference information to the SRNC, together with a time stamp of when the value was obtained.
6. If there are insufficient OTDOA measures, or it is otherwise considered advantageous to do so, the SRNC requests the RTT measure for the UE from the serving Node B.
7. The SRNC requests the RTD measures for the associated transmitters from the associated database. These may be stored locally if they are constant over time, otherwise they must be updated to represent the RTD timing at the time-of-day the OTDOA measurements were made.
8. The Node B returns the RTT measures to the SRNC if they were requested.
9. The SRNC using the OTDOA, RTD and, if necessary, RTT information performs a position calculation. The calculation may include a co-ordinate transformation to the geographic system requested by the application. The position estimate includes the position, the estimated accuracy of the results and the time of day of the estimate.
10. The SRNC passes the position estimate to the CN.

## CHANGE REQUEST

⌘ **25.331 CR 722** ⌘ rev **r1** ⌘ Current version: **3.5.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** ⌘ (U)SIM  ME/UE  Radio Access Network  Core Network

<b>Title:</b>	⌘ Introduction of IPDLs for TDD		
<b>Source:</b>	⌘ TSG-RAN WG2		
<b>Work item code:</b>	⌘ LCS1-UEpos-enh	<b>Date:</b>	⌘ 19. Feb. 01
<b>Category:</b>	⌘ <b>C</b>	<b>Release:</b>	⌘ REL-4
	<i>Use one of the following categories:</i> <b>F</b> (essential correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (Addition of feature), <b>C</b> (Functional modification of feature) <b>D</b> (Editorial modification) Detailed explanations of the above categories can be found in 3GPP TR 21.900.		<i>Use one of the following releases:</i> <b>2</b> (GSM Phase 2) <b>R96</b> (Release 1996) <b>R97</b> (Release 1997) <b>R98</b> (Release 1998) <b>R99</b> (Release 1999) <b>REL-4</b> (Release 4) <b>REL-5</b> (Release 5)

<b>Reason for change:</b>	⌘ As a result of the WI "UE positioning enhancements" IPDLs are introduced for TDD
<b>Summary of change:</b>	⌘ - UEs using IPDLs for positioning should use another alpha parameter for open loop power control in TDD than R'99 UEs. When IPDLs are applied and occur in slots carrying the PCCPCH, the impact on the Open Loop Power Control has to be taken into account by using another alpha parameter compared to the one used for Open Loop PC without IPDLs. Since there may be R'99 UEs not knowing anything about IPDLs, the "special" alpha parameter needs to be signalled additionally to the already existing alpha parameter, which should be set to 0. Additionally a value for the maximum allowed increase of transmit power needs to be signalled from SRNC to the UE. - TDD specific IPDL parameters are introduced into the IE "UP IPDL parameters"
<b>Consequences if not approved:</b>	⌘

<b>Clauses affected:</b>	⌘ 8.2.10.3; 8.5.7; 10.2.59; 10.3.6.79; 10.3.7.98; 11	
<b>Other specs affected:</b>	⌘ <input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications	⌘
<b>Other comments:</b>	⌘	

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at: [http://www.3gpp.org/3G\\_Specs/CRs.htm](http://www.3gpp.org/3G_Specs/CRs.htm). Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://www.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2000-09 contains the specifications resulting from the September 2000 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

### 8.2.10.3 Reception of UPLINK PHYSICAL CHANNEL CONTROL message by the UE

Upon reception of the UPLINK PHYSICAL CHANNEL CONTROL message, the UE shall act upon all received information elements as specified in subclause 8.6.

If the IEs "Uplink DPCH Power Control Info", "Constant Value", "Alpha" or IE group "list of UL Timeslot Interference" are transmitted, this information shall be taken into account by the UE for uplink open loop power control as specified in subclause 8.5.7. If the UE is capable of using IPDLs for UE positioning, the IE "IPDL-Alpha" shall be used instead of the IE "Alpha". If the IE "IPDL-Alpha" parameter is not present, the UE shall use IE "Alpha".

The UE shall clear the entry for the UPLINK PHYSICAL CHANNEL CONTROL message in the table "Accepted transactions" in the variable TRANSACTIONS and the procedure ends.

### 8.5.7 Open loop power control

For FDD and prior to PRACH or PCPCH transmission the UE shall:

- read the IEs "Primary CPICH DL TX power", "UL interference" and "Constant value" in System Information Block type 6 (or System Information Block type 5, if system information block type 6 is not being broadcast) and System Information Block type 7.
- measure the value for the CPICH\_RSCP
- calculate the power for the first preamble as:

$$\text{Preamble\_Initial\_Power} = \text{Primary CPICH DL TX power} - \text{CPICH\_RSCP} + \text{UL interference} + \text{Constant Value}$$

Where,

Primary CPICH DL TX power shall have the value of IE "Primary CPICH DL TX power",

UL interference shall have the value of IE "UL interference"; and

Constant Value shall have the value of IE "Constant Value".

- as long as the physical layer is configured for PRACH or PCPCH transmission, continuously recalculate the Preamble\_Initial\_Power when any of the broadcast parameters used in the above formula changes and resubmit to the physical layer the new calculated Preamble\_Initial\_Power.

For TDD the UE shall:

- if in the IE "Uplink DPCH Power Control" the "CHOICE UL OL PC info" has the value "Broadcast UL OL PC info":
  - acquire Reference Power, Constant Values from System Information Block type 5 and System Information Block type 6, and  $I_{\text{BTS}}$  for all active UL timeslots from System Information Block type 14 on the BCH;
- otherwise:
  - acquire Reference Power, Constant Values and  $I_{\text{BTS}}$  for all active UL timeslots from the IE "Uplink DPCH Power Control".
- for PUSCH and PRACH power control acquire Reference Power, Constant Values and  $I_{\text{BTS}}$  for all active UL timeslots from System Information Block type 5, System Information Block type and System Information Block type 14 on the BCH,

calculate the UL transmit power according to the following formula for the PRACH continuously while the physical channel is active:

- $P_{PRACH} = L_{PCCPCH} + I_{BTS} + \text{RACH Constant value}$ ,
- 3dB shall be added to RACH Constant Value in the above equation for the case where RACH Spreading Factor = 8
- calculate the UL transmit power according to the following formula for the DPCH continuously while the physical channel is active:
 
$$P_{DPCH} = \alpha L_{PCCPCH} + (1-\alpha)L_0 + I_{BTS} + \text{SIR}_{TARGET} + \text{DPCH Constant value}$$
- calculate the UL transmit power according to the following formula for the PUSCH continuously while the physical channel is active:
 
$$P_{USCH} = \alpha L_{PCCPCH} + (1-\alpha)L_0 + I_{BTS} + \text{SIR}_{TARGET} + \text{USCH Constant value}$$

Where, for all the above equations for TDD the following apply:

- $P_{PRACH}$ ,  $P_{DPCH}$ , &  $P_{USCH}$ : Transmitter power level in dBm,
- $L_{PCCPCH}$ : Measurement representing path loss in dB (reference transmit power "Primary CCPCH Tx Power" is broadcast on BCH in System Information Block type 5 and System Information Block type 6, or individually signalled to each UE in the IE "Uplink DPCH Power Control").
- $L_0$ : Long term average of path loss in dB
- $I_{BTS}$ : Interference signal power level at cell's receiver in dBm ("UL Interference" is broadcast on BCH in System Information Block type 14 or individually signalled to each UE in the IE "Uplink DPCH Power Control" for each active uplink timeslot).
- $\alpha$ :  $\alpha$  is a weighting parameter, which represents the quality of path loss measurements.  $\alpha$  may be a function of the time delay between the uplink time slot and the most recent down link PCCPCH time slot.  $\alpha$  is calculated at the UE. If UE is capable of estimating its position by using the OTDOA IPDL method, the UE shall use the IPDL- $\alpha$  parameter.
- $\text{SIR}_{TARGET}$ : Target SNR in dB. This value is individually signalled to UEs in IEs "UL DPCH Power Control Info" and "PUSCH Power Control Info".
- RACH Constant value: This value is broadcast on BCH and shall be read on System Information Block type 5 and System Information Block type 6.
- DPCH Constant value: This value is broadcast on BCH and shall be read on System Information Block type 5 and System Information Block type 6, or individually signalled to each UE in the IE "Uplink DPCH Power Control".
- USCH Constant Value: This value is broadcast on BCH and shall be read on System Information Block type 5 and System Information Block type 6.

- If IPDLs are applied, the UE may increase UL Tx power by the value given in the IE "Max power increase". This power increase is only allowed in the slots between an idle slot and the next beacon slot.

## 10.2.59 UPLINK PHYSICAL CHANNEL CONTROL

NOTE: Only for TDD.

This message is used to transfer uplink physical channel parameters to the UE.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN→UE

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
Message Type	MP		Message Type		
<b>UE information elements</b>					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	OP		Integrity check info 10.3.3.16		
<b>PhyCH information elements</b>					
CCTrCH power control info	OP		CCTrCH power control info 10.3.6.8	Power control information for one CCTrCH	
Alpha	OP		Alpha 10.3.6.5		
Timing Advance Control	OP		UL Timing Advance Control 10.3.6.96		
PRACH Constant Value	OP		Constant value 10.3.6.11	Operator controlled PRACH Margin	
PUSCH Constant Value	OP		Constant value 10.3.6.11	Operator controlled PUSCH Margin	
<a href="#">UE positioning related parameters</a>	<a href="#">CV-IPDLs</a>				<a href="#">REL-4</a>
<a href="#">&gt;IPDL-Alpha</a>	<a href="#">MP</a>		<a href="#">Alpha 10.3.6.5</a>		<a href="#">REL-4</a>
<a href="#">&gt;Max power increase</a>	<a href="#">MP</a>		<a href="#">Integer (0..3)</a>	<a href="#">In db</a>	<a href="#">REL-4</a>

Condition	Explanation
<a href="#">IPDLs</a>	<a href="#">This IE is present only if idle periods are applied</a>

### 10.3.6.79 TDD open loop power control

This information element contains parameters for open loop power control setting for TDD.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Primary CCPCH Tx Power	OP		Primary CCPCH Tx Power 10.3.6.59	For path loss calculation	
Alpha	OP		Alpha 10.3.6.5		
PRACH Constant Value	OP		Constant Value 10.3.6.11	Operator controlled PRACH Margin	
DPCH Constant Value	OP		Constant Value 10.3.6.11	Operator controlled UL DPCH Margin	
PUSCH Constant Value	OP		Constant Value 10.3.6.11	Operator controlled PUSCH Margin	
<u>UE positioning related parameters</u>	<u>CV-IPDLs</u>				<u>REL-4</u>
>IPDL-Alpha	<u>MP</u>		<u>Alpha</u> 10.3.6.5		<u>REL-4</u>
>Max power increase	<u>MP</u>		<u>Integer (0..3)</u>	<u>In db</u>	<u>REL-4</u>

<u>Condition</u>	<u>Explanation</u>
<u>UEPositioning</u>	<u>This IE is present only if idle periods are applied</u>

### 10.3.7.98 UP IPDL parameters

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
IP spacing	MP		Integer(5,7,10,15,20,30,40,50)	The IPs are repeated every IP spacing frame.	
<u>CHOICE MODE</u>					<u>REL-4</u>
>FDD					<u>REL-4</u>
>>IP length	MP		Integer(5,10)	The length in symbols of the idle periods	
>>IP offset	MP		Integer(0..9)	Relates the BFN and SFN, should be same as T_cell defined in 25.402	
>>Seed	MP		Integer(0..63)	Seed used to start the random number generator	
>TDD					<u>REL-4</u>
>>IP_Start	<u>MP</u>		<u>Integer(0..4095)</u>	<u>Number of the first frame containing idle periods</u>	<u>REL-4</u>
>>IP_Slot	<u>MP</u>		<u>Integer(0..14)</u>	<u>Number of the idle slot within a frame</u>	<u>REL-4</u>
>>IP_PCCPCH	<u>CV-channel</u>		<u>Boolean</u>	<u>Indicates if the PCCPCH is switched off in two consecutive frames</u>	<u>REL-4</u>
Burst mode parameters	OP				
>Burst Start	MP		Integer(0..15)	The frame number where the 1 <sup>st</sup> Idle Period Burst occurs within an SFN cycle. Scaling factor 256.	
>Burst Length	MP		Integer(10..25)	Number of Idle Periods in a 'burst' of Idle Periods	
>Burst freq	MP		Integer(1..16)	Number of 10ms frames between consecutive Idle Period bursts. Scaling factor 256.	



<u>Condition</u>	<u>Explanation</u>
<u>channel</u>	This IE is present only if the idle slot carries the <u>PCCPCH</u>

The function  $IP\_position(x)$  described below yields the position of the  $x^{th}$  Idle Period relative to a) the start of the SFN cycle when continuous mode or b) the start of a burst when in burst mode. The operator "%" denotes the modulo operator. Regardless of mode of operation, the Idle Period pattern is reset at the start of every SFN cycle. Continuous mode can be considered as a specific case of the burst mode with just one burst spanning the whole SFN cycle. Note also that  $x$  will be reset to  $x=1$  for the first idle period in a SFN cycle for both continuous and burst modes and will also, in the case of burst mode, be reset for the first Idle Period in every burst.

$Max\_dev=150-IP\_length$

$rand(x)=(106 \cdot rand(x-1)+1283) \bmod 6075,$

$rand(0)=seed$

$IP\_position(x) = x \cdot IP\_spacing \cdot 150 + rand(x \bmod 64) \bmod Max\_dev + IP\_offset$

---

# 11 Message and Information element abstract syntax (with ASN.1)

This clause contains definitions for RRC PDUs and IEs using a subset of ASN.1 as specified in TR 25.921. PDU and IE definitions are grouped into separate ASN.1 modules.

## 11.1 General message structure

```
Class-definitions DEFINITIONS AUTOMATIC TAGS ::=
```

```
BEGIN
```

```
IMPORTS
```

```
    ActiveSetUpdate-r3,  
    ActiveSetUpdateComplete,  
    ActiveSetUpdateFailure,  
    AssistanceDataDelivery-r3,  
    CellChangeOrderFromUTRAN-r3,  
    CellChangeFailureFromUTRAN,  
    CellUpdate,  
    CellUpdateConfirm-CCCH-r3,  
    CellUpdateConfirm-r3,  
    CounterCheck-r3,  
    CounterCheckResponse,  
    DownlinkDirectTransfer-r3,  
    HandoverToUTRANComplete,  
    InitialDirectTransfer,  
    HandoverFromUTRANCommand-GSM-r3,  
    HandoverFromUTRANCommand-CDMA2000-r3,  
    HandoverFromUTRANFailure,  
    MeasurementControl-r3,  
    MeasurementControlFailure,  
    MeasurementReport,  
    PagingType1,  
    PagingType2,  
    PhysicalChannelReconfiguration-r3,  
    PhysicalChannelReconfigurationComplete,  
    PhysicalChannelReconfigurationFailure,  
    PhysicalSharedChannelAllocation-r3,  
    PUSCHCapacityRequest,  
    RadioBearerReconfiguration-r3,  
    RadioBearerReconfigurationComplete,  
    RadioBearerReconfigurationFailure,  
    RadioBearerRelease-r3,  
    RadioBearerReleaseComplete,  
    RadioBearerReleaseFailure,  
    RadioBearerSetup-r3,  
    RadioBearerSetupComplete,  
    RadioBearerSetupFailure,  
    RRCConnectionReject-r3,  
    RRCConnectionRelease-r3,  
    RRCConnectionRelease-CCCH-r3,  
    RRCConnectionReleaseComplete,  
    RRCConnectionRequest,  
    RRCConnectionSetup-r3,  
    RRCConnectionSetupComplete,  
    RRCStatus,  
    SecurityModeCommand-r3,  
    SecurityModeComplete,  
    SecurityModeFailure,  
    SignallingConnectionRelease-r3,  
    SignallingConnectionReleaseRequest,  
    SystemInformation-BCH,  
    SystemInformation-FACH,  
    SystemInformationChangeIndication,  
    TransportChannelReconfiguration-r3,  
    TransportChannelReconfigurationComplete,  
    TransportChannelReconfigurationFailure,  
    TransportFormatCombinationControl,  
    TransportFormatCombinationControlFailure,
```

```

UECapabilityEnquiry-r3,
UECapabilityInformation,
UECapabilityInformationConfirm-r3,
UplinkDirectTransfer,
UplinkPhysicalChannelControl-r3,
URAUpdate,
URAUpdateConfirm-r3,
URAUpdateConfirm-CCCH-r3,
UTRANMobilityInformation,
UTRANMobilityInformationConfirm,
UTRANMobilityInformationFailure
FROM PDU-definitions

```

```

-- User Equipment IEs :
  IntegrityCheckInfo
FROM InformationElements;

```

```

--*****
--
-- Downlink DCCH messages
--
--*****

```

```

DL-DCCH-Message ::= SEQUENCE {
  integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
  message                  DL-DCCH-MessageType
}

```

```

DL-DCCH-MessageType ::= CHOICE {
  activeSetUpdate                ActiveSetUpdate-r3,
  assistanceDataDelivery         AssistanceDataDelivery-r3,
  cellChangeOrderFromUTRAN      CellChangeOrderFromUTRAN-r3,
  cellUpdateConfirm             CellUpdateConfirm-r3,
  counterCheck                  CounterCheck-r3,
  downlinkDirectTransfer         DownlinkDirectTransfer-r3,
  handoverFromUTRANCommand-GSM  HandoverFromUTRANCommand-GSM-r3,
  handoverFromUTRANCommand-CDMA2000 HandoverFromUTRANCommand-CDMA2000-r3,
  measurementControl            MeasurementControl-r3,
  pagingType2                   PagingType2,
  physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
  physicalSharedChannelAllocation PhysicalSharedChannelAllocation-r3,
  radioBearerReconfiguration     RadioBearerReconfiguration-r3,
  radioBearerRelease            RadioBearerRelease-r3,
  radioBearerSetup              RadioBearerSetup-r3,
  rrcConnectionRelease          RRCCConnectionRelease-r3,
  securityModeCommand           SecurityModeCommand-r3,
  signallingConnectionRelease    SignallingConnectionRelease-r3,
  transportChannelReconfiguration TransportChannelReconfiguration-r3,
  transportFormatCombinationControl TransportFormatCombinationControl,
  ueCapabilityEnquiry           UECapabilityEnquiry-r3,
  ueCapabilityInformationConfirm UECapabilityInformationConfirm-r3,
  uplinkPhysicalChannelControl   UplinkPhysicalChannelControl-r3,
  uraUpdateConfirm              URAUpdateConfirm-r3,
  utranMobilityInformation       UTRANMobilityInformation,
  extension                     NULL
}

```

```

--*****
--
-- Uplink DCCH messages
--
--*****

```

```

UL-DCCH-Message ::= SEQUENCE {
  integrityCheckInfo      IntegrityCheckInfo      OPTIONAL,
  message                  UL-DCCH-MessageType
}

```

```

UL-DCCH-MessageType ::= CHOICE {
  activeSetUpdateComplete        ActiveSetUpdateComplete,
  activeSetUpdateFailure         ActiveSetUpdateFailure,
  cellChangeFailureFromUTRAN     CellChangeFailureFromUTRAN,
  counterCheckResponse           CounterCheckResponse,
  handoverToUTRANComplete        HandoverToUTRANComplete,
  initialDirectTransfer          InitialDirectTransfer,
  handoverFromUTRANFailure       HandoverFromUTRANFailure,
  measurementControlFailure      MeasurementControlFailure,
  measurementReport              MeasurementReport,
}

```

```

physicalChannelReconfigurationComplete
physicalChannelReconfigurationFailure
radioBearerReconfigurationComplete
radioBearerReconfigurationFailure
radioBearerReleaseComplete
radioBearerReleaseFailure
radioBearerSetupComplete
radioBearerSetupFailure
rrcConnectionReleaseComplete
rrcConnectionSetupComplete
rrcStatus
securityModeComplete
securityModeFailure
signallingConnectionReleaseRequest
transportChannelReconfigurationComplete
transportChannelReconfigurationFailure
transportFormatCombinationControlFailure
ueCapabilityInformation
uplinkDirectTransfer
utranMobilityInformationConfirm
utranMobilityInformationFailure
extension
}

```

```

-----
--
-- Downlink CCCH messages
--
-----

```

```

DL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo    IntegrityCheckInfo    OPTIONAL,
    message                DL-CCCH-MessageType
}

```

```

DL-CCCH-MessageType ::= CHOICE {
    cellUpdateConfirm      CellUpdateConfirm-CCCH-r3,
    rrcConnectionReject    RRCConnectionReject-r3,
    rrcConnectionRelease    RRCConnectionRelease-CCCH-r3,
    rrcConnectionSetup      RRCConnectionSetup-r3,
    uraUpdateConfirm        URAUpdateConfirm-CCCH-r3,
    extension                NULL
}

```

```

-----
--
-- Uplink CCCH messages
--
-----

```

```

UL-CCCH-Message ::= SEQUENCE {
    integrityCheckInfo    IntegrityCheckInfo    OPTIONAL,
    message                UL-CCCH-MessageType
}

```

```

UL-CCCH-MessageType ::= CHOICE {
    cellUpdate              CellUpdate,
    rrcConnectionRequest    RRCConnectionRequest,
    uraUpdate                URAUpdate,
    extension                NULL
}

```

```

-----
--
-- PCCH messages
--
-----

```

```

PCCH-Message ::= SEQUENCE {
    message                PCCH-MessageType
}

```

```

PCCH-MessageType ::= CHOICE {

```

```

    pagingTypel          PagingTypel,
    extension            NULL
}

--*****
--
-- Downlink SHCCH messages
--
--*****

DL-SHCCH-Message ::= SEQUENCE {
    message            DL-SHCCH-MessageType
}

DL-SHCCH-MessageType ::= CHOICE {
    physicalSharedChannelAllocation    PhysicalSharedChannelAllocation-r3,
    extension                            NULL
}

--*****
--
-- Uplink SHCCH messages
--
--*****

UL-SHCCH-Message ::= SEQUENCE {
    message            UL-SHCCH-MessageType
}

UL-SHCCH-MessageType ::= CHOICE {
    puschCapacityRequest    PUSCHCapacityRequest,
    extension                NULL
}

--*****
--
-- BCCH messages sent on FACH
--
--*****

BCCH-FACH-Message ::= SEQUENCE {
    message            BCCH-FACH-MessageType
}

BCCH-FACH-MessageType ::= CHOICE {
    systemInformation            SystemInformation-FACH,
    systemInformationChangeIndication    SystemInformationChangeIndication,
    extension                    NULL
}

--*****
--
-- BCCH messages sent on BCH
--
--*****

BCCH-BCH-Message ::= SEQUENCE {
    message            SystemInformation-BCH
}

END

```

## 11.2 PDU definitions

```

--*****
--
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--
--*****

PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```

```

--*****
--
-- IE parameter types from other modules
--
--*****

IMPORTS

-- Core Network IEs :
  CN-DomainIdentity,
  CN-InformationInfo,
  NAS-Message,
  PagingRecordTypeID,
-- UTRAN Mobility IEs :
  URA-Identity,
-- User Equipment IEs :
  ActivationTime,
  C-RNTI,
  CapabilityUpdateRequirement,
  CellUpdateCause,
  CipheringAlgorithm,
  CipheringModeInfo,
  EstablishmentCause,
  FailureCauseWithProtErr,
  FailureCauseWithProtErrTrId,
  InitialUE-Identity,
  IntegrityProtActivationInfo,
  IntegrityProtectionModeInfo,
  N-308,
  PagingCause,
  PagingRecordList,
  ProtocolErrorIndicator,
  ProtocolErrorIndicatorWithMoreInfo,
  Rb-timer-indicator,
  Re-EstablishmentTimer,
  RedirectionInfo,
  RejectionCause,
  ReleaseCause,
  RRC-StateIndicator,
  RRC-TransactionIdentifier,
  SecurityCapability,
  START-Value,
  STARTList,
  U-RNTI,
  U-RNTI-Short,
  UE-RadioAccessCapability,
  UE-ConnTimersAndConstants,
  URA-UpdateCause,
  UTRAN-DRX-CycleLengthCoefficient,
  WaitTime,
-- Radio Bearer IEs :
  PredefinedConfigIdentity,
  RAB-Info,
  RAB-Info-Post,
  RAB-InformationList,
  RAB-InformationReconfigList,
  RAB-InformationSetupList,
  RB-ActivationTimeInfo,
  RB-ActivationTimeInfoList,
  RB-COUNT-C-InformationList,
  RB-COUNT-C-MSB-InformationList,
  RB-IdentityList,
  RB-InformationAffectedList,
  RB-InformationReconfigList,
  RB-InformationReleaseList,
  RB-InformationSetupList,
  RB-WithPDCP-InfoList,
  SRB-InformationSetupList,
  SRB-InformationSetupList2,
-- Transport Channel IEs:
  CPCH-SetID,
  DL-AddReconfTransChInfo2List,
  DL-AddReconfTransChInfoList,
  DL-CommonTransChInfo,
  DL-DeletedTransChInfoList,
  DRAC-StaticInformationList,
  TFC-Subset,

```

```

    TFCS-Identity,
    UL-AddReconfTransChInfoList,
    UL-CommonTransChInfo,
    UL-DeletedTransChInfoList,
-- Physical Channel IEs :
    AllocationPeriodInfo,
    Alpha,
    CCTrCH-PowerControlInfo,
    ConstantValue,
    CPCH-SetInfo,
    DL-CommonInformation,
    DL-CommonInformationPost,
    DL-InformationPerRL,
    DL-InformationPerRL-List,
    DL-InformationPerRL-ListPostFDD,
    DL-InformationPerRL-PostTDD,
    DL-DPCH-PowerControlInfo,
    DL-PDSCH-Information,
    DPCH-CompressedModeStatusInfo,
    FrequencyInfo,
    FrequencyInfoFDD,
    FrequencyInfoTDD,
    IndividualTS-InterferenceList,
    MaxAllowedUL-TX-Power,
    PDSCH-CapacityAllocationInfo,
    PDSCH-Identity,
    PDSCH-Info,
    PRACH-RACH-Info,
    PrimaryCCPCH-TX-Power,
    PUSCH-CapacityAllocationInfo,
    PUSCH-Identity,
    RL-AdditionInformationList,
    RL-RemovalInformationList,
    SSDT-Information,
    TFC-ControlDuration,
    TimeslotList,
    TX-DiversityMode,
    UL-ChannelRequirement,
    UL-ChannelRequirementWithCPCH-SetID,
    UL-DPCH-Info,
    UL-DPCH-InfoPostFDD,
    UL-DPCH-InfoPostTDD,
    UL-TimingAdvance,
    UL-TimingAdvanceControl,
-- Measurement IEs :
    AdditionalMeasurementID-List,
    EventResults,
    InterRAT-TargetCellDescription,
    MeasuredResults,
    MeasuredResultsList,
    MeasuredResultsOnRACH,
    MeasurementCommand,
    MeasurementIdentity,
    MeasurementReportingMode,
    PrimaryCCPCH-RSCP,
    TimeslotListWithISCP,
    TrafficVolumeMeasuredResultsList,
    UP-GPS-AssistanceData,
    UP-OTDOA-AssistanceData,
-- Other IEs :
    BCCH-ModificationInfo,
    CDMA2000-MessageList,
    GSM-MessageList,
    InterRAT-ChangeFailureCause,
    InterRAT-HO-Failure,
    InterRAT-UE-RadioAccessCapabilityList,
    InterRATMessage,
    IntraDomainNasNodeSelector,
    ProtocolErrorInformation,
    ProtocolErrorMoreInformation,
    Rplmn-Information,
    SegCount,
    SegmentIndex,
    SFN-Prime,
    SIB-Data-fixed,
    SIB-Data-variable,
    SIB-Type
FROM InformationElements

```

```

    maxSIBperMsg,
    maxSystemCapability
FROM Constant-definitions;

-- *****
--
-- ACTIVE SET UPDATE (FDD only)
--
-- *****

ActiveSetUpdate-r3 ::= CHOICE {
    r3 SEQUENCE {
        activeSetUpdate-r3 ActiveSetUpdate-r3-IEs,
        nonCriticalExtensions SEQUENCE {} OPTIONAL
    },
    criticalExtensions SEQUENCE {}
}

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo CipheringModeInfo OPTIONAL,
    activationTime ActivationTime OPTIONAL,
    newU-RNTI U-RNTI OPTIONAL,
    -- Core network IEs
    cn-InformationInfo CN-InformationInfo OPTIONAL,
    -- Radio bearer IEs
    rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
    -- Physical channel IEs
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
    rl-AdditionInformationList RL-AdditionInformationList OPTIONAL,
    rl-RemovalInformationList RL-RemovalInformationList OPTIONAL,
    tx-DiversityMode TX-DiversityMode OPTIONAL,
    ssdt-Information SSDT-Information OPTIONAL
}

-- *****
--
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- *****

ActiveSetUpdateComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo IntegrityProtActivationInfo OPTIONAL,
    -- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL,
    rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- ACTIVE SET UPDATE FAILURE (FDD only)
--
-- *****

ActiveSetUpdateFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    failureCause FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- Assistance Data Delivery
--
-- *****

AssistanceDataDelivery-r3 ::= CHOICE {
    r3 SEQUENCE {
        assistanceDataDelivery-r3 AssistanceDataDelivery-r3-IEs,
        nonCriticalExtensions SEQUENCE {

```



```

-- In case of TDD, the following IE is included instead of the IE
-- up-IPDL-Parameters in up-OTDOA-AssistanceData
up-IPDL-Parameter-TDD          UP-IPDL-Paramater-TDD          OPTIONAL,
-- Extension mechanism for non- release4 information
nonCriticalExtensions          SEQUENCE {}                    OPTIONAL
}--OPTIONAL                                                         OPTIONAL
},
criticalExtensions              SEQUENCE {}
}

AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
--Assistance Data Information Elements
up-GPS-AssistanceData          UP-GPS-AssistanceData          OPTIONAL,
up-OTDOA-AssistanceData        UP-OTDOA-AssistanceData        OPTIONAL
}

-- *****
--
-- CELL CHANGE ORDER FROM UTRAN
--
-- *****

CellChangeOrderFromUTRAN-r3 ::= CHOICE {
r3                               SEQUENCE {
cellChangeOrderFromUTRAN-IEs    CellChangeOrderFromUTRAN-r3-IEs,
nonCriticalExtensions            SEQUENCE {} OPTIONAL
},
criticalExtensions              SEQUENCE {}
}

CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
-- User equipment IEs
integrityProtectionModeInfo      IntegrityProtectionModeInfo      OPTIONAL,
activationTime                    ActivationTime                    OPTIONAL,
rab-InformationList              RAB-InformationList              OPTIONAL,
interRAT-TargetCellDescription    InterRAT-TargetCellDescription
}

-- *****
--
-- CELL CHANGE FAILURE FROM UTRAN
--
-- *****

CellChangeFailureFromUTRAN ::= CHOICE {
r3                               SEQUENCE {
r3-IEs                          CellChangeFailureFromUTRAN-r3-IEs,
nonCriticalExtensions            SEQUENCE {} OPTIONAL
},
criticalExtensions              SEQUENCE {}
}

CellChangeFailureFromUTRAN-r3-IEs ::= SEQUENCE {
-- User equipment IEs
integrityProtectionModeInfo      IntegrityProtectionModeInfo      OPTIONAL,
interRAT-ChangeFailureCause      InterRAT-ChangeFailureCause
}

-- *****
--
-- CELL UPDATE
--
-- *****

CellUpdate ::= SEQUENCE {
-- User equipment IEs
u-RNTI                            U-RNTI,
startList                          STARTList,
am-RLC-ErrorIndicationC-plane      BOOLEAN,
am-RLC-ErrorIndicationU-plane      BOOLEAN,
cellUpdateCause                    CellUpdateCause,
failureCause                        FailureCauseWithProtErrTrId      OPTIONAL,
-- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
rb-timer-indicator                Rb-timer-indicator,
-- Measurement IEs
measuredResultsOnRACH              MeasuredResultsOnRACH            OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions              SEQUENCE {} OPTIONAL
}

```

```

}

-- *****
--
-- CELL UPDATE CONFIRM
--
-- *****

CellUpdateConfirm-r3 ::= CHOICE {
    r3
        cellUpdateConfirm-r3          SEQUENCE {
            nonCriticalExtensions      CellUpdateConfirm-r3-IEs,
                                     SEQUENCE {} OPTIONAL
        },
        criticalExtensions            SEQUENCE {}
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    integrityProtectionModeInfo        IntegrityProtectionModeInfo          OPTIONAL,
    cipheringModeInfo                  CipheringModeInfo                      OPTIONAL,
    activationTime                      ActivationTime                          OPTIONAL,
    new-U-RNTI                          U-RNTI                              OPTIONAL,
    new-C-RNTI                          C-RNTI                              OPTIONAL,
    rrc-StateIndicator                  RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff          UTRAN-DRX-CycleLengthCoefficient    OPTIONAL,
    rlc-ResetIndicatorC-Plane           BOOLEAN,
    rlc-ResetIndicatorU-Plane           BOOLEAN,
    -- CN information elements
    cn-InformationInfo                  CN-InformationInfo                  OPTIONAL,
    -- UTRAN mobility IES
    ura-Identity                        URA-Identity                        OPTIONAL,
    -- Radio bearer IES
    rb-InformationReleaseList           RB-InformationReleaseList           OPTIONAL,
    rb-InformationReconfigList          RB-InformationReconfigList          OPTIONAL,
    rb-InformationAffectedList          RB-InformationAffectedList          OPTIONAL,
    rb-WithPDCP-InfoList                RB-WithPDCP-InfoList                OPTIONAL,
    -- Transport channel IES
    ul-CommonTransChInfo                UL-CommonTransChInfo                OPTIONAL,
    ul-deletedTransChInfoList           UL-DeletedTransChInfoList           OPTIONAL,
    ul-AddReconfTransChInfoList         UL-AddReconfTransChInfoList         OPTIONAL,
    modeSpecificTransChInfo             CHOICE {
        fdd
            cpch-SetID                  CPCH-SetID                          OPTIONAL,
            addReconfTransChDRAC-Info    DRAC-StaticInformationList          OPTIONAL
        },
        tdd
            NULL
    },
    dl-CommonTransChInfo                DL-CommonTransChInfo                OPTIONAL,
    dl-DeletedTransChInfoList           DL-DeletedTransChInfoList           OPTIONAL,
    dl-AddReconfTransChInfoList         DL-AddReconfTransChInfoList         OPTIONAL,
    -- Physical channel IES
    frequencyInfo                       FrequencyInfo                         OPTIONAL,
    maxAllowedUL-TX-Power                MaxAllowedUL-TX-Power                OPTIONAL,
    ul-ChannelRequirement                UL-ChannelRequirement                OPTIONAL,
    modeSpecificPhysChInfo               CHOICE {
        fdd
            dl-PDSCH-Information         DL-PDSCH-Information                OPTIONAL
        },
        tdd
            NULL
    },
    dl-CommonInformation                DL-CommonInformation                OPTIONAL,
    dl-InformationPerRL-List             DL-InformationPerRL-List            OPTIONAL
}

-- *****
--
-- CELL UPDATE CONFIRM for CCCH
--
-- *****

CellUpdateConfirm-CCCH-r3 ::= CHOICE {
    r3
        -- User equipment IES
        u-RNTI                          U-RNTI,
        -- The rest of the message is identical to the one sent on DCCH.
        cellUpdateConfirm-r3            CellUpdateConfirm-r3-IEs,
}

```

```

        nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

-- *****
--
-- COUNTER CHECK
--
-- *****

CounterCheck-r3 ::= CHOICE {
    r3                                SEQUENCE {
        counterCheck-r3              CounterCheck-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

CounterCheck-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    -- Radio bearer IEs
    rb-COUNT-C-MSB-InformationList  RB-COUNT-C-MSB-InformationList
}

-- *****
--
-- COUNTER CHECK RESPONSE
--
-- *****

CounterCheckResponse ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    -- Radio bearer IEs
    rb-COUNT-C-InformationList      RB-COUNT-C-InformationList          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions            SEQUENCE {} OPTIONAL
}

-- *****
--
-- DOWNLINK DIRECT TRANSFER
--
-- *****

DownlinkDirectTransfer-r3 ::= CHOICE {
    r3                                SEQUENCE {
        downlinkDirectTransfer-r3    DownlinkDirectTransfer-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    -- Core network IEs
    cn-DomainIdentity                CN-DomainIdentity,
    nas-Message                       NAS-Message
}

-- *****
--
-- HANDOVER TO UTRAN COMMAND
--
-- *****

HandoverToUTRANCommand-r3 ::= CHOICE {
    r3                                SEQUENCE {
        handoverToUTRANCommand-r3    HandoverToUTRANCommand-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

```

```

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  new-U-RNTI                U-RNTI-Short,
  activationTime             ActivationTime           OPTIONAL,
  cipheringAlgorithm        CipheringAlgorithm      OPTIONAL,
  -- Radio bearer IEs
  rab-Info                  RAB-Info-Post,
  -- Specification mode information
  specificationMode         CHOICE {
    complete                 SEQUENCE {
      srb-InformationSetupList SRB-InformationSetupList,
      rab-InformationSetupList RAB-InformationSetupList           OPTIONAL,
      ul-CommonTransChInfo    UL-CommonTransChInfo,
      ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
      dl-CommonTransChInfo    DL-CommonTransChInfo,
      dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
      ul-DPCH-Info            UL-DPCH-Info,
      modeSpecificInfo        CHOICE {
        fdd                   SEQUENCE {
          dl-PDSCH-Information DL-PDSCH-Information OPTIONAL,
          cpch-SetInfo        CPCH-SetInfo           OPTIONAL
        },
        tdd                   NULL
      },
      dl-CommonInformation    DL-CommonInformation,
      dl-InformationPerRL-List DL-InformationPerRL-List,
      frequencyInfo           FrequencyInfo
    },
    preconfiguration         SEQUENCE {
      -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
      -- one for the FDD only elements and one for the TDD only elements, so that one
      -- FDD/TDD choice in this level is sufficient.
      predefinedConfigIdentity PredefinedConfigIdentity,
      rab-Info                RAB-Info-Post           OPTIONAL,
      modeSpecificInfo        CHOICE {
        fdd                   SEQUENCE {
          ul-DPCH-Info        UL-DPCH-InfoPostFDD,
          dl-CommonInformationPost DL-CommonInformationPost,
          dl-InformationPerRL-List DL-InformationPerRL-ListPostFDD,
          frequencyInfo        FrequencyInfoFDD
        },
        tdd                   SEQUENCE {
          ul-DPCH-Info        UL-DPCH-InfoPostTDD,
          dl-InformationPerRL-List DL-InformationPerRL-ListPostTDD,
          frequencyInfo        FrequencyInfoTDD,
          primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
        }
      }
    }
  },
  -- Physical channel IEs
  maxAllowedUL-TX-Power     MaxAllowedUL-TX-Power
}

-- *****
--
-- HANDBOVER TO UTRAN COMPLETE
--
-- *****

HandoverToUTRANComplete ::= SEQUENCE {
  --TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  -- TABULAR: the IE below is conditional on history.
  startList                 STARTList               OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions     SEQUENCE {}             OPTIONAL
}

-- *****
--
-- INITIAL DIRECT TRANSFER
--
-- *****

InitialDirectTransfer ::= SEQUENCE {
  -- Core network IEs

```

```

        cn-DomainIdentity          CN-DomainIdentity,
        intraDomainNasNodeSelector IntraDomainNasNodeSelector,
        nas-Message                 NAS-Message,
-- Measurement IEs
        measuredResultsOnRACH       MeasuredResultsOnRACH          OPTIONAL,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions       SEQUENCE {}                   OPTIONAL
    }

-- *****
--
-- HANOVER FROM UTRAN COMMAND
--
-- *****

HandoverFromUTRANCommand-GSM-r3 ::= CHOICE {
    r3                               SEQUENCE {
        handoverFromUTRANCommand-GSM-r3
        nonCriticalExtensions        HandoverFromUTRANCommand-GSM-r3-IEs,
        SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

HandoverFromUTRANCommand-GSM-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    activationTime                  ActivationTime                OPTIONAL,
-- Radio bearer IEs
    remainingRAB-Info              RAB-Info                      OPTIONAL,
-- Other IEs
    message-and-extension          CHOICE {
        gsm-Message                 SEQUENCE {},
        -- In this case, what follows the basic production is a variable length bit string
        -- with no length field, containing the GSM message including GSM padding up to end
        -- of container, to be analysed according to GSM specifications
        with-extension              SEQUENCE {
            messages                 GSM-MessageList
        }
    }
}

HandoverFromUTRANCommand-CDMA2000-r3 ::= CHOICE {
    r3                               SEQUENCE {
        handoverFromUTRANCommand-CDMA2000-r3
        nonCriticalExtensions        HandoverFromUTRANCommand-CDMA2000-r3-IEs,
        SEQUENCE {} OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    activationTime                  ActivationTime                OPTIONAL,
-- Radio bearer IEs
    remainingRAB-Info              RAB-Info                      OPTIONAL,
-- Other IEs
    cdma2000-MessageList           CDMA2000-MessageList
}

-- *****
--
-- HANOVER FROM UTRAN FAILURE
--
-- *****

HandoverFromUTRANFailure ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
-- Other IEs
    interRAT-HO-Failure            InterRAT-HO-Failure        OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}                   OPTIONAL
}

-- *****
--

```

```

-- MEASUREMENT CONTROL
--
-- *****

MeasurementControl-r3 ::= CHOICE {
  r3                               SEQUENCE {
    measurementControl-r3          MeasurementControl-r3-IEs,
    nonCriticalExtensions          SEQUENCE {
      -- In case of TDD, the following IE is included instead of the IE
      -- up-IPDL-Parameters in up-OTDOA-AssistanceData
      up-IPDL-Parameter-TDD        UP-IPDL-Parameter-TDD           OPTIONAL,
      -- Extension mechanism for non- release4 information
      nonCriticalExtensions        SEQUENCE {}                     OPTIONAL
    }                               OPTIONAL
  },
  criticalExtensions              SEQUENCE {}
}

MeasurementControl-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier        RRC-TransactionIdentifier,
  -- Measurement IEs
  measurementIdentity             MeasurementIdentity,
  measurementCommand              MeasurementCommand,
  -- TABULAR: The measurement type is included in MeasurementCommand.
  measurementReportingMode        MeasurementReportingMode        OPTIONAL,
  additionalMeasurementList        AdditionalMeasurementID-List    OPTIONAL,
  -- Physical channel IEs
  dpch-CompressedModeStatusInfo   DPCH-CompressedModeStatusInfo  OPTIONAL
}

-- *****
--
-- MEASUREMENT CONTROL FAILURE
--
-- *****

MeasurementControlFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier        RRC-TransactionIdentifier,
  failureCause                    FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}                     OPTIONAL
}

-- *****
--
-- MEASUREMENT REPORT
--
-- *****

MeasurementReport ::= SEQUENCE {
  -- Measurement IEs
  measurementIdentity             MeasurementIdentity,
  measuredResults                 MeasuredResults                 OPTIONAL,
  measuredResultsOnRACH           MeasuredResultsOnRACH           OPTIONAL,
  additionalMeasuredResults        MeasuredResultsList            OPTIONAL,
  eventResults                    EventResults                   OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}                     OPTIONAL
}

-- *****
--
-- PAGING TYPE 1
--
-- *****

PagingType1 ::= SEQUENCE {
  -- User equipment IEs
  pagingRecordList                PagingRecordList              OPTIONAL,
  -- Other IEs
  bcch-ModificationInfo           BCCH-ModificationInfo         OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions            SEQUENCE {}                     OPTIONAL
}

-- *****

```

```

--
-- PAGING TYPE 2
--
-- *****

PagingType2 ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  pagingCause                     PagingCause,
  -- Core network IEs
  cn-DomainIdentity              CN-DomainIdentity,
  pagingRecordTypeID             PagingRecordTypeID,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION
--
-- *****

PhysicalChannelReconfiguration-r3 ::= CHOICE {
  r3                             SEQUENCE {
    physicalChannelReconfiguration-r3
                                PhysicalChannelReconfiguration-r3-IEs,
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo    IntegrityProtectionModeInfo      OPTIONAL,
  cipheringModeInfo             CipheringModeInfo                OPTIONAL,
  activationTime                ActivationTime                    OPTIONAL,
  new-U-RNTI                    U-RNTI                          OPTIONAL,
  new-C-RNTI                    C-RNTI                          OPTIONAL,
  rrc-StateIndicator            RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- Core network IEs
  cn-InformationInfo            CN-InformationInfo                OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                  URA-Identity                    OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList          OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                FrequencyInfo                    OPTIONAL,
  maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power          OPTIONAL,
  ul-ChannelRequirement        UL-ChannelRequirementWithCPCH-SetID  OPTIONAL,
  -- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
  -- between UL DPCH info, CPCH SET info and CPCH set ID.
  modeSpecificInfo             CHOICE {
    fdd                         SEQUENCE {
      dl-PDSCH-Information      DL-PDSCH-Information      OPTIONAL
    },
    tdd                         NULL
  },
  dl-CommonInformation         DL-CommonInformation          OPTIONAL,
  dl-InformationPerRL-List     DL-InformationPerRL-List    OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
--
-- *****

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo    OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance              UL-TimingAdvance                OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime        ActivationTime                    OPTIONAL,
  rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList     OPTIONAL,

```

```

        rb-WithPDCP-InfoList          RB-WithPDCP-InfoList          OPTIONAL,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions          SEQUENCE {}                   OPTIONAL
}

-- *****
--
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
--
-- *****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
-- User equipment IEs
        rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
        failureCause                   FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions          SEQUENCE {}                   OPTIONAL
}

-- *****
--
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
--
-- *****

PhysicalSharedChannelAllocation-r3 ::= CHOICE {
        r3                              SEQUENCE {
                physicalSharedChannelAllocation-r3
                PhysicalSharedChannelAllocation-r3-IEs,
                nonCriticalExtensions    SEQUENCE {}                   OPTIONAL
        },
        criticalExtensions              SEQUENCE {}
}

PhysicalSharedChannelAllocation-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
        c-RNTI                          C-RNTI                          OPTIONAL,
        rrc-TransactionIdentifier        RRC-TransactionIdentifier,
-- Physical channel IEs
        ul-TimingAdvance                UL-TimingAdvanceControl          OPTIONAL,
        pusch-CapacityAllocationInfo    PUSCH-CapacityAllocationInfo    OPTIONAL,
        pdsch-CapacityAllocationInfo    PDSCH-CapacityAllocationInfo    OPTIONAL,
        confirmRequest                  ENUMERATED {
                confirmPDSCH, confirmPUSCH } OPTIONAL,
-- TABULAR: If the above value is not present, the default value "No Confirm"
-- shall be used as specified in 10.2.25.
        iscpTimeslotList                TimeslotList                      OPTIONAL
}

-- *****
--
-- PUSCH CAPACITY REQUEST (TDD only)
--
-- *****

PUSCHCapacityRequest ::= SEQUENCE {
-- User equipment IEs
        c-RNTI                          C-RNTI                          OPTIONAL,
-- Measurement IEs
        trafficVolumeMeasuredResultsList
                TrafficVolumeMeasuredResultsList,
        timeslotListWithISCP            TimeslotListWithISCP            OPTIONAL,
        primaryCCPCH-RSCP              PrimaryCCPCH-RSCP              OPTIONAL,
        allocationConfirmation          CHOICE {
                pdschConfirmation      PDSCH-Identity,
                puschConfirmation      PUSCH-Identity
        } OPTIONAL,
        protocolErrorIndicator          ProtocolErrorIndicatorWithMoreInfo,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions          SEQUENCE {}                   OPTIONAL
}

-- *****
--
-- RADIO BEARER RECONFIGURATION
--
-- *****

```



```

RadioBearerReconfiguration-r3 ::= CHOICE {
  r3 SEQUENCE {
    radioBearerReconfiguration-r3 RadioBearerReconfiguration-r3-IEs,
    nonCriticalExtensions SEQUENCE {} OPTIONAL
  },
  criticalExtensions SEQUENCE {}
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo CipheringModeInfo OPTIONAL,
  activationTime ActivationTime OPTIONAL,
  new-U-RNTI U-RNTI OPTIONAL,
  new-C-RNTI C-RNTI OPTIONAL,
  rrc-StateIndicator RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- Core network IEs
  cn-InformationInfo CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity URA-Identity OPTIONAL,
  -- Radio bearer IEs
  rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,
  rb-InformationReconfigList RB-InformationReconfigList,
  rb-InformationAffectedList RB-InformationAffectedList OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo UL-CommonTransChInfo OPTIONAL,
  ul-deletedTransChInfoList UL-DeletedTransChInfoList OPTIONAL,
  ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
  modeSpecificTransChInfo CHOICE {
    fdd SEQUENCE {
      cpch-SetID CPCH-SetID OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
    },
    tdd NULL
  }
  dl-CommonTransChInfo DL-CommonTransChInfo OPTIONAL,
  dl-DeletedTransChInfoList DL-DeletedTransChInfoList OPTIONAL,
  dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List OPTIONAL,
  -- Physical channel IEs
  frequencyInfo FrequencyInfo OPTIONAL,
  maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
  ul-ChannelRequirement UL-ChannelRequirement OPTIONAL,
  modeSpecificPhysChInfo CHOICE {
    fdd SEQUENCE {
      dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
    },
    tdd NULL
  },
  dl-CommonInformation DL-CommonInformation OPTIONAL,
  dl-InformationPerRL-List DL-InformationPerRL-List
}

-- *****
--
-- RADIO BEARER RECONFIGURATION COMPLETE
--
-- *****

RadioBearerReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo IntegrityProtActivationInfo OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance UL-TimingAdvance OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL,
  rb-WithPDCP-InfoList RB-WithPDCP-InfoList OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RECONFIGURATION FAILURE
--

```

```

-- *****
RadioBearerReconfigurationFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                   FailureCauseWithProtErr,
  -- Radio bearer IEs
  potentiallySuccessfulBearerList RB-IdentityList           OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE
--
-- *****

RadioBearerRelease-r3 ::= CHOICE {
  r3                             SEQUENCE {
    radioBearerRelease-r3       RadioBearerRelease-r3-IEs,
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
  },
  criticalExtensions            SEQUENCE {}
}

RadioBearerRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo   IntegrityProtectionModeInfo   OPTIONAL,
  cipheringModeInfo             CipheringModeInfo                     OPTIONAL,
  activationTime                 ActivationTime                       OPTIONAL,
  new-U-RNTI                     U-RNTI                             OPTIONAL,
  new-C-RNTI                     C-RNTI                             OPTIONAL,
  rrc-StateIndicator             RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
  -- Core network IEs
  cn-InformationInfo             CN-InformationInfo                   OPTIONAL,
  signallingConnectionRelIndication CN-DomainIdentity               OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                   URA-Identity                       OPTIONAL,
  -- Radio bearer IEs
  rab-InformationReconfigList    RAB-InformationReconfigList   OPTIONAL,
  rb-InformationReleaseList      RB-InformationReleaseList    OPTIONAL,
  rb-InformationAffectedList     RB-InformationAffectedList    OPTIONAL,
  rb-WithPDCP-InfoList          RB-WithPDCP-InfoList         OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo           UL-CommonTransChInfo         OPTIONAL,
  ul-deletedTransChInfoList      UL-DeletedTransChInfoList    OPTIONAL,
  ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList  OPTIONAL,
  modeSpecificTransChInfo        CHOICE {
    fdd                           SEQUENCE {
      cpch-SetID                  CPCH-SetID                   OPTIONAL,
      addReconfTransChDRAC-Info    DRAC-StaticInformationList  OPTIONAL
    },
    tdd                            NULL
  }
  dl-CommonTransChInfo           DL-CommonTransChInfo         OPTIONAL,
  dl-DeletedTransChInfoList      DL-DeletedTransChInfoList    OPTIONAL,
  dl-AddReconfTransChInfoList    DL-AddReconfTransChInfo2List  OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                  FrequencyInfo                 OPTIONAL,
  maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power       OPTIONAL,
  ul-ChannelRequirement           UL-ChannelRequirement       OPTIONAL,
  modeSpecificPhysChInfo          CHOICE {
    fdd                           SEQUENCE {
      dl-PDSCH-Information         DL-PDSCH-Information        OPTIONAL
    },
    tdd                            NULL
  },
  dl-CommonInformation           DL-CommonInformation        OPTIONAL,
  dl-InformationPerRL-List       DL-InformationPerRL-List    OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE COMPLETE
--

```

```

-- *****
RadioBearerReleaseComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo     OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance              UL-TimingAdvance                       OPTIONAL,
  -- Radio bearer IEs
  rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList     OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- *****
--
-- RADIO BEARER RELEASE FAILURE
--
-- *****

RadioBearerReleaseFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
  -- Radio bearer IEs
  potentiallySuccessfulBearerList RB-IdentityList                       OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP
--
-- *****

RadioBearerSetup-r3 ::= CHOICE {
  r3                             SEQUENCE {
    radioBearerSetup-r3          RadioBearerSetup-r3-IEs,
    nonCriticalExtensions        SEQUENCE {}      OPTIONAL
  },
  criticalExtensions             SEQUENCE {}
}

RadioBearerSetup-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  integrityProtectionModeInfo   IntegrityProtectionModeInfo     OPTIONAL,
  cipheringModeInfo             CipheringModeInfo                 OPTIONAL,
  activationTime                 ActivationTime                       OPTIONAL,
  new-U-RNTI                     U-RNTI                             OPTIONAL,
  new-C-RNTI                     C-RNTI                             OPTIONAL,
  rrc-StateIndicator             RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                   URA-Identity                       OPTIONAL,
  -- Core network IEs
  cn-InformationInfo             CN-InformationInfo                 OPTIONAL,
  -- Radio bearer IEs
  srb-InformationSetupList       SRB-InformationSetupList         OPTIONAL,
  rab-InformationSetupList       RAB-InformationSetupList         OPTIONAL,
  rb-InformationAffectedList     RB-InformationAffectedList     OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo           UL-CommonTransChInfo           OPTIONAL,
  ul-deletedTransChInfoList      UL-DeletedTransChInfoList      OPTIONAL,
  ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList    OPTIONAL,
  modeSpecificTransChInfo        CHOICE {
    fdd                           SEQUENCE {
      cpch-SetID                  CPCH-SetID                     OPTIONAL,
      addReconfTransChDRAC-Info   DRAC-StaticInformationList  OPTIONAL
    },
    tdd                           NULL
  }
  dl-CommonTransChInfo           DL-CommonTransChInfo           OPTIONAL,
  dl-DeletedTransChInfoList      DL-DeletedTransChInfoList      OPTIONAL,
  dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList    OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                  FrequencyInfo                       OPTIONAL,
}

```

```

maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power          OPTIONAL,
ul-ChannelRequirement          UL-ChannelRequirement          OPTIONAL,
modeSpecificPhysChInfo        CHOICE {
    fdd                        SEQUENCE {
        dl-PDSCH-Information    DL-PDSCH-Information    OPTIONAL
    },
    tdd                        NULL
},
dl-CommonInformation          DL-CommonInformation          OPTIONAL,
dl-InformationPerRL-List      DL-InformationPerRL-List      OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP COMPLETE
--
-- *****

RadioBearerSetupComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo    IntegrityProtActivationInfo    OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance            UL-TimingAdvance            OPTIONAL,
    start-Value                  START-Value                OPTIONAL,
    -- Radio bearer IEs
    count-C-ActivationTime        ActivationTime            OPTIONAL,
    rb-UL-CiphActivationTimeInfo    RB-ActivationTimeInfoList    OPTIONAL,
    rb-WithPDCP-InfoList          RB-WithPDCP-InfoList        OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}            OPTIONAL
}

-- *****
--
-- RADIO BEARER SETUP FAILURE
--
-- *****

RadioBearerSetupFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Radio bearer IEs
    potentiallySuccessfulBearerList    RB-IdentityList            OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}            OPTIONAL
}

-- *****
--
-- RRC CONNECTION REJECT
--
-- *****

RRCConnectionReject-r3 ::= CHOICE {
    r3                            SEQUENCE {
        rrcConnectionReject-r3        RRCConnectionReject-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}            OPTIONAL
    },
    criticalExtensions            SEQUENCE {}
}

RRCConnectionReject-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity            InitialUE-Identity,
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    rejectionCause                  RejectionCause,
    waitTime                        WaitTime,
    redirectionInfo                RedirectionInfo            OPTIONAL
}

-- *****
--
-- RRC CONNECTION RELEASE
--
-- *****

```

```

RRCConnectionRelease-r3 ::= CHOICE {
  r3
    rrcConnectionRelease-r3      SEQUENCE {
      nonCriticalExtensions      RRCConnectionRelease-r3-IEs,
    },
    criticalExtensions            SEQUENCE {}
}

RRCConnectionRelease-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  n-308                          N-308,
  -- The IE above is conditional on the UE state.
  releaseCause                   ReleaseCause,
  rplmn-information              Rplmn-Information
}

-- *****
--
-- RRC CONNECTION RELEASE for CCCH
--
-- *****

RRCConnectionRelease-CCCH-r3 ::= CHOICE {
  r3
    rrcConnectionRelease-CCCH-r3 SEQUENCE {
      nonCriticalExtensions      RRCConnectionRelease-CCCH-r3-IEs,
    },
    criticalExtensions            SEQUENCE {}
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                          U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease           RRCConnectionRelease-r3-IEs
}

-- *****
--
-- RRC CONNECTION RELEASE COMPLETE
--
-- *****

RRCConnectionReleaseComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  errorIndication               FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}
}

-- *****
--
-- RRC CONNECTION REQUEST
--
-- *****

RRCConnectionRequest ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message.
  -- User equipment IEs
  initialUE-Identity            InitialUE-Identity,
  establishmentCause            EstablishmentCause,
  protocolErrorIndicator        ProtocolErrorIndicator,
  -- The IE above is MD, but for compactness reasons no default value
  -- has been assigned to it.
  -- Measurement IEs
  measuredResultsOnRACH         MeasuredResultsOnRACH,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions          SEQUENCE {}
}

-- *****
--
-- RRC CONNECTION SETUP
--
-- *****

```

```

RRCConnectionSetup-r3 ::= CHOICE {
    r3          SEQUENCE {
        rrcConnectionSetup-r3          RRCConnectionSetup-r3-IEs,
        nonCriticalExtensions          SEQUENCE {} OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity          InitialUE-Identity,
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    activationTime              ActivationTime          OPTIONAL,
    new-U-RNTI                  U-RNTI,
    new-c-RNTI                  C-RNTI          OPTIONAL,
    rrc-StateIndicator          RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient,
    capabilityUpdateRequirement CapabilityUpdateRequirement OPTIONAL,
    -- TABULAR: If the IE is not present, the default value defined in 10.3.3.2 shall
    -- be used.
    -- Radio bearer IEs
    srb-InformationSetupList    SRB-InformationSetupList2,
    -- Transport channel IEs
    ul-CommonTransChInfo       UL-CommonTransChInfo          OPTIONAL,
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo       DL-CommonTransChInfo          OPTIONAL,
    dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
    -- Physical channel IEs
    frequencyInfo              FrequencyInfo          OPTIONAL,
    maxAllowedUL-TX-Power      MaxAllowedUL-TX-Power    OPTIONAL,
    ul-ChannelRequirement      UL-ChannelRequirement    OPTIONAL,
    dl-CommonInformation       DL-CommonInformation    OPTIONAL,
    dl-InformationPerRL-List   DL-InformationPerRL-List  OPTIONAL
}

-- *****
--
-- RRC CONNECTION SETUP COMPLETE
--
-- *****

RRCConnectionSetupComplete ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    startList                    STARTList,
    ue-RadioAccessCapability     UE-RadioAccessCapability          OPTIONAL,
    -- Other IEs
    ue-RATSpecificCapability     InterRAT-UE-RadioAccessCapabilityList  OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}          OPTIONAL
}

-- *****
--
-- RRC STATUS
--
-- *****

RRCStatus ::= SEQUENCE {
    -- Other IEs
    protocolErrorInformation     ProtocolErrorMoreInformation,
    -- TABULAR: Identification of received message is nested in
    -- ProtocolErrorMoreInformation
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}          OPTIONAL
}

SecurityModeCommand-r3 ::= CHOICE {
    r3          SEQUENCE {
        securityModeCommand-r3    SecurityModeCommand-r3-IEs,
        nonCriticalExtensions      SEQUENCE {}          OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

```

```

-- *****
--
-- SECURITY MODE COMMAND
--
-- *****

SecurityModeCommand-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    securityCapability              SecurityCapability,
    cipheringModeInfo              CipheringModeInfo          OPTIONAL,
    integrityProtectionModeInfo    IntegrityProtectionModeInfo  OPTIONAL,
-- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SECURITY MODE COMPLETE
--
-- *****

SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.

-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo  OPTIONAL,
-- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList   OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- SECURITY MODE FAILURE
--
-- *****

SecurityModeFailure ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                   FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE
--
-- *****

SignallingConnectionRelease-r3 ::= CHOICE {
    r3                             SEQUENCE {
        signallingConnectionRelease-r3 SignallingConnectionRelease-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    },
    criticalExtensions              SEQUENCE {}
}

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
-- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity
}

-- *****
--
-- SIGNALLING CONNECTION RELEASE REQUEST
--
-- *****

SignallingConnectionReleaseRequest ::= SEQUENCE {
-- Core network IEs

```

```

        cn-DomainIdentity          CN-DomainIdentity,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions      SEQUENCE {} OPTIONAL
    }

-- *****
--
-- SYSTEM INFORMATION for BCH
--
-- *****

SystemInformation-BCH ::= SEQUENCE {
    -- Other information elements
    sfm-Prime                      SFN-Prime,
    payload                         CHOICE {
        noSegment                   NULL,
        firstSegment                FirstSegment,
        subsequentSegment           SubsequentSegment,
        lastSegmentShort            LastSegmentShort,
        lastAndFirst                SEQUENCE {
            lastSegmentShort        LastSegmentShort,
            firstSegment             FirstSegmentShort
        },
        lastAndComplete             SEQUENCE {
            lastSegmentShort        LastSegmentShort,
            completeSIB-List        CompleteSIB-List
        },
        lastAndCompleteAndFirst     SEQUENCE {
            lastSegmentShort        LastSegmentShort,
            completeSIB-List        CompleteSIB-List,
            firstSegment            FirstSegmentShort
        },
        completeSIB-List            CompleteSIB-List,
        completeAndFirst            SEQUENCE {
            completeSIB-List        CompleteSIB-List,
            firstSegment            FirstSegmentShort
        },
        completeSIB                 CompleteSIB,
        lastSegment                 LastSegment
    }
}

-- *****
--
-- SYSTEM INFORMATION for FACH
--
-- *****

SystemInformation-FACH ::= SEQUENCE {
    -- Other information elements
    payload                         CHOICE {
        noSegment                   NULL,
        firstSegment                FirstSegment,
        subsequentSegment           SubsequentSegment,
        lastSegmentShort            LastSegmentShort,
        lastAndFirst                SEQUENCE {
            lastSegmentShort        LastSegmentShort,
            firstSegment             FirstSegmentShort
        },
        lastAndComplete             SEQUENCE {
            lastSegmentShort        LastSegmentShort,
            completeSIB-List        CompleteSIB-List
        },
        lastAndCompleteAndFirst     SEQUENCE {
            lastSegmentShort        LastSegmentShort,
            completeSIB-List        CompleteSIB-List,
            firstSegment            FirstSegmentShort
        },
        completeSIB-List            CompleteSIB-List,
        completeAndFirst            SEQUENCE {
            completeSIB-List        CompleteSIB-List,
            firstSegment            FirstSegmentShort
        },
        completeSIB                 CompleteSIB,
        lastSegment                 LastSegment
    }
}

```



```

-- *****
--
-- First segment
--
-- *****

FirstSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        seg-Count         SegCount,
        sib-Data-fixed    SIB-Data-fixed
    }

-- *****
--
-- First segment (short)
--
-- *****

FirstSegmentShort ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        seg-Count         SegCount,
        sib-Data-variable SIB-Data-variable
    }

-- *****
--
-- Subsequent segment
--
-- *****

SubsequentSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex     SegmentIndex,
        sib-Data-fixed    SIB-Data-fixed
    }

-- *****
--
-- Last segment
--
-- *****

LastSegment ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex     SegmentIndex,
        sib-Data-fixed    SIB-Data-fixed
        -- In case the SIB data is less than 222 bits, padding shall be used
        -- The same padding bits shall be used as defined in clause 12.1
    }

LastSegmentShort ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        segmentIndex     SegmentIndex,
        sib-Data-variable SIB-Data-variable
    }

-- *****
--
-- Complete SIB
--
-- *****

CompleteSIB-List ::=
    SEQUENCE (SIZE (1..maxSIBperMsg)) OF
        CompleteSIBshort

CompleteSIB ::=
    SEQUENCE {
        -- Other information elements
        sib-Type          SIB-Type,
        sib-Data-fixed    BIT STRING (SIZE (226))
        -- In case the SIB data is less than 226 bits, padding shall be used
        -- The same padding bits shall be used as defined in clause 12.1
    }

```

```

CompleteSIBshort ::=                               SEQUENCE {
  -- Other information elements
  sib-Type                SIB-Type,
  sib-Data-variable       SIB-Data-variable
}

-- *****
--
-- SYSTEM INFORMATION CHANGE INDICATION
--
-- *****

SystemInformationChangeIndication ::= SEQUENCE {
  -- Other IEs
  bcch-ModificationInfo   BCCH-ModificationInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions    SEQUENCE {} OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION
--
-- *****

TransportChannelReconfiguration-r3 ::= CHOICE {
  r3                       SEQUENCE {
    transportChannelReconfiguration-r3
    nonCriticalExtensions   SEQUENCE {} OPTIONAL
  },
  criticalExtensions       SEQUENCE {}
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo        CipheringModeInfo OPTIONAL,
  activationTime            ActivationTime OPTIONAL,
  new-U-RNTI                U-RNTI OPTIONAL,
  new-C-RNTI                C-RNTI OPTIONAL,
  rrc-StateIndicator        RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- Core network IEs
  cn-InformationInfo        CN-InformationInfo OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity              URA-Identity OPTIONAL,
  -- Radio bearer IEs
  rb-WithPDCP-InfoList     RB-WithPDCP-InfoList OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo     UL-CommonTransChInfo OPTIONAL,
  ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
  modeSpecificTransChInfo  CHOICE {
    fdd                     SEQUENCE {
      cpch-SetID            CPCH-SetID OPTIONAL,
      addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
    },
    tdd                     NULL
  }
  dl-CommonTransChInfo     DL-CommonTransChInfo OPTIONAL,
  dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList OPTIONAL,
  -- Physical channel IEs
  frequencyInfo            FrequencyInfo OPTIONAL,
  maxAllowedUL-TX-Power    MaxAllowedUL-TX-Power OPTIONAL,
  ul-ChannelRequirement    UL-ChannelRequirement OPTIONAL,
  modeSpecificPhysChInfo   CHOICE {
    fdd                     SEQUENCE {
      dl-PDSCH-Information  DL-PDSCH-Information OPTIONAL
    },
    tdd                     NULL
  },
  dl-CommonInformation     DL-CommonInformation OPTIONAL,
  dl-InformationPerRL-List DL-InformationPerRL-List OPTIONAL
}

-- *****
--

```

```

-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
--
-- *****

TransportChannelReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo      OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance              UL-TimingAdvance                OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime        ActivationTime                OPTIONAL,
  rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList   OPTIONAL,
  rb-WithPDCP-InfoList         RB-WithPDCP-InfoList       OPTIONAL,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
--
-- *****

TransportChannelReconfigurationFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL
--
-- *****

TransportFormatCombinationControl ::= SEQUENCE {
  -- TABULAR: Integrity protection shall not be performed on this message when transmitting this
  message
  -- on the transparent mode signalling DCCH.
  rrc-TransactionIdentifier      RRC-TransactionIdentifier      OPTIONAL,
  -- The information element is not included when transmitting the message
  -- on the transparent mode signalling DCCH
  modeSpecificInfo              CHOICE {
    fdd                          NULL,
    tdd                          SEQUENCE {
      tfcs-ID                    TFCS-Identity          OPTIONAL
    }
  },
  dpch-TFCS-InUplink            TFC-Subset,
  tfc-ControlDuration            TFC-ControlDuration          OPTIONAL,
  -- The information element is not included when transmitting the message
  -- on the transparent mode signalling DCCH and is optional otherwise
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
--
-- *****

TransportFormatCombinationControlFailure ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  failureCause                  FailureCauseWithProtErr,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions         SEQUENCE {}                  OPTIONAL
}

-- *****
--
-- UE CAPABILITY ENQUIRY
--
-- *****

```

```

UECapabilityEnquiry-r3 ::= CHOICE {
    r3          SEQUENCE {
        ueCapabilityEnquiry-r3          UECapabilityEnquiry-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}          OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    capabilityUpdateRequirement          CapabilityUpdateRequirement
}

-- *****
--
-- UE CAPABILITY INFORMATION
--
-- *****

UECapabilityInformation ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier          OPTIONAL,
    ue-RadioAccessCapability          UE-RadioAccessCapability          OPTIONAL,
    -- Other IEs
    ue-RATSpecificCapability          InterRAT-UE-RadioAccessCapabilityList
    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UE CAPABILITY INFORMATION CONFIRM
--
-- *****

UECapabilityInformationConfirm-r3 ::= CHOICE {
    r3          SEQUENCE {
        ueCapabilityInformationConfirm-r3
        nonCriticalExtensions          UECapabilityInformationConfirm-r3-IEs,
        SEQUENCE {}          OPTIONAL
    },
    criticalExtensions          SEQUENCE {}
}

UECapabilityInformationConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier
}

-- *****
--
-- UPLINK DIRECT TRANSFER
--
-- *****

UplinkDirectTransfer ::= SEQUENCE {
    -- Core network IEs
    cn-DomainIdentity          CN-DomainIdentity,
    nas-Message          NAS-Message,
    -- Measurement IEs
    measuredResultsOnRACH          MeasuredResultsOnRACH          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UPLINK PHYSICAL CHANNEL CONTROL
--
-- *****

UplinkPhysicalChannelControl-r3 ::= CHOICE {
    r3          SEQUENCE {
        uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}
    }
}

```

```

-- In case of TDD, the following IE is included instead of the IE
-- up-IPDL-Parameters in up-OTDOA-AssistanceData
openLoopPowerControl-IPDL-TDD  OpenLoopPowerControl-IPDL-TDD      OPTIONAL,
-- Extension mechanism for non- release4 information
noncriticalExtensions          SEQUENCE {}                          OPTIONAL
}
},
criticalExtensions              SEQUENCE {}
}

```

```

UplinkPhysicalChannelControl-r3-IEs ::= SEQUENCE {
-- User equipment IEs
rrc-TransactionIdentifier      RRC-TransactionIdentifier,
-- Physical channel IEs
ccTrCH-PowerControlInfo        CCTrCH-PowerControlInfo      OPTIONAL,
timingAdvance                   UL-TimingAdvanceControl     OPTIONAL,
alpha                           Alpha                          OPTIONAL,
prach-ConstantValue            ConstantValue                 OPTIONAL,
pusch-ConstantValue            ConstantValue                 OPTIONAL
}

```

```

-- *****
--
-- URA UPDATE
--
-- *****

```

```

URAUUpdate ::= SEQUENCE {
-- User equipment IEs
u-RNTI                          U-RNTI,
ura-UpdateCause                 URA-UpdateCause,
protocolErrorIndicator          ProtocolErrorIndicatorWithMoreInfo,
-- Extension mechanism for non- release99 information
nonCriticalExtensions           SEQUENCE {}                  OPTIONAL
}

```

```

-- *****
--
-- URA UPDATE CONFIRM
--
-- *****

```

```

URAUUpdateConfirm-r3 ::= CHOICE {
r3                               SEQUENCE {
uraUpdateConfirm-r3            URAUpdateConfirm-r3-IEs,
nonCriticalExtensions          SEQUENCE {}                  OPTIONAL
},
criticalExtensions              SEQUENCE {}
}

```

```

URAUUpdateConfirm-r3-IEs ::= SEQUENCE {
-- User equipment IEs
rrc-TransactionIdentifier      RRC-TransactionIdentifier,
integrityProtectionModeInfo    IntegrityProtectionModeInfo  OPTIONAL,
cipheringModeInfo              CipheringModeInfo             OPTIONAL,
new-U-RNTI                     U-RNTI                       OPTIONAL,
new-C-RNTI                     C-RNTI                       OPTIONAL,
rrc-StateIndicator             RRC-StateIndicator,
utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
-- CN information elements
cn-InformationInfo             CN-InformationInfo           OPTIONAL,
-- UTRAN mobility IEs
ura-Identity                   URA-Identity                 OPTIONAL,
-- Radio bearer IEs
rb-WithPDCP-InfoList          RB-WithPDCP-InfoList        OPTIONAL
}

```

```

-- *****
--
-- URA UPDATE CONFIRM for CCCH
--
-- *****

```

```

URAUUpdateConfirm-CCCH-r3 ::= CHOICE {
r3                               SEQUENCE {
uraUpdateConfirm-CCCH-r3      URAUpdateConfirm-CCCH-r3-IEs,
nonCriticalExtensions          SEQUENCE {}                  OPTIONAL
}
}

```

```

    },
    criticalExtensions          SEQUENCE {}
}

URAUUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
    -- User equipment IES
    u-RNTI                      U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    uraUpdateConfirm            URAUpdateConfirm-r3-IEs
}

-- *****
--
-- UTRAN MOBILITY INFORMATION
--
-- *****

UTRANMobilityInformation ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    integrityProtectionModeInfo  IntegrityProtectionModeInfo    OPTIONAL,
    cipheringModeInfo            CipheringModeInfo                    OPTIONAL,
    new-U-RNTI                   U-RNTI                                OPTIONAL,
    new-C-RNTI                   C-RNTI                                OPTIONAL,
    ue-ConnTimersAndConstants    UE-ConnTimersAndConstants        OPTIONAL,
    -- CN information elements
    cn-InformationInfo           CN-InformationInfo                    OPTIONAL,
    -- UTRAN mobility IES
    ura-Identity                 URA-Identity                        OPTIONAL,
    -- Radio bearer IES
    count-C-ActivationTime       ActivationTime                    OPTIONAL,
    rb-WithPDCP-InfoList         RB-WithPDCP-InfoList          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION CONFIRM
--
-- *****

UTRANMobilityInformationConfirm ::= SEQUENCE {
    -- User equipment IES
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo   IntegrityProtActivationInfo    OPTIONAL,
    -- Radio bearer IES
    rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList    OPTIONAL,
    rb-WithPDCP-InfoList         RB-WithPDCP-InfoList          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}          OPTIONAL
}

-- *****
--
-- UTRAN MOBILITY INFORMATION FAILURE
--
-- *****

UTRANMobilityInformationFailure ::= SEQUENCE {
    -- UE information elements
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    failureCause                 FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}          OPTIONAL
}
}

END

```

## 11.3 Information element definitions

```

InformationElements DEFINITIONS AUTOMATIC TAGS ::=
-- *****
--
-- CORE NETWORK INFORMATION ELEMENTS (10.3.1)
--

```

-- \*\*\*\*\*

BEGIN

IMPORTS

hiPDSCHidentities,  
hiPUSCHidentities,  
hiRM,  
maxAC,  
maxAdditionalMeas,  
maxASC,  
maxASCmap,  
maxASCpersist,  
maxCCTrCH,  
maxCellMeas,  
maxCellMeas-1,  
maxCNdomains,  
maxCPCHsets,  
maxDPCH-DLchan,  
maxDPCHcodesPerTS,  
maxDPDCH-UL,  
maxDRACclasses,  
maxFACH,  
maxFreq,  
maxFrequencybands,  
maxInterSysMessages,  
maxLoCHperRLC,  
maxMeasEvent,  
maxMeasIntervals,  
maxMeasParEvent,  
maxNumCDMA2000Freqs,  
maxNumFDDFreqs,  
maxNumGSMFreqRanges,  
maxNumTDDFreqs,  
maxOtherRAT,  
maxPage1,  
maxPCPCH-Apsig,  
maxPCPCH-APsubCh,  
maxPCPCH-CDsig,  
maxPCPCH-CDsubCh,  
maxPCPCH-SF,  
maxPCPCHs,  
maxPDCPAlgoType,  
maxPDSCH,  
maxPDSCH-TFCigroups,  
maxPRACH,  
maxPUSCH,  
maxRABsetup,  
maxRAT,  
maxRB,  
maxRBallRABs,  
maxRBMuxOptions,  
maxRBperRAB,  
maxReportedGSMCells,  
maxSRBsetup,  
maxRL,  
maxRL-1,  
maxSCCPCH,  
maxSat,  
maxSIB,  
maxSIB-FACH,  
maxSig,  
maxSubCh,  
maxSystemCapability,  
maxTF,  
maxTF-CPCH,  
maxTFC,  
maxTFCI-2-Combs,  
maxTGPS,  
maxTrCH,  
maxTS,  
maxTS-1,  
maxURA

FROM Constant-definitions;

CN-DomainIdentity ::= ENUMERATED {  
                          cs-domain,  
                          ps-domain }

```

CN-DomainInformation ::=          SEQUENCE {
    cn-DomainIdentity             CN-DomainIdentity,
    cn-DomainSpecificNAS-Info     NAS-SystemInformationGSM-MAP
}

CN-DomainInformationList ::=     SEQUENCE (SIZE (1..maxCNdomains)) OF
    CN-DomainInformation

CN-DomainSysInfo ::=            SEQUENCE {
    cn-DomainIdentity             CN-DomainIdentity,
    cn-Type                       CHOICE {
        gsm-MAP                   NAS-SystemInformationGSM-MAP,
        ansi-41                    NAS-SystemInformationANSI-41
    },
    cn-DRX-CycleLengthCoeff       CN-DRX-CycleLengthCoefficient
}

CN-DomainSysInfoList ::=        SEQUENCE (SIZE (1..maxCNdomains)) OF
    CN-DomainSysInfo

CN-InformationInfo ::=          SEQUENCE {
    plmn-Identity                 PLMN-Identity                OPTIONAL,
    cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP  OPTIONAL,
    cn-DomainInformationList      CN-DomainInformationList     OPTIONAL
}

Digit ::=                       INTEGER (0..9)

IMEI ::=                         SEQUENCE (SIZE (15)) OF
    IMEI-Digit

IMEI-Digit ::=                  INTEGER (0..15)

IMSI-GSM-MAP ::=               SEQUENCE (SIZE (6..15)) OF
    Digit

IntraDomainNasNodeSelector ::=  BIT STRING (SIZE (16))

LAI ::=                         SEQUENCE {
    plmn-Identity                 PLMN-Identity,
    lac                           BIT STRING (SIZE (16))
}

MCC ::=                         SEQUENCE (SIZE (3)) OF
    Digit

MNC ::=                         SEQUENCE (SIZE (2..3)) OF
    Digit

NAS-Message ::=                OCTET STRING (SIZE (1..4095))

NAS-Synchronisation-Indicator ::= BIT STRING(SIZE(4))

NAS-SystemInformationGSM-MAP ::= OCTET STRING (SIZE (1..8))

P-TMSI-GSM-MAP ::=             BIT STRING (SIZE (32))

PagingRecordTypeID ::=         ENUMERATED {
    imsi-GSM-MAP,
    tmsi-GSM-MAP-P-TMSI,
    imsi-DS-41,
    tmsi-DS-41 }

PLMN-Identity ::=              SEQUENCE {
    mcc                           MCC,
    mnc                           MNC
}

PLMN-Type ::=                  CHOICE {
    gsm-MAP                       SEQUENCE {
        plmn-Identity             PLMN-Identity
    },
    ansi-41                       SEQUENCE {
        p-REV                     P-REV,
        min-P-REV                 Min-P-REV,
        sid                       SID,
        nid                       NID
    },
}

```



```

gsm-MAP-and-ANSI-41          SEQUENCE {
    plmn-Identity             PLMN-Identity,
    p-REV                     P-REV,
    min-P-REV                 Min-P-REV,
    sid                       SID,
    nid                       NID
}
}

RAB-Identity ::=             CHOICE {
    gsm-MAP-RAB-Identity     BIT STRING (SIZE (8)),
    ansi-41-RAB-Identity     BIT STRING (SIZE (8))
}

RAI ::=                      SEQUENCE {
    lai                      LAI,
    rac                      RoutingAreaCode
}

RoutingAreaCode ::=         BIT STRING (SIZE (8))

TMSI-GSM-MAP ::=           BIT STRING (SIZE (32))

-- *****
--
--     UTRAN MOBILITY INFORMATION ELEMENTS (10.3.2)
--
-- *****

AccessClassBarred ::=       ENUMERATED {
    barred, notBarred }

AccessClassBarredList ::=   SEQUENCE (SIZE (maxAC)) OF
    AccessClassBarred

AllowedIndicator ::=        ENUMERATED {
    allowed, notAllowed }

CellAccessRestriction ::=   SEQUENCE {
    cellBarred                CellBarred,
    cellReservedForOperatorUse ReservedIndicator,
    cellReservedForSOLSA     ReservedIndicator,
    accessClassBarredList    AccessClassBarredList           OPTIONAL
}

CellBarred ::=              CHOICE {
    barred                     SEQUENCE {
        intraFreqCellReselectionInd AllowedIndicator,
        t-Barred                  T-Barred
    },
    notBarred                 NULL
}

CellIdentity ::=            BIT STRING (SIZE (28))

CellSelectReselectInfoSIB-3-4 ::= SEQUENCE {
    mappingInfo                MappingInfo           OPTIONAL,
    cellSelectQualityMeasure    CHOICE {
        cpich-Ec-No              SEQUENCE {
            q-HYST-2-S            Q-Hyst-S           OPTIONAL
            -- Default value for q-HYST-2-S is q-HYST-1-S
        },
        cpich-RSCP                NULL
    },
    modeSpecificInfo           CHOICE {
        fdd                      SEQUENCE {
            s-Intrasearch         S-SearchQual   OPTIONAL,
            s-Intersearch         S-SearchQual   OPTIONAL,
            s-SearchHCS           S-SearchRXLEV     OPTIONAL,
            rat-List              RAT-FDD-InfoList    OPTIONAL,
            q-QualMin             Q-QualMin,
            q-RxlevMin            Q-RxlevMin
        },
        tdd                      SEQUENCE {
            s-Intrasearch         S-SearchRXLEV   OPTIONAL,
            s-Intersearch         S-SearchRXLEV   OPTIONAL,
            s-SearchHCS           S-SearchRXLEV   OPTIONAL,
            rat-List              RAT-TDD-InfoList    OPTIONAL,

```

```

        q-RxlevMin
    },
    q-Hyst-l-S
    t-Reselection-S
    hcs-ServingCellInformation
    maxAllowedUL-TX-Power
}

Q-RxlevMin
Q-Hyst-S,
T-Reselection-S,
HCS-ServingCellInformation
MaxAllowedUL-TX-Power
OPTIONAL,
}

MapParameter ::=
    INTEGER (0..99)

Mapping ::=
    SEQUENCE {
        rat
        mappingFunctionParameterList
    }

MappingFunctionParameter ::=
    SEQUENCE {
        functionType
        mapParameter1
        mapParameter2
        upperLimit
        -- The parameter is conditional on the number of repetition
    }
    OPTIONAL,
    OPTIONAL

MappingFunctionParameterList ::=
    SEQUENCE (SIZE (1..maxMeasIntervals)) OF
        MappingFunctionParameter

MappingFunctionType ::=
    ENUMERATED {
        linear,
        functionType2,
        functionType3,
        functionType4
    }

MappingInfo ::=
    SEQUENCE (SIZE (1..maxRAT)) OF
        Mapping

-- Actual value = IE value * 2
Q-Hyst-S ::=
    INTEGER (0..20)

RAT ::=
    ENUMERATED {
        ultra-FDD,
        ultra-TDD,
        gsm,
        cdma2000
    }

RAT-FDD-Info ::=
    SEQUENCE {
        rat-Identifier
        s-SearchRAT
        s-HCS-RAT
        s-Limit-SearchRAT
    }
    OPTIONAL,

RAT-FDD-InfoList ::=
    SEQUENCE (SIZE (1..maxOtherRAT)) OF
        RAT-FDD-Info

RAT-Identifier ::=
    ENUMERATED {
        gsm, cdma2000
    }

RAT-TDD-Info ::=
    SEQUENCE {
        rat-Identifier
        s-SearchRAT
        s-HCS-RAT
        s-Limit-SearchRAT
    }
    OPTIONAL,

RAT-TDD-InfoList ::=
    SEQUENCE (SIZE (1..maxOtherRAT)) OF
        RAT-TDD-Info

ReservedIndicator ::=
    ENUMERATED {
        reserved,
        notReserved
    }

-- Actual value = IE value * 2
S-SearchQual ::=
    INTEGER (-16..10)

-- Actual value = (IE value * 2) + 1
S-SearchRXLEV ::=
    INTEGER (-53..45)

```

```

T-Barred ::=
    ENUMERATED {
        s10, s20, s40, s80,
        s160, s320, s640, s1280 }

T-Reselection-S ::=
    INTEGER (0..31)

-- The used range depends on the RAT used.
UpperLimit ::=
    INTEGER (1..91)

URA-Identity ::=
    BIT STRING (SIZE (16))

URA-IdentityList ::=
    SEQUENCE (SIZE (1..maxURA)) OF
        URA-Identity

-- *****
--
--     USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
--
-- *****

ActivationTime ::=
    INTEGER (0..255)
-- TABULAR : value 'now' always appear as default, and is encoded by absence of the field

BackoffControlParams ::=
    SEQUENCE {
        n-AP-RetransMax      N-AP-RetransMax,
        n-AccessFails       N-AccessFails,
        nf-BO-NoAICH        NF-BO-NoAICH,
        ns-BO-Busy          NS-BO-Busy,
        nf-BO-AllBusy       NF-BO-AllBusy,
        nf-BO-Mismatch      NF-BO-Mismatch,
        t-CPCH              T-CPCH
    }

C-RNTI ::=
    BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::=
    SEQUENCE {
        ue-RadioCapabilityUpdateRequirement    BOOLEAN,
        systemSpecificCapUpdateReqList        SystemSpecificCapUpdateReqList    OPTIONAL
    }

CellUpdateCause ::=
    ENUMERATED {
        cellReselection,
        periodicalCellUpdate,
        uplinkDataTransmission,
        utran-pagingResponse,
        re-enteredServiceArea,
        radiolinkFailure,
        rlc-unrecoverableError,
        spare1 }

ChipRateCapability ::=
    ENUMERATED {
        mcps3-84, mcps1-28 }

CipheringAlgorithm ::=
    ENUMERATED {
        uea0, uea1 }

CipheringModeCommand ::=
    CHOICE {
        startRestart      CipheringAlgorithm,
        stopCiphering     NULL
    }

CipheringModeInfo ::=
    SEQUENCE {
        cipheringModeCommand      CipheringModeCommand,
        -- TABULAR: The ciphering algorithm is included in
        -- the CipheringModeCommand.
        activationTimeForDPCH      ActivationTime      OPTIONAL,
        rb-DL-CiphActivationTimeInfo    RB-ActivationTimeInfoList    OPTIONAL
    }

CN-DRX-CycleLengthCoefficient ::=
    INTEGER (6..9)

CN-PagedUE-Identity ::=
    CHOICE {
        imsi-GSM-MAP      IMSI-GSM-MAP,
        tmsi-GSM-MAP      TMSI-GSM-MAP,
        p-TMSI-GSM-MAP    P-TMSI-GSM-MAP,
        imsi-DS-41        IMSI-DS-41,
        tmsi-DS-41        TMSI-DS-41
    }

```

```

CompressedModeMeasCapability ::= SEQUENCE {
    fdd-Measurements          BOOLEAN,
    -- TABULAR: The IEs below are made optional since they are conditional based
    -- on another information element. Their absence corresponds to the case where
    -- the condition is not true.
    tdd-Measurements          BOOLEAN          OPTIONAL,
    gsm-Measurements          GSM-Measurements OPTIONAL,
    multiCarrierMeasurements  BOOLEAN          OPTIONAL
}

CPCH-Parameters ::= SEQUENCE {
    initialPriorityDelayList  InitialPriorityDelayList          OPTIONAL,
    backoffControlParams     BackoffControlParams,
    powerControlAlgorithm    PowerControlAlgorithm,
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    dl-DPCCH-BER             DL-DPCCH-BER
}

DL-DPCCH-BER ::= INTEGER (0..63)

DL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPCH-PDSCH-Codes    INTEGER (1..8),
    maxNoPhysChBitsReceived  MaxNoPhysChBitsReceived,
    supportForSF-512         BOOLEAN,
    supportOfPDSCH           BOOLEAN,
    simultaneousSCCPCH-DPCH-Reception SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame           MaxTS-PerFrame,
    maxPhysChPerFrame        MaxPhysChPerFrame,
    minimumSF                MinimumSF-DL,
    supportOfPDSCH           BOOLEAN,
    maxPhysChPerTS           MaxPhysChPerTS
}

DL-TransChCapability ::= SEQUENCE {
    maxNoBitsReceived        MaxNoBits,
    maxConvCodeBitsReceived  MaxNoBits,
    turboDecodingSupport     TurboSupport,
    maxSimultaneousTransChs  MaxSimultaneousTransChsDL,
    maxSimultaneousCCTrCH-Count MaxSimultaneousCCTrCH-Count,
    maxReceivedTransportBlocks MaxTransportBlocksDL,
    maxNumberOfTFC-InTFCS    MaxNumberOfTFC-InTFCS-DL,
    maxNumberOfTF            MaxNumberOfTF
}

DRAC-SysInfo ::= SEQUENCE {
    transmissionProbability  TransmissionProbability,
    maximumBitRate           MaximumBitRate
}

DRAC-SysInfoList ::= SEQUENCE (SIZE (1..maxDRACclasses)) OF
    DRAC-SysInfo

ESN-DS-41 ::= BIT STRING (SIZE (32))

EstablishmentCause ::= ENUMERATED {
    originatingConversationalCall,
    originatingStreamingCall,
    originatingInteractiveCall,
    originatingBackgroundCall,
    originatingSubscribedTrafficCall,
    terminatingConversationalCall,
    terminatingStreamingCall,
    terminatingInteractiveCall,
    terminatingBackgroundCall,
    emergencyCall,
    interRAT-CellReselection,
    interRAT-CellChangeOrder,
    registration,
    detach,
    highPrioritySignalling,
    lowPrioritySignalling,
    callRe-establishment,
    spare1 }

```

```

FailureCauseWithProtErr ::= CHOICE {
    configurationUnsupported          NULL,
    physicalChannelFailure           NULL,
    incompatibleSimultaneousReconfiguration
                                     NULL,
    compressedModeRuntimeError      TGPSI,
    protocolError                   ProtocolErrorInformation,
    cellReselection                 NULL,
    invalidConfiguration            NULL,
    configurationIncomplete         NULL,
    unsupportedMeasurement          NULL,
    spare1                          NULL,
    spare2                          NULL,
    spare3                          NULL,
    spare4                          NULL,
    spare5                          NULL,
    spare6                          NULL,
    spare7                          NULL
}

FailureCauseWithProtErrTrId ::= SEQUENCE {
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                   FailureCauseWithProtErr
}

GSM-Measurements ::= SEQUENCE {
    gsm900                         BOOLEAN,
    dcs1800                        BOOLEAN,
    gsml900                        BOOLEAN
}

ICS-Version ::= ENUMERATED {
    r99 }

IMSI-and-ESN-DS-41 ::= SEQUENCE {
    imsi-DS-41                    IMSI-DS-41,
    esn-DS-41                     ESN-DS-41
}

IMSI-DS-41 ::= OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::= SEQUENCE (SIZE (maxASC)) OF
    NS-IP

InitialUE-Identity ::= CHOICE {
    imsi                          IMSI-GSM-MAP,
    tmsi-and-LAI                  TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI                P-TMSI-and-RAI-GSM-MAP,
    imei                          IMEI,
    esn-DS-41                     ESN-DS-41,
    imsi-DS-41                    IMSI-DS-41,
    imsi-and-ESN-DS-41            IMSI-and-ESN-DS-41,
    tmsi-DS-41                    TMSI-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode     MessageAuthenticationCode,
    rrc-MessageSequenceNumber     RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList RRC-MessageSequenceNumberList
}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uia1 }

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection      SEQUENCE {
        integrityProtInitNumber   IntegrityProtInitNumber
    },
    modify                        SEQUENCE {
        dl-IntegrityProtActivationInfo IntegrityProtActivationInfo
    }
}

```

```

IntegrityProtectionModeInfo ::= SEQUENCE {
    integrityProtectionModeCommand IntegrityProtectionModeCommand,
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection intialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionAlgorithm IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MaxHcContextSpace ::= ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192 }

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am32 }

-- Actual value = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600 }

MaxNoBits ::= ENUMERATED {
    b640, b1280, b2560, b3840, b5120,
    b6400, b7680, b8960, b10240,
    b20480, b40960, b81920, b163840 }

MaxNoPhysChBitsReceived ::= ENUMERATED {
    b600, b1200, b2400, b3600,
    b4800, b7200, b9600, b14400,
    b19200, b28800, b38400, b48000,
    b57600, b67200, b76800 }

MaxNoSCCPCH-RL ::= ENUMERATED {
    r11 }

MaxNumberOfTF ::= ENUMERATED {
    tf32, tf64, tf128, tf256,
    tf512, tf1024 }

MaxNumberOfTFC-InTFCS-DL ::= ENUMERATED {
    tfc16, tfc32, tfc48, tfc64, tfc96,
    tfc128, tfc256, tfc512, tfc1024 }

MaxNumberOfTFC-InTFCS-UL ::= ENUMERATED {
    tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
    tfc96, tfc128, tfc256, tfc512, tfc1024 }

MaxPhysChPerFrame ::= INTEGER (1..224)

MaxPhysChPerTimeslot ::= ENUMERATED {
    ts1, ts2 }

MaxPhysChPerTS ::= INTEGER (1..16)

MaxSimultaneousCCTrCH-Count ::= INTEGER (1..8)

MaxSimultaneousTransChsDL ::= ENUMERATED {
    e4, e8, e16, e32 }

MaxSimultaneousTransChsUL ::= ENUMERATED {
    e2, e4, e8, e16, e32 }

MaxTransportBlocksDL ::= ENUMERATED {
    tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }

MaxTransportBlocksUL ::= ENUMERATED {
    tb2, tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }

```

```

MaxTS-PerFrame ::=                               INTEGER (1..14)

-- TABULAR: This IE contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.
MeasurementCapability ::=                       SEQUENCE {
    downlinkCompressedMode                     CompressedModeMeasCapability,
    uplinkCompressedMode                       CompressedModeMeasCapability
}

MessageAuthenticationCode ::=                 BIT STRING (SIZE (32))

MinimumSF-DL ::=                               ENUMERATED {
    sf1, sf16 }

MinimumSF-UL ::=                               ENUMERATED {
    sf1, sf2, sf4, sf8, sf16 }

MultiModeCapability ::=                       ENUMERATED {
    tdd, fdd, fdd-tdd }

MultiRAT-Capability ::=                       SEQUENCE {
    supportOfGSM                               BOOLEAN,
    supportOfMulticarrier                     BOOLEAN
}

N-300 ::=                                     INTEGER (0..7)
N-301 ::=                                     INTEGER (0..7)
N-302 ::=                                     INTEGER (0..7)
N-304 ::=                                     INTEGER (0..7)
N-308 ::=                                     INTEGER (1..8)
N-310 ::=                                     INTEGER (0..7)
N-312 ::=                                     ENUMERATED {
    s1, s50, s100, s200, s400,
    s600, s800, s1000 }
N-313 ::=                                     ENUMERATED {
    s1, s2, s4, s10, s20,
    s50, s100, s200 }
N-315 ::=                                     ENUMERATED {
    s1, s50, s100, s200, s400,
    s600, s800, s1000 }

N-AccessFails ::=                             INTEGER (1..64)
N-AP-RetransMax ::=                           INTEGER (1..64)
NetworkAssistedGPS-Supported ::=              ENUMERATED {
    networkBased,
    ue-Based,
    bothNetworkAndUE-Based,
    noNetworkAssistedGPS }

NF-BO-AllBusy ::=                             INTEGER (0..31)
NF-BO-NoAICH ::=                              INTEGER (0..31)
NF-BO-Mismatch ::=                            INTEGER (0..127)
NS-BO-Busy ::=                                INTEGER (0..63)
NS-IP ::=                                     INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::=                   SEQUENCE {
    p-TMSI                                     P-TMSI-GSM-MAP,
    rai                                        RAI
}

PagingCause ::=                               ENUMERATED {
    terminatingConversationalCall,
    terminatingStreamingCall,

```

```

        terminatingInteractiveCall,
        terminatingBackgroundCall,
        highPrioritySignalling,
        lowPrioritySignalling
    }

PagingRecord ::=
    CHOICE {
        cn-Identity
            SEQUENCE {
                pagingCause
                    PagingCause,
                cn-DomainIdentity
                    CN-DomainIdentity,
                cn-pagedUE-Identity
                    CN-PagedUE-Identity
            },
        utran-Identity
            SEQUENCE {
                u-RNTI
                    U-RNTI,
                cn-OriginatedPage-connectedMode-UE
                    SEQUENCE {
                        pagingCause
                            PagingCause,
                        cn-DomainIdentity
                            CN-DomainIdentity,
                        pagingRecordTypeID
                            PagingRecordTypeID
                    }
            }
    }
    OPTIONAL

PagingRecordList ::=
    SEQUENCE (SIZE (1..maxPage1)) OF
        PagingRecord

PDCP-Capability ::=
    SEQUENCE {
        losslessSRNS-RelocationSupport
            BOOLEAN,
        supportForRfc2507
            CHOICE {
                notSupported
                    NULL,
                supported
                    MaxHcContextSpace
            }
    }

PhysicalChannelCapability ::=
    SEQUENCE {
        fddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                    DL-PhysChCapabilityFDD,
                uplinkPhysChCapability
                    UL-PhysChCapabilityFDD
            }
            OPTIONAL,
        tddPhysChCapability
            SEQUENCE {
                downlinkPhysChCapability
                    DL-PhysChCapabilityTDD,
                uplinkPhysChCapability
                    UL-PhysChCapabilityTDD
            }
            OPTIONAL
    }

ProtocolErrorCause ::=
    ENUMERATED {
        asn1-ViolationOrEncodingError,
        messageTypeNonexistent,
        messageNotCompatibleWithReceiverState,
        ie-ValueNotComprehended,
        conditionalInformationElementError,
        messageExtensionNotComprehended,
        spare1, spare2
    }

ProtocolErrorIndicator ::=
    ENUMERATED {
        noError, errorOccurred
    }

ProtocolErrorIndicatorWithMoreInfo ::=
    CHOICE {
        noError
            NULL,
        errorOccurred
            SEQUENCE {
                rrc-TransactionIdentifier
                    RRC-TransactionIdentifier,
                protocolErrorInformation
                    ProtocolErrorInformation
            }
    }

ProtocolErrorMoreInformation ::=
    SEQUENCE {
        diagnosticsType
            CHOICE {
                type1
                    CHOICE {
                        asn1-ViolationOrEncodingError
                            NULL,
                        messageTypeNonexistent
                            NULL,
                        messageNotCompatibleWithReceiverState
                            IdentificationOfReceivedMessage,
                        ie-ValueNotComprehended
                            IdentificationOfReceivedMessage,
                        conditionalInformationElementError
                            IdentificationOfReceivedMessage,
                        messageExtensionNotComprehended
                            IdentificationOfReceivedMessage,
                        spare1
                            NULL,
                        spare2
                            NULL
                    }
            }
    },

```



```

    spare                NULL
}
}

RadioFrequencyBand ::=      ENUMERATED {
                              a, b, c, ab, ac, bc, abc }

Rb-timer-indicator ::=      SEQUENCE {
    t314-expired            BOOLEAN,
    t315-expired            BOOLEAN }

Re-EstablishmentTimer ::=  ENUMERATED {
                              useT314, useT315
}

RedirectionInfo ::=        CHOICE {
    frequencyInfo           FrequencyInfo,
    interRATInfo            InterRATInfo
}

RejectionCause ::=         ENUMERATED {
    congestion,
    unspecified }

ReleaseCause ::=           ENUMERATED {
    normalEvent,
    unspecified,
    pre-emptiveRelease,
    congestion,
    re-establishmentReject,
    directedsignallingconnectionre-establishment,
    userInactivity }

RF-Capability ::=          SEQUENCE {
    fddRF-Capability         SEQUENCE {
        ue-PowerClass        UE-PowerClass,
        txRxFrequencySeparation TxRxFrequencySeparation
    }
    tddRF-Capability         SEQUENCE {
        ue-PowerClass        UE-PowerClass,
        radioFrequencyBandList RadioFrequencyBand,
        chipRateCapability   ChipRateCapability
    }
}

RLC-Capability ::=         SEQUENCE {
    totalRLC-AM-BufferSize   TotalRLC-AM-BufferSize,
    maximumRLC-WindowSize    MaximumRLC-WindowSize,
    maximumAM-EntityNumber   MaximumAM-EntityNumberRLC-Cap
}

RRC-MessageSequenceNumber ::= INTEGER (0..15)

RRC-MessageSequenceNumberList ::= SEQUENCE (SIZE (4..5)) OF
    RRC-MessageSequenceNumber

RRC-StateIndicator ::=     ENUMERATED {
    cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::= INTEGER (0..3)

S-RNTI ::=                 BIT STRING (SIZE (20))

S-RNTI-2 ::=               BIT STRING (SIZE (10))

SecurityCapability ::=      SEQUENCE {
    cipheringAlgorithmCap     BIT STRING (SIZE (16)),
    integrityProtectionAlgorithmCap BIT STRING (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported              NULL,
    supported                  SEQUENCE {
        maxNoSCCPCH-RL        MaxNoSCCPCH-RL,
        simultaneousSCCPCH-DPCH-DPCH-Reception
        BOOLEAN
    }
}

```

```

    }
    -- The IE above is applicable only if IE Support of PDSCH = TRUE
}

SRNC-Identity ::= BIT STRING (SIZE (12))

START-Value ::= BIT STRING (SIZE (20))

STARTList ::= SEQUENCE (SIZE (1..maxCNdomains)) OF
    STARTSingle

STARTSingle ::= SEQUENCE {
    cn-DomainIdentity
    start-Value
}

SystemSpecificCapUpdateReq ::= ENUMERATED {
    gsm
}

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
    SystemSpecificCapUpdateReq

T-300 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000
}

T-301 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000
}

T-302 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000
}

T-304 ::= ENUMERATED {
    ms100, ms200, ms400,
    ms1000, ms2000
}

T-305 ::= ENUMERATED {
    noUpdate, m5, m10, m30,
    m60, m120, m360, m720
}

T-307 ::= ENUMERATED {
    s5, s10, s15, s20,
    s30, s40, s50
}

T-308 ::= ENUMERATED {
    ms40, ms80, ms160, ms320
}

T-309 ::= INTEGER (1..8)

T-310 ::= ENUMERATED {
    ms40, ms80, ms120, ms160,
    ms200, ms240, ms280, ms320
}

T-311 ::= ENUMERATED {
    ms250, ms500, ms750, ms1000,
    ms1250, ms1500, ms1750, ms2000
}

T-312 ::= INTEGER (0..15)

T-313 ::= INTEGER (0..15)

T-314 ::= ENUMERATED {
    s0, s2, s4, s6, s8,
    s12, s16, s20
}

T-315 ::= ENUMERATED {
    s0, s10, s30, s60, s180,
    s600, s1200, s1800
}

```

```

T-316 ::=          ENUMERATED {
                    s0, s10, s20, s30, s40,
                    s50, s-inf }

T-317 ::=          ENUMERATED {
                    s0, s10, s30, s60, s180,
                    s600, s1200, s1800 }

T-CPCH ::=         ENUMERATED {
                    ct0, ct1 }

TMSI-and-LAI-GSM-MAP ::= SEQUENCE {
    tmsi          TMSI-GSM-MAP,
    lai           LAI
}

TMSI-DS-41 ::=     OCTET STRING (SIZE (2..12))

TotalRLC-AM-BufferSize ::= ENUMERATED {
    kb2, kb10, kb50, kb100,
    kb150, kb500, kb1000 }

-- Actual value = IE value * 0.125
TransmissionProbability ::= INTEGER (1..8)

TransportChannelCapability ::= SEQUENCE {
    dl-TransChCapability DL-TransChCapability,
    ul-TransChCapability UL-TransChCapability
}

TurboSupport ::=   CHOICE {
    notSupported     NULL,
    supported        MaxNoBits
}

TxRxFrequencySeparation ::= ENUMERATED {
    mhz190, mhz174-8-205-2,
    mhz134-8-245-2 }

U-RNTI ::=         SEQUENCE {
    srnc-Identity   SRNC-Identity,
    s-RNTI          S-RNTI
}

U-RNTI-Short ::=  SEQUENCE {
    srnc-Identity   SRNC-Identity,
    s-RNTI-2       S-RNTI-2
}

UE-ConnTimersAndConstants ::= SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
    t-301          T-301          DEFAULT ms2000,
    n-301          N-301          DEFAULT 2,
    t-302          T-302          DEFAULT ms4000,
    n-302          N-302          DEFAULT 3,
    t-304          T-304          OPTIONAL,
    n-304          N-304          OPTIONAL,
    t-305          T-305          DEFAULT m30,
    t-307          T-307          DEFAULT s30,
    t-308          T-308          OPTIONAL,
    t-309          T-309          OPTIONAL,
    t-310          T-310          DEFAULT ms160,
    n-310          N-310          DEFAULT 4,
    t-311          T-311          DEFAULT ms2000,
    t-312          T-312          DEFAULT 1,
    n-312          N-312          DEFAULT s1,
    t-313          T-313          OPTIONAL,
    n-313          N-313          OPTIONAL,
    t-314          T-314          OPTIONAL,
    t-315          T-315          OPTIONAL,
    n-315          N-315          OPTIONAL,
    t-316          T-316          OPTIONAL,
    t-317          T-317          OPTIONAL
}

UE-IdleTimersAndConstants ::= SEQUENCE {
    t-300          T-300,

```

```

n-300          N-300,
t-312          T-312,
n-312          N-312
}

UE-MultiModeRAT-Capability ::= SEQUENCE {
    multiRAT-CapabilityList    MultiRAT-Capability,
    multiModeCapability        MultiModeCapability
}

UE-PowerClass ::= INTEGER (1..4)

UE-RadioAccessCapability ::= SEQUENCE {
    ics-Version                ICS-Version,
    pdcp-Capability            PDCP-Capability,
    rlc-Capability              RLC-Capability,
    transportChannelCapability TransportChannelCapability,
    rf-Capability               RF-Capability,
    physicalChannelCapability   PhysicalChannelCapability,
    ue-MultiModeRAT-Capability UE-MultiModeRAT-Capability,
    securityCapability          SecurityCapability,
    up-Capability               UP-Capability,
    measurementCapability      MeasurementCapability        OPTIONAL
}

UL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPDCH-BitsTransmitted MaxNoDPDCH-BitsTransmitted,
    supportOfPCPCH             BOOLEAN
}

UL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame             MaxTS-PerFrame,
    maxPhysChPerTimeslot       MaxPhysChPerTimeslot,
    minimumSF                   MinimumSF-UL,
    supportOfPUSCH             BOOLEAN
}

UL-TransChCapability ::= SEQUENCE {
    maxNoBitsTransmitted        MaxNoBits,
    maxConvCodeBitsTransmitted MaxNoBits,
    turboDecodingSupport        TurboSupport,
    maxSimultaneousTransChs     MaxSimultaneousTransChsUL,
    modeSpecificInfo            CHOICE {
        fdd                      NULL,
        tdd                      SEQUENCE {
            maxSimultaneousCCTrCH-Count MaxSimultaneousCCTrCH-Count
        }
    },
    maxTransmittedBlocks        MaxTransportBlocksUL,
    maxNumberOfTFC-InTFCS       MaxNumberOfTFC-InTFCS-UL,
    maxNumberOfTF                MaxNumberOfTF
}

UP-Capability ::= SEQUENCE {
    standaloneLocMethodsSupported    BOOLEAN,
    ue-BasedOTDOA-Supported          BOOLEAN,
    networkAssistedGPS-Supported     NetworkAssistedGPS-Supported,
    gps-ReferenceTimeCapable         BOOLEAN,
    supportForIDL                     BOOLEAN
}

URA-UpdateCause ::= ENUMERATED {
    changeOfURA,
    periodicURAUpdate,
    re-enteredServiceArea,
    spare1 }

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::= INTEGER (0..15)

-- *****
--
--     RADIO BEARER INFORMATION ELEMENTS (10.3.4)
--
-- *****

AlgorithmSpecificInfo ::= CHOICE {

```

```

    rfc2507-Info                                RFC2507-Info
}

-- Upper limit is 2^32 - 1
COUNT-C ::=                                INTEGER (0..4294967295)

-- Upper limit is 2^25 - 1
COUNT-C-MSB ::=                            INTEGER (0..33554431)

DL-AM-RLC-Mode ::=                          SEQUENCE {
    inSequenceDelivery                        BOOLEAN,
    receivingWindowSize                      ReceivingWindowSize,
    dl-RLC-StatusInfo                       DL-RLC-StatusInfo
}

DL-LogicalChannelMapping ::=                SEQUENCE {
    -- TABULAR: DL-TransportChannelType contains TransportChannelIdentity as well.
    dl-TransportChannelType                 DL-TransportChannelType,
    logicalChannelIdentity                  LogicalChannelIdentity                OPTIONAL
}

DL-LogicalChannelMappingList ::=           SEQUENCE (SIZE (1..maxLoCHperRLC)) OF
    DL-LogicalChannelMapping

DL-RLC-Mode ::=                            CHOICE {
    dl-AM-RLC-Mode                         DL-AM-RLC-Mode,
    dl-UM-RLC-Mode                         NULL,
    dl-TM-RLC-Mode                         DL-TM-RLC-Mode
}

DL-RLC-StatusInfo ::=                    SEQUENCE {
    timerStatusProhibit                    TimerStatusProhibit                OPTIONAL,
    timerEPC                               TimerEPC                            OPTIONAL,
    missingPU-Indicator                    BOOLEAN,
    timerStatusPeriodic                    TimerStatusPeriodic                OPTIONAL
}

DL-TM-RLC-Mode ::=                        SEQUENCE {
    segmentationIndication                 BOOLEAN
}

DL-TransportChannelType ::=               CHOICE {
    dch                                     TransportChannelIdentity,
    fach                                    NULL,
    dsch                                    TransportChannelIdentity
}

ExpectReordering ::=                      ENUMERATED {
    reorderingNotExpected,
    reorderingExpected }

ExplicitDiscard ::=                      SEQUENCE {
    timerMRW                                TimerMRW,
    timerDiscard                            TimerDiscard,
    maxMRW                                   MaxMRW
}

HeaderCompressionInfo ::=                SEQUENCE {
    algorithmSpecificInfo                  AlgorithmSpecificInfo
}

HeaderCompressionInfoList ::=            SEQUENCE (SIZE (1..maxPDCPALgoType)) OF
    HeaderCompressionInfo

LogicalChannelIdentity ::=                INTEGER (1..15)

LosslessSRNS-RelocSupport ::=            CHOICE {
    supported                               MaxPDCP-SN-WindowSize,
    notSupported                            NULL
}

MAC-LogicalChannelPriority ::=            INTEGER (1..8)

MaxDAT ::=                                ENUMERATED {
    dat1, dat2, dat3, dat4, dat5, dat6,
    dat7, dat8, dat9, dat10, dat15, dat20,
    dat25, dat30, dat35, dat40 }

```

```

MaxDAT-Retransmissions ::= SEQUENCE {
    maxDAT
    timerMRW
    maxMRW
}

MaxMRW ::= ENUMERATED {
    mm1, mm4, mm6, mm8, mm12, mm16,
    mm24, mm32 }

MaxPDCP-SN-WindowSize ::= ENUMERATED {
    sn255, sn65535 }

MaxRST ::= ENUMERATED {
    rst1, rst4, rst6, rst8, rst12,
    rst16, rst24, rst32 }

NoExplicitDiscard ::= ENUMERATED {
    dt10, dt20, dt30, dt40, dt50,
    dt60, dt70, dt80, dt90, dt100 }

PDCP-Info ::= SEQUENCE {
    losslessSRNS-RelocSupport LosslessSRNS-RelocSupport OPTIONAL,
    pdcP-PDU-Header PDCP-PDU-Header,
    -- TABULAR: The IE above is MD in the tabular format and it can be encoded
    -- in one bit, so the OPTIONAL is removed for compactness.
    headerCompressionInfoList HeaderCompressionInfoList OPTIONAL
}

PDCP-InfoReconfig ::= SEQUENCE {
    pdcP-Info
    pdcP-SN-Info
}

PDCP-PDU-Header ::= ENUMERATED {
    present, absent }

PDCP-SN-Info ::= INTEGER (0..65535)

Poll-PU ::= ENUMERATED {
    pu1, pu2, pu4, pu8, pu16,
    pu32, pu64, pu128 }

Poll-SDU ::= ENUMERATED {
    sdu1, sdu4, sdu16, sdu64 }

PollingInfo ::= SEQUENCE {
    timerPollProhibit TimerPollProhibit OPTIONAL,
    timerPoll TimerPoll OPTIONAL,
    poll-PU Poll-PU OPTIONAL,
    poll-SDU Poll-SDU OPTIONAL,
    lastTransmissionPU-Poll BOOLEAN,
    lastRetransmissionPU-Poll BOOLEAN,
    pollWindow PollWindow OPTIONAL,
    timerPollPeriodic TimerPollPeriodic OPTIONAL
}

PollWindow ::= ENUMERATED {
    pw50, pw60, pw70, pw80, pw85,
    pw90, pw95, pw99 }

PredefinedConfigIdentity ::= INTEGER (0..15)

PredefinedConfigValueTag ::= INTEGER (0..15)

PredefinedRB-Configuration ::= SEQUENCE {
    srb-InformationList SRB-InformationSetupList,
    rb-InformationList RB-InformationSetupList
}

PreDefRadioConfiguration ::= SEQUENCE {
    -- User equipment IEs
    re-EstablishmentTimer Re-EstablishmentTimer,
    -- Radio bearer IEs
    predefinedRB-Configuration PredefinedRB-Configuration,
    -- Transport channel IEs
    preDefTransChConfiguration PreDefTransChConfiguration,

```

```

-- Physical channel IEs
preDefPhyChConfiguration          PreDefPhyChConfiguration
}

RAB-Info ::=
  rab-Identity                    RAB-Identity,
  cn-DomainIdentity              CN-DomainIdentity,
  nas-Synchronisation-Indicator  NAS-Synchronisation-Indicator OPTIONAL,
  re-EstablishmentTimer         Re-EstablishmentTimer
}
RAB-InformationList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
  RAB-Info

RAB-InformationReconfigList ::= SEQUENCE (SIZE (1.. maxRABsetup)) OF
  RAB-InformationReconfig

RAB-InformationReconfig ::= SEQUENCE {
  rab-Identity                    RAB-Identity,
  cn-DomainIdentity              CN-DomainIdentity,
  nas-Synchronisation-Indicator  NAS-Synchronisation-Indicator
}

RAB-Info-Post ::= SEQUENCE {
  rab-Identity                    RAB-Identity,
  cn-DomainIdentity              CN-DomainIdentity,
  nas-Synchronisation-Indicator  NAS-Synchronisation-Indicator OPTIONAL
}

RAB-InformationSetup ::= SEQUENCE {
  rab-Info                        RAB-Info,
  rb-InformationSetupList        RB-InformationSetupList
}

RAB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRABsetup)) OF
  RAB-InformationSetup

RB-ActivationTimeInfo ::= SEQUENCE {
  rb-Identity                    RB-Identity,
  rlc-SequenceNumber            RLC-SequenceNumber
}

RB-ActivationTimeInfoList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-ActivationTimeInfo

RB-COUNT-C-Information ::= SEQUENCE {
  rb-Identity                    RB-Identity,
  count-C-UL                    COUNT-C,
  count-C-DL                    COUNT-C
}

RB-COUNT-C-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
  RB-COUNT-C-Information

RB-COUNT-C-MSB-Information ::= SEQUENCE {
  rb-Identity                    RB-Identity,
  count-C-MSB-UL                COUNT-C-MSB,
  count-C-MSB-DL                COUNT-C-MSB
}

RB-COUNT-C-MSB-InformationList ::= SEQUENCE (SIZE (1..maxRBallRABs)) OF
  RB-COUNT-C-MSB-Information

RB-Identity ::= INTEGER (1..32)

RB-IdentityList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-Identity

RB-InformationAffected ::= SEQUENCE {
  rb-Identity                    RB-Identity,
  rb-MappingInfo                RB-MappingInfo
}

RB-InformationAffectedList ::= SEQUENCE (SIZE (1..maxRB)) OF
  RB-InformationAffected

RB-InformationReconfig ::= SEQUENCE {
  rb-Identity                    RB-Identity,
  pdcp-Info                     PDCP-InfoReconfig OPTIONAL,

```

```

    rlc-Info                RLC-Info                OPTIONAL,
    rb-MappingInfo          RB-MappingInfo          OPTIONAL,
    rb-StopContinue         RB-StopContinue         OPTIONAL
}

RB-InformationReconfigList ::= SEQUENCE (SIZE (1..maxRB)) OF
    RB-InformationReconfig

RB-InformationReleaseList ::= SEQUENCE (SIZE (1..maxRB)) OF
    RB-Identity

RB-InformationSetup ::= SEQUENCE {
    rb-Identity            RB-Identity,
    pdcp-Info              PDCP-Info                OPTIONAL,
    rlc-Info               RLC-Info,
    rb-MappingInfo         RB-MappingInfo
}

RB-InformationSetupList ::= SEQUENCE (SIZE (1..maxRBperRAB)) OF
    RB-InformationSetup

RB-MappingInfo ::= SEQUENCE (SIZE (1..maxRBMuxOptions)) OF
    RB-MappingOption

RB-MappingOption ::= SEQUENCE {
    ul-LogicalChannelMappings UL-LogicalChannelMappings    OPTIONAL,
    dl-LogicalChannelMappingList DL-LogicalChannelMappingList  OPTIONAL
}

RB-StopContinue ::= ENUMERATED {
    stopRB, continueRB }

RB-WithPDCP-Info ::= SEQUENCE {
    rb-Identity            RB-Identity,
    pdcp-SN-Info          PDCP-SN-Info
}

RB-WithPDCP-InfoList ::= SEQUENCE (SIZE (1..maxRBperRABs)) OF
    RB-WithPDCP-Info

ReceivingWindowSize ::= ENUMERATED {
    rw1, rw8, rw16, rw32, rw64, rw128, rw256,
    rw512, rw768, rw1024, rw1536, rw2047,
    rw2560, rw3072, rw3584, rw4095 }

RFC2507-Info ::= SEQUENCE {
    f-MAX-PERIOD          INTEGER (1..65535)          DEFAULT 256,
    f-MAX-TIME            INTEGER (1..255)          DEFAULT 5,
    max-HEADER            INTEGER (60..65535)       DEFAULT 168,
    tcp-SPACE             INTEGER (3..255)          DEFAULT 15,
    non-TCP-SPACE         INTEGER (3..65535)        DEFAULT 15,
    expectReordering      ExpectReordering
    -- TABULAR: The IE above has only two possible values, so using Optional or Default
    -- would be wasteful
}

RLC-Info ::= SEQUENCE {
    ul-RLC-Mode           UL-RLC-Mode                OPTIONAL,
    dl-RLC-Mode           DL-RLC-Mode                OPTIONAL
}

RLC-SequenceNumber ::= INTEGER (0..4095)

RLC-SizeInfo ::= SEQUENCE {
    rlc-SizeIndex         INTEGER (1..maxTF)
}

RLC-SizeExplicitList ::= SEQUENCE (SIZE (1..maxTF)) OF
    RLC-SizeInfo

SRB-InformationSetup ::= SEQUENCE {
    rb-Identity            RB-Identity                OPTIONAL,
    -- The default value for the IE above is the smallest value not used yet.
    rlc-Info              RLC-Info,
    rb-MappingInfo         RB-MappingInfo
}

SRB-InformationSetupList ::= SEQUENCE (SIZE (1..maxSRBsetup)) OF

```



```

SRB-InformationSetup
SRB-InformationSetupList2 ::= SEQUENCE (SIZE (3..4)) OF
    SRB-InformationSetup
TimerDiscard ::= ENUMERATED {
    td0-1, td0-25, td0-5, td0-75,
    td1, td1-25, td1-5, td1-75,
    td2, td2-5, td3, td3-5, td4,
    td4-5, td5, td7-5 }
TimerEPC ::= ENUMERATED {
    te50, te60, te70, te80, te90,
    te100, te120, te140, te160, te180,
    te200, te300, te400, te500, te700,
    te900 }
TimerMRW ::= ENUMERATED {
    te50, te60, te70, te80, te90, te100,
    te120, te140, te160, te180, te200,
    te300, te400, te500, te700, te900 }
TimerPoll ::= ENUMERATED {
    tp10, tp20, tp30, tp40, tp50,
    tp60, tp70, tp80, tp90, tp100,
    tp110, tp120, tp130, tp140, tp150,
    tp160, tp170, tp180, tp190, tp200,
    tp210, tp220, tp230, tp240, tp250,
    tp260, tp270, tp280, tp290, tp300,
    tp310, tp320, tp330, tp340, tp350,
    tp360, tp370, tp380, tp390, tp400,
    tp410, tp420, tp430, tp440, tp450,
    tp460, tp470, tp480, tp490, tp500,
    tp510, tp520, tp530, tp540, tp550,
    tp600, tp650, tp700, tp750, tp800,
    tp850, tp900, tp950, tp1000 }
TimerPollPeriodic ::= ENUMERATED {
    tper100, tper200, tper300, tper400,
    tper500, tper750, tper1000, tper2000 }
TimerPollProhibit ::= ENUMERATED {
    tpp10, tpp20, tpp30, tpp40, tpp50,
    tpp60, tpp70, tpp80, tpp90, tpp100,
    tpp110, tpp120, tpp130, tpp140, tpp150,
    tpp160, tpp170, tpp180, tpp190, tpp200,
    tpp210, tpp220, tpp230, tpp240, tpp250,
    tpp260, tpp270, tpp280, tpp290, tpp300,
    tpp310, tpp320, tpp330, tpp340, tpp350,
    tpp360, tpp370, tpp380, tpp390, tpp400,
    tpp410, tpp420, tpp430, tpp440, tpp450,
    tpp460, tpp470, tpp480, tpp490, tpp500,
    tpp510, tpp520, tpp530, tpp540, tpp550,
    tpp600, tpp650, tpp700, tpp750, tpp800,
    tpp850, tpp900, tpp950, tpp1000 }
TimerRST ::= ENUMERATED {
    tr50, tr100, tr150, tr200, tr250, tr300,
    tr350, tr400, tr450, tr500, tr550,
    tr600, tr700, tr800, tr900, tr1000 }
TimerStatusPeriodic ::= ENUMERATED {
    tsp100, tsp200, tsp300, tsp400, tsp500,
    tsp750, tsp1000, tsp2000 }
TimerStatusProhibit ::= ENUMERATED {
    tsp10, tsp20, tsp30, tsp40, tsp50,
    tsp60, tsp70, tsp80, tsp90, tsp100,
    tsp110, tsp120, tsp130, tsp140, tsp150,
    tsp160, tsp170, tsp180, tsp190, tsp200,
    tsp210, tsp220, tsp230, tsp240, tsp250,
    tsp260, tsp270, tsp280, tsp290, tsp300,
    tsp310, tsp320, tsp330, tsp340, tsp350,
    tsp360, tsp370, tsp380, tsp390, tsp400,
    tsp410, tsp420, tsp430, tsp440, tsp450,
    tsp460, tsp470, tsp480, tsp490, tsp500,
    tsp510, tsp520, tsp530, tsp540, tsp550,
    tsp600, tsp650, tsp700, tsp750, tsp800,

```

```

        tsp850,tsp900,tsp950,tsp1000 }

TransmissionRLC-Discard ::=      CHOICE {
    timerBasedExplicit           ExplicitDiscard,
    timerBasedNoExplicit        NoExplicitDiscard,
    maxDAT-Retransmissions      MaxDAT-Retransmissions,
    noDiscard                   MaxDAT
}

TransmissionWindowSize ::=      ENUMERATED {
    tw1, tw8, tw16, tw32, tw64, tw128, tw256,
    tw512, tw768, tw1024, tw1536, tw2047,
    tw2560, tw3072, tw3584, tw4095 }

UL-AM-RLC-Mode ::=            SEQUENCE {
    transmissionRLC-Discard      TransmissionRLC-Discard,
    transmissionWindowSize      TransmissionWindowSize,
    timerRST                    TimerRST,
    max-RST                    MaxRST,
    pollingInfo                 PollingInfo
}

UL-LogicalChannelMapping ::=  SEQUENCE {
    -- TABULAR: UL-TransportChannelType contains TransportChannelIdentity as well.
    ul-TransportChannelType      UL-TransportChannelType,
    logicalChannelIdentity       LogicalChannelIdentity          OPTIONAL,
    rlc-SizeList                 CHOICE {
        allSizes                 NULL,
        configured               NULL,
        explicitList             RLC-SizeExplicitList
    },
    mac-LogicalChannelPriority    MAC-LogicalChannelPriority
}

UL-LogicalChannelMappingList ::= SEQUENCE {
    rlc-LogicalChannelMappingIndicator  BOOLEAN,
    ul-LogicalChannelMapping            SEQUENCE (SIZE (maxLoCHperRLC)) OF
                                        UL-LogicalChannelMapping
}

UL-LogicalChannelMappings ::=  CHOICE {
    oneLogicalChannel             UL-LogicalChannelMapping,
    twoLogicalChannels            UL-LogicalChannelMappingList
}

UL-RLC-Mode ::=               CHOICE {
    ul-AM-RLC-Mode               UL-AM-RLC-Mode,
    ul-UM-RLC-Mode               UL-UM-RLC-Mode,
    ul-TM-RLC-Mode               UL-TM-RLC-Mode,
    spare                        NULL
}

UL-TM-RLC-Mode ::=           SEQUENCE {
    transmissionRLC-Discard      TransmissionRLC-Discard          OPTIONAL,
    segmentationIndication      BOOLEAN
}

UL-UM-RLC-Mode ::=           SEQUENCE {
    transmissionRLC-Discard      TransmissionRLC-Discard          OPTIONAL
}

UL-TransportChannelType ::=  CHOICE {
    dch                          TransportChannelIdentity,
    rach                         NULL,
    cpch                         NULL,
    usch                         NULL
}

-- *****
--
--     TRANSPORT CHANNEL INFORMATION ELEMENTS (10.3.5)
--
-- *****

AllowedTFC-List ::=          SEQUENCE (SIZE (1..maxTFC)) OF
                              TFC-Value

```

```

AllowedTFI-List ::=                               SEQUENCE (SIZE (1..maxTF)) OF
                                                    INTEGER (0..31)

BitModeRLC-SizeInfo ::=                          CHOICE {
  sizeType1                                       INTEGER (1..127),
  sizeType2                                       SEQUENCE {
    part1                                         INTEGER (0..15),
    part2                                         INTEGER (1..7)                                     OPTIONAL
    -- Actual size = (part1 * 8) + 128 + part2
  },
  sizeType3                                       SEQUENCE {
    part1                                         INTEGER (0..47),
    part2                                         INTEGER (1..15)                                     OPTIONAL
    -- Actual size = (part1 * 16) + 256 + part2
  },
  sizeType4                                       SEQUENCE {
    part1                                         INTEGER (0..62),
    part2                                         INTEGER (1..63)                                     OPTIONAL
    -- Actual size = (part1 * 64) + 1024 + part2
  }
}
-- Actual value = IE value * 0.1
BLER-QualityValue ::=                             INTEGER (-63..0)

ChannelCodingType ::=                             CHOICE {
  noCoding                                         NULL,
  convolutional                                   CodingRate,
  turbo                                           NULL
}

CodingRate ::=                                   ENUMERATED {
  half,
  third }

CommonDynamicTF-Info ::=                         SEQUENCE {
  rlc-Size                                         CHOICE {
    fdd                                           SEQUENCE {
      octetModeRLC-SizeInfoType2                 OctetModeRLC-SizeInfoType2
    },
    tdd                                           SEQUENCE {
      commonTDD-Choice                           CHOICE {
        bitModeRLC-SizeInfo                       BitModeRLC-SizeInfo,
        octetModeRLC-SizeInfoType1                OctetModeRLC-SizeInfoType1
      }
    }
  },
  numberOfTbSizeList                               SEQUENCE (SIZE (1..maxTF)) OF
                                                    NumberOFTransportBlocks,
  logicalChannelList                               LogicalChannelList
}

CommonDynamicTF-Info-DynamicTTI ::= SEQUENCE {
  commonTDD-Choice                                CHOICE {
    bitModeRLC-SizeInfo                           BitModeRLC-SizeInfo,
    octetModeRLC-SizeInfoType1                    OctetModeRLC-SizeInfoType1
  },
  numberOfTbSizeAndTTIList                         NumberOfTbSizeAndTTIList,
  logicalChannelList                               LogicalChannelList
}

CommonDynamicTF-InfoList ::=                     SEQUENCE (SIZE (1..maxTF)) OF
                                                    CommonDynamicTF-Info

CommonDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
                                                    CommonDynamicTF-Info-DynamicTTI

CommonTransChTFS ::=                             SEQUENCE {
  tti                                              CHOICE {
    tti10                                         CommonDynamicTF-InfoList,
    tti20                                         CommonDynamicTF-InfoList,
    tti40                                         CommonDynamicTF-InfoList,
    tti80                                         CommonDynamicTF-InfoList,
    dynamic                                       CommonDynamicTF-InfoList-DynamicTTI
  },
  semistaticTF-Information                         SemistaticTF-Information
}

CPCH-SetID ::=                                  INTEGER (1..maxCPCHsets)

```

```

CRC-Size ::=
    ENUMERATED {
        crc0, crc8, crc12, crc16, crc24 }

DedicatedDynamicTF-Info ::=
    SEQUENCE {
        rlc-Size
            CHOICE {
                bitMode
                    BitModeRLC-SizeInfo,
                octetModeType1
                    OctetModeRLC-SizeInfoType1
            },
        numberOfTbSizeList
            SEQUENCE (SIZE (1..maxTF)) OF
        numberOfTransportBlocks,
        logicalChannelList
            LogicalChannelList
    }

DedicatedDynamicTF-Info-DynamicTTI ::= SEQUENCE {
    rlc-Size
        CHOICE {
            bitMode
                BitModeRLC-SizeInfo,
            octetModeType1
                OctetModeRLC-SizeInfoType1
        },
    numberOfTbSizeAndTTIList
        NumberOfTbSizeAndTTIList,
    logicalChannelList
        LogicalChannelList
}

DedicatedDynamicTF-InfoList ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info

DedicatedDynamicTF-InfoList-DynamicTTI ::= SEQUENCE (SIZE (1..maxTF)) OF
    DedicatedDynamicTF-Info-DynamicTTI

DedicatedTransChTFS ::= SEQUENCE {
    tti
        CHOICE {
            tti10
                DedicatedDynamicTF-InfoList,
            tti20
                DedicatedDynamicTF-InfoList,
            tti40
                DedicatedDynamicTF-InfoList,
            tti80
                DedicatedDynamicTF-InfoList,
            dynamic
                DedicatedDynamicTF-InfoList-DynamicTTI
        },
    semistaticTF-Information
        SemistaticTF-Information
}

DL-AddReconfTransChInfo2List ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation2

DL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DL-AddReconfTransChInformation

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of messages other than: Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation ::= SEQUENCE {
    dl-transportChannelIdentity
        TransportChannelIdentity,
    tfs-SignallingMode
        CHOICE {
            explicit
                TransportFormatSet,
            sameAsULTrCH
                TransportChannelIdentity
        },
    dch-QualityTarget
        QualityTarget
        OPTIONAL,
    tm-SignallingInfo
        TM-SignallingInfo
        OPTIONAL
}

-- ASN.1 for IE "Added or Reconfigured DL TrCH information"
-- in case of Radio Bearer Release message and
-- Radio Bearer Reconfiguration message
DL-AddReconfTransChInformation2 ::= SEQUENCE {
    transportChannelIdentity
        TransportChannelIdentity,
    tfs-SignallingMode
        CHOICE {
            explicit
                TransportFormatSet,
            sameAsULTrCH
                TransportChannelIdentity
        },
    qualityTarget
        QualityTarget
        OPTIONAL
}

DL-CommonTransChInfo ::= SEQUENCE {
    sccpch-TFCS
        TFCS
        OPTIONAL,
    modeSpecificInfo
        CHOICE {
            fdd
                SEQUENCE {
                    tfs-SignallingMode
                        CHOICE {
                            explicit
                                TFCS,
                            sameAsUL
                                NULL
                        }
                }
        }
}

```

```

        }
    },
    tdd
        individualDL-CCTrCH-InfoList
        SEQUENCE {
            IndividualDL-CCTrCH-InfoList
        }
    }
}
OPTIONAL
OPTIONAL

DL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

DRAC-ClassIdentity ::= INTEGER (1..maxDRACclasses)

DRAC-StaticInformation ::= SEQUENCE {
    transmissionTimeValidity
    timeDurationBeforeRetry
    drac-ClassIdentity
}

DRAC-StaticInformationList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    DRAC-StaticInformation

ExplicitTFCS-Configuration ::= CHOICE {
    complete
    addition
    removal
    replacement
    tfcsRemoval
    tfcsAdd
}

GainFactor ::= INTEGER (0..15)

GainFactorInformation ::= CHOICE {
    signalledGainFactors
    computedGainFactors
}

IndividualDL-CCTrCH-Info ::= SEQUENCE {
    dl-TFCS-Identity
    tfcs-SignallingMode
    explicit
    sameAsUL
}

IndividualDL-CCTrCH-InfoList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
    IndividualDL-CCTrCH-Info

IndividualUL-CCTrCH-Info ::= SEQUENCE {
    ul-TFCS-Identity
    ul-TFCS
}

IndividualUL-CCTrCH-InfoList ::= SEQUENCE (SIZE (1..maxCCTrCH)) OF
    IndividualUL-CCTrCH-Info

LogicalChannelByRB ::= SEQUENCE {
    rb-Identity
    logChOfRb
}
OPTIONAL

LogicalChannelList ::= CHOICE {
    allSizes
    configured
    explicitList
}

NumberOfTbSizeAndTTIList ::= SEQUENCE (SIZE (1..maxTF)) OF SEQUENCE {
    numberOfTransportBlocks
    transmissionTimeInterval
}

MessType ::= ENUMERATED {
    transportFormatCombinationControl
}

```

```

Non-allowedTFC-List ::=          SEQUENCE (SIZE (1..maxTFC)) OF
                                  TFC-Value

NumberOfTransportBlocks ::=     CHOICE {
    zero                          NULL,
    one                           NULL,
    small                          INTEGER (2..17),
    large                          INTEGER (18..512)
}

OctetModeRLC-SizeInfoType1 ::= CHOICE {
    sizeType1                      INTEGER (0..31),
    -- Actual size = (8 * sizeType1) + 16
    sizeType2                      SEQUENCE {
        part1                      INTEGER (0..23),
        part2                      INTEGER (1..3)                OPTIONAL
    },
    -- Actual size = (32 * part1) + 272 + (part2 * 8)
    sizeType3                      SEQUENCE {
        part1                      INTEGER (0..61),
        part2                      INTEGER (1..7)                OPTIONAL
    },
    -- Actual size = (64 * part1) + 1040 + (part2 * 8)
}

OctetModeRLC-SizeInfoType2 ::= CHOICE {
    sizeType1                      INTEGER (0..31),
    -- Actual size = (sizeType1 * 8) + 48
    sizeType2                      INTEGER (0..63),
    -- Actual size = (sizeType2 * 16) + 312
    sizeType3                      INTEGER (0..56),
    -- Actual size = (sizeType3 * 64) + 1384
}

PowerOffsetInformation ::=      SEQUENCE {
    gainFactorInformation           GainFactorInformation,
    -- PowerOffsetPp-m is always absent in TDD
    powerOffsetPp-m               PowerOffsetPp-m                OPTIONAL
}

PowerOffsetPp-m ::=            INTEGER (-5..10)

PreDefTransChConfiguration ::= SEQUENCE {
    ul-CommonTransChInfo          UL-CommonTransChInfo,
    ul-AddReconfTrChInfoList     UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo          DL-CommonTransChInfo,
    dl-TrChInfoList              DL-AddReconfTransChInfoList
}

QualityTarget ::=              SEQUENCE {
    bler-QualityValue             BLER-QualityValue
}

RateMatchingAttribute ::=      INTEGER (1..hIRM)

ReferenceTFC-ID ::=            INTEGER (0..3)

RestrictedTrChInfo ::=         SEQUENCE {
    restrictedTrChIdentity         TransportChannelIdentity,
    allowedTFI-List              AllowedTFI-List                OPTIONAL
}

RestrictedTrChInfoList ::=     SEQUENCE (SIZE (1..maxTrCH)) OF
                                  RestrictedTrChInfo

SemistaticTF-Information ::=   SEQUENCE {
    -- TABULAR: Transmission time interval has been included in the IE CommonTransChTFS.
    channelCodingType            ChannelCodingType,
    rateMatchingAttribute         RateMatchingAttribute,
    crc-Size                     CRC-Size
}

SignalledGainFactors ::=       SEQUENCE {
    modeSpecificInfo             CHOICE {
        fdd                      SEQUENCE {
            gainFactorBetaC       GainFactor
        }
    }
}

```

```

        },
        tdd
    },
    gainFactorBetaD
    referenceTFC-ID
}

SplitTFCI-Signalling ::=
    splitType
    tfci-Field2-Length
    tfci-Field1-Information
    tfci-Field2-Information
}

SplitType ::=
    ENUMERATED {
        hardSplit, logicalSplit }

TFC-Subset ::=
    minimumAllowedTFC-Number
    allowedTFC-List
    non-allowedTFC-List
    restrictedTrChInfoList
    fullTFCS
}

TFC-Value ::=
    INTEGER (0..1023)

TFCI-Field2-Information ::=
    tfci-Range
    explicit
}

TFCI-Range ::=
    maxTFCIField2Value
    tfcs-InfoForDSCH
}

TFCI-RangeList ::=
    SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
        TFCI-Range

TFCS ::=
    normalTFCI-Signalling
    splitTFCI-Signalling
}

TFCS-Identity ::=
    tfcs-ID
    sharedChannelIndicator
}

TFCS-IdentityPlain ::=
    INTEGER (1..8)

TFCS-InfoForDSCH ::=
    ctfc2bit
    ctfc4bit
    ctfc6bit
    ctfc8bit
    ctfc12bit
    ctfc16bit
    ctfc24bit
}

TFCS-ReconfAdd ::=
    ctfcSize
        ctfc2Bit
            ctfc2
            gainFactorInformation
        },
        ctfc4Bit
            ctfc4
            gainFactorInformation
        },
        ctfc6Bit
            ctfc6
            gainFactorInformation
        },
        ctfc8Bit
            ctfc8
}

SEQUENCE {
    SplitType
    INTEGER (1..10)
    ExplicitTFCS-Configuration
    TFCI-Field2-Information
}

SEQUENCE {
    TFC-Value,
    AllowedTFC-List,
    Non-allowedTFC-List,
    RestrictedTrChInfoList,
    NULL
}

CHOICE {
    TFCI-RangeList,
    ExplicitTFCS-Configuration
}

SEQUENCE {
    INTEGER (1..1023),
    TFCS-InfoForDSCH
}

SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    TFCI-Range

CHOICE {
    ExplicitTFCS-Configuration,
    SplitTFCI-Signalling
}

SEQUENCE {
    INTEGER (1..8)
    BOOLEAN
}

INTEGER (1..8)

CHOICE {
    INTEGER (0..3),
    INTEGER (0..15),
    INTEGER (0..63),
    INTEGER (0..255),
    INTEGER (0..4095),
    INTEGER (0..65535),
    INTEGER (0..16777215)
}

SEQUENCE {
    CHOICE {
        SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
            INTEGER (0..3),
            PowerOffsetInformation
        } OPTIONAL
    },
    SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
        INTEGER (0..15),
        PowerOffsetInformation
    } OPTIONAL
    },
    SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
        INTEGER (0..63),
        PowerOffsetInformation
    } OPTIONAL
    },
    SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
        INTEGER (0..255),
        PowerOffsetInformation
    }
}
}

```

```

        gainFactorInformation          PowerOffsetInformation          OPTIONAL
    },
    ctfc12Bit                          SEQUENCE (SIZE(1..maxTFC)) OF SEQUENCE {
        ctfc12                          INTEGER (0..4095),
        gainFactorInformation          PowerOffsetInformation          OPTIONAL
    },
    ctfc16Bit                          SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
        ctfc16                          INTEGER(0..65535),
        gainFactorInformation          PowerOffsetInformation          OPTIONAL
    },
    ctfc24Bit                          SEQUENCE (SIZE (1..maxTFC)) OF SEQUENCE {
        ctfc24                          INTEGER(0..16777215),
        gainFactorInformation          PowerOffsetInformation          OPTIONAL
    }
}

TFCS-Removal ::= SEQUENCE {
    tfci INTEGER (0..1023)
}

TFCS-RemovalList ::= SEQUENCE (SIZE (1..maxTFC)) OF
    TFCS-Removal

TimeDurationBeforeRetry ::= INTEGER (1..256)

TM-SignallingInfo ::= SEQUENCE {
    messType MessType,
    tm-SignallingMode CHOICE {
        mode1 NULL,
        mode2 SEQUENCE {
            ul-controlledTrChList UL-ControlledTrChList
        }
    }
}

TransmissionTimeInterval ::= ENUMERATED {
    tti10, tti20, tti40, tti80 }

TransmissionTimeValidity ::= INTEGER (1..256)

TransportChannelIdentity ::= INTEGER (1..32)

TransportFormatSet ::= CHOICE {
    dedicatedTransChTFS DedicatedTransChTFS,
    commonTransChTFS CommonTransChTFS
}

UL-AddReconfTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    UL-AddReconfTransChInformation

UL-AddReconfTransChInformation ::= SEQUENCE {
    transportChannelIdentity TransportChannelIdentity,
    transportFormatSet TransportFormatSet
}

UL-CommonTransChInfo ::= SEQUENCE {
    tfc-Subset TFC-Subset OPTIONAL,
    prach-TFCS TFCS OPTIONAL,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            ul-TFCS TFCS
        },
        tdd SEQUENCE {
            individualUL-CCTrCH-InfoList IndividualUL-CCTrCH-InfoList OPTIONAL,
            ul-TFCS TFCS
        }
    }
}

UL-ControlledTrChList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

UL-DeletedTransChInfoList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

```



```

-- *****
--
--     PHYSICAL CHANNEL INFORMATION ELEMENTS (10.3.6)
--
-- *****

AC-To-ASC-Mapping ::=                INTEGER (0..7)

AC-To-ASC-MappingTable ::=           SEQUENCE (SIZE (maxASCmap)) OF
                                      AC-To-ASC-Mapping

AccessServiceClass ::=               SEQUENCE {
    availableSignatureStartIndex      INTEGER (0..15),
    availableSignatureEndIndex        INTEGER (0..15),
    assignedSubChannelNumber          BIT STRING (SIZE(4))
}

AccessServiceClassIndex ::=          INTEGER (1..8)

AICH-Info ::=                        SEQUENCE {
    channelisationCode256             ChannelisationCode256,
    sttd-Indicator                    BOOLEAN,
    aich-TransmissionTiming           AICH-TransmissionTiming
}

AICH-PowerOffset ::=                INTEGER (-22..5)

AICH-TransmissionTiming ::=          ENUMERATED {
    e0, e1 }

AllocationPeriodInfo ::=             SEQUENCE {
    allocationActivationTime           INTEGER (1..256),
    allocationDuration                 INTEGER (1..256)
}

Alpha ::=                            INTEGER (0..8)

AP-AICH-ChannelisationCode ::=       INTEGER (0..255)

AP-PreambleScramblingCode ::=        INTEGER (0..79)

AP-Signature ::=                     INTEGER (0..15)

AP-Signature-VCAM ::=               SEQUENCE {
    ap-Signature                       AP-Signature,
    availableAP-SubchannelList         AvailableAP-SubchannelList OPTIONAL
}

AP-Subchannel ::=                    INTEGER (0..11)

ASC ::=                              SEQUENCE {
    accessServiceClass                 AccessServiceClassIndex,
    repetitionPeriodAndOffset          ASC-RepetitionPeriodAndOffset    OPTIONAL
    -- TABULAR: The offset is nested in the repetition period
}

ASC-RepetitionPeriodAndOffset ::=     CHOICE {
    rp1                                NULL,
    rp2                                INTEGER (0..1),
    rp4                                INTEGER (0..3),
    rp8                                INTEGER (0..7)
}

ASCSetting ::=                       SEQUENCE {
    -- TABULAR: This is MD in tabular description
    -- Default value is previous ASC
    -- If this is the first ASC, the default value is all available signature and sub-channels
    accessServiceClass                 AccessServiceClass            OPTIONAL
}

AvailableAP-Signature-VCAMList ::=    SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
                                      AP-Signature-VCAM

AvailableAP-SignatureList ::=         SEQUENCE (SIZE (1..maxPCPCH-APsig)) OF
                                      AP-Signature

AvailableAP-SubchannelList ::=        SEQUENCE (SIZE (1..maxPCPCH-APsubCh)) OF
                                      AP-Subchannel

```

```

AvailableMinimumSF-ListVCAM ::= SEQUENCE (SIZE (1..maxPCPCH-SF)) OF
    AvailableMinimumSF-VCAM

AvailableMinimumSF-VCAM ::= SEQUENCE {
    minimumSpreadingFactor MinimumSpreadingFactor,
    nf-Max NF-Max,
    maxAvailablePCPCH-Number MaxAvailablePCPCH-Number,
    availableAP-Signature-VCAMList AvailableAP-Signature-VCAMList
}

AvailableSignatures ::= BIT STRING(SIZE(16))

AvailableSubChannelNumbers ::= BIT STRING(SIZE(12))

BurstType ::= ENUMERATED {
    short1, long2 }

BurstType1 ::= ENUMERATED { ms4, ms8, ms16 }

BurstType2 ::= ENUMERATED { ms3, ms6 }

CCTrCH-PowerControlInfo ::= SEQUENCE {
    tfcs-Identity TFCS-Identity OPTIONAL,
    ul-DPCH-PowerControlInfo UL-DPCH-PowerControlInfo
}

CD-AccessSlotSubchannel ::= INTEGER (0..11)

CD-AccessSlotSubchannelList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsubCh)) OF
    CD-AccessSlotSubchannel

CD-CA-ICH-ChannelisationCode ::= INTEGER (0..255)

CD-PreambleScramblingCode ::= INTEGER (0..79)

CD-SignatureCode ::= INTEGER (0..15)

CD-SignatureCodeList ::= SEQUENCE (SIZE (1..maxPCPCH-CDsig)) OF
    CD-SignatureCode

CellParametersID ::= INTEGER (0..127)

Cfntargetsfntframeoffset ::= INTEGER(0..255)

ChannelAssignmentActive ::= CHOICE {
    notActive NULL,
    isActive AvailableMinimumSF-ListVCAM
}

ChannelisationCode256 ::= INTEGER (0..255)

ChannelReqParamsForUCSM ::= SEQUENCE {
    availableAP-SignatureList AvailableAP-SignatureList,
    availableAP-SubchannelList AvailableAP-SubchannelList OPTIONAL
}

ClosedLoopTimingAdjMode ::= ENUMERATED {
    slot1, slot2 }

CodeNumberDSCH ::= INTEGER (0..255)

CodeRange ::= SEQUENCE {
    pdsch-CodeMapList PDSCH-CodeMapList,
    codeNumberStart CodeNumberDSCH,
    codeNumberStop CodeNumberDSCH
}

CodeWordSet ::= ENUMERATED {
    longCWS,
    mediumCWS,
    shortCWS,
    ssdtOff }

CommonTimeslotInfo ::= SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode SecondInterleavingMode,

```

```

    tfci-Coding                TFCI-Coding                OPTIONAL,
    puncturingLimit            PuncturingLimit,
    repetitionPeriodAndLength  RepetitionPeriodAndLength  OPTIONAL
}

CommonTimeslotInfoSCCPCH ::=          SEQUENCE {
    -- TABULAR: The IE below is MD, but since it can be encoded in a single
    -- bit it is not defined as OPTIONAL.
    secondInterleavingMode      SecondInterleavingMode,
    tfci-Coding                 TFCI-Coding                OPTIONAL,
    puncturingLimit             PuncturingLimit,
    repetitionPeriodLengthAndOffset RepetitionPeriodLengthAndOffset OPTIONAL
}

ConstantValue ::=                  INTEGER (-35..10)

CPCH-PersistenceLevels ::=          SEQUENCE {
    cpch-SetID                  CPCH-SetID,
    dynamicPersistenceLevelTF-List DynamicPersistenceLevelTF-List
}

CPCH-PersistenceLevelsList ::=      SEQUENCE (SIZE (1..maxCPCHsets)) OF
    CPCH-PersistenceLevels

CPCH-SetInfo ::=                   SEQUENCE {
    cpch-SetID                  CPCH-SetID,
    transportFormatSet          TransportFormatSet,
    tfcs                         TFCS,
    ap-PreambleScramblingCode    AP-PreambleScramblingCode,
    ap-AICH-ChannelisationCode    AP-AICH-ChannelisationCode,
    cd-PreambleScramblingCode     CD-PreambleScramblingCode,
    cd-CA-ICH-ChannelisationCode  CD-CA-ICH-ChannelisationCode,
    cd-AccessSlotSubchannelList  CD-AccessSlotSubchannelList  OPTIONAL,
    cd-SignatureCodeList         CD-SignatureCodeList         OPTIONAL,
    deltaPp-m                    DeltaPp-m,
    ul-DPCCH-SlotFormat          UL-DPCCH-SlotFormat,
    n-StartMessage              N-StartMessage,
    n-EOT                        N-EOT,
    channelAssignmentActive       ChannelAssignmentActive,
    -- TABULAR: VCAM info has been nested inside ChannelAssignmentActive,
    -- which in turn is mandatory since it's only a binary choice.
    cpch-StatusIndicationMode    CPCH-StatusIndicationMode,
    pcpch-ChannelInfoList        PCPCH-ChannelInfoList
}

CPCH-SetInfoList ::=               SEQUENCE (SIZE (1..maxCPCHsets)) OF
    CPCH-SetInfo

CPCH-StatusIndicationMode ::=      ENUMERATED {
    pa-mode,
    pamsf-mode }

CSICH-PowerOffset ::=              INTEGER (-10..5)

-- DefaultDPCH-OffsetValueFDD and DefaultDPCH-OffsetValueTDD corresponds to
-- IE "Default DPCH Offset Value" depending on the mode.
-- Actual value = IE value * 512
DefaultDPCH-OffsetValueFDD ::=      INTEGER (0..599)

DefaultDPCH-OffsetValueTDD ::=      INTEGER (0..7)

DeltaPp-m ::=                       INTEGER (-10..10)

-- Actual value = IE value * 0.1
DeltaSIR ::=                         INTEGER (0..30)

DL-CCTrCh ::=                       SEQUENCE {
    tfcs-Identity                TFCS-IdentityPlain          OPTIONAL,
    timeInfo                     TimeInfo,
    dl-CCTrCH-TimeslotsCodes     DownlinkTimeslotsCodes      OPTIONAL,
    ul-CCTrChTPCList            UL-CCTrChTPCList                OPTIONAL
}

DL-CCTrChList ::=                   SEQUENCE (SIZE (1..maxCCTrCH)) OF
    DL-CCTrCh

DL-ChannelisationCode ::=           SEQUENCE {
    secondaryScramblingCode      SecondaryScramblingCode      OPTIONAL,

```

```

    sf-AndCodeNumber          SF512-AndCodeNumber,
    scramblingCodeChange      ScramblingCodeChange          OPTIONAL
}

DL-ChannelisationCodeList ::= SEQUENCE (SIZE (1..maxDPCH-DLchan)) OF
                               DL-ChannelisationCode

DL-CommonInformation ::= SEQUENCE {
    dl-DPCH-InfoCommon        DL-DPCH-InfoCommon          OPTIONAL,
    modeSpecificInfo          CHOICE {
        fdd                   SEQUENCE {
            defaultDPCH-OffsetValue    DefaultDPCH-OffsetValueFDD  OPTIONAL,
            dpch-CompressedModeInfo    DPCH-CompressedModeInfo    OPTIONAL,
            tx-DiversityMode           TX-DiversityMode          OPTIONAL,
            ssdt-Information            SSDT-Information          OPTIONAL
        },
        tdd                   SEQUENCE {
            defaultDPCH-OffsetValue    DefaultDPCH-OffsetValueTDD  OPTIONAL
        }
    }
}

DL-CommonInformationPost ::= SEQUENCE {
    dl-DPCH-InfoCommon        DL-DPCH-InfoCommonPost
}

DL-CommonInformationPredef ::= SEQUENCE {
    dl-DPCH-InfoCommon        DL-DPCH-InfoCommonPredef    OPTIONAL,
    modeSpecificInfo          CHOICE {
        fdd                   SEQUENCE {
            defaultDPCH-OffsetValue    DefaultDPCH-OffsetValueFDD
        },
        tdd                   SEQUENCE {
            defaultDPCH-OffsetValue    DefaultDPCH-OffsetValueTDD
        }
    }
}

DL-CompressedModeMethod ::= ENUMERATED {
    puncturing, sf-2,
    higherLayerScheduling }

DL-DPCH-InfoCommon ::= SEQUENCE {
    cfnHandling               CHOICE {
        maintain              NULL,
        initialise            SEQUENCE {
            cfntargetsfnsframeoffset    Cfntargetsfnsframeoffset    OPTIONAL
        }
    },
    modeSpecificInfo          CHOICE {
        fdd                   SEQUENCE {
            dl-DPCH-PowerControlInfo    DL-DPCH-PowerControlInfo    OPTIONAL,
            dl-rate-matching-restriction    Dl-rate-matching-restriction    OPTIONAL,
            spreadingFactorAndPilot        SF512-AndPilot,
            -- TABULAR: The number of pilot bits is nested inside the spreading factor.
            positionFixedOrFlexible        PositionFixedOrFlexible,
            tfci-Existence                BOOLEAN
        },
        tdd                   SEQUENCE {
            commonTimeslotInfo            CommonTimeslotInfo          OPTIONAL
        }
    }
}

DL-DPCH-InfoCommonPost ::= SEQUENCE {
    dl-DPCH-PowerControlInfo    DL-DPCH-PowerControlInfo    OPTIONAL
}

DL-DPCH-InfoCommonPredef ::= SEQUENCE {
    modeSpecificInfo          CHOICE {
        fdd                   SEQUENCE {
            spreadingFactorAndPilot        SF512-AndPilot,
            -- TABULAR: The number of pilot bits is nested inside the spreading factor.
            positionFixedOrFlexible        PositionFixedOrFlexible,
            tfci-Existence                BOOLEAN
        },
        tdd                   SEQUENCE {
            commonTimeslotInfo            CommonTimeslotInfo
        }
    }
}

```

```

    }
  }
}

DL-DPCH-InfoPerRL ::=
  fdd
    pCPICH-UsageForChannelEst
    dcpH-FrameOffset
    secondaryCPICH-Info
    dl-ChannelisationCodeList
    tpc-CombinationIndex
    ssdt-CellIdentity
    closedLoopTimingAdjMode
  },
  tdd
}

CHOICE {
  SEQUENCE {
    PCPICH-UsageForChannelEst,
    DPCH-FrameOffset,
    SecondaryCPICH-Info
  } OPTIONAL,
  DL-ChannelisationCodeList,
  TPC-CombinationIndex,
  SSdT-CellIdentity
} OPTIONAL,
  ClosedLoopTimingAdjMode
} OPTIONAL,
  DL-CCTrChList
}

DL-DPCH-InfoPerRL-PostFDD ::=
  pCPICH-UsageForChannelEst
  dl-ChannelisationCode
  tpc-CombinationIndex
}

SEQUENCE {
  PCPICH-UsageForChannelEst,
  DL-ChannelisationCode,
  TPC-CombinationIndex
}

DL-DPCH-InfoPerRL-PostTDD ::=
  dl-CCTrCH-TimeslotsCodes
}

SEQUENCE {
  DownlinkTimeslotsCodes
}

DL-DPCH-PowerControlInfo ::=
  modeSpecificInfo
  fdd
    dpc-Mode
  },
  tdd
    tpc-StepSizeTDD
}

SEQUENCE {
  CHOICE {
    SEQUENCE {
      DPC-Mode
    }
    SEQUENCE {
      TPC-StepSizeTDD
    }
  }
} OPTIONAL

DL-FrameType ::=
  dl-FrameTypeA, dl-FrameTypeB
}

ENUMERATED {
  dl-FrameTypeA, dl-FrameTypeB
}

DL-InformationPerRL ::=
  modeSpecificInfo
  fdd
    primaryCPICH-Info
    pdsch-SHO-DCH-Info
    pdsch-CodeMapping
  },
  tdd
    PrimaryCCPCH-Info
  },
  dl-DPCH-InfoPerRL
  secondaryCCPCH-Info
}

CHOICE {
  SEQUENCE {
    PrimaryCPICH-Info,
    PDSCH-SHO-DCH-Info
  } OPTIONAL,
  PDSCH-CodeMapping
} OPTIONAL,
  PrimaryCCPCH-Info
} OPTIONAL,
  DL-DPCH-InfoPerRL
  SecondaryCCPCH-Info
} OPTIONAL

DL-InformationPerRL-List ::=
  SEQUENCE (SIZE (1..maxRL)) OF
  DL-InformationPerRL

DL-InformationPerRL-ListPostFDD ::= SEQUENCE (SIZE (1..maxRL)) OF
  DL-InformationPerRL-PostFDD

DL-InformationPerRL-PostFDD ::=
  primaryCPICH-Info
  dl-DPCH-InfoPerRL
}

SEQUENCE {
  PrimaryCPICH-Info,
  DL-DPCH-InfoPerRL-PostFDD
}

DL-InformationPerRL-PostTDD ::=
  primaryCCPCH-Info
  dl-DPCH-InfoPerRL
}

SEQUENCE {
  PrimaryCCPCH-InfoPost,
  DL-DPCH-InfoPerRL-PostTDD
}

DL-PDSCH-Information ::=
  pdsch-SHO-DCH-Info
  pdsch-CodeMapping
}

SEQUENCE {
  PDSCH-SHO-DCH-Info
  PDSCH-CodeMapping
} OPTIONAL,
OPTIONAL

DL-rate-matching-restriction ::=
  restrictedTrCH-InfoList
}

SEQUENCE {
  RestrictedTrCH-InfoList
} OPTIONAL

```

```

DL-TS-ChannelisationCode ::=          ENUMERATED {
                                        cc16-1, cc16-2, cc16-3, cc16-4,
                                        cc16-5, cc16-6, cc16-7, cc16-8,
                                        cc16-9, cc16-10, cc16-11, cc16-12,
                                        cc16-13, cc16-14, cc16-15, cc16-16 }

DL-TS-ChannelisationCodesShort ::= SEQUENCE {
    codesRepresentation              CHOICE {
        consecutive                  SEQUENCE {
            firstChannelisationCode  DL-TS-ChannelisationCode,
            lastChannelisationCode   DL-TS-ChannelisationCode
        },
        bitmap                       BIT STRING (SIZE (16))
    }
}

DownlinkAdditionalTimeslots ::= SEQUENCE {
    parameters                      CHOICE {
        sameAsLast                   SEQUENCE {
            timeslotNumber            TimeslotNumber
        },
        newParameters                SEQUENCE {
            individualTimeslotInfo    IndividualTimeslotInfo,
            dl-TS-ChannelisationCodesShort DL-TS-ChannelisationCodesShort
        }
    }
}

DownlinkTimeslotsCodes ::=          SEQUENCE {
    firstIndividualTimeslotInfo      IndividualTimeslotInfo,
    dl-TS-ChannelisationCodesShort  DL-TS-ChannelisationCodesShort,
    moreTimeslots                   CHOICE {
        noMore                       NULL,
        additionalTimeslots          CHOICE {
            consecutive               INTEGER (1..maxTS-1),
            timeslotList              SEQUENCE (SIZE (1..maxTS-1)) OF
                                     DownlinkAdditionalTimeslots
        }
    }
}

DPC-Mode ::=                          ENUMERATED {
                                        singleTPC,
                                        tpcTripletInSoft }

-- The actual value of DPCCH power offset is the value of this IE * 2.
DPCCH-PowerOffset ::=                INTEGER (-82..-3)

DPCH-CompressedModeInfo ::=          SEQUENCE {
    tgp-SequenceList                TGP-SequenceList
}

DPCH-CompressedModeStatusInfo ::= SEQUENCE (SIZE (1..maxTGPS)) OF
    TGP-SequenceShort

-- TABULAR: Actual value = IE value * 256
DPCH-FrameOffset ::=                INTEGER (0..149)

DSCH-Mapping ::=                     SEQUENCE {
    maxTFCI-Field2Value             MaxTFCI-Field2Value,
    spreadingFactor                  SF-PDSCH,
    codeNumber                       CodeNumberDSCH,
    multiCodeInfo                    MultiCodeInfo
}

DSCH-MappingList ::=                 SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
    DSCH-Mapping

DSCH-RadioLinkIdentifier ::=         INTEGER (0..511)

DurationTimeInfo ::=                 INTEGER (1..4096)

-- TABULAR : value [Duration = infinite] is the value by default,
-- and is encoded by absence of the full sequence. If the sequence is present,
-- thefield is absent, the default is respectivelyinfinite. Presence of the
-- field absent should not be used, but shall be understood as if the

```

```

-- sequence was absent.

DynamicPersistenceLevel ::=          INTEGER (1..8)

DynamicPersistenceLevelList ::=      SEQUENCE (SIZE (1..maxPRACH)) OF
                                      DynamicPersistenceLevel

DynamicPersistenceLevelTF-List ::=   SEQUENCE (SIZE (1..maxTF-CPCH)) OF
                                      DynamicPersistenceLevel

FACH-PCH-Information ::=            SEQUENCE {
    transportFormatSet                TransportFormatSet,
    transportChannelIdentity          TransportChannelIdentity,
    ctch-Indicator                    BOOLEAN
}

FACH-PCH-InformationList ::=        SEQUENCE (SIZE (1..maxFACH)) OF
                                      FACH-PCH-Information

FrequencyInfo ::=                   SEQUENCE {
    modeSpecificInfo                   CHOICE {
        fdd                            FrequencyInfoFDD,
        tdd                            FrequencyInfoTDD    }
}

FrequencyInfoFDD ::=                SEQUENCE {
    uarfcn-UL                          UARFCN                OPTIONAL,
    uarfcn-DL                          UARFCN
}

FrequencyInfoTDD ::=                SEQUENCE {
    uarfcn-Nt                          UARFCN
}

IndividualTimeslotInfo ::=          SEQUENCE {
    timeslotNumber                     TimeslotNumber,
    tfci-Existence                     BOOLEAN,
    midambleShiftAndBurstType          MidambleShiftAndBurstType
}

IndividualTS-Interference ::=       SEQUENCE {
    timeslot                           TimeslotNumber,
    ul-TimeslotInterference            UL-Interference
}

IndividualTS-InterferenceList ::=   SEQUENCE (SIZE (1..maxTS)) OF
                                      IndividualTS-Interference

ITP ::=                             ENUMERATED {
    mode0, mode1 }

MaxAllowedUL-TX-Power ::=           INTEGER (-50..33)

MaxAvailablePCPCH-Number ::=        INTEGER (1..64)

MaxPowerIncrease ::=                INTEGER (0..3)

MaxTFCI-Field2Value ::=             INTEGER (1..1023)

MidambleConfiguration ::=           SEQUENCE {
    burstType1                         BurstType1                DEFAULT ms8,
    -- TABULAR: The default value for BurstType2 has not been specified due to
    -- compactness reasons.
    burstType2                         BurstType2
}

MidambleShiftAndBurstType ::=       SEQUENCE {
    burstType                           CHOICE {
        type1                           SEQUENCE {
            midambleAllocationMode      CHOICE {
                defaultMidamble         NULL,
                commonMidamble          NULL,
                ueSpecificMidamble       SEQUENCE {
                    midambleShift       MidambleShiftLong
                }
            }
        },
        type2                           SEQUENCE {

```

```

midambleAllocationMode      CHOICE {
    defaultMidamble          NULL,
    commonMidamble          NULL,
    ueSpecificMidamble      SEQUENCE {
        midambleShift
    }
},
type3
midambleAllocationMode      CHOICE {
    defaultMidamble          NULL,
    ueSpecificMidamble      SEQUENCE {
        midambleShift
    }
}
}
}
}

MidambleShiftLong ::=      INTEGER (0..15)

MidambleShiftShort ::=    INTEGER (0..5)

MinimumSpreadingFactor ::= ENUMERATED {
    sf4, sf8, sf16, sf32,
    sf64, sf128, sf256 }

MultiCodeInfo ::=        INTEGER (1..16)

N-EOT ::=                 INTEGER (0..7)

N-GAP ::=                 ENUMERATED {
    f2, f4, f8 }

N-PCH ::=                 INTEGER (1..8)

N-StartMessage ::=       INTEGER (1..8)

NB01 ::=                  INTEGER (0..50)

NF-Max ::=                INTEGER (1..64)

NumberOfDPDCH ::=        INTEGER (1..maxDPDCH-UL)

NumberOfFBI-Bits ::=     INTEGER (1..2)

OpenLoopPowerControl-TDD ::= SEQUENCE {
    primaryCCPCH-TX-Power    PrimaryCCPCH-TX-Power,
    alpha                    Alpha,                OPTIONAL,
    prach-ConstantValue      ConstantValue,
    dpch-ConstantValue       ConstantValue,
    pusch-ConstantValue      ConstantValue        OPTIONAL
}

OpenLoopPowerControl-IPDL-TDD ::= SEQUENCE {
    ipdl-alpha                Alpha,
    maxPowerIncrease          MaxPowerIncrease
}

PagingIndicatorLength ::= ENUMERATED {
    pi4, pi8, pi16 }

PC-Preamble ::=          ENUMERATED {
    pcp0, pcp15 }

PCP-Length ::=          ENUMERATED {
    as0, as8 }

PCPCH-ChannelInfo ::=   SEQUENCE {
    pcpch-UL-ScramblingCode  INTEGER (0..79),
    pcpch-DL-ChannelisationCode INTEGER (0..511),
    pcpch-DL-ScramblingCode  SecondaryScramblingCode    OPTIONAL,
    pcp-Length                PCP-Length,
    ucsM-Info                 UCSM-Info                OPTIONAL
}

```



```

PCPCH-ChannelInfoList ::= SEQUENCE (SIZE (1..maxPCPCHs)) OF
                           PCPCH-ChannelInfo

PCPICH-UsageForChannelEst ::= ENUMERATED {
                                mayBeUsed,
                                shallNotBeUsed }

PDSCH-CapacityAllocationInfo ::= SEQUENCE {
    pdsch-PowerControlInfo          PDSCH-PowerControlInfo          OPTIONAL,
    pdsch-AllocationPeriodInfo      AllocationPeriodInfo,
    tfcs-Identity                    TFCS-IdentityPlain          OPTIONAL,
    configuration                    CHOICE {
        old-Configuration            SEQUENCE {
            pdsch-Identity          PDSCH-Identity
        },
        new-Configuration            SEQUENCE {
            pdsch-Info              PDSCH-Info,
            pdsch-Identity          PDSCH-Identity          OPTIONAL
        }
    }
}

PDSCH-CodeInfo ::= SEQUENCE {
    spreadingFactor      SF-PDSCH,
    codeNumber           CodeNumberDSCH,
    multiCodeInfo       MultiCodeInfo
}

PDSCH-CodeInfoList ::= SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
                       PDSCH-CodeInfo

PDSCH-CodeMap ::= SEQUENCE {
    spreadingFactor      SF-PDSCH,
    multiCodeInfo       MultiCodeInfo
}

PDSCH-CodeMapList ::= SEQUENCE (SIZE (1..maxPDSCH-TFCIgroups)) OF
                      PDSCH-CodeMap

PDSCH-CodeMapping ::= SEQUENCE {
    dl-ScramblingCode    SecondaryScramblingCode          OPTIONAL,
    signallingMethod     CHOICE {
        codeRange        CodeRange,
        tfci-Range       DSCH-MappingList,
        explicit         PDSCH-CodeInfoList,
        replace          ReplacedPDSCH-CodeInfoList
    }
}

PDSCH-Identity ::= INTEGER (1..hiPDSCHidentities)

PDSCH-Info ::= SEQUENCE {
    tfcs-Identity        TFCS-IdentityPlain          OPTIONAL,
    commonTimeslotInfo  CommonTimeslotInfo          OPTIONAL,
    pdsch-TimeslotsCodes DownlinkTimeslotsCodes    OPTIONAL
}

PDSCH-PowerControlInfo ::= SEQUENCE {
    tpc-StepSizeTDD      TPC-StepSizeTDD          OPTIONAL,
    ul-CCTrChTPCList    UL-CCTrChTPCList          OPTIONAL
}

PDSCH-SHO-DCH-Info ::= SEQUENCE {
    dsch-RadioLinkIdentifier DSCH-RadioLinkIdentifier,
    tfci-CombiningSet       TFCI-CombiningSet          OPTIONAL,
    rl-IdentifierList       RL-IdentifierList          OPTIONAL
}

PDSCH-SysInfo ::= SEQUENCE {
    pdsch-Identity        PDSCH-Identity,
    pdsch-Info            PDSCH-Info,
    dsch-TFS              TransportFormatSet          OPTIONAL,
    dsch-TFCS             TFCS                        OPTIONAL
}

PDSCH-SysInfoList ::= SEQUENCE (SIZE (1..maxPDSCH)) OF
                      PDSCH-SysInfo

```

```

PDSCH-SysInfoList-SFN ::=          SEQUENCE (SIZE (1..maxPDSCH)) OF
    pdsch-SysInfo                  SEQUENCE {
    sfm-TimeInfo                    PDSCH-SysInfo,
    }                                SFN-TimeInfo
                                     OPTIONAL

PersistenceScalingFactor ::=       ENUMERATED {
    psf0-9, psf0-8, psf0-7, psf0-6,
    psf0-5, psf0-4, psf0-3, psf0-2 }

PersistenceScalingFactorList ::=   SEQUENCE (SIZE (1..maxASCpersist)) OF
    PersistenceScalingFactor

PI-CountPerFrame ::=              ENUMERATED {
    e18, e36, e72, e144 }

PICH-Info ::=                     CHOICE {
    fdd                             SEQUENCE {
        channelisationCode256      ChannelisationCode256,
        pi-CountPerFrame           PI-CountPerFrame,
        sttd-Indicator             BOOLEAN
    },
    tdd                             SEQUENCE {
        channelisationCode         TDD-PICH-CCode
        timeslot                   TimeslotNumber
        burstType                  CHOICE {
            type-1                 MidambleShiftLong,
            type-2                 MidambleShiftShort
        }
        repetitionPeriodLengthOffset RepPerLengthOffset-PICH
        pagingIndicatorLength       PagingIndicatorLength
        n-GAP                       N-GAP
        n-PCH                       N-PCH
    }
}
                                     OPTIONAL,
                                     OPTIONAL,
                                     OPTIONAL,
                                     OPTIONAL,
                                     DEFAULT pi4,
                                     DEFAULT f4,
                                     DEFAULT 2

PICH-PowerOffset ::=              INTEGER (-10..5)

PilotBits128 ::=                  ENUMERATED {
    pb4, pb8 }

PilotBits256 ::=                  ENUMERATED {
    pb2, pb4, pb8 }

PositionFixedOrFlexible ::=       ENUMERATED {
    fixed,
    flexible }

PowerControlAlgorithm ::=         CHOICE {
    algorithm1                      TPC-StepSizeFDD,
    algorithm2                      NULL
}

PowerRampStep ::=                 INTEGER (1..8)

PRACH-Midamble ::=                ENUMERATED {
    direct,
    direct-Inverted }

PRACH-Partitioning ::=            CHOICE {
    fdd                             SEQUENCE (SIZE (1..maxASC)) OF
        ASCSetting,
    tdd                             SEQUENCE (SIZE (1..maxASC)) OF
        ASC
}

PRACH-PowerOffset ::=             SEQUENCE {
    powerRampStep                   PowerRampStep,
    preambleRetransMax              PreambleRetransMax
}

PRACH-RACH-Info ::=               SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                         SEQUENCE {
            availableSignatures     AvailableSignatures,
            availableSF              SF-PRACH,
            preambleScramblingCodeWordNumber PreambleScramblingCodeWordNumber,

```

```

        puncturingLimit                PuncturingLimit,
        availableSubChannelNumbers      AvailableSubChannelNumbers
    },
    tdd                                SEQUENCE {
        timeslot                        TimeslotNumber,
        channelisationCode              TDD-PRACH-CCodeList,
        prach-Midamble                  PRACH-Midamble                OPTIONAL
    }
}

PRACH-SystemInformation ::=          SEQUENCE {
    prach-RACH-Info                    PRACH-RACH-Info,
    transportChannelIdentity            TransportChannelIdentity,
    rach-TransportFormatSet             TransportFormatSet                OPTIONAL,
    rach-TFCS                           TFCS                            OPTIONAL,
    prach-Partitioning                  PRACH-Partitioning               OPTIONAL,
    persistenceScalingFactorList        PersistenceScalingFactorList      OPTIONAL,
    ac-To-ASC-MappingTable               AC-To-ASC-MappingTable           OPTIONAL,
    modeSpecificInfo                    CHOICE {
        fdd                              SEQUENCE {
            primaryCPICH-TX-Power        PrimaryCPICH-TX-Power            OPTIONAL,
            constantValue                 ConstantValue                     OPTIONAL,
            prach-PowerOffset              PRACH-PowerOffset               OPTIONAL,
            rach-TransmissionParameters    RACH-TransmissionParameters    OPTIONAL,
            aich-Info                      AICH-Info                        OPTIONAL
        },
        tdd                              NULL
    }
}

PRACH-SystemInformationList ::=      SEQUENCE (SIZE (1..maxPRACH)) OF
    PRACH-SystemInformation

PreambleRetransMax ::=                INTEGER (1..64)

PreambleScramblingCodeWordNumber ::= INTEGER (0..15)

PreDefPhyChConfiguration ::=         SEQUENCE {
    ul-DPCH-InfoPredef                  UL-DPCH-InfoPredef,
    dl-CommonInformationPredef           DL-CommonInformationPredef      OPTIONAL
}

PrimaryCCPCH-Info ::=                CHOICE {
    fdd                                  SEQUENCE {
        tx-DiversityIndicator            BOOLEAN
    },
    tdd                                  SEQUENCE {
        syncCase                          CHOICE {
            syncCase1                     SEQUENCE {
                timeslot                    TimeslotNumber
            },
            syncCase2                     SEQUENCE {
                timeslotSync2              TimeslotSync2
            }
        }
        cellParametersID                  CellParametersID                OPTIONAL,
        blockSTTD-Indicator                BOOLEAN                          OPTIONAL
    }
}

PrimaryCCPCH-InfoPost ::=             SEQUENCE {
    syncCase                              CHOICE {
        syncCase1                         SEQUENCE {
            timeslot                        TimeslotNumber
        },
        syncCase2                         SEQUENCE {
            timeslotSync2                  TimeslotSync2
        }
    },
    cellParametersID                      CellParametersID,
    blockSTTD-Indicator                    BOOLEAN
}

PrimaryCCPCH-TX-Power ::=             INTEGER (6..43)

PrimaryCPICH-Info ::=                SEQUENCE {
    primaryScramblingCode                 PrimaryScramblingCode
}

```

```

}

PrimaryCPICH-TX-Power ::=          INTEGER (-10..50)

PrimaryScramblingCode ::=          INTEGER (0..511)

PuncturingLimit ::=                ENUMERATED {
    pl0-40, pl0-44, pl0-48, pl0-52, pl0-56,
    pl0-60, pl0-64, pl0-68, pl0-72, pl0-76,
    pl0-80, pl0-84, pl0-88, pl0-92, pl0-96, pl1 }

PUSCH-CapacityAllocationInfo ::=  SEQUENCE {
    pusch-Allocation                CHOICE {
        pusch-AllocationPending    NULL,
        pusch-AllocationAssignment SEQUENCE {
            pdsch-AllocationPeriodInfo AllocationPeriodInfo,
            pusch-PowerControlInfo     UL-TargetSIR                OPTIONAL,
            tfcs-Identity               TFCS-IdentityPlain         OPTIONAL,
            configuration                CHOICE {
                old-Configuration      SEQUENCE {
                    pusch-Identity    PUSCH-Identity
                },
                new-Configuration     SEQUENCE {
                    pusch-Info         PUSCH-Info,
                    pusch-Identity    PUSCH-Identity    OPTIONAL
                }
            }
        }
    }
}

PUSCH-Identity ::=                INTEGER (1..hiPUSCHidentities)

PUSCH-Info ::=                    SEQUENCE {
    tfcs-Identity                  TFCS-IdentityPlain         OPTIONAL,
    commonTimeslotInfo             CommonTimeslotInfo         OPTIONAL,
    pusch-TimeslotsCodes           UplinkTimeslotsCodes         OPTIONAL
}

PUSCH-SysInfo ::=                 SEQUENCE {
    pusch-Identity                 PUSCH-Identity,
    pusch-Info                     PUSCH-Info,
    usch-TFS                       TransportFormatSet         OPTIONAL,
    usch-TFCS                      TFCS                    OPTIONAL
}

PUSCH-SysInfoList ::=             SEQUENCE (SIZE (1..maxPUSCH)) OF
    PUSCH-SysInfo

PUSCH-SysInfoList-SFN ::=         SEQUENCE (SIZE (1..maxPDSCH)) OF
    SEQUENCE {
        pusch-SysInfo              PUSCH-SysInfo,
        sfn-TimeInfo               SFN-TimeInfo                OPTIONAL
    }
}

RACH-TransmissionParameters ::=   SEQUENCE {
    mmax                           INTEGER (1..32),
    nb01Min                         NB01,
    nb01Max                         NB01
}

ReducedScramblingCodeNumber ::=   INTEGER (0..8191)

RepetitionPeriodAndLength ::=     CHOICE {
    repetitionPeriod1              NULL,
    repetitionPeriod2              INTEGER (1..1),
    -- repetitionPeriod2 could just as well be NULL also.
    repetitionPeriod4              INTEGER (1..3),
    repetitionPeriod8              INTEGER (1..7),
    repetitionPeriod16             INTEGER (1..15),
    repetitionPeriod32             INTEGER (1..31),
    repetitionPeriod64             INTEGER (1..63)
}

RepetitionPeriodLengthAndOffset ::= CHOICE {
    repetitionPeriod1              NULL,
    repetitionPeriod2              SEQUENCE {
        length                     NULL,

```

```

        offset                                INTEGER (0..1)
    },
    repetitionPeriod4                          SEQUENCE {
        length                                INTEGER (1..3),
        offset                                INTEGER (0..3)
    },
    repetitionPeriod8                          SEQUENCE {
        length                                INTEGER (1..7),
        offset                                INTEGER (0..7)
    },
    repetitionPeriod16                         SEQUENCE {
        length                                INTEGER (1..15),
        offset                                INTEGER (0..15)
    },
    repetitionPeriod32                         SEQUENCE {
        length                                INTEGER (1..31),
        offset                                INTEGER (0..31)
    },
    repetitionPeriod64                         SEQUENCE {
        length                                INTEGER (1..63),
        offset                                INTEGER (0..63)
    }
}

ReplacedPDSCH-CodeInfo ::=
    tfci-Field2                               SEQUENCE {
        spreadingFactor                       MaxTFCI-Field2Value,
        codeNumber                             SF-PDSCH,
        multiCodeInfo                          CodeNumberDSCH,
    }
    MultiCodeInfo

ReplacedPDSCH-CodeInfoList ::=
    SEQUENCE (SIZE (1..maxTFCI-2-Combs)) OF
    ReplacedPDSCH-CodeInfo

RepPerLengthOffset-PICH ::=
    rpp4-2                                     CHOICE {
        rpp8-2                                 INTEGER (0..3),
        rpp8-4                                 INTEGER (0..7),
        rpp16-2                                INTEGER (0..7),
        rpp16-4                                INTEGER (0..15),
        rpp32-2                                INTEGER (0..15),
        rpp32-4                                INTEGER (0..31),
        rpp64-2                                INTEGER (0..31),
        rpp64-4                                INTEGER (0..63),
    }

RestrictedTrCH ::=
    restrictedDL-TrCH-Identity                 SEQUENCE {
        allowedTFIList                          TransportChannelIdentity,
    }
    AllowedTFI-List

RestrictedTrCH-InfoList ::=
    SEQUENCE (SIZE(1..maxTrCH)) OF
    RestrictedTrCH

RL-AdditionInformation ::=
    primaryCPICH-Info                          SEQUENCE {
        dl-DPCH-InfoPerRL                       PrimaryCPICH-Info,
        tfci-CombiningIndicator                 DL-DPCH-InfoPerRL,
        sccpch-InfoforFACH                       BOOLEAN,
    }
    SCCPCH-InfoForFACH                          OPTIONAL

RL-AdditionInformationList ::=
    SEQUENCE (SIZE (1..maxRL)) OF
    RL-AdditionInformation

RL-IdentifierList ::=
    SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RL-RemovalInformationList ::=
    SEQUENCE (SIZE (1..maxRL-1)) OF
    PrimaryCPICH-Info

RPP ::=
    ENUMERATED {
        mode0, mode1 }

S-Field ::=
    ENUMERATED {
        e1bit, e2bits }

SCCPCH-ChannelisationCode ::=
    ENUMERATED {
        cc16-1, cc16-2, cc16-3, cc16-4,

```

```

cc16-5, cc16-6, cc16-7, cc16-8,
cc16-9, cc16-10, cc16-11, cc16-12,
cc16-13, cc16-14, cc16-15, cc16-16 }

SCCPCH-ChannelisationCodeList ::= SEQUENCE (SIZE (1..16)) OF
    SCCPCH-ChannelisationCode

SCCPCH-InfoForFACH ::= SEQUENCE {
    secondaryCCPCH-Info      SecondaryCCPCH-Info,
    tfcs                     TFCS,
    fach-PCH-InformationList FACH-PCH-InformationList,
    sib-ReferenceListFACH    SIB-ReferenceListFACH
}

SCCPCH-SystemInformation ::= SEQUENCE {
    secondaryCCPCH-Info      SecondaryCCPCH-Info,
    tfcs                     TFCS,
    fach-PCH-InformationList FACH-PCH-InformationList,
    pich-Info                PICH-Info
} OPTIONAL,
OPTIONAL,
OPTIONAL

SCCPCH-SystemInformationList ::= SEQUENCE (SIZE (1..maxSCCPCH)) OF
    SCCPCH-SystemInformation

ScramblingCodeChange ::= ENUMERATED {
    codeChange, noCodeChange }

ScramblingCodeType ::= ENUMERATED {
    shortSC,
    longSC }

SecondaryCCPCH-Info ::= SEQUENCE {
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            pCPICH-UsageForChannelEst PCPICH-UsageForChannelEst,
            secondaryCPICH-Info        SecondaryCPICH-Info,
            secondaryScramblingCode    SecondaryScramblingCode,
            sttd-Indicator              BOOLEAN,
            sf-AndCodeNumber            SF256-AndCodeNumber,
            pilotSymbolExistence        BOOLEAN,
            tfci-Existence              BOOLEAN,
            positionFixedOrFlexible     PositionFixedOrFlexible,
            timingOffset                TimingOffset
        } DEFAULT 0
        tdd SEQUENCE {
            -- TABULAR: the offset is included in CommonTimeslotInfoSCCPCH
            commonTimeslotInfo          CommonTimeslotInfoSCCPCH,
            individualTimeslotInfo      IndividualTimeslotInfo,
            channelisationCode          SCCPCH-ChannelisationCodeList
        }
    }
}

SecondaryCPICH-Info ::= SEQUENCE {
    secondaryDL-ScramblingCode SecondaryScramblingCode,
    channelisationCode256      ChannelisationCode256
} OPTIONAL,

SecondaryScramblingCode ::= INTEGER (1..15)

SecondInterleavingMode ::= ENUMERATED {
    frameRelated, timeslotRelated }

-- SF256-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF256-AndCodeNumber ::= CHOICE {
    sf4      INTEGER (0..3),
    sf8      INTEGER (0..7),
    sf16     INTEGER (0..15),
    sf32     INTEGER (0..31),
    sf64     INTEGER (0..63),
    sf128    INTEGER (0..127),
    sf256    INTEGER (0..255)
}

-- SF512-AndCodeNumber encodes both "Spreading factor" and "Code Number"
SF512-AndCodeNumber ::= CHOICE {
    sf4      INTEGER (0..3),
    sf8      INTEGER (0..7),

```

```

    sf16                INTEGER (0..15),
    sf32                INTEGER (0..31),
    sf64                INTEGER (0..63),
    sf128              INTEGER (0..127),
    sf256              INTEGER (0..255),
    sf512              INTEGER (0..511)
}

-- SF512-AndPilot encodes both "Spreading factor" and "Number of bits for Pilot bits"
SF512-AndPilot ::=
    CHOICE {
        sfd4            NULL,
        sfd8            NULL,
        sfd16           NULL,
        sfd32           NULL,
        sfd64           NULL,
        sfd128          PilotBits128,
        sfd256          PilotBits256,
        sfd512          NULL
    }
SF-PDSCH ::=
    ENUMERATED {
        sfp4, sfp8, sfp16, sfp32,
        sfp64, sfp128, sfp256 }

SF-PRACH ::=
    ENUMERATED {
        sfpr32, sfpr64, sfpr128, sfpr256 }

SFN-TimeInfo ::=
    SEQUENCE {
        activationTimeSFN    INTEGER (0..4095),
        physChDuration       DurationTimeInfo
    }

SpreadingFactor ::=
    ENUMERATED {
        sf4, sf8, sf16, sf32,
        sf64, sf128, sf256 }

SSDT-CellIdentity ::=
    ENUMERATED {
        ssdt-id-a, ssdt-id-b, ssdt-id-c,
        ssdt-id-d, ssdt-id-e, ssdt-id-f,
        ssdt-id-g, ssdt-id-h }

SSDT-Information ::=
    SEQUENCE {
        s-Field             S-Field,
        codeWordSet         CodeWordSet
    }

TDD-PICH-CCode ::=
    ENUMERATED {
        cc16-1, cc16-2, cc16-3, cc16-4,
        cc16-5, cc16-6, cc16-7, cc16-8,
        cc16-9, cc16-10, cc16-11, cc16-12,
        cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCode8 ::=
    ENUMERATED {
        cc8-1, cc8-2, cc8-3, cc8-4,
        cc8-5, cc8-6, cc8-7, cc8-8 }

TDD-PRACH-CCode16 ::=
    ENUMERATED {
        cc16-1, cc16-2, cc16-3, cc16-4,
        cc16-5, cc16-6, cc16-7, cc16-8,
        cc16-9, cc16-10, cc16-11, cc16-12,
        cc16-13, cc16-14, cc16-15, cc16-16 }

TDD-PRACH-CCodeList ::=
    CHOICE {
        sf8              SEQUENCE (SIZE (1..8)) OF
                        TDD-PRACH-CCode8,
        sf16             SEQUENCE (SIZE (1..8)) OF
                        TDD-PRACH-CCode16
    }

TFC-ControlDuration ::=
    ENUMERATED {
        tfc-cd1, tfc-cd2, tfc-cd4, tfc-cd8,
        tfc-cd16, tfc-cd24, tfc-cd32,
        tfc-cd48, tfc-cd64, tfc-cd128,
        tfc-cd192, tfc-cd256, tfc-cd512 }

TF-CI-Coding ::=
    ENUMERATED {
        tfci-bits-4, tfci-bits-8,
        tfci-bits-16, tfci-bits-32 }

```

```

-- **TODO**, not defined
TFCI-CombiningSet ::=
}
SEQUENCE {

TGCFN ::=
INTEGER (0..255)

-- The value 270 represents "undefined" in the tabular description.
TGD ::=
INTEGER (15..270)

TGL ::=
INTEGER (1..14)

TGMP ::=
ENUMERATED {
    tdd-Measurement, fdd-Measurement,
    gsm-CarrierRSSIMeasurement,
    gsm-initialBSICIdentification, gsmBSICReconfirmation }

TGP-Sequence ::=
SEQUENCE {
    tgpsi
    TGPSI,
    tgps-StatusFlag
    TGPS-StatusFlag,
    tgcfn
    TGCFN,
    tgps-ConfigurationParams
    TGPS-ConfigurationParams
}
OPTIONAL

TGP-SequenceList ::=
SEQUENCE (SIZE (1..maxTGPS)) OF
    TGP-Sequence

TGP-SequenceShort ::=
SEQUENCE {
    tgpsi
    TGPSI,
    tgps-StatusFlag
    TGPS-StatusFlag,
    tgcfn
    TGCFN
}

TGPL ::=
INTEGER (1..144)

-- TABULAR: The value 0 represents "infinity" in the tabular description.
TGPRC ::=
INTEGER (0..63)

TGPS-ConfigurationParams ::=
SEQUENCE {
    tgmpp
    TGMP,
    tgprc
    TGPRC,
    tgsn
    TGSN,
    tg11
    TGL,
    tg12
    TGL
}
OPTIONAL,
    tgd
    TGD,
    tgpl1
    TGPL,
    tgpl2
    TGPL
}
OPTIONAL,
    rpp
    RPP,
    itp
    ITP,
    ul-DL-Mode
    UL-DL-Mode,
    -- TABULAR: Compressed mode method is nested inside UL-DL-Mode
    dl-FrameType
    DL-FrameType,
    deltaSIR1
    DeltaSIR,
    deltaSIRAfter1
    DeltaSIR,
    deltaSIR2
    DeltaSIR
}
OPTIONAL,
    deltaSIRAfter2
    DeltaSIR
}
OPTIONAL

TGPS-StatusFlag ::=
ENUMERATED {
    tgpsActive, tgpsInactive }

TGPSI ::=
INTEGER (1..maxTGPS)

TGSN ::=
INTEGER (0..14)

TimeInfo ::=
SEQUENCE {
    activationTime
    ActivationTime
    durationTimeInfo
    DurationTimeInfo
}
OPTIONAL,
OPTIONAL

TimeslotList ::=
SEQUENCE (SIZE (1..maxTS)) OF
    TimeslotNumber

TimeslotNumber ::=
INTEGER (0..14)

TimeslotSync2 ::=
INTEGER (0..6)

-- Actual value = IE value * 256
TimingOffset ::=
INTEGER (0..149)

```



```

TPC-CombinationIndex ::=          INTEGER (0..5)
TPC-StepSizeFDD ::=              INTEGER (0..1)
TPC-StepSizeTDD ::=              INTEGER (1..3)
TX-DiversityMode ::=              ENUMERATED {
                                    noDiversity,
                                    sttd,
                                    closedLoopModel1,
                                    closedLoopMode2 }
UARFCN ::=                        INTEGER (0..16383)
UCSM-Info ::=                     SEQUENCE {
    minimumSpreadingFactor         MinimumSpreadingFactor,
    nf-Max                         NF-Max,
    channelReqParamsForUCSM        ChannelReqParamsForUCSM
}
UL-CCTrCH ::=                     SEQUENCE {
    tfcs-Identity                  TFCS-IdentityPlain           OPTIONAL,
    timeInfo                       TimeInfo,
    commonTimeslotInfo             CommonTimeslotInfo           OPTIONAL,
    ul-CCTrCH-TimeslotsCodes       UplinkTimeslotsCodes         OPTIONAL
}
UL-CCTrCHList ::=                 SEQUENCE (SIZE (1..maxCCTrCH)) OF
    UL-CCTrCH
UL-CCTrChTPCList ::=              SEQUENCE (SIZE (0..maxCCTrCH)) OF
    TFCS-Identity
UL-ChannelRequirement ::=         CHOICE {
    ul-DPCH-Info                   UL-DPCH-Info,
    cpch-SetInfo                   CPCH-SetInfo
}
UL-ChannelRequirementWithCPCH-SetID ::= CHOICE {
    ul-DPCH-Info                   UL-DPCH-Info,
    cpch-SetInfo                   CPCH-SetInfo,
    cpch-SetID                     CPCH-SetID
}
UL-CompressedModeMethod ::=       ENUMERATED {
    sf-2,
    higherLayerScheduling }
UL-DL-Mode ::=                    CHOICE {
    ul                              UL-CompressedModeMethod,
    dl                              DL-CompressedModeMethod
}
UL-DPCCH-SlotFormat ::=           ENUMERATED {
    slf0, slf1, slf2 }
UL-DPCH-Info ::=                  SEQUENCE {
    ul-DPCH-PowerControlInfo        UL-DPCH-PowerControlInfo   OPTIONAL,
    modeSpecificInfo                CHOICE {
        fdd                          SEQUENCE {
            scramblingCodeType        ScramblingCodeType,
            scramblingCode            UL-ScramblingCode,
            numberOfDPDCH             NumberOfDPDCH             DEFAULT 1,
            spreadingFactor           SpreadingFactor,
            tfci-Existence            BOOLEAN,
            numberOfFBI-Bits          NumberOfFBI-Bits        OPTIONAL,
            -- The IE above is conditional based on history
            puncturingLimit           PuncturingLimit
        },
        tdd                          SEQUENCE {
            ul-TimingAdvance          UL-TimingAdvanceControl   OPTIONAL,
            ul-CCTrCHList             UL-CCTrCHList
        }
    }
}
UL-DPCH-InfoPostFDD ::=           SEQUENCE {

```

```

        ul-DPCH-PowerControlInfo           UL-DPCH-PowerControlInfoPostFDD,
            scramblingCodeType             ScramblingCodeType,
            reducedScramblingCodeNumber    ReducedScramblingCodeNumber,
            spreadingFactor                 SpreadingFactor
    }

UL-DPCH-InfoPostTDD ::= SEQUENCE {
    ul-DPCH-PowerControlInfo             UL-DPCH-PowerControlInfoPostTDD,
    ul-TimingAdvance                     UL-TimingAdvanceControl
    ul-CCTrCH-TimeslotsCodes             UplinkTimeslotsCodes
} OPTIONAL,

UL-DPCH-InfoPredef ::= SEQUENCE {
    ul-DPCH-PowerControlInfo             UL-DPCH-PowerControlInfoPredef,
    modeSpecificInfo                     CHOICE {
        fdd                               SEQUENCE {
            tfci-Existence                 BOOLEAN,
            puncturingLimit                PuncturingLimit
        },
        tdd                               SEQUENCE {
            commonTimeslotInfo             CommonTimeslotInfo
        }
    }
}

UL-DPCH-PowerControlInfo ::= CHOICE {
    fdd                                   SEQUENCE {
        dpcch-PowerOffset                 DPCCH-PowerOffset,
        pc-Preamble                       PC-Preamble,
        powerControlAlgorithm              PowerControlAlgorithm
        -- TABULAR: TPC step size nested inside PowerControlAlgorithm
    },
    tdd                                   SEQUENCE {
        ul-TargetSIR                      UL-TargetSIR,
        ul-OL-PC-Signalling                 CHOICE {
            broadcast-UL-OL-PC-info        NULL,
            handoverGroup                  SEQUENCE {
                individualTS-InterferenceList IndividualTS-InterferenceList,
                dpch-ConstantValue         ConstantValue,
                primaryCCPCH-TX-Power      PrimaryCCPCH-TX-Power
            }
        }
    }
} OPTIONAL

UL-DPCH-PowerControlInfoPostFDD ::= SEQUENCE {
    powerControlAlgorithm                 PowerControlAlgorithm
    -- TABULAR: TPC step size nested inside PowerControlAlgorithm
}

UL-DPCH-PowerControlInfoPostTDD ::= SEQUENCE {
    ul-TargetSIR                         UL-TargetSIR,
    ul-TimeslotInterference               UL-Interference
}

UL-DPCH-PowerControlInfoPredef ::= CHOICE {
    fdd                                   SEQUENCE {
        dpcch-PowerOffset                 DPCCH-PowerOffset,
        pc-Preamble                       PC-Preamble
    },
    tdd                                   SEQUENCE {
        dpch-ConstantValue                 ConstantValue
    }
}

UL-Interference ::= INTEGER (-110..-70)

UL-ScramblingCode ::= INTEGER (0..16777215)

-- Actual value = (IE value * 0.5) - 11
UL-TargetSIR ::= INTEGER (0..62)

UL-TimingAdvance ::= INTEGER (0..63)

UL-TimingAdvanceControl ::= CHOICE {
    disabled                               NULL,
    enabled                                SEQUENCE {

```

```

        ul-TimingAdvance
        activationTime
    }
}
UL-TS-ChannelisationCode ::=          ENUMERATED {
    cc1-1, cc2-1, cc2-2,
    cc4-1, cc4-2, cc4-3, cc4-4,
    cc8-1, cc8-2, cc8-3, cc8-4,
    cc8-5, cc8-6, cc8-7, cc8-8,
    cc16-1, cc16-2, cc16-3, cc16-4,
    cc16-5, cc16-6, cc16-7, cc16-8,
    cc16-9, cc16-10, cc16-11, cc16-12,
    cc16-13, cc16-14, cc16-15, cc16-16 }

UL-TS-ChannelisationCodeList ::=     SEQUENCE (SIZE (1..2)) OF
    UL-TS-ChannelisationCode

UplinkAdditionalTimeslots ::=        SEQUENCE {
    parameters
        sameAsLast
        timeslotNumber
    },
    newParameters
        individualTimeslotInfo
        ul-TS-ChannelisationCodeList
}
}

UplinkTimeslotsCodes ::=            SEQUENCE {
    dynamicSFusage
        BOOLEAN,
    firstIndividualTimeslotInfo
        IndividualTimeslotInfo,
    ul-TS-ChannelisationCodeList
        UL-TS-ChannelisationCodeList,
    moreTimeslots
        CHOICE {
            noMore
                NULL,
            additionalTimeslots
                CHOICE {
                    consecutive
                        SEQUENCE {
                            numAdditionalTimeslots
                                INTEGER (1..maxTS-1)
                        }
                },
            timeslotList
                SEQUENCE (SIZE (1..maxTS-1)) OF
                    UplinkAdditionalTimeslots
        }
}
}

-- *****
--
--     MEASUREMENT INFORMATION ELEMENTS (10.3.7)
--
-- *****

AcquisitionSatInfo ::=              SEQUENCE {
    satID
        SatID,
    doppler0thOrder
        INTEGER (-2048..2047),
    extraDopplerInfo
        ExtraDopplerInfo
        OPTIONAL,
    codePhase
        INTEGER (0..1022),
    integerCodePhase
        INTEGER (0..19),
    gps-BitNumber
        INTEGER (0..3),
    codePhaseSearchWindow
        CodePhaseSearchWindow,
    azimuthAndElevation
        AzimuthAndElevation
        OPTIONAL
}

AcquisitionSatInfoList ::=          SEQUENCE (SIZE (1..maxSat)) OF
    AcquisitionSatInfo

AdditionalAssistanceData ::=         OCTET STRING (SIZE (1..38))

AdditionalMeasurementID-List ::=     SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
    MeasurementIdentity

AlmanacSatInfo ::=                  SEQUENCE {
    satID
        SatID,
    e
        BIT STRING (SIZE (16)),
    t-oa
        BIT STRING (SIZE (8)),
    deltaI
        BIT STRING (SIZE (16)),
    omegaDot
        BIT STRING (SIZE (16)),
    satHealth
        BIT STRING (SIZE (8)),
}

```

```

a-Sqrt                BIT STRING (SIZE (24)),
omega0                BIT STRING (SIZE (24)),
m0                    BIT STRING (SIZE (24)),
omega                 BIT STRING (SIZE (24)),
af0                   BIT STRING (SIZE (11)),
af1                   BIT STRING (SIZE (11))
}

AlmanacSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
                        AlmanacSatInfo

AverageRLC-BufferPayload ::= ENUMERATED {
                                pla0, pla4, pla8, pla16, pla32,
                                pla64, pla128, pla256, pla512,
                                pla1024, pla2k, pla4k, pla8k, pla16k,
                                pla32k, pla64k, pla128k, pla256k,
                                pla512k, pla1024k }

AzimuthAndElevation ::= SEQUENCE {
                            azimuth
                            elevation
                        }

BadSatList ::= SEQUENCE (SIZE (1..maxSat)) OF
                INTEGER (0..63)

BCCH-ARFCN ::= INTEGER (0..1023)

BLER-MeasurementResults ::= SEQUENCE {
                                transportChannelIdentity
                                dl-TransportChannelBLER
                            }
                                OPTIONAL

BLER-MeasurementResultsList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
                                BLER-MeasurementResults

BLER-TransChIdList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
                        TransportChannelIdentity

BSIC-VerificationRequired ::= ENUMERATED {
                                required, notRequired }

BSICReported ::= CHOICE {
                            verifiedBSIC
                            nonVerifiedBSIC
                            BCCH-ARFCN
                        }

BurstModeParameters ::= SEQUENCE {
                            burstStart
                            burstLength
                            burstFreq
                        }

CellDCH-ReportCriteria ::= CHOICE {
                            intraFreqReportingCriteria
                            periodicalReportingCriteria
                        }

-- Actual value = IE value * 0.5
CellIndividualOffset ::= INTEGER (-20..20)

CellInfo ::= SEQUENCE {
                cellIndividualOffset
                referenceTimeDifferenceToCell
                modeSpecificInfo
                CHOICE {
                    fdd
                        SEQUENCE {
                            primaryCPICH-Info
                            primaryCPICH-TX-Power
                            readSFN-Indicator
                            tx-DiversityIndicator
                        }
                    tdd
                        SEQUENCE {
                            primaryCCPCH-Info
                            primaryCCPCH-TX-Power
                            timeslotInfoList
                        }
                }
                DEFAULT 0,
                OPTIONAL,
                OPTIONAL,
                OPTIONAL,
                OPTIONAL,
                OPTIONAL
            }

```

```

}

CellInfoSI-RSCP ::=
  cellIndividualOffset
  referenceTimeDifferenceToCell
  modeSpecificInfo
    fdd
      primaryCPICH-Info
      primaryCPICH-TX-Power
      readSFN-Indicator
      tx-DiversityIndicator
    },
    tdd
      primaryCCPCH-Info
      primaryCCPCH-TX-Power
      timeslotInfoList
    }
  },
  cellSelectionReselectionInfo
}

SEQUENCE {
  CellIndividualOffset           DEFAULT 0,
  ReferenceTimeDifferenceToCell  OPTIONAL,
  CHOICE {
    SEQUENCE {
      PrimaryCPICH-Info          OPTIONAL,
      PrimaryCPICH-TX-Power      OPTIONAL,
      BOOLEAN,
      BOOLEAN
    }
    SEQUENCE {
      PrimaryCCPCH-Info,
      PrimaryCCPCH-TX-Power      OPTIONAL,
      TimeslotInfoList           OPTIONAL
    }
  }
}

CellInfoSI-ECN0 ::=
  cellIndividualOffset
  referenceTimeDifferenceToCell
  modeSpecificInfo
    fdd
      primaryCPICH-Info
      primaryCPICH-TX-Power
      readSFN-Indicator
      tx-DiversityIndicator
    },
    tdd
      primaryCCPCH-Info
      primaryCCPCH-TX-Power
      timeslotInfoList
    }
  },
  cellSelectionReselectionInfo
}

SEQUENCE {
  CellIndividualOffset           DEFAULT 0,
  ReferenceTimeDifferenceToCell  OPTIONAL,
  CHOICE {
    SEQUENCE {
      PrimaryCPICH-Info          OPTIONAL,
      PrimaryCPICH-TX-Power      OPTIONAL,
      BOOLEAN,
      BOOLEAN
    }
    SEQUENCE {
      PrimaryCCPCH-Info,
      PrimaryCCPCH-TX-Power      OPTIONAL,
      TimeslotInfoList           OPTIONAL
    }
  }
}

CellInfoSI-HCS-RSCP ::=
  cellIndividualOffset
  referenceTimeDifferenceToCell
  modeSpecificInfo
    fdd
      primaryCPICH-Info
      primaryCPICH-TX-Power
      readSFN-Indicator
      tx-DiversityIndicator
    },
    tdd
      primaryCCPCH-Info
      primaryCCPCH-TX-Power
      timeslotInfoList
    }
  },
  cellSelectionReselectionInfo
}

SEQUENCE {
  CellIndividualOffset           DEFAULT 0,
  ReferenceTimeDifferenceToCell  OPTIONAL,
  CHOICE {
    SEQUENCE {
      PrimaryCPICH-Info          OPTIONAL,
      PrimaryCPICH-TX-Power      OPTIONAL,
      BOOLEAN,
      BOOLEAN
    }
    SEQUENCE {
      PrimaryCCPCH-Info,
      PrimaryCCPCH-TX-Power      OPTIONAL,
      TimeslotInfoList           OPTIONAL
    }
  }
}

CellInfoSI-HCS-ECN0 ::=
  cellIndividualOffset
  referenceTimeDifferenceToCell
  modeSpecificInfo
    fdd
      primaryCPICH-Info
      primaryCPICH-TX-Power
      readSFN-Indicator
      tx-DiversityIndicator
    },
    tdd
      primaryCCPCH-Info
      primaryCCPCH-TX-Power
      timeslotInfoList
    }
  },
  cellSelectionReselectionInfo
}

SEQUENCE {
  CellIndividualOffset           DEFAULT 0,
  ReferenceTimeDifferenceToCell  OPTIONAL,
  CHOICE {
    SEQUENCE {
      PrimaryCPICH-Info          OPTIONAL,
      PrimaryCPICH-TX-Power      OPTIONAL,
      BOOLEAN,
      BOOLEAN
    }
    SEQUENCE {
      PrimaryCCPCH-Info,
      PrimaryCCPCH-TX-Power      OPTIONAL,
      TimeslotInfoList           OPTIONAL
    }
  }
}

```

```

CellMeasuredResults ::=
    cellIdentity                SEQUENCE {
        cellIdentity                OPTIONAL,
        sfn-SFN-ObsTimeDifference   SFN-SFN-ObsTimeDifference   OPTIONAL,
        cellSynchronisationInfo     CellSynchronisationInfo     OPTIONAL,
        modeSpecificInfo            CHOICE {
            fdd                     SEQUENCE {
                primaryCPICH-Info   PrimaryCPICH-Info,
                cpich-Ec-N0         CPICH-Ec-N0                OPTIONAL,
                cpich-RSCP          CPICH-RSCP                OPTIONAL,
                pathloss            Pathloss                       OPTIONAL
            },
            tdd                     SEQUENCE {
                cellParametersID     CellParametersID,
                proposedTGSN         TGSN                      OPTIONAL,
                primaryCCPCH-RSCP    PrimaryCCPCH-RSCP        OPTIONAL,
                timeslotISCP-List    TimeslotISCP-List       OPTIONAL
            }
        }
    }

CellMeasurementEventResults ::=
    CHOICE {
        fdd                     SEQUENCE (SIZE (1..maxCellMeas)) OF
            PrimaryCPICH-Info,
        tdd                     SEQUENCE (SIZE (1..maxCellMeas)) OF
            PrimaryCCPCH-Info
    }

CellPosition ::=
    SEQUENCE {
        relativeNorth           INTEGER (-32767..32767),
        relativeEast            INTEGER (-32767..32767),
        relativeAltitude        INTEGER (-4095..4095)
    }

CellReportingQuantities ::=
    SEQUENCE {
        sfn-SFN-OTD-Type        SFN-SFN-OTD-Type,
        cellIdentity-reportingIndicator    BOOLEAN,
        cellSynchronisationInfoReportingIndicator    BOOLEAN,
        modeSpecificInfo        CHOICE {
            fdd                     SEQUENCE {
                cpich-Ec-N0-reportingIndicator    BOOLEAN,
                cpich-RSCP-reportingIndicator    BOOLEAN,
                pathloss-reportingIndicator      BOOLEAN
            },
            tdd                     SEQUENCE {
                timeslotISCP-reportingIndicator    BOOLEAN,
                proposedTGSN-ReportingRequired    BOOLEAN,
                primaryCCPCH-RSCP-reportingIndicator    BOOLEAN,
                pathloss-reportingIndicator      BOOLEAN
            }
        }
    }

CellSelectReselectInfoSIB-11-12 ::= SEQUENCE {
    q-Offset1S-N                Q-OffsetS-N                DEFAULT 0,
    q-Offset2S-N                Q-OffsetS-N                OPTIONAL,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power    OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP    HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo            CHOICE {
        fdd                     SEQUENCE {
            q-QualMin              Q-QualMin                OPTIONAL,
            q-RxlevMin             Q-RxlevMin                OPTIONAL
        },
        tdd                     SEQUENCE {
            q-RxlevMin             Q-RxlevMin                OPTIONAL
        },
        gsm                     SEQUENCE {
            q-RxlevMin             Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-RSCP ::= SEQUENCE {
    q-OffsetS-N                Q-OffsetS-N                DEFAULT 0,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power    OPTIONAL,
    modeSpecificInfo            CHOICE {
        fdd                     SEQUENCE {
            q-QualMin              Q-QualMin                OPTIONAL,

```

```

        q-RxlevMin                Q-RxlevMin                OPTIONAL
    },
    tdd                            SEQUENCE {
        q-RxlevMin                Q-RxlevMin                OPTIONAL
    },
    gsm                            SEQUENCE {
        q-RxlevMin                Q-RxlevMin                OPTIONAL
    }
}

CellSelectReselectInfoSIB-11-12-ECNO ::= SEQUENCE {
    q-Offset1S-N                    Q-OffsetS-N                    DEFAULT 0,
    q-Offset2S-N                    Q-OffsetS-N                    DEFAULT 0,
    maxAllowedUL-TX-Power            MaxAllowedUL-TX-Power        OPTIONAL,
    modeSpecificInfo                CHOICE {
        fdd                        SEQUENCE {
            q-QualMin                Q-QualMin                OPTIONAL,
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        tdd                        SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        gsm                        SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-RSCP ::= SEQUENCE {
    q-OffsetS-N                      Q-OffsetS-N                      DEFAULT 0,
    maxAllowedUL-TX-Power            MaxAllowedUL-TX-Power            OPTIONAL,
    hcs-NeighbouringCellInformation-RSCP HCS-NeighbouringCellInformation-RSCP
    OPTIONAL,
    modeSpecificInfo                CHOICE {
        fdd                        SEQUENCE {
            q-QualMin                Q-QualMin                OPTIONAL,
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        tdd                        SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        gsm                        SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        }
    }
}

CellSelectReselectInfoSIB-11-12-HCS-ECNO ::= SEQUENCE {
    q-Offset1S-N                    Q-OffsetS-N                    DEFAULT 0,
    q-Offset2S-N                    Q-OffsetS-N                    DEFAULT 0,
    maxAllowedUL-TX-Power            MaxAllowedUL-TX-Power            OPTIONAL,
    hcs-NeighbouringCellInformation-ECNO HCS-NeighbouringCellInformation-ECNO
    OPTIONAL,
    modeSpecificInfo                CHOICE {
        fdd                        SEQUENCE {
            q-QualMin                Q-QualMin                OPTIONAL,
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        tdd                        SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        },
        gsm                        SEQUENCE {
            q-RxlevMin                Q-RxlevMin                OPTIONAL
        }
    }
}

CellSynchronisationInfo ::= SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                        SEQUENCE {
            countC-SFN-Frame-difference CountC-SFN-Frame-difference OPTIONAL,
            tm                        INTEGER(0..38399)
        },
        tdd                        SEQUENCE {
            countC-SFN-Frame-difference CountC-SFN-Frame-difference
        }
    }
}

```

```

}

CellToMeasure ::=
    sfn-sfn-Drift                SEQUENCE {
    primaryCPICH-Info            INTEGER (0..30)                OPTIONAL,
    frequencyInfo                PrimaryCPICH-Info,
    sfn-SFN-ObservedTimeDifference FrequencyInfo                OPTIONAL,
    fineSFN-SFN                 SFN-SFN-ObsTimeDifference1,
    cellPosition                 FineSFN-SFN,
                                CellPosition                OPTIONAL
    }

CellToMeasureInfoList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToMeasure

CellToReport ::= SEQUENCE {
    bsicReported                 BSICReported
    }

CellToReportList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellToReport

CodePhaseSearchWindow ::= ENUMERATED {
    w1023, w1, w2, w3, w4, w6, w8,
    w12, w16, w24, w32, w48, w64,
    w96, w128, w192 }

CountC-SFN-Frame-difference ::= SEQUENCE {
    countC-SFN-High             INTEGER(0..15),                -- Actual value = IE value * 256
    off                         INTEGER(0..255)
    }

CPICH-Ec-N0 ::= INTEGER (-20..0)

-- IE value 0 = <-24 dB, 1 = between -24 and -23 and so on
CPICH-Ec-N0-OTDOA ::= INTEGER (0..26)

CPICH-RSCP ::= INTEGER (-115..-40)

DeltaPRC ::= INTEGER (-127..127)

DeltaRRC ::= INTEGER (-7..7)

DGPS-CorrectionSatInfo ::= SEQUENCE {
    satID                       SatID,
    iode                         BIT STRING (SIZE (8)),
    udre                         UDRE,
    prc                          PRC,
    rrc                          RRC,
    deltaPRC2                    DeltaPRC,
    deltaRRC2                    DeltaRRC,
    deltaPRC3                    DeltaPRC,
    deltaRRC3                    DeltaRRC
    }

DGPS-CorrectionSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
    DGPS-CorrectionSatInfo

DGPS-Information ::= SEQUENCE {
    satID                       SatID,
    iode                         IODE,
    udre                         UDRE,
    prc                          PRC,
    rrc                          RRC,
    deltaPRC2                    DeltaPRC,
    deltaRRC2                    DeltaRRC
    }

DGPS-InformationList ::= SEQUENCE (SIZE (1..maxSat)) OF
    DGPS-Information

DiffCorrectionStatus ::= ENUMERATED {
    udre-1-0, udre-0-75, udre-0-5, udre-0-3,
    udre-0-2, udre-0-1, noData, invalidData }

-- Actual value = IE value * 0.02
DL-PhysicalChannelBER ::= INTEGER (0..255)

```



```

DL-TransportChannelBLER ::=          INTEGER (0..63)

DopplerUncertainty ::=              ENUMERATED {
                                        hz12-5, hz25, hz50, hz100, hz200 }

EllipsoidPoint ::=                  OCTET STRING (SIZE (7))

EllipsoidPointAltitude ::=          OCTET STRING (SIZE (9))

EllipsoidPointAltitudeEllipse ::=   OCTET STRING (SIZE (14))

EllipsoidPointUncertCircle ::=      OCTET STRING (SIZE (8))

EllipsoidPointUncertEllipse ::=     OCTET STRING (SIZE (11))

EnvironmentCharacterisation ::=     ENUMERATED {
                                        possibleHeavyMultipathNLOS,
                                        lightMultipathLOS,
                                        notDefined }

Event1a ::=                          SEQUENCE {
    triggeringCondition                TriggeringCondition2,
    reportingRange                    ReportingRange,
    forbiddenAffectCellList           ForbiddenAffectCellList           OPTIONAL,
    w                                  W,
    reportDeactivationThreshold        ReportDeactivationThreshold,
    reportingAmount                   ReportingAmount,
    reportingInterval                 ReportingInterval
}

Event1b ::=                          SEQUENCE {
    triggeringCondition                TriggeringCondition1,
    reportingRange                    ReportingRange,
    forbiddenAffectCellList           ForbiddenAffectCellList           OPTIONAL,
    w                                  W
}

Event1c ::=                          SEQUENCE {
    replacementActivationThreshold     ReplacementActivationThreshold,
    reportingAmount                   ReportingAmount,
    reportingInterval                 ReportingInterval
}

Event1e ::=                          SEQUENCE {
    triggeringCondition                TriggeringCondition2,
    thresholdUsedFrequency            ThresholdUsedFrequency
}

Event1f ::=                          SEQUENCE {
    triggeringCondition                TriggeringCondition1,
    thresholdUsedFrequency            ThresholdUsedFrequency
}

Event2a ::=                          SEQUENCE {
    usedFreqThreshold                 Threshold,
    usedFreqW                          W,
    hysteresis                        HysteresisInterFreq,
    timeToTrigger                     TimeToTrigger,
    reportingCellStatus               ReportingCellStatus           OPTIONAL,
    nonUsedFreqParameterList          NonUsedFreqParameterList       OPTIONAL
}

Event2b ::=                          SEQUENCE {
    usedFreqThreshold                 Threshold,
    usedFreqW                          W,
    hysteresis                        HysteresisInterFreq,
    timeToTrigger                     TimeToTrigger,
    reportingCellStatus               ReportingCellStatus           OPTIONAL,
    nonUsedFreqParameterList          NonUsedFreqParameterList       OPTIONAL
}

Event2c ::=                          SEQUENCE {
    hysteresis                        HysteresisInterFreq,
    timeToTrigger                     TimeToTrigger,
    reportingCellStatus               ReportingCellStatus           OPTIONAL,
    nonUsedFreqParameterList          NonUsedFreqParameterList       OPTIONAL
}

```

```

Event2d ::=
    usedFreqThreshold
    usedFreqW
    hysteresis
    timeToTrigger
    reportingCellStatus
}
SEQUENCE {
    Threshold,
    W,
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
} OPTIONAL

Event2e ::=
    hysteresis
    timeToTrigger
    reportingCellStatus
    nonUsedFreqParameterList
}
SEQUENCE {
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
    NonUsedFreqParameterList
} OPTIONAL,
OPTIONAL

Event2f ::=
    usedFreqThreshold
    usedFreqW
    hysteresis
    timeToTrigger
    reportingCellStatus
}
SEQUENCE {
    Threshold,
    W,
    HysteresisInterFreq,
    TimeToTrigger,
    ReportingCellStatus
} OPTIONAL

Event3a ::=
    thresholdOwnSystem
    w
    thresholdOtherSystem
    hysteresis
    timeToTrigger
    reportingCellStatus
}
SEQUENCE {
    Threshold,
    W,
    Threshold,
    Hysteresis,
    TimeToTrigger,
    ReportingCellStatus
} OPTIONAL

Event3b ::=
    thresholdOtherSystem
    hysteresis
    timeToTrigger
    reportingCellStatus
}
SEQUENCE {
    Threshold,
    Hysteresis,
    TimeToTrigger,
    ReportingCellStatus
} OPTIONAL

Event3c ::=
    thresholdOtherSystem
    hysteresis
    timeToTrigger
    reportingCellStatus
}
SEQUENCE {
    Threshold,
    Hysteresis,
    TimeToTrigger,
    ReportingCellStatus
} OPTIONAL

Event3d ::=
    hysteresis
    timeToTrigger
    reportingCellStatus
}
SEQUENCE {
    Hysteresis,
    TimeToTrigger,
    ReportingCellStatus
} OPTIONAL

EventIDInterFreq ::=
ENUMERATED {
    e2a, e2b, e2c, e2d, e2e, e2f }

EventIDInterRAT ::=
ENUMERATED {
    e3a, e3b, e3c, e3d }

EventIDIntraFreq ::=
ENUMERATED {
    e1a, e1b, e1c, e1d, e1e,
    e1f, e1g, e1h, e1i }

EventResults ::=
    intraFreqEventResults
    interFreqEventResults
    interRATEventResults
    trafficVolumeEventResults
    qualityEventResults
    ue-InternalEventResults
    up-MeasurementEventResults
}
CHOICE {
    IntraFreqEventResults,
    InterFreqEventResults,
    InterRATEventResults,
    TrafficVolumeEventResults,
    QualityEventResults,
    UE-InternalEventResults,
    UP-MeasurementEventResults
}

ExtraDopplerInfo ::=
    doppler1stOrder
    dopplerUncertainty
}
SEQUENCE {
    INTEGER (-42..21),
    DopplerUncertainty
}

```

```

FACH-MeasurementOccasionInfo ::= SEQUENCE {
    fACH-meas-occasion-coeff          INTEGER (1..12)          OPTIONAL,
    inter-freq-FDD-meas-ind          BOOLEAN,
    inter-freq-TDD-meas-ind          BOOLEAN,
    inter-RAT-meas-ind               SEQUENCE (SIZE (1..maxOtherRAT)) OF
                                     RAT-Type          OPTIONAL
}

FilterCoefficient ::= ENUMERATED {
    fc0, fc1, fc2, fc3, fc4, fc5,
    fc6, fc7, fc8, fc9, fc11, fc13,
    fc15, fc17, fc19, spare1 }

FinesSFN-SFN ::= ENUMERATED {
    fs0, fs0-25, fs0-5, fs0-75 }

ForbiddenAffectCell ::= CHOICE {
    fdd          PrimaryCPICH-Info,
    tdd          PrimaryCCPCH-Info
}

ForbiddenAffectCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    ForbiddenAffectCell

FreqQualityEstimateQuantity-FDD ::= ENUMERATED {
    cpich-Ec-N0,
    cpich-RSCP }

FreqQualityEstimateQuantity-TDD ::= ENUMERATED {
    primaryCCPCH-RSCP }

GPS-MeasurementParam ::= SEQUENCE {
    satelliteID          INTEGER (0..63),
    c-N0                 INTEGER (0..63),
    doppler              INTEGER (-32768..32768),
    wholeGPS-Chips       INTEGER (0..1023),
    fractionalGPS-Chips  INTEGER (0..1023),
    multipathIndicator   MultipathIndicator,
    pseudorangeRMS-Error INTEGER (0..63)
}

GPS-MeasurementParamList ::= SEQUENCE (SIZE (1..maxSat)) OF
    GPS-MeasurementParam

GSM-CarrierRSSI ::= BIT STRING (SIZE (6))

GSM-MeasuredResults ::= SEQUENCE {
    gsm-CarrierRSSI          GSM-CarrierRSSI          OPTIONAL,
    pathloss                 Pathloss                 OPTIONAL,
    bsicReported             BSICReported,
    observedTimeDifferenceToGSM ObservedTimeDifferenceToGSM OPTIONAL
}

GSM-MeasuredResultsList ::= SEQUENCE (SIZE (1..maxReportedGSMCells)) OF
    GSM-MeasuredResults

-- **TODO**, not defined yet
GSM-OutputPower ::= SEQUENCE {
}

GPS-TOW-lmsec ::= INTEGER (0..604799999)

GPS-TOW-lusec ::= SEQUENCE {
    tow-lmsec          GPS-TOW-lmsec,
    tow-rem-usec       GPS-TOW-rem-usec
}

GPS-TOW-Assist ::= SEQUENCE {
    satID              SatID,
    tlm-Message        BIT STRING (SIZE (14)),
    antiSpoof          BOOLEAN,
    alert              BOOLEAN,
    tlm-Reserved       BIT STRING (SIZE (2))
}

GPS-TOW-AssistList ::= SEQUENCE (SIZE (1..maxSat)) OF
    GPS-TOW-Assist

```

```

GPS-TOW-rem-usec ::=                INTEGER (0..999)

HCS-CellReselectInformation-RSCP ::= SEQUENCE {
    penaltyTime                      PenaltyTime-RSCP
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-CellReselectInformation-ECNO ::= SEQUENCE {
    penaltyTime                      PenaltyTime-ECNO
    -- TABULAR: The default value is "notUsed", temporary offset is nested inside PenaltyTime
}

HCS-NeighbouringCellInformation-RSCP ::= SEQUENCE {
    hcs-PRIO                        HCS-PRIO                DEFAULT 0,
    q-HCS                            Q-HCS                DEFAULT 0,
    hcs-CellReselectInformation      HCS-CellReselectInformation-RSCP
}

HCS-NeighbouringCellInformation-ECNO ::= SEQUENCE {
    hcs-PRIO                        HCS-PRIO                DEFAULT 0,
    q-HCS                            Q-HCS                DEFAULT 0,
    hcs-CellReselectInformation      HCS-CellReselectInformation-ECNO
}

HCS-PRIO ::=                        INTEGER (0..7)

HCS-ServingCellInformation ::= SEQUENCE {
    hcs-PRIO                        HCS-PRIO                DEFAULT 0,
    q-HCS                            Q-HCS                DEFAULT 0,
    t-CR-Max                        T-CRMax                OPTIONAL
}

-- Actual value = IE value * 0.5
Hysteresis ::=                      INTEGER (0..15)

-- Actual value = IE value * 0.5
HysteresisInterFreq ::=            INTEGER (0..29)

InterFreqCell ::=                  SEQUENCE {
    frequencyInfo                   FrequencyInfo,
    nonFreqRelatedEventResults      CellMeasurementEventResults
}

InterFreqCellID ::=               INTEGER (0..maxCellMeas-1)

InterFreqCellInfoList ::=         SEQUENCE {
    removedInterFreqCellList        RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList            NewInterFreqCellList        OPTIONAL
}

InterFreqCellInfoSI-List-RSCP ::= SEQUENCE {
    removedInterFreqCellList        RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList            NewInterFreqCellSI-List-RSCP  OPTIONAL
}

InterFreqCellInfoSI-List-ECNO ::= SEQUENCE {
    removedInterFreqCellList        RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList            NewInterFreqCellSI-List-ECNO  OPTIONAL
}

InterFreqCellInfoSI-List-HCS-RSCP ::= SEQUENCE {
    removedInterFreqCellList        RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList            NewInterFreqCellSI-List-HCS-RSCP  OPTIONAL
}

InterFreqCellInfoSI-List-HCS-ECNO ::= SEQUENCE {
    removedInterFreqCellList        RemovedInterFreqCellList    OPTIONAL,
    newInterFreqCellList            NewInterFreqCellSI-List-HCS-ECNO  OPTIONAL
}

InterFreqCellList ::=             SEQUENCE (SIZE (1..maxFreq)) OF
    InterFreqCell

InterFreqCellMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellMeasuredResults

InterFreqEvent ::=                CHOICE {
    event2a                          Event2a,
}

```

```

    event2b          Event2b,
    event2c          Event2c,
    event2d          Event2d,
    event2e          Event2e,
    event2f          Event2f
}

InterFreqEventList ::=          SEQUENCE (SIZE (1..maxMeasEvent)) OF
                                InterFreqEvent

InterFreqEventResults ::=      SEQUENCE {
    eventID          EventIDInterFreq,
    interFreqCellList InterFreqCellList          OPTIONAL
}

InterFreqMeasQuantity ::=      SEQUENCE {
    reportingCriteria CHOICE {
        intraFreqReportingCriteria SEQUENCE {
            intraFreqMeasQuantity IntraFreqMeasQuantity
        },
        interFreqReportingCriteria SEQUENCE {
            filterCoefficient FilterCoefficient          DEFAULT fc0,
            modeSpecificInfo CHOICE {
                fdd SEQUENCE {
                    freqQualityEstimateQuantity-FDD FreqQualityEstimateQuantity-FDD
                },
                tdd SEQUENCE {
                    freqQualityEstimateQuantity-TDD FreqQualityEstimateQuantity-TDD
                }
            }
        }
    }
}

InterFreqMeasuredResults ::=   SEQUENCE {
    frequencyInfo    FrequencyInfo          OPTIONAL,
    ultra-CarrierRSSI UTRA-CarrierRSSI      OPTIONAL,
    interFreqCellMeasuredResultsList InterFreqCellMeasuredResultsList OPTIONAL
}

InterFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxFreq)) OF
                                InterFreqMeasuredResults

InterFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-RSCP          OPTIONAL
}

InterFreqMeasurementSysInfo-ECNO ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-ECNO          OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-RSCP          OPTIONAL
}

InterFreqMeasurementSysInfo-HCS-ECNO ::= SEQUENCE {
    interFreqCellInfoSI-List InterFreqCellInfoSI-List-HCS-ECNO          OPTIONAL
}

InterFreqReportCriteria ::=     CHOICE {
    intraFreqReportingCriteria IntraFreqReportingCriteria,
    interFreqReportingCriteria InterFreqReportingCriteria,
    periodicalReportingCriteria PeriodicalWithReportingCellStatus,
    noReporting ReportingCellStatusOpt
}

InterFreqReportingCriteria ::= SEQUENCE {
    interFreqEventList InterFreqEventList          OPTIONAL
}

InterFreqReportingQuantity ::= SEQUENCE {
    ultra-Carrier-RSSI BOOLEAN,
    frequencyQualityEstimate BOOLEAN,
    nonFreqRelatedQuantities CellReportingQuantities
}

```

```

InterFrequencyMeasurement ::= SEQUENCE {
    interFreqCellInfoList      InterFreqCellInfoList,
    interFreqMeasQuantity      InterFreqMeasQuantity      OPTIONAL,
    interFreqReportingQuantity InterFreqReportingQuantity  OPTIONAL,
    measurementValidity        MeasurementValidity        OPTIONAL,
    interFreqSetUpdate         UE-AutonomousUpdateMode    OPTIONAL,
    reportCriteria              InterFreqReportCriteria
}
InterRAT-TargetCellDescription ::= SEQUENCE {
    technologySpecificInfo     CHOICE {
        gsm                     SEQUENCE {
            bsic                 BSIC,
            bcch-ARFCN           BCCH-ARFCN,
            ncMode                NC-Mode                OPTIONAL
        },
        is-2000                  NULL,
        spare                     NULL
    }
}
InterRATCellID ::= INTEGER (0..maxCellMeas-1)
InterRATCellInfoList ::= SEQUENCE {
    removedInterRATCellList    RemovedInterRATCellList,
    newInterRATCellList        NewInterRATCellList
}
InterRATCellInfoList-HCS ::= SEQUENCE {
    removedInterRATCellList    RemovedInterRATCellList,
    newInterRATCellList        NewInterRATCellList-HCS
}
InterRATEvent ::= CHOICE {
    event3a                     Event3a,
    event3b                     Event3b,
    event3c                     Event3c,
    event3d                     Event3d
}
InterRATEventList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    InterRATEvent
InterRATEventResults ::= SEQUENCE {
    eventID                     EventIDInterRAT,
    cellToReportList            CellToReportList
}
InterRATInfo ::= ENUMERATED {
    gsm
}
InterRATMeasQuantity ::= SEQUENCE {
    measQuantityUTRAN-QualityEstimate IntraFreqMeasQuantity      OPTIONAL,
    ratSpecificInfo                  CHOICE {
        gsm                           SEQUENCE {
            measurementQuantity        MeasurementQuantityGSM,
            filterCoefficient           FilterCoefficient          DEFAULT fcl,
            bsic-VerificationRequired   BSIC-VerificationRequired
        },
        is-2000                        SEQUENCE {
            tadd-EcIo                  INTEGER (0..63),
            tcomp-EcIo                 INTEGER (0..15),
            softSlope                   INTEGER (0..63)          OPTIONAL,
            addIntercept                INTEGER (0..63)          OPTIONAL
        }
    }
}
InterRATMeasuredResults ::= CHOICE {
    gsm                            GSM-MeasuredResultsList,
    spare                            NULL
}
InterRATMeasuredResultsList ::= SEQUENCE (SIZE (1..maxOtherRAT)) OF
    InterRATMeasuredResults
InterRATMeasurement ::= SEQUENCE {
    interRATCellInfoList          InterRATCellInfoList      OPTIONAL,
}

```

```

interRATMeasQuantity          InterRATMeasQuantity          OPTIONAL,
interRATReportingQuantity     InterRATReportingQuantity    OPTIONAL,
reportCriteria                InterRATReportCriteria
}

InterRATMeasurementSysInfo ::= SEQUENCE {
    interRATCellInfoList      InterRATCellInfoList          OPTIONAL
}

InterRATMeasurementSysInfo-HCS ::= SEQUENCE {
    interRATCellInfoList      InterRATCellInfoList-HCS     OPTIONAL
}

InterRATReportCriteria ::= CHOICE {
    interRATReportingCriteria  InterRATReportingCriteria,
    periodicalReportingCriteria PeriodicalWithReportingCellStatus,
    noReporting                ReportingCellStatusOpt
}

InterRATReportingCriteria ::= SEQUENCE {
    interRATEventList          InterRATEventList            OPTIONAL
}

InterRATReportingQuantity ::= SEQUENCE {
    utran-EstimatedQuality     BOOLEAN,
    ratSpecificInfo            CHOICE {
        gsm                    SEQUENCE {
            pathloss            BOOLEAN,
            observedTimeDifferenceGSM BOOLEAN,
            gsm-Carrier-RSSI    BOOLEAN
        }
    }
}

IntraFreqCellID ::= INTEGER (0..maxCellMeas-1)

IntraFreqCellInfoList ::= SEQUENCE {
    removedIntraFreqCellList   RemovedIntraFreqCellList     OPTIONAL,
    newIntraFreqCellList       NewIntraFreqCellList         OPTIONAL
}

IntraFreqCellInfoSI-List-RSCP ::= SEQUENCE {
    removedIntraFreqCellList   RemovedIntraFreqCellList     OPTIONAL,
    newIntraFreqCellList       NewIntraFreqCellSI-List-RSCP
}

IntraFreqCellInfoSI-List-ECNO ::= SEQUENCE {
    removedIntraFreqCellList   RemovedIntraFreqCellList     OPTIONAL,
    newIntraFreqCellList       NewIntraFreqCellSI-List-ECNO
}

IntraFreqCellInfoSI-List-HCS-RSCP ::= SEQUENCE {
    removedIntraFreqCellList   RemovedIntraFreqCellList     OPTIONAL,
    newIntraFreqCellList       NewIntraFreqCellSI-List-HCS-RSCP
}

IntraFreqCellInfoSI-List-HCS-ECNO ::= SEQUENCE {
    removedIntraFreqCellList   RemovedIntraFreqCellList     OPTIONAL,
    newIntraFreqCellList       NewIntraFreqCellSI-List-HCS-ECNO
}

IntraFreqEvent ::= CHOICE {
    ela                        Event1a,
    elb                        Event1b,
    elc                        Event1c,
    eld                        NULL,
    ele                        Event1e,
    elf                        Event1f,
    elg                        NULL,
    elh                        ThresholdUsedFrequency,
    eli                        ThresholdUsedFrequency
}

IntraFreqEventCriteria ::= SEQUENCE {
    event                      IntraFreqEvent,
    hysteresis                 Hysteresis,
    timeToTrigger              TimeToTrigger,
    reportingCellStatus        ReportingCellStatus          OPTIONAL
}

```

```

}

IntraFreqEventCriteriaList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    IntraFreqEventCriteria

IntraFreqEventResults ::= SEQUENCE {
    eventID EventIDIntraFreq,
    cellMeasurementEventResults CellMeasurementEventResults
}

IntraFreqMeasQuantity ::= SEQUENCE {
    filterCoefficient FilterCoefficient DEFAULT fcl,
    modeSpecificInfo CHOICE {
        fdd SEQUENCE {
            intraFreqMeasQuantity-FDD IntraFreqMeasQuantity-FDD
        },
        tdd SEQUENCE {
            intraFreqMeasQuantity-TDDList IntraFreqMeasQuantity-TDDList
        }
    }
}

IntraFreqMeasQuantity-FDD ::= ENUMERATED {
    cpich-Ec-NO,
    cpich-RSCP,
    pathloss,
    ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDD ::= ENUMERATED {
    primaryCCPCH-RSCP,
    pathloss,
    timeslotISCP,
    ultra-CarrierRSSI }

IntraFreqMeasQuantity-TDDList ::= SEQUENCE (SIZE (1..4)) OF
    IntraFreqMeasQuantity-TDD

IntraFreqMeasuredResultsList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    CellMeasuredResults

IntraFreqMeasurementSysInfo-RSCP ::= SEQUENCE {
    intraFreqMeasurementID MeasurementIdentity DEFAULT 1,
    intraFreqCellInfoSI-List IntraFreqCellInfoSI-List-RSCP OPTIONAL,
    intraFreqMeasQuantity IntraFreqMeasQuantity OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH MaxReportedCellsOnRACH OPTIONAL,
    reportingInfoForCellDCH ReportingInfoForCellDCH OPTIONAL
}

IntraFreqMeasurementSysInfo-ECNO ::= SEQUENCE {
    intraFreqMeasurementID MeasurementIdentity DEFAULT 1,
    intraFreqCellInfoSI-List IntraFreqCellInfoSI-List-ECNO OPTIONAL,
    intraFreqMeasQuantity IntraFreqMeasQuantity OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH MaxReportedCellsOnRACH OPTIONAL,
    reportingInfoForCellDCH ReportingInfoForCellDCH OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-RSCP ::= SEQUENCE {
    intraFreqMeasurementID MeasurementIdentity DEFAULT 1,
    intraFreqCellInfoSI-List IntraFreqCellInfoSI-List-HCS-RSCP OPTIONAL,
    intraFreqMeasQuantity IntraFreqMeasQuantity OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH MaxReportedCellsOnRACH OPTIONAL,
    reportingInfoForCellDCH ReportingInfoForCellDCH OPTIONAL
}

IntraFreqMeasurementSysInfo-HCS-ECNO ::= SEQUENCE {
    intraFreqMeasurementID MeasurementIdentity DEFAULT 1,
    intraFreqCellInfoSI-List IntraFreqCellInfoSI-List-HCS-ECNO OPTIONAL,
    intraFreqMeasQuantity IntraFreqMeasQuantity OPTIONAL,
    intraFreqReportingQuantityForRACH IntraFreqReportingQuantityForRACH OPTIONAL,
    maxReportedCellsOnRACH MaxReportedCellsOnRACH OPTIONAL,
    reportingInfoForCellDCH ReportingInfoForCellDCH OPTIONAL
}

IntraFreqReportCriteria ::= CHOICE {
    intraFreqReportingCriteria IntraFreqReportingCriteria,
}

```



```

    periodicalReportingCriteria      PeriodicalWithReportingCellStatus,
    noReporting                      ReportingCellStatusOpt
}

IntraFreqReportingCriteria ::= SEQUENCE {
    eventCriteriaList              IntraFreqEventCriteriaList      OPTIONAL
}

IntraFreqReportingQuantity ::= SEQUENCE {
    activeSetReportingQuantities   CellReportingQuantities,
    monitoredSetReportingQuantities CellReportingQuantities,
    detectedSetReportingQuantities CellReportingQuantities      OPTIONAL
}

IntraFreqReportingQuantityForRACH ::= SEQUENCE {
    sfn-SFN-OTD-Type              SFN-SFN-OTD-Type,
    modeSpecificInfo              CHOICE {
        fdd                        SEQUENCE {
            intraFreqRepQuantityRACH-FDD      IntraFreqRepQuantityRACH-FDD
        },
        tdd                        SEQUENCE {
            intraFreqRepQuantityRACH-TDDList   IntraFreqRepQuantityRACH-TDDList
        }
    }
}

IntraFreqRepQuantityRACH-FDD ::= ENUMERATED {
    cpich-EcN0, cpich-RSCP,
    pathloss, noReport }

IntraFreqRepQuantityRACH-TDD ::= ENUMERATED {
    timeslotISCP,
    primaryCCPCH-RSCP,
    noReport }

IntraFreqRepQuantityRACH-TDDList ::= SEQUENCE (SIZE (1..2)) OF
    IntraFreqRepQuantityRACH-TDD

IntraFrequencyMeasurement ::= SEQUENCE {
    intraFreqCellInfoList         IntraFreqCellInfoList      OPTIONAL,
    intraFreqMeasQuantity         IntraFreqMeasQuantity      OPTIONAL,
    intraFreqReportingQuantity    IntraFreqReportingQuantity  OPTIONAL,
    measurementValidity           MeasurementValidity          OPTIONAL,
    reportCriteria                IntraFreqReportCriteria      OPTIONAL
}

IODE ::= INTEGER (0..255)

IP-Length ::= ENUMERATED {
    ip15, ip110 }

IP-PCCPCH ::= BOOLEAN

IP-Spacing ::= ENUMERATED {
    e5, e7, e10, e15, e20,
    e30, e40, e50 }

IS-2000SpecificMeasInfo ::= ENUMERATED {
    frequency, timeslot, colourcode,
    outputpower, pn-Offset }

MaxNumberOfReportingCellsType1 ::= ENUMERATED {
    e1, e2, e3, e4, e5, e6}

MaxNumberOfReportingCellsType2 ::= ENUMERATED {
    e1, e2, e3, e4, e5, e6, e7, e8, e9, e10, e11, e12}

MaxNumberOfReportingCellsType3 ::= ENUMERATED {
    viactCellsPlus1,
    viactCellsPlus2,
    viactCellsPlus3,
    viactCellsPlus4,
    viactCellsPlus5,
    viactCellsPlus6 }

MaxReportedCellsOnRACH ::= ENUMERATED {
    noReport,
    currentCell,
}

```

```

currentAnd-1-BestNeighbour,
currentAnd-2-BestNeighbour,
currentAnd-3-BestNeighbour,
currentAnd-4-BestNeighbour,
currentAnd-5-BestNeighbour,
currentAnd-6-BestNeighbour }

MeasuredResults ::=
    CHOICE {
        intraFreqMeasuredResultsList      IntraFreqMeasuredResultsList,
        interFreqMeasuredResultsList      InterFreqMeasuredResultsList,
        interRATMeasuredResultsList      InterRATMeasuredResultsList,
        trafficVolumeMeasuredResultsList  TrafficVolumeMeasuredResultsList,
        qualityMeasuredResults            QualityMeasuredResults,
        ue-InternalMeasuredResults        UE-InternalMeasuredResults,
        up-MeasuredResults                UP-MeasuredResults
    }

MeasuredResultsList ::=
    SEQUENCE (SIZE (1..maxAdditionalMeas)) OF
        MeasuredResults

MeasuredResultsOnRACH ::=
    SEQUENCE {
        currentCell
            SEQUENCE {
                modeSpecificInfo
                    CHOICE {
                        fdd
                            SEQUENCE {
                                measurementQuantity
                                    CHOICE {
                                        cpich-Ec-N0,
                                        CPICH-RSCP,
                                        pathloss
                                    }
                                },
                                tdd
                                    SEQUENCE {
                                        timeslotISCP
                                            TimeslotISCP-List
                                        primaryCCPCH-RSCP
                                            PrimaryCCPCH-RSCP
                                        }
                                }
                            },
                monitoredCells
                    MonitoredCellRACH-List
                }
            }
        OPTIONAL
    }

MeasurementCommand ::=
    CHOICE {
        setup
            MeasurementType,
        modify
            SEQUENCE {
                measurementType
                    MeasurementType
            }
        OPTIONAL
        release
            NULL
    }

MeasurementControlSysInfo ::=
    SEQUENCE {
        use-of-HCS
            CHOICE {
                hcs-not-used
                    SEQUENCE {
                        cellSelectQualityMeasure
                            CHOICE {
                                cpich-RSCP
                                    SEQUENCE {
                                        intraFreqMeasurementSysInfo
                                            IntraFreqMeasurementSysInfo-RSCP
                                        }
                                    }
                                interFreqMeasurementSysInfo
                                    InterFreqMeasurementSysInfo-RSCP
                                }
                            }
                        OPTIONAL
                    },
                cpich-Ec-No
                    SEQUENCE {
                        intraFreqMeasurementSysInfo
                            IntraFreqMeasurementSysInfo-ECNO
                        }
                    }
                OPTIONAL
            },
            interFreqMeasurementSysInfo
                InterFreqMeasurementSysInfo-ECNO
            }
        OPTIONAL
    },
        interRATMeasurementSysInfo
            InterRATMeasurementSysInfo-HCS
        OPTIONAL
    },
        hcs-used
            SEQUENCE {
                cellSelectQualityMeasure
                    CHOICE {
                        cpich-RSCP
                            SEQUENCE {
                                intraFreqMeasurementSysInfo
                                    IntraFreqMeasurementSysInfo-HCS-RSCP
                                }
                                interFreqMeasurementSysInfo
                                    InterFreqMeasurementSysInfo-HCS-RSCP
                                }
                            }
                        OPTIONAL
                    },
                cpich-Ec-No
                    SEQUENCE {
                        intraFreqMeasurementSysInfo
                            IntraFreqMeasurementSysInfo-HCS-ECNO
                        }
                    }
                OPTIONAL
            },
            interFreqMeasurementSysInfo
                InterFreqMeasurementSysInfo-HCS-ECNO
            }
        OPTIONAL
    },
    }

```

```

        interRATMeasurementSysInfo      InterRATMeasurementSysInfo      OPTIONAL
    },
    trafficVolumeMeasSysInfo            TrafficVolumeMeasSysInfo      OPTIONAL,
    ue-InternalMeasurementSysInfo       UE-InternalMeasurementSysInfo  OPTIONAL
}

MeasurementIdentity ::=      INTEGER (1..16)

MeasurementQuantityGSM ::=   ENUMERATED {
    gsm-CarrierRSSI,
    pathloss }

MeasurementReportingMode ::= SEQUENCE {
    measurementReportTransferMode    TransferMode,
    periodicalOrEventTrigger        PeriodicalOrEventTrigger
}

MeasurementType ::=         CHOICE {
    intraFrequencyMeasurement        IntraFrequencyMeasurement,
    interFrequencyMeasurement        InterFrequencyMeasurement,
    interRATMeasurement              InterRATMeasurement,
    up-Measurement                    UP-Measurement,
    trafficVolumeMeasurement          TrafficVolumeMeasurement,
    qualityMeasurement                QualityMeasurement,
    ue-InternalMeasurement            UE-InternalMeasurement
}

MeasurementValidity ::=     SEQUENCE {
    ue-State                          ENUMERATED {
        cell-DCH, all-But-Cell-DCH, all-States }
}

MonitoredCellRACH-List ::= SEQUENCE (SIZE (1..7)) OF
    MonitoredCellRACH-Result

MonitoredCellRACH-Result ::= SEQUENCE {
    sfn-SFN-ObsTimeDifference        SFN-SFN-ObsTimeDifference      OPTIONAL,
    modeSpecificInfo                 CHOICE {
        fdd                           SEQUENCE {
            primaryCPICH-Info          PrimaryCPICH-Info,
            measurementQuantity        CHOICE {
                cpich-Ec-N0,
                cpich-RSCP,
                pathloss
            }
        },
        tdd                           SEQUENCE {
            cellParametersID           CellParametersID,
            primaryCCPCH-RSCP          PrimaryCCPCH-RSCP
        }
    }
}

MultipathIndicator ::=     ENUMERATED {
    nm,
    low,
    medium,
    high }

N-CR-T-CRMaxHyst ::=      SEQUENCE {
    n-CR                              INTEGER (1..16)                DEFAULT 8,
    t-CRMaxHyst                       T-CRMaxHyst
}

NavigationModelSatInfo ::= SEQUENCE {
    satID                              SatID,
    satelliteStatus                    SatelliteStatus,
    navModel                            NavModel
}

NavigationModelSatInfoList ::= SEQUENCE (SIZE (1..maxSat)) OF
    NavigationModelSatInfo

NavModel ::=              SEQUENCE {
    codeOnL2                          BIT STRING (SIZE (2)),
    uraIndex                           BIT STRING (SIZE (4)),
}

```

```

    satHealth          BIT STRING (SIZE (6)),
    iodc               BIT STRING (SIZE (10)),
    l2Pflag           BIT STRING (SIZE (1)),
    sflRevd           SubFrameReserved,
    t-GD              BIT STRING (SIZE (8)),
    t-oc              BIT STRING (SIZE (16)),
    af2               BIT STRING (SIZE (8)),
    af1               BIT STRING (SIZE (16)),
    af0               BIT STRING (SIZE (22)),
    c-rs              BIT STRING (SIZE (16)),
    delta-n           BIT STRING (SIZE (16)),
    m0                BIT STRING (SIZE (32)),
    c-uc              BIT STRING (SIZE (16)),
    e                 BIT STRING (SIZE (32)),
    c-us              BIT STRING (SIZE (16)),
    a-Sqrt            BIT STRING (SIZE (32)),
    t-oe              BIT STRING (SIZE (16)),
    fitInterval       BIT STRING (SIZE (1)),
    aodo              BIT STRING (SIZE (5)),
    c-ic              BIT STRING (SIZE (16)),
    omega0            BIT STRING (SIZE (32)),
    c-is              BIT STRING (SIZE (16)),
    i0                BIT STRING (SIZE (32)),
    c-rc              BIT STRING (SIZE (16)),
    omega              BIT STRING (SIZE (32)),
    omegaDot          BIT STRING (SIZE (24)),
    iDot              BIT STRING (SIZE (14))
}
NC-Mode ::=          BIT STRING (SIZE (3))

Neighbour ::=        SEQUENCE {
    neighbourIdentity PrimaryCPICH-Info          OPTIONAL,
    neighbourQuantity NeighbourQuantity,
    sfn-SFN-ObsTimeDifference2 SFN-SFN-ObsTimeDifference2
}

NeighbourList ::=    SEQUENCE (SIZE (1..maxCellMeas)) OF
    Neighbour

-- **TODO**, to be defined fully
NeighbourQuantity ::= SEQUENCE {
}

NewInterFreqCell ::= SEQUENCE {
    interFreqCellID InterFreqCellID          OPTIONAL,
    frequencyInfo    FrequencyInfo           OPTIONAL,
    cellInfo         CellInfo
}

NewInterFreqCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCell

NewInterFreqCellSI-RSCP ::= SEQUENCE {
    interFreqCellID InterFreqCellID          OPTIONAL,
    frequencyInfo    FrequencyInfo           OPTIONAL,
    cellInfo         CellInfoSI-RSCP
}

NewInterFreqCellSI-ECNO ::= SEQUENCE {
    interFreqCellID InterFreqCellID          OPTIONAL,
    frequencyInfo    FrequencyInfo           OPTIONAL,
    cellInfo         CellInfoSI-ECNO
}

NewInterFreqCellSI-HCS-RSCP ::= SEQUENCE {
    interFreqCellID InterFreqCellID          OPTIONAL,
    frequencyInfo    FrequencyInfo           OPTIONAL,
    cellInfo         CellInfoSI-HCS-RSCP
}

NewInterFreqCellSI-HCS-ECNO ::= SEQUENCE {
    interFreqCellID InterFreqCellID          OPTIONAL,
    frequencyInfo    FrequencyInfo           OPTIONAL,
    cellInfo         CellInfoSI-HCS-ECNO
}

NewInterFreqCellSI-List-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    NewInterFreqCellSI-ECNO

```

```

NewInterFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterFreqCellSI-HCS-RSCP

NewInterFreqCellSI-List-HCS-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterFreqCellSI-HCS-ECNO

NewInterFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterFreqCellSI-RSCP

NewInterRATCell ::= SEQUENCE {
    interRATCellID InterRATCellID OPTIONAL,
    technologySpecificInfo CHOICE {
        gsm SEQUENCE {
            cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12 OPTIONAL,
            bsic BSIC,
            bcch-ARFCN BCCH-ARFCN,
            gsm-OutputPower GSM-OutputPower OPTIONAL
        },
        is-2000 SEQUENCE {
            is-2000SpecificMeasInfo IS-2000SpecificMeasInfo
        },
        spare1 NULL,
        spare2 NULL
    }
}

NewInterRATCell-HCS ::= SEQUENCE {
    interRATCellID InterRATCellID OPTIONAL,
    technologySpecificInfo CHOICE {
        gsm SEQUENCE {
            cellSelectionReselectionInfo CellSelectReselectInfoSIB-11-12 OPTIONAL,
            bsic BSIC,
            bcch-ARFCN BCCH-ARFCN,
            gsm-OutputPower GSM-OutputPower OPTIONAL
        },
        is-2000 SEQUENCE {
            is-2000SpecificMeasInfo IS-2000SpecificMeasInfo
        },
        spare1 NULL,
        spare2 NULL
    }
}

NewInterRATCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterRATCell

NewInterRATCellList-HCS ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewInterRATCell-HCS

NewIntraFreqCell ::= SEQUENCE {
    intraFreqCellID IntraFreqCellID OPTIONAL,
    cellInfo CellInfo
}

NewIntraFreqCellList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewIntraFreqCell

NewIntraFreqCellSI-RSCP ::= SEQUENCE {
    intraFreqCellID IntraFreqCellID OPTIONAL,
    cellInfo CellInfoSI-RSCP
}

NewIntraFreqCellSI-ECNO ::= SEQUENCE {
    intraFreqCellID IntraFreqCellID OPTIONAL,
    cellInfo CellInfoSI-ECNO
}

NewIntraFreqCellSI-HCS-RSCP ::= SEQUENCE {
    intraFreqCellID IntraFreqCellID OPTIONAL,
    cellInfo CellInfoSI-HCS-RSCP
}

NewIntraFreqCellSI-HCS-ECNO ::= SEQUENCE {
    intraFreqCellID IntraFreqCellID OPTIONAL,
    cellInfo CellInfoSI-HCS-ECNO
}

NewIntraFreqCellSI-List-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF

```

NewIntraFreqCellSI-RSCP

```

NewIntraFreqCellSI-List-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewIntraFreqCellSI-ECNO

NewIntraFreqCellSI-List-HCS-RSCP ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewIntraFreqCellSI-HCS-RSCP

NewIntraFreqCellSI-List-HCS-ECNO ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
NewIntraFreqCellSI-HCS-ECNO

NodeB-ClockDrift ::= INTEGER (0..15)

NonUsedFreqParameter ::= SEQUENCE {
    nonUsedFreqThreshold
    nonUsedFreqW
}

NonUsedFreqParameterList ::= SEQUENCE (SIZE (1..maxFreq)) OF
NonUsedFreqParameter

ObservedTimeDifferenceToGSM ::= INTEGER (0..4095)

OTDOA-SearchWindowSize ::= ENUMERATED {
    c10, c20, c30, c40, c50,
    c60, c70, moreThan70 }

Pathloss ::= INTEGER (46..158)

PenaltyTime-RSCP ::= CHOICE {
    notUsed
    pt10
    pt20
    pt30
    pt40
    pt50
    pt60
}

PenaltyTime-ECNO ::= CHOICE {
    notUsed
    pt10
    pt20
    pt30
    pt40
    pt50
    pt60
}

PendingTimeAfterTrigger ::= ENUMERATED {
    ptat0-25, ptat0-5, ptat1,
    ptat2, ptat4, ptat8, ptat16 }

PeriodicalOrEventTrigger ::= ENUMERATED {
    periodical,
    eventTrigger }

PeriodicalReportingCriteria ::= SEQUENCE {
    reportingAmount
    reportingInterval
}
    ReportingAmount
    ReportingIntervalLong
    DEFAULT ra-Infinity,

PeriodicalWithReportingCellStatus ::= SEQUENCE {
    periodicalReportingCriteria
    reportingCellStatus
}
    PeriodicalReportingCriteria,
    ReportingCellStatus
    OPTIONAL

PositionEstimate ::= CHOICE {
    ellipsoidPoint
    ellipsoidPointUncertCircle
    ellipsoidPointUncertEllipse
    ellipsoidPointAltitude
    ellipsoidPointAltitudeEllipse
}
    EllipsoidPoint,
    EllipsoidPointUncertCircle,
    EllipsoidPointUncertEllipse,
    EllipsoidPointAltitude,
    EllipsoidPointAltitudeEllipse

PositioningMethod ::= ENUMERATED {
    otdoa,
    gps,
}

```

```

        otdoaOrGPS }

PRC ::=
    INTEGER (-2047..2047)

PrimaryCCPCH-RSCP ::=
    INTEGER (-115..-25)

Q-HCS ::=
    INTEGER (0..99)

Q-OffsetS-N ::=
    INTEGER (-50..50)

Q-QualMin ::=
    INTEGER (-20..0)

-- Actual value = (IE value * 2) + 1
Q-RxlevMin ::=
    INTEGER (-58..-13)

QualityEventResults ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
        TransportChannelIdentity

QualityMeasuredResults ::=
    SEQUENCE {
        blerMeasurementResultsList
            BLER-MeasurementResultsList
            OPTIONAL,
        modeSpecificInfo
            CHOICE {
                fdd
                    NULL,
                tdd
                    SEQUENCE {
                        sir-MeasurementResults
                            SIR-MeasurementList
                            OPTIONAL
                    }
            }
    }

QualityMeasurement ::=
    SEQUENCE {
        qualityReportingQuantity
            QualityReportingQuantity
            OPTIONAL,
        reportCriteria
            QualityReportCriteria
    }

QualityReportCriteria ::=
    CHOICE {
        qualityReportingCriteria
            QualityReportingCriteria,
        periodicalReportingCriteria
            PeriodicalReportingCriteria,
        noReporting
            NULL
    }

QualityReportingCriteria ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
        QualityReportingCriteriaSingle

QualityReportingCriteriaSingle ::=
    SEQUENCE {
        transportChannelIdentity
            TransportChannelIdentity,
        totalCRC
            INTEGER (1..512),
        badCRC
            INTEGER (1..512),
        pendingAfterTrigger
            INTEGER (1..512)
    }

QualityReportingQuantity ::=
    SEQUENCE {
        dl-TransChBLER
            BOOLEAN,
        bler-dl-TransChIdList
            BLER-TransChIdList
            OPTIONAL,
        modeSpecificInfo
            CHOICE {
                fdd
                    NULL,
                tdd
                    SEQUENCE {
                        sir-TFCS-List
                            SIR-TFCS-List
                            OPTIONAL
                    }
            }
    }

QualityType ::=
    ENUMERATED {
        std-10, std-50, cpich-Ec-N0 }

RAT-Type ::=
    ENUMERATED {
        gsm, is2000 }

ReferenceCellPosition ::=
    CHOICE {
        ellipsoidPoint
            EllipsoidPoint,
        ellipsoidPointWithAltitude
            EllipsoidPointAltitude
    }

ReferenceCellRelation ::=
    ENUMERATED {
        first-12-second-3,
        first-13-second-2,
        first-1-second-23 }

-- As defined in 23.032 (2D with 24bits for each coordinate)

```

```

ReferenceLocationforSIB ::=          SEQUENCE {
    ellipsoidPoint                EllipsoidPoint
}

ReferenceQuality ::=                ENUMERATED {
    m0-19, m20-39, m40-79,
    m80-159, m160-319, m320-639,
    m640-1319, m1320Plus }

-- Actual value = IE value * 10
ReferenceQuality10 ::=              INTEGER (1..32)

-- Actual value = IE value * 50
ReferenceQuality50 ::=              INTEGER (1..32)

ReferenceSFN ::=                    INTEGER (0..4095)

-- Actual value = IE value * 512
ReferenceTimeDifferenceToCell ::=    CHOICE {
    -- Actual value = IE value * 40
    accuracy40                      INTEGER (0..960),
    -- Actual value = IE value * 256
    accuracy256                      INTEGER (0..150),
    -- Actual value = IE value * 2560
    accuracy2560                    INTEGER (0..15)
}

RemovedInterFreqCellList ::=        CHOICE {
    removeAllInterFreqCells          NULL,
    removeSomeInterFreqCells         SEQUENCE (SIZE (1..maxCellMeas)) OF
        InterFreqCellID,
    removeNoInterFreqCells           NULL
}

RemovedInterRATCellList ::=         CHOICE {
    removeAllInterRATCells           NULL,
    removeSomeInterRATCells          SEQUENCE (SIZE (1..maxCellMeas)) OF
        InterRATCellID,
    removeNoInterRATCells            NULL
}

RemovedIntraFreqCellList ::=        CHOICE {
    removeAllIntraFreqCells          NULL,
    removeSomeIntraFreqCells         SEQUENCE (SIZE (1..maxCellMeas)) OF
        IntraFreqCellID,
    removeNoIntraFreqCells           NULL
}

ReplacementActivationThreshold ::=    ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportDeactivationThreshold ::=      ENUMERATED {
    notApplicable, t1, t2,
    t3, t4, t5, t6, t7 }

ReportingAmount ::=                 ENUMERATED {
    ra1, ra2, ra4, ra8, ra16, ra32,
    ra64, ra-Infinity }

ReportingCellStatus ::=              CHOICE{
    withinActiveSet                   MaxNumberOfReportingCellsType1,
    withinMonitoredSetUsedFreq        MaxNumberOfReportingCellsType1,
    withinActiveAndOrMonitoredUsedFreq MaxNumberOfReportingCellsType1,
    withinDetectedSetUsedFreq         MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrDetectedUsedFreq MaxNumberOfReportingCellsType1,
    allActiveplusMonitoredSet         MaxNumberOfReportingCellsType3,
    allActivePlusDetectedSet          MaxNumberOfReportingCellsType3,
    allActivePlusMonitoredAndOrDetectedSet MaxNumberOfReportingCellsType3,
    withinVirtualActSet               MaxNumberOfReportingCellsType1,
    withinMonitoredSetNonUsedFreq     MaxNumberOfReportingCellsType1,
    withinMonitoredAndOrActiveSetNonUsedFreq MaxNumberOfReportingCellsType1,
    allVirtualActSetplusMonitoredSetNonUsedFreq MaxNumberOfReportingCellsType1,
    withinActSetOrVirtualActSet       MaxNumberOfReportingCellsType2,
}

```



```

        withinActSetAndOrMonitoredUsedFreqOrMonitoredNonUsedFreq
            MaxNumberOfReportingCellsType2
    }
ReportingCellStatusOpt ::=          SEQUENCE {
    reportingCellStatus              ReportingCellStatus              OPTIONAL
}

ReportingInfoForCellDCH ::=        SEQUENCE {
    intraFreqReportingQuantity      IntraFreqReportingQuantity,
    measurementReportingMode        MeasurementReportingMode,
    reportCriteria                   CellDCH-ReportCriteria
}

ReportingInterval ::=              ENUMERATED {
    noPeriodicalreporting, ri0-25,
    ri0-5, ril, ri2, ri4, ri8, ril6 }

ReportingIntervalLong ::=          ENUMERATED {
    ril0, ril0-25, ril0-5, ril1,
    ril2, ril3, ril4, ril6, ril8,
    ril12, ril16, ril20, ril24,
    ril28, ril32, ril64 }

-- Actual value = IE value * 0.5
ReportingRange ::=                INTEGER (0..29)

RL-AdditionInfoList ::=           SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RL-InformationLists ::=           SEQUENCE {
    rl-AdditionInfoList             RL-AdditionInfoList              OPTIONAL,
    rl-RemovalInfoList             RL-RemovalInfoList              OPTIONAL
}

RL-RemovalInfoList ::=            SEQUENCE (SIZE (1..maxRL)) OF
    PrimaryCPICH-Info

RLC-BuffersPayload ::=            ENUMERATED {
    pl0, pl4, pl8, pl16, pl32, pl64, pl128,
    pl256, pl512, pl1024, pl2k, pl4k,
    pl8k, pl16k, pl32k, pl64k, pl128k,
    pl256k, pl512k, pl1024k }

RRC ::=                           INTEGER (-127..127)

SatelliteStatus ::=              ENUMERATED {
    ns-NN-U,
    es-SN,
    es-NN-U,
    es-NN-C }

SatID ::=                         INTEGER (0..63)

SFN-SFN-ObsTimeDifference ::=     CHOICE {
    type1                           SFN-SFN-ObsTimeDifference1,
    -- Actual value for type2 = IE value * 0.0625 - 1280
    type2                           SFN-SFN-ObsTimeDifference2
}

SFN-SFN-ObsTimeDifference1 ::=    INTEGER (0..9830399)

SFN-SFN-ObsTimeDifference2 ::=    INTEGER (0..40961)

SFN-SFN-OTD-Type ::=             ENUMERATED {
    noReport,
    type1,
    type2 }

SIR ::=                           INTEGER (-10..20)

SIR-MeasurementList ::=           SEQUENCE (SIZE (1..maxCCTrCH)) OF
    SIR-MeasurementResults

SIR-MeasurementResults ::=        SEQUENCE {

```

```

    tfcs-ID                TFCS-IdentityPlain,
    sir-TimeslotList       SIR-TimeslotList
}

SIR-TFCS ::=              TFCS-IdentityPlain

SIR-TFCS-List ::=        SEQUENCE (SIZE (1..maxCCTrCH)) OF
                          SIR-TFCS

SIR-TimeslotList ::=     SEQUENCE (SIZE (1..maxTS)) OF
                          SIR

-- Reserved bits in subframe 1 of the GPS navigation message
SubFrame1Reserved ::=   SEQUENCE {
    reserved1             BIT STRING (SIZE (23)),
    reserved2             BIT STRING (SIZE (24)),
    reserved3             BIT STRING (SIZE (24)),
    reserved4             BIT STRING (SIZE (16))
}

T-CRMax ::=              CHOICE {
    notUsed               NULL,
    t30                   N-CR-T-CRMaxHyst,
    t60                   N-CR-T-CRMaxHyst,
    t120                  N-CR-T-CRMaxHyst,
    t180                  N-CR-T-CRMaxHyst,
    t240                  N-CR-T-CRMaxHyst
}

T-CRMaxHyst ::=          ENUMERATED {
    notUsed, t10, t20, t30,
    t40, t50, t60, t70 }

TemporaryOffset ::=     ENUMERATED {
    to10, to20, to30, to40, to50,
    to60, to70, infinite }

TemporaryOffsetList ::= SEQUENCE {
    temporaryOffset1     TemporaryOffset,
    temporaryOffset2     TemporaryOffset
}

Threshold ::=            INTEGER (-115..0)

ThresholdPositionChange ::= ENUMERATED {
    pc10, pc20, pc30, pc40, pc50,
    pc100, pc200, pc300, pc500,
    pc1000, pc2000, pc5000, pc10000,
    pc20000, pc50000, pc100000 }

ThresholdSFN-GPS-TOW ::= ENUMERATED {
    ms1, ms2, ms3, ms5, ms10,
    ms20, ms50, ms100 }

ThresholdSFN-SFN-Change ::= ENUMERATED {
    c0-25, c0-5, c1, c2, c3, c4, c5,
    c10, c20, c50, c100, c200, c500,
    c1000, c2000, c5000 }

ThresholdUsedFrequency ::= INTEGER (-115..165)

-- Actual value = IE value * 20.
TimeInterval ::=         INTEGER (1..13)

TimeslotInfo ::=        SEQUENCE {
    timeslotNumber        TimeslotNumber,
    burstType             BurstType
}

TimeslotInfoList ::=    SEQUENCE (SIZE (1..maxTS)) OF
                          TimeslotInfo

TimeslotISCP ::=        INTEGER (-115..-25)

```

```

TimeslotISCP-List ::= SEQUENCE (SIZE (1..maxTS)) OF
    TimeslotISCP

TimeslotListWithISCP ::= SEQUENCE (SIZE (1..maxTS)) OF
    TimeslotWithISCP

TimeslotWithISCP ::= SEQUENCE {
    timeslot
    timeslotISCP
}

TimeToTrigger ::= ENUMERATED {
    ttt0, ttt10, ttt20, ttt40, ttt60,
    ttt80, ttt100, ttt120, ttt160,
    ttt200, ttt240, tt320, ttt640,
    ttt1280, ttt2560, ttt5000 }

TrafficVolumeEventParam ::= SEQUENCE {
    eventID
    reportingThreshold
    timeToTrigger
    pendingTimeAfterTrigger
    tx-InterruptionAfterTrigger
    TrafficVolumeEventType
    TrafficVolumeThreshold
    TimeToTrigger
    PendingTimeAfterTrigger
    TX-InterruptionAfterTrigger
    OPTIONAL,
    OPTIONAL,
    OPTIONAL
}

TrafficVolumeEventResults ::= SEQUENCE {
    ul-transportChannelCausingEvent
    trafficVolumeEventIdentity
    TransportChannelIdentity,
    TrafficVolumeEventType
}

TrafficVolumeEventType ::= ENUMERATED {
    e4a,
    e4b }

TrafficVolumeMeasQuantity ::= CHOICE {
    rlc-BufferPayload
    averageRLC-BufferPayload
    varianceOfRLC-BufferPayload
    NULL,
    TimeInterval,
    TimeInterval
}

TrafficVolumeMeasSysInfo ::= SEQUENCE {
    trafficVolumeMeasurementID
    trafficVolumeMeasurementObjectList
    trafficVolumeMeasQuantity
    trafficVolumeReportingQuantity
    trafficVolumeMeasRepCriteria
    measurementValidity
    measurementReportingMode
    reportCriteriaSysInf
    MeasurementIdentity
    TrafficVolumeMeasurementObjectList
    TrafficVolumeMeasQuantity
    TrafficVolumeReportingQuantity
    TrafficVolumeReportingCriteria
    MeasurementValidity
    MeasurementReportingMode,
    TrafficVolumeReportCriteriaSysInfo
    DEFAULT 4,
    OPTIONAL,
    OPTIONAL,
    OPTIONAL,
    OPTIONAL,
    OPTIONAL,
    OPTIONAL
}

TrafficVolumeMeasuredResults ::= SEQUENCE {
    rb-Identity
    rlc-BuffersPayload
    averageRLC-BufferPayload
    varianceOfRLC-BufferPayload
    RB-Identity,
    RLC-BuffersPayload
    AverageRLC-BufferPayload
    VarianceOfRLC-BufferPayload
    OPTIONAL,
    OPTIONAL,
    OPTIONAL
}

TrafficVolumeMeasuredResultsList ::= SEQUENCE (SIZE (1..maxRB)) OF
    TrafficVolumeMeasuredResults

TrafficVolumeMeasurement ::= SEQUENCE {
    trafficVolumeMeasurementObjectList
    trafficVolumeMeasQuantity
    trafficVolumeReportingQuantity
    measurementValidity
    reportCriteria
    TrafficVolumeMeasurementObjectList
    TrafficVolumeMeasQuantity
    TrafficVolumeReportingQuantity
    MeasurementValidity
    TrafficVolumeReportCriteria
    OPTIONAL,
    OPTIONAL,
    OPTIONAL,
    OPTIONAL,
}

TrafficVolumeMeasurementObjectList ::= SEQUENCE (SIZE (1..maxTrCH)) OF
    TransportChannelIdentity

TrafficVolumeReportCriteria ::= CHOICE {
    trafficVolumeReportingCriteria
    periodicalReportingCriteria
    noReporting
    TrafficVolumeReportingCriteria,
    PeriodicalReportingCriteria,
    NULL
}

```

```

TrafficVolumeReportCriteriaSysInfo ::= CHOICE {
    trafficVolumeReportingCriteria    TrafficVolumeReportingCriteria,
    periodicalReportingCriteria        PeriodicalReportingCriteria
}

TrafficVolumeReportingCriteria ::= SEQUENCE {
    transChCriteriaList                TransChCriteriaList                OPTIONAL
}

TrafficVolumeReportingQuantity ::= SEQUENCE {
    rlc-RB-BufferPayload                BOOLEAN,
    rlc-RB-BufferPayloadAverage          BOOLEAN,
    rlc-RB-BufferPayloadVariance         BOOLEAN
}

TrafficVolumeThreshold ::=
    ENUMERATED {
        th8, th16, th32, th64, th128,
        th256, th512, th1024, th2k, th3k,
        th4k, th6k, th8k, th12k, th16k,
        th24k, th32k, th48k, th64k, th96k,
        th128k, th192k, th256k, th384k,
        th512k, th768k
    }

TransChCriteria ::=
    SEQUENCE {
        ul-transportChannelID            TransportChannelIdentity            OPTIONAL,
        eventSpecificParameters           SEQUENCE (SIZE (1..maxMeasParEvent)) OF
                                           TrafficVolumeEventParam            OPTIONAL
    }
}

TransChCriteriaList ::=
    SEQUENCE (SIZE (1..maxTrCH)) OF
    TransChCriteria

TransferMode ::=
    ENUMERATED {
        acknowledgedModeRLC,
        unacknowledgedModeRLC
    }

TransmittedPowerThreshold ::=
    INTEGER (-50..33)

TriggeringCondition1 ::=
    ENUMERATED {
        activeSetCellsOnly,
        monitoredSetCellsOnly,
        activeSetAndMonitoredSetCells
    }

TriggeringCondition2 ::=
    ENUMERATED {
        activeSetCellsOnly,
        monitoredSetCellsOnly,
        activeSetAndMonitoredSetCells,
        detectedSetCellsOnly,
        detectedSetAndMonitoredSetCells
    }

TX-InterruptionAfterTrigger ::=
    ENUMERATED {
        txiat0-25, txiat0-5, txiat1,
        txiat2, txiat4, txiat8, txiat16
    }

UDRE ::=
    ENUMERATED {
        lessThan1,
        between1-and-4,
        between4-and-8,
        over8
    }

UE-6AB-Event ::=
    SEQUENCE {
        timeToTrigger                    TimeToTrigger,
        transmittedPowerThreshold         TransmittedPowerThreshold
    }

UE-6FG-Event ::=
    SEQUENCE {
        timeToTrigger                    TimeToTrigger,
        ue-RX-TX-TimeDifferenceThreshold  UE-RX-TX-TimeDifferenceThreshold
    }

UE-AutonomousUpdateMode ::=
    CHOICE {
        on                                NULL,
        onWithNoReporting                 NULL,
        off                                RL-InformationLists
    }

UE-InternalEventParam ::=
    CHOICE {

```

```

event6a          UE-6AB-Event,
event6b          UE-6AB-Event,
event6c          TimeToTrigger,
event6d          TimeToTrigger,
event6e          TimeToTrigger,
event6f          UE-6FG-Event,
event6g          UE-6FG-Event
}

UE-InternalEventParamList ::= SEQUENCE (SIZE (1..maxMeasEvent)) OF
    UE-InternalEventParam

UE-InternalEventResults ::= CHOICE {
    event6a      NULL,
    event6b      NULL,
    event6c      NULL,
    event6d      NULL,
    event6e      NULL,
    event6f      PrimaryCPICH-Info,
    event6g      PrimaryCPICH-Info
}

UE-InternalMeasQuantity ::= SEQUENCE {
    measurementQuantity  UE-MeasurementQuantity,
    filterCoefficient    FilterCoefficient           DEFAULT fcl
}

UE-InternalMeasuredResults ::= SEQUENCE {
    modeSpecificInfo     CHOICE {
        fdd              SEQUENCE {
            ue-TransmittedPowerFDD      UE-TransmittedPower      OPTIONAL,
            ue-RX-TX-ReportEntryList    UE-RX-TX-ReportEntryList  OPTIONAL
        },
        tdd              SEQUENCE {
            ue-TransmittedPowerTDD-List  UE-TransmittedPowerTDD-List  OPTIONAL,
            appliedTA                    UL-TimingAdvance           OPTIONAL
        }
    }
}

UE-InternalMeasurement ::= SEQUENCE {
    ue-InternalMeasQuantity  UE-InternalMeasQuantity      OPTIONAL,
    ue-InternalReportingQuantity  UE-InternalReportingQuantity  OPTIONAL,
    reportCriteria            UE-InternalReportCriteria
}

UE-InternalMeasurementSysInfo ::= SEQUENCE {
    ue-InternalMeasurementID  MeasurementIdentity      DEFAULT 5,
    ue-InternalMeasQuantity   UE-InternalMeasQuantity
}

UE-InternalReportCriteria ::= CHOICE {
    ue-InternalReportingCriteria  UE-InternalReportingCriteria,
    periodicalReportingCriteria  PeriodicalReportingCriteria,
    noReporting                   NULL
}

UE-InternalReportingCriteria ::= SEQUENCE {
    ue-InternalEventParamList    UE-InternalEventParamList      OPTIONAL
}

UE-InternalReportingQuantity ::= SEQUENCE {
    ue-TransmittedPower          BOOLEAN,
    modeSpecificInfo            CHOICE {
        fdd                      SEQUENCE {
            ue-RX-TX-TimeDifferece  BOOLEAN
        },
        tdd                      SEQUENCE {
            appliedTA                BOOLEAN
        }
    }
}

-- TABULAR: For TDD only the first two values are used.
UE-MeasurementQuantity ::= ENUMERATED {
    ue-TransmittedPower,
    ultra-Carrier-RSSI,
    ue-RX-TX-TimeDifference }

```

```

UE-RX-TX-ReportEntry ::=          SEQUENCE {
    primaryCPICH-Info              PrimaryCPICH-Info,
    ue-RX-TX-TimeDifferenceType1    UE-RX-TX-TimeDifferenceType1
}

UE-RX-TX-ReportEntryList ::=      SEQUENCE (SIZE (1..maxRL)) OF
    UE-RX-TX-ReportEntry

UE-RX-TX-TimeDifferenceType1 ::=   INTEGER (768..1280)

-- Actual value = IE value * 0.0625 + 768
UE-RX-TX-TimeDifferenceType2 ::=   INTEGER (0..8191)

UE-RX-TX-TimeDifferenceThreshold ::= INTEGER (768..1280)

UE-TransmittedPower ::=           INTEGER (-50..33)

UE-TransmittedPowerTDD-List ::=   SEQUENCE (SIZE (1..maxTS)) OF
    UE-TransmittedPower

UP-Accuracy ::=                   BIT STRING (SIZE (7))

-- For sfID=0 (sf4), pageNo=18, and sfID=0 & sfID=1 (sf4 & sf5), pageNo=25,
-- the IE fields for word3 - word110 are the same as UP-GPS-IonosphericModel
-- and UP-GPS-UTC-Model. For the rest of the pages, they are the same as
-- UP-GPS-Almanac.
UP-Alma-SIB-Data ::=              SEQUENCE {
    sfID                           INTEGER (0..1),
    dataID                          INTEGER (0..3),
    pageNo                          INTEGER (0..63),
    word3                           BIT STRING (SIZE (16)),
    word4                           BIT STRING (SIZE (24)),
    word5                           BIT STRING (SIZE (24)),
    word6                           BIT STRING (SIZE (24)),
    word7                           BIT STRING (SIZE (24)),
    word8                           BIT STRING (SIZE (24)),
    word9                           BIT STRING (SIZE (24)),
    word10                          BIT STRING (SIZE (22))
}

UP-Alma-SIB-DataList ::=          SEQUENCE (SIZE (1..3)) OF
    UP-Alma-SIB-Data

UP-CipherParameters ::=           SEQUENCE {
    cipheringKeyFlag                BIT STRING (SIZE (1)),
    cipheringSerialNumber           INTEGER (0..65535)
}

UP-DGPS-SIB-Data ::=             SEQUENCE {
    nodeBClockDrift                NodeB-ClockDrift                OPTIONAL,
    referenceLocationforSIB         ReferenceLocationforSIB,
    referenceSFN                    ReferenceSFN                    OPTIONAL,
    referenceGPS-TOW                GPS-TOW-lusec,
    statusHealth                    DiffCorrectionStatus,
    dgps-InformationList            DGPS-InformationList
}

UP-Ephe-SIB-Data ::=             SEQUENCE {
    transmissionTOW                 INTEGER (0..1048575),
    satID                           SatID,
    tlmMessage                       BIT STRING (SIZE (14)),
    tlmRevd                          BIT STRING (SIZE (2)),
    how                              BIT STRING (SIZE (22)),
    wn                              BIT STRING (SIZE (10)),
    navModel                         NavModel
}

UP-Error ::=                     SEQUENCE {
    errorReason                     UP-ErrorCause,
    additionalAssistanceData        AdditionalAssistanceData
}

UP-ErrorCause ::=                ENUMERATED {
    notEnoughOTDOA-Cells,
    notEnoughGPS-Satellites,
    assistanceDataMissing,
    methodNotSupported,
}

```

```

        undefinedError,
        requestDeniedByUser,
        notProcessedAndTimeout }

UP-EventID ::=
    ENUMERATED {
        e7a, e7b, e7c }

UP-EventParam ::=
    reportingAmount
    reportFirstFix
    measurementInterval
    eventSpecificInfo
    }
    SEQUENCE {
        ReportingAmount,
        BOOLEAN,
        UP-MeasurementInterval,
        UP-EventSpecificInfo
    }

UP-EventParamList ::=
    SEQUENCE (SIZE (1..maxMeasEvent)) OF
        UP-EventParam

UP-EventSpecificInfo ::=
    e7a
    e7b
    e7c
    }
    CHOICE {
        ThresholdPositionChange,
        ThresholdSFN-SFN-Change,
        ThresholdSFN-GPS-TOW
    }

UP-GPS-AcquisitionAssistance ::=
    referenceTime
    utran-ReferenceTime
    gps-ReferenceTimeOnly
    },
    satelliteInformationList
    }
    SEQUENCE {
        CHOICE {
            UTRAN-ReferenceTime,
            INTEGER (0..604799999)
        }
        AcquisitionSatInfoList
    }

UP-GPS-Almanac ::=
    wn-a
    almanacSatInfoList
    }
    SEQUENCE {
        BIT STRING (SIZE (8)),
        AlmanacSatInfoList
    }

UP-GPS-AssistanceData ::=
    up-GPS-ReferenceTime
    up-GPS-ReferenceLocation
    up-GPS-DGPS-Corrections
    up-GPS-NavigationModel
    up-GPS-IonosphericModel
    up-GPS-UTC-Model
    up-GPS-Almanac
    up-GPS-AcquisitionAssistance
    up-GPS-Real-timeIntegrity
    }
    SEQUENCE {
        UP-GPS-ReferenceTime
        EllipsoidPointAltitude
        UP-GPS-DGPS-Corrections
        UP-GPS-NavigationModel
        UP-GPS-IonosphericModel
        UP-GPS-UTC-Model
        UP-GPS-Almanac
        UP-GPS-AcquisitionAssistance
        BadSatList
        OPTIONAL,
        OPTIONAL,
        OPTIONAL,
        OPTIONAL,
        OPTIONAL,
        OPTIONAL,
        OPTIONAL,
        OPTIONAL
    }

UP-Cipher-GPS-Data-Indicator ::=
    up-CipherParameters
    }
    SEQUENCE {
        UP-CipherParameters
        OPTIONAL

UP-GPS-DGPS-Corrections ::=
    gps-TOW
    statusHealth
    dgps-CorrectionSatInfoList
    }
    SEQUENCE {
        INTEGER (0..604799),
        DiffCorrectionStatus,
        DGPS-CorrectionSatInfoList
    }

UP-GPS-IonosphericModel ::=
    alfa0
    alfa1
    alfa2
    alfa3
    beta0
    beta1
    beta2
    beta3
    }
    SEQUENCE {
        BIT STRING (SIZE (8)),
        BIT STRING (SIZE (8)),
        BIT STRING (SIZE (8)),
        BIT STRING (SIZE (8)),
        BIT STRING (SIZE (8)),
        BIT STRING (SIZE (8)),
        BIT STRING (SIZE (8)),
        BIT STRING (SIZE (8))
    }

UP-GPS-Measurement ::=
    referenceSFN
    gps-TOW-lmsec
    gps-TOW-rem-usec
    gps-MeasurementParamList
    }
    SEQUENCE {
        ReferenceSFN
        GPS-TOW-lmsec,
        GPS-TOW-rem-usec
        GPS-MeasurementParamList
        OPTIONAL,
        OPTIONAL,
    }

UP-GPS-NavigationModel ::=
    n-SAT
    }
    SEQUENCE {
        INTEGER (1..16),
    }

```

```

    navigationModelSatInfoList      NavigationModelSatInfoList
}

UP-GPS-ReferenceTime ::=          SEQUENCE {
    gps-Week                        INTEGER (0..1023),
    gps-TOW                          GPS-TOW-lusec,
    sfn                              INTEGER (0..4095),
    gps-TOW-AssistList              GPS-TOW-AssistList          OPTIONAL
}

UP-GPS-UTC-Model ::=             SEQUENCE {
    a1                              BIT STRING (SIZE (24)),
    a0                              BIT STRING (SIZE (32)),
    t-ot                            BIT STRING (SIZE (8)),
    wn-t                            BIT STRING (SIZE (8)),
    delta-t-LS                      BIT STRING (SIZE (8)),
    wn-lsf                          BIT STRING (SIZE (8)),
    dn                              BIT STRING (SIZE (8)),
    delta-t-LSF                    BIT STRING (SIZE (8))
}

UP-IPDL-Parameters ::=          SEQUENCE {
    ip-Spacing                      IP-Spacing,
    ip-Length                      IP-Length,
    ip-Offset                      INTEGER (0..9),
    seed                          INTEGER (0..63),
    burstModeParameters            BurstModeParameters
}

UP-IPDL-Parameters-TDD ::=      SEQUENCE {
    ip-Spacing                      IP-Spacing,
    ip-slot                        INTEGER (0..14),
    ip-Start                      INTEGER (0..4095),
    ip-PCCPCH                      IP-PCCPCH          OPTIONAL,
    burstModeParameters            BurstModeParameters
}

UP-MeasuredResults ::=          SEQUENCE {
    up-MultipleSets                UP-MultipleSets          OPTIONAL,
    up-ReferenceCellIdentity        PrimaryCPICH-Info          OPTIONAL,
    up-OTDOA-Measurement            UP-OTDOA-Measurement        OPTIONAL,
    up-Position                    UP-Position              OPTIONAL,
    up-GPS-Measurement              UP-GPS-Measurement        OPTIONAL,
    up-Error                        UP-Error                  OPTIONAL
}

UP-Measurement ::=              SEQUENCE {
    up-ReportingQuantity            UP-ReportingQuantity,
    reportCriteria                  UP-ReportCriteria,
    up-OTDOA-AssistanceData        UP-OTDOA-AssistanceData    OPTIONAL,
    up-GPS-AssistanceData          UP-GPS-AssistanceData    OPTIONAL
}

UP-MeasurementEventResults ::=  CHOICE {
    event7a                        UP-Position,
    event7b                        UP-OTDOA-Measurement,
    event7c                        UP-GPS-Measurement
}

UP-MeasurementInterval ::=      ENUMERATED {
    e5, e15, e60, e300,
    e900, e1800, e3600, e7200 }

UP-MethodType ::=              ENUMERATED {
    ue-Assisted,
    ue-Based,
    ue-BasedPreferred,
    ue-AssistedPreferred }

UP-MultipleSets ::=             SEQUENCE {
    numberOfOTDOA-IPDL-GPS-Sets    INTEGER (2..3),
    numberOfReferenceCells         INTEGER (1..3),
    referenceCellRelation          ReferenceCellRelation
}

UP-OTDOA-AssistanceData ::=     SEQUENCE {
    up-OTDOA-ReferenceCell         UP-OTDOA-ReferenceCell    OPTIONAL,
    up-OTDOA-MeasurementAssistDataList UP-OTDOA-MeasurementAssistDataList OPTIONAL,

```



```

    up-IPDL-Parameters          UP-IPDL-Parameters          OPTIONAL
}

UP-OTDOA-AssistanceSIB ::=      SEQUENCE {
    up-CipherParameters          UP-CipherParameters          OPTIONAL,
    searchWindowSize             OTDOA-SearchWindowSize,
    referenceCellPosition        ReferenceCellPosition,
    up-IPDL-Parameters          UP-IPDL-Parameters          OPTIONAL,
    cellToMeasureInfoList        CellToMeasureInfoList
}

UP-OTDOA-Measurement ::=        SEQUENCE {
    sfn                          INTEGER (0..4095),
    ue-RX-TX-TimeDifferenceType2  UE-RX-TX-TimeDifferenceType2,
    qualityChoice                CHOICE {
        std-10                   ReferenceQuality10,
        std-50                   ReferenceQuality50,
        cpich-EcN0                CPICH-Ec-N0-OTDOA,
        defaultQuality            ReferenceQuality
    },
    neighbourList                NeighbourList                OPTIONAL
}

UP-OTDOA-MeasurementAssistData ::= SEQUENCE {
    primaryCPICH-Info            PrimaryCPICH-Info,
    frequencyInfo                FrequencyInfo                OPTIONAL,
    sfn-SFN-ObsTimeDifference     SFN-SFN-ObsTimeDifference1,
    fineSFN-SFN                  FineSFN-SFN                OPTIONAL,
    searchWindowSize             OTDOA-SearchWindowSize,
    relativeNorth                INTEGER (-20000..20000)        OPTIONAL,
    relativeEast                 INTEGER (-20000..20000)        OPTIONAL,
    relativeAltitude             INTEGER (-4000..4000)        OPTIONAL
}

UP-OTDOA-MeasurementAssistDataList ::= SEQUENCE (SIZE (1..maxCellMeas)) OF
    UP-OTDOA-MeasurementAssistData

UP-OTDOA-ReferenceCell ::=      SEQUENCE {
    primaryCPICH-Info            PrimaryCPICH-Info,
    frequencyInfo                FrequencyInfo                OPTIONAL,
    cellPosition                 ReferenceCellPosition        OPTIONAL
}

UP-Position ::=                 SEQUENCE {
    referenceSFN                 ReferenceSFN,
    gps-TOW                      GPS-TOW-lusec,
    positionEstimate              PositionEstimate
}

UP-ReportCriteria ::=           CHOICE {
    up-ReportingCriteria          UP-EventParamList,
    periodicalReportingCriteria   PeriodicalReportingCriteria,
    noReporting                   NULL
}

UP-ReportingQuantity ::=        SEQUENCE {
    methodType                   UP-MethodType,
    positioningMethod             PositioningMethod,
    responseTime                  UP-ResponseTime,
    accuracy                      UP-Accuracy                OPTIONAL,
    gps-TimingOfCellWanted        BOOLEAN,
    multipleSets                  BOOLEAN,
    environmentCharacterisation    EnvironmentCharacterisation    OPTIONAL
}

UP-ResponseTime ::=             ENUMERATED {
    s1, s2, s4, s8, s16,
    s32, s64, s128
}

UTRA-CarrierRSSI ::=           INTEGER (-95..-30)

UTRAN-ReferenceTime ::=         SEQUENCE {
    gps-TOW                      GPS-TOW-lusec,
    sfn                          INTEGER (0..4095)
}

VarianceOfRLC-BufferPayload ::= ENUMERATED {

```

```

        plv0, plv4, plv8, plv16, plv32, plv64,
        plv128, plv256, plv512, plv1024,
        plv2k, plv4k, plv8k, plv16k }

-- Actual value = IE value * 0.1
W ::= INTEGER (0..20)

-- *****
--
-- OTHER INFORMATION ELEMENTS (10.3.8)
--
-- *****

BCC ::= INTEGER (0..7)

BCCH-ModificationInfo ::= SEQUENCE {
    mib-ValueTag          MIB-ValueTag,
    bcch-ModificationTime BCCH-ModificationTime          OPTIONAL
}

-- Actual value = IE value * 8
BCCH-ModificationTime ::= INTEGER (0..511)

BSIC ::= SEQUENCE {
    ncc          NCC,
    bcc          BCC
}

CBS-DRX-Level1Information ::= SEQUENCE {
    ctch-AllocationPeriod INTEGER (1..256),
    cbs-FrameOffset       INTEGER (0..255)
}

CDMA2000-Message ::= SEQUENCE {
    msg-Type          BIT STRING (SIZE (8)),
    payload           BIT STRING (SIZE (1..512))
}

CDMA2000-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    CDMA2000-Message

CDMA2000-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumCDMA2000Freqs)) OF
    FrequencyInfoCDMA2000

CellValueTag ::= INTEGER (1..4)

--Actual value = 2^(IE value)
ExpirationTimerFactor ::= INTEGER (1..8)

FDD-UMTS-Frequency-List ::= SEQUENCE (SIZE (1..maxNumFDDFreqs)) OF
    FrequencyInfoFDD

FrequencyInfoCDMA2000 ::= SEQUENCE {
    band-Class          BIT STRING (SIZE (5)),
    cdma-Freq           BIT STRING (SIZE(11))
}

GSM-BA-Range ::= SEQUENCE {
    gsmLowRangeUARFCN   UARFCN,
    gsmUpRangeUARFCN   UARFCN
}

GSM-BA-Range-List ::= SEQUENCE (SIZE (1..maxNumGSMFreqRanges)) OF
    GSM-BA-Range

GSM-Classmark2 ::= OCTET STRING (SIZE (5))
GSM-Classmark3 ::= OCTET STRING

GSM-MessageList ::= SEQUENCE (SIZE (1..maxInterSysMessages)) OF
    BIT STRING (SIZE (1..512))

IdentificationOfReceivedMessage ::= SEQUENCE {
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    receivedMessageType       ReceivedMessageType
}

InterRAT-ChangeFailureCause ::= CHOICE {

```

```

configurationUnacceptable          NULL,
physicalChannelFailure             NULL,
protocolError                     ProtocolErrorInformation,
unspecified                       NULL,
spare1                            NULL,
spare2                            NULL,
spare3                            NULL,
}

InterRAT-UE-RadioAccessCapability ::= CHOICE {
    gsm                             SEQUENCE {
        gsm-Classmark2             GSM-Classmark2,
        gsm-Classmark3             GSM-Classmark3
    },
    cdma2000                         SEQUENCE {
        cdma2000-MessageList       CDMA2000-MessageList
    }
}

InterRAT-UE-RadioAccessCapabilityList ::= SEQUENCE (SIZE(1..maxInterSysMessages)) OF
InterRAT-UE-RadioAccessCapability

InterRAT-HO-Failure ::= SEQUENCE {
    interRAT-HO-FailureCause        InterRAT-HO-FailureCause OPTIONAL,
    interRATMessage                 InterRATMessage           OPTIONAL
}

InterRAT-HO-FailureCause ::= CHOICE {
    configurationUnacceptable        NULL,
    physicalChannelFailure           NULL,
    protocolError                   ProtocolErrorInformation,
    interRAT-ProtocolError          NULL,
    unspecified                     NULL,
    spare1                          NULL,
    spare2                          NULL,
    spare3                          NULL,
    spare4                          NULL
}

InterRATMessage ::= CHOICE {
    gsm                             SEQUENCE {
        gsm-MessageList            GSM-MessageList
    },
    cdma2000                         SEQUENCE {
        cdma2000-MessageList       CDMA2000-MessageList
    }
}

InterRATMessageList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
InterRATMessage

MasterInformationBlock ::= SEQUENCE {
    mib-ValueTag                    MIB-ValueTag,
    plmn-Type                        PLMN-Type,
    -- TABULAR: The PLMN identity and ANSI-41 core network information
    -- are included in PLMN-Type.
    sibSb-ReferenceList             SIBSb-ReferenceList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions           SEQUENCE {} OPTIONAL
}

MIB-ValueTag ::= INTEGER (1..8)

NCC ::= INTEGER (0..7)

PLMN-ValueTag ::= INTEGER (1..256)

PredefinedConfigIdentityAndValueTag ::= SEQUENCE {
    predefinedConfigIdentity         PredefinedConfigIdentity,
    predefinedConfigValueTag         PredefinedConfigValueTag OPTIONAL
}

ProtocolErrorInformation ::= SEQUENCE {
    diagnosticsType                 CHOICE {
        type1                       SEQUENCE {
            protocolErrorCause       ProtocolErrorCause
        },

```

```

    spare                NULL
}
}

ReceivedMessageType ::=
    ENUMERATED {
        activeSetUpdate,
        cellUpdateConfirm,
        counterCheck,
        downlinkDirectTransfer,
        interRATHandoverCommand,
        measurementControl,
        pagingType2,
        physicalChannelReconfiguration,
        physicalSharedChannelAllocation,
        radioBearerReconfiguration,
        radioBearerRelease,
        radioBearerSetup,
        rrcConnectionRelease,
        rrcConnectionReject,
        rrcConnectionSetup,
        securityModeCommand,
        signallingConnectionRelease,
        transportChannelReconfiguration,
        transportFormatCombinationControl,
        ueCapabilityEnquiry,
        ueCapabilityInformationConfirm,
        uplinkPhysicalChannelControl,
        uraUpdateConfirm,
        utranMobilityInformation,
        spare1, spare2, spare3, spare4,
        spare5, spare6, spare7
    }

Rplmn-Information ::=
    SEQUENCE {
        gsm-BA-Range-List      GSM-BA-Range-List      OPTIONAL,
        fdd-UMTS-Frequency-List FDD-UMTS-Frequency-List
        OPTIONAL,
        tdd-UMTS-Frequency-List FDD-UMTS-Frequency-List
        OPTIONAL,
        cdma2000-UMTS-Frequency-List CDMA2000-UMTS-Frequency-
        List      OPTIONAL
    }

SchedulingInformation ::=
    SEQUENCE {
        scheduling
            SEQUENCE {
                segCount      SegCount      DEFAULT 1,
                sib-Pos
                    CHOICE {
                        -- The element name indicates the repetition period and the value
                        -- (multiplied by two) indicates the position of the first segment.
                        rep4      INTEGER (0..1),
                        rep8      INTEGER (0..3),
                        rep16     INTEGER (0..7),
                        rep32     INTEGER (0..15),
                        rep64     INTEGER (0..31),
                        rep128    INTEGER (0..63),
                        rep256    INTEGER (0..127),
                        rep512    INTEGER (0..255),
                        rep1024   INTEGER (0..511),
                        rep2048   INTEGER (0..1023),
                        rep4096   INTEGER (0..2047)
                    },
                sib-PosOffsetInfo      SibOFF-List      OPTIONAL
            }
    }

SchedulingInformationSIB ::=
    SEQUENCE {
        sib-Type      SIB-TypeAndTag,
        scheduling    SchedulingInformation
    }

SchedulingInformationSIBSb ::=
    SEQUENCE {
        sibSb-Type    SIBSb-TypeAndTag,
        scheduling    SchedulingInformation
    }

SegCount ::=
    INTEGER (1..16)

SegmentIndex ::=
    INTEGER (1..15)

```



```

sysInfoType6          CellValueTag,
sysInfoType7          NULL,
sysInfoType8          CellValueTag,
sysInfoType9          NULL,
sysInfoType10         NULL,
sysInfoType11         CellValueTag,
sysInfoType12         CellValueTag,
sysInfoType13         CellValueTag,
sysInfoType13-1       CellValueTag,
sysInfoType13-2       CellValueTag,
sysInfoType13-3       CellValueTag,
sysInfoType13-4       CellValueTag,
sysInfoType14         NULL,
sysInfoType15         CellValueTag,
sysInfoType16         PredefinedConfigIdentityAndValueTag,
sysInfoType17         NULL,
sysInfoTypeSB1        CellValueTag,
sysInfoTypeSB2        CellValueTag
}

SibOFF ::=
    ENUMERATED {
        so2, so4, so6, so8, so10,
        so12, so14, so16, so18,
        so20, so22, so24, so26,
        so28, so30, so32 }

SibOFF-List ::=
    SEQUENCE (SIZE (1..15)) OF
        SibOFF

SysInfoType1 ::=
    SEQUENCE {
        -- Core network IEs
        cn-CommonGSM-MAP-NAS-SysInfo    NAS-SystemInformationGSM-MAP,
        cn-DomainSysInfoList            CN-DomainSysInfoList,
        -- User equipment IEs
        ue-ConnTimersAndConstants        UE-ConnTimersAndConstants,
        ue-IdleTimersAndConstants        UE-IdleTimersAndConstants,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions            SEQUENCE {}
    }

SysInfoType2 ::=
    SEQUENCE {
        -- UTRAN mobility IEs
        ura-IdentityList                URA-IdentityList,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions            SEQUENCE {}
    }

SysInfoType3 ::=
    SEQUENCE {
        sib4indicator                    BOOLEAN,
        -- UTRAN mobility IEs
        cellIdentity                     CellIdentity,
        cellSelectReselectInfo           CellSelectReselectInfoSIB-3-4,
        cellAccessRestriction            CellAccessRestriction,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions            SEQUENCE {}
    }

SysInfoType4 ::=
    SEQUENCE {
        -- UTRAN mobility IEs
        cellIdentity                     CellIdentity,
        cellSelectReselectInfo           CellSelectReselectInfoSIB-3-4,
        cellAccessRestriction            CellAccessRestriction,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions            SEQUENCE {}
    }

SysInfoType5 ::=
    SEQUENCE {
        sib6indicator                    BOOLEAN,
        -- Physical channel IEs
        pich-PowerOffset                 PICH-PowerOffset,
        modeSpecificInfo                 CHOICE {
            fdd                          SEQUENCE {
                aich-PowerOffset         AICH-PowerOffset
            },
            tdd                          SEQUENCE {
                pusch-SysInfoList-SFN    PUSCH-SysInfoList-SFN    OPTIONAL,
                pdsch-SysInfoList-SFN    PDSCH-SysInfoList-SFN    OPTIONAL,
                midambleConfiguration    MidambleConfiguration    OPTIONAL,
            }
        }
    }

```

```

        openLoopPowerControl-TDD      OpenLoopPowerControl-TDD
    }
    },
    primaryCCPCH-Info                 PrimaryCCPCH-Info                 OPTIONAL,
    prach-SystemInformationList        PRACH-SystemInformationList,
    sCCPCH-SystemInformationList       SCCPCH-SystemInformationList,
    cbs-DRX-Level1Information           CBS-DRX-Level1Information           OPTIONAL,
    -- Conditional on any of the CTCH indicator IEs in
    -- sCCPCH-SystemInformationList
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {
    -- In case of TDD, the following IE is included instead of the
    -- IE up-IPDL-Parameter in up-OTDOA-AssistanceData.
    openLoopPowerControl-IPDL-TDD      OpenLoopPowerControl-IPDL-TDD      OPTIONAL,
    -- Extension mechanism for non- release4 information
    noncriticalExtensions              SEQUENCE {}                          OPTIONAL
    }
}

```

```

SysInfoType6 ::=                      SEQUENCE {
    -- Physical channel IEs
    pich-PowerOffset                  PICH-PowerOffset,
    modeSpecificInfo                  CHOICE {
        fdd                            SEQUENCE {
            aich-PowerOffset            AICH-PowerOffset,
            csich-PowerOffset           CSICH-PowerOffset           OPTIONAL
        },
        tdd                            SEQUENCE {
            pusch-SysInfoList-SFN       PUSCH-SysInfoList-SFN       OPTIONAL,
            pdsch-SysInfoList-SFN       PDSCH-SysInfoList-SFN       OPTIONAL,
            midambleConfiguration       MidambleConfiguration       OPTIONAL,
            openLoopPowerControl-TDD     OpenLoopPowerControl-TDD
        }
    },
    primaryCCPCH-Info                 PrimaryCCPCH-Info                 OPTIONAL,
    prach-SystemInformationList        PRACH-SystemInformationList       OPTIONAL,
    sCCPCH-SystemInformationList       SCCPCH-SystemInformationList       OPTIONAL,
    cbs-DRX-Level1Information           CBS-DRX-Level1Information         OPTIONAL,
    -- Conditional on any of the CTCH indicator IEs in
    -- sCCPCH-SystemInformationList
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {
    -- This IE is present only if IPDLs are applied for TDD
    openLoopPowerControl-IPDL-TDD      OpenLoopPowerControl-IPDL-TDD      OPTIONAL,
    -- Extension mechanism for non- release4 information
    noncriticalExtensions              SEQUENCE {}                          OPTIONAL
    }
}

```

```

SysInfoType7 ::=                      SEQUENCE {
    -- Physical channel IEs
    modeSpecificInfo                  CHOICE {
        fdd                            SEQUENCE {
            ul-Interference             UL-Interference
        },
        tdd                            NULL
    },
    prach-Information-SIB5-List        DynamicPersistenceLevelList,
    prach-Information-SIB6-List        DynamicPersistenceLevelList,
    expirationTimeFactor               ExpirationTimerFactor             OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {}
}

```

```

SysInfoType8 ::=                      SEQUENCE {
    -- User equipment IEs
    cpch-Parameters                   CPCH-Parameters,
    -- Physical channel IEs
    cpch-SetInfoList                  CPCH-SetInfoList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {}
}

```

```

SysInfoType9 ::=                      SEQUENCE {
    -- Physical channel IEs
    cpch-PersistenceLevelsList        CPCH-PersistenceLevelsList,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions              SEQUENCE {}
}

```

```

}

SysInfoType10 ::=
    SEQUENCE {
        -- User equipment IEs
        drac-SysInfoList          DRAC-SysInfoList,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions     SEQUENCE {}
    }

SysInfoType11 ::=
    SEQUENCE {
        sib12indicator           BOOLEAN,
        -- Measurement IEs
        fach-MeasurementOccasionInfo  FACH-MeasurementOccasionInfo    OPTIONAL,
        measurementControlSysInfo     MeasurementControlSysInfo,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType12 ::=
    SEQUENCE {
        -- Measurement IEs
        fach-MeasurementOccasionInfo  FACH-MeasurementOccasionInfo    OPTIONAL,
        measurementControlSysInfo     MeasurementControlSysInfo,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType13 ::=
    SEQUENCE {
        -- Core network IEs
        cn-DomainSysInfoList         CN-DomainSysInfoList,
        -- User equipment IEs
        ue-IdleTimersAndConstants     UE-IdleTimersAndConstants    OPTIONAL,
        capabilityUpdateRequirement   CapabilityUpdateRequirement  OPTIONAL,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType13-1 ::=
    SEQUENCE {
        -- ANSI-41 IEs
        ansi-41-RAND-Information      ANSI-41-RAND-Information,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType13-2 ::=
    SEQUENCE {
        -- ANSI-41 IEs
        ansi-41-UserZoneID-Information  ANSI-41-UserZoneID-Information,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType13-3 ::=
    SEQUENCE {
        -- ANSI-41 IEs
        ansi-41-PrivateNeighbourListInfo  ANSI-41-PrivateNeighbourListInfo,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType13-4 ::=
    SEQUENCE {
        -- ANSI-41 IEs
        ansi-41-GlobalServiceRedirectInfo  ANSI-41-GlobalServiceRedirectInfo,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType14 ::=
    SEQUENCE {
        -- Physical channel IEs
        individualTS-InterferenceList  IndividualTS-InterferenceList,
        expirationTimeFactor           ExpirationTimerFactor    OPTIONAL,
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions         SEQUENCE {}
    }

SysInfoType15 ::=
    SEQUENCE {
        -- Measurement IEs
        up-GPS-Assistance              UP-Cipher-GPS-Data-Indicator    OPTIONAL,
        up-OTDOA-Assistance             UP-OTDOA-AssistanceSIB        OPTIONAL,
        -- Extension mechanism for non- release99 information
    }

```



```

        nonCriticalExtensions          SEQUENCE {
        up-Ipd1-Parameter-TDD          UP-IPDL-Paramater-TDD  OPTIONAL
        -- Extension mechanism for non- release4 information
        nonCriticalExtensions          SEQUENCE {}              OPTIONAL
    }
}

SysInfoType15-1 ::=                    SEQUENCE {
    -- DGPS corrections
    up-DGPS-SIB-Data                  UP-DGPS-SIB-Data
}

SysInfoType15-2 ::=                    SEQUENCE {
    -- Ephemeris and clock corrections
    up-Ephe-SIB-Data                  UP-Ephe-SIB-Data
}

SysInfoType15-3 ::=                    SEQUENCE {
    -- Almanac and other data
    transmissionTOW                   INTEGER (0..1048575),
    satMask                             BIT STRING (SIZE (1..32)),
    lsbTOW                               BIT STRING (SIZE (8)),
    up-Alma-SIB-DataList                UP-Alma-SIB-DataList
}

SysInfoType16 ::=                      SEQUENCE {
    -- Radio bearer IEs
    preDefinedRadioConfiguration       PreDefRadioConfiguration,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions               SEQUENCE {}
}

SysInfoType17 ::=                      SEQUENCE {
    -- Physical channel IEs
    pusch-SysInfoList                  PUSCH-SysInfoList          OPTIONAL,
    pdsch-SysInfoList                  PDSCH-SysInfoList          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions               SEQUENCE {}
}

SysInfoTypeSB1 ::=                     SEQUENCE {
    -- Other IEs
    sib-ReferenceList                  SIB-ReferenceList          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions               SEQUENCE {}
}

SysInfoTypeSB2 ::=                     SEQUENCE {
    -- Other IEs
    sib-ReferenceList                  SIB-ReferenceList          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions               SEQUENCE {}
}

TDD-UMTS-Frequency-List ::=            SEQUENCE (SIZE (1..maxNumTDDFreqs)) OF
                                        FrequencyInfoTDD

-- *****
--
--      ANSI-41 INFORMATION ELEMENTS (10.3.9)
--
-- *****

ANSI-41-GlobalServiceRedirectInfo ::=  ANSI-41-NAS-Parameter
ANSI-41-PrivateNeighbourListInfo ::=  ANSI-41-NAS-Parameter
ANSI-41-RAND-Information ::=           ANSI-41-NAS-Parameter
ANSI-41-UserZoneID-Information ::=    ANSI-41-NAS-Parameter
ANSI-41-NAS-Parameter ::=              BIT STRING (SIZE (1..2048))

Min-P-REV ::=                           BIT STRING (SIZE (8))

NAS-SystemInformationANSI-41 ::=        ANSI-41-NAS-Parameter
NID ::=                                  BIT STRING (SIZE (16))

P-REV ::=                                BIT STRING (SIZE (8))

SID ::=                                  BIT STRING (SIZE (15))

END

```

## 11.4 Constant definitions

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

```
hiPDSCHidentities      INTEGER ::= 64
hiPUSCHidentities      INTEGER ::= 64
hiRM                    INTEGER ::= 256
maxAC                   INTEGER ::= 16
maxAdditionalMeas       INTEGER ::= 4
maxASC                  INTEGER ::= 8
maxASCmap               INTEGER ::= 7
maxASCPersist           INTEGER ::= 6
maxCCTrCH               INTEGER ::= 8
maxCellMeas             INTEGER ::= 32
maxCellMeas-1           INTEGER ::= 31
maxCNDomains            INTEGER ::= 4
maxCPCHsets             INTEGER ::= 16
maxDPCH-DLchan          INTEGER ::= 8
maxDPCHcodesPerTS      INTEGER ::= 16
-- **TODO**
maxDPDCH-UL             INTEGER ::= 6
maxDRACclasses          INTEGER ::= 8
-- **TODO**
maxFACH                 INTEGER ::= 8
maxFreq                 INTEGER ::= 8
maxFrequencybands       INTEGER ::= 4
maxInterSysMessages    INTEGER ::= 4
maxLoCHperRLC           INTEGER ::= 2
maxMeasEvent            INTEGER ::= 8
maxMeasIntervals        INTEGER ::= 3
maxMeasParEvent         INTEGER ::= 2
maxNumCDMA2000Freqs     INTEGER ::= 8
maxNumGSMFreqRanges    INTEGER ::= 32
maxNumFDDFreqs          INTEGER ::= 8
maxNumTDDFreqs          INTEGER ::= 8
maxNoOfMeas             INTEGER ::= 16
maxOtherRAT             INTEGER ::= 15
maxPage1                INTEGER ::= 8
maxPCPCH-APsig          INTEGER ::= 16
maxPCPCH-APsubCh        INTEGER ::= 12
maxPCPCH-CDsig          INTEGER ::= 16
maxPCPCH-CDsubCh        INTEGER ::= 12
maxPCPCH-SF             INTEGER ::= 7
maxPCPCHs               INTEGER ::= 64
maxPDCPAlgoType         INTEGER ::= 8
maxPDSCH                INTEGER ::= 8
maxPDSCH-TFCIgroups    INTEGER ::= 256
maxPRACH                INTEGER ::= 16
maxPredefConfig         INTEGER ::= 16
maxPUSCH                INTEGER ::= 8
maxRABsetup             INTEGER ::= 16
maxRAT                  INTEGER ::= 16
maxRB                   INTEGER ::= 32
maxRBallRABs            INTEGER ::= 27
maxRBMuxOptions         INTEGER ::= 8
maxRBperRAB             INTEGER ::= 8
maxReportedGSMCells     INTEGER ::= 6
maxRL                   INTEGER ::= 8
maxRL-1                 INTEGER ::= 7
maxSat                  INTEGER ::= 16
maxSCCPCH               INTEGER ::= 16
maxSIB                  INTEGER ::= 32
-- **TODO**
maxSIB-FACH             INTEGER ::= 8
maxSIBperMsg            INTEGER ::= 16
maxSig                  INTEGER ::= 16
maxSRBsetup             INTEGER ::= 8
maxSubCh                INTEGER ::= 12
maxSystemCapability     INTEGER ::= 16
maxTF                   INTEGER ::= 32
maxTF-CPCH              INTEGER ::= 16
maxTFC                  INTEGER ::= 1024
maxTFCI-2-Combs         INTEGER ::= 512
maxTGPS                 INTEGER ::= 6
maxTrCH                 INTEGER ::= 32
```

```

maxTrCHpreconf      INTEGER ::= 16
maxTS                INTEGER ::= 14
maxTS-1             INTEGER ::= 13
maxURA              INTEGER ::= 8

```

END

## 11.5 RRC information between network nodes

Internode-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS

```

    HandoverToUTRANCommand-r3,
    MeasurementReport,
    PhysicalChannelReconfiguration-r3,
    RadioBearerReconfiguration-r3,
    RadioBearerRelease-r3,
    RadioBearerSetup-r3,
    TransportChannelReconfiguration-r3,
    UECapabilityInformation

```

FROM PDU-definitions

```

-- Core Network IEs :
    CN-DomainInformationList,
    NAS-SystemInformationGSM-MAP,
-- UTRAN Mobility IEs :
    CellIdentity,
    URA-Identity,
-- User Equipment IEs :
    C-RNTI,
    RRC-MessageSequenceNumber,
    START-Value,
    STARTList,
    U-RNTI,
    UE-RadioAccessCapability,
-- Radio Bearer IEs :
    PDCP-InfoReconfig,
    PredefinedConfigValueTag,
    RAB-InformationSetupList,
    RB-Identity,
    RB-MappingInfo,
    RLC-Info,
    RLC-SequenceNumber,
    SRB-InformationSetupList,
-- Transport Channel IEs :
    CPCH-SetID,
    DL-CommonTransChInfo,
    DL-AddReconfTransChInfoList,
    DRAC-StaticInformationList,
    UL-CommonTransChInfo,
    UL-AddReconfTransChInfoList,
-- Measurement IEs :
    MeasurementIdentity,
    MeasurementReportingMode,
    MeasurementType,
    AdditionalMeasurementID-List,
-- Other IEs :
    InterRATMessage

```

FROM InformationElements

```

    maxNoOfMeas,
    maxPredefConfig,
    maxRABsetup,
    maxRB,
    maxSRBsetup,
    maxTrCH

```

FROM Constant-definitions;

```

-- RRC information transferred between network nodes,
-- per group of information transfers having same endpoint
-- Alike class definitions for RRC PDUs

```

```

-- *****
--

```

```

-- RRC information, to target RNC
--
-- *****
-- *****
--
-- RRC information, target RNC to source RNC
--
-- *****

T-RNC-ToSRNC-Container ::= SEQUENCE {
    message          T-RNC-ToSRNC-ContainerType
}

T-RNC-ToSRNC-ContainerType ::= CHOICE {
    radioBearerSetup          RadioBearerSetup-r3,
    radioBearerReconfiguration RadioBearerReconfiguration-r3,
    radioBearerRelease        RadioBearerRelease-r3,
    transportChannelReconfiguration TransportChannelReconfiguration-r3,
    physicalChannelReconfiguration PhysicalChannelReconfiguration-r3,
    extension                  NULL
}

-- *****
--
-- RRC information, target RNC to source RAT
--
-- *****

-- Container definitions, alike PDU definitions
-- RRC Container definition, to target RNC

-- *****
--
-- SRNC Relocation information
--
-- *****

SRNC-RelocationInfo ::= SEQUENCE {
    -- Non-RRC IEs
    stateOfRRC                StateOfRRC,
    stateOfRRC-Procedure       StateOfRRC-Procedure,
    cipheringStatus            CipheringStatus,
    calculationTimeForCiphering CalculationTimeForCiphering OPTIONAL,
    cipheringInfoPerRB-List    CipheringInfoPerRB-List OPTIONAL,
    integrityProtectionStatus  IntegrityProtectionStatus,
    srb-SpecificIntegrityProtInfo SRB-SpecificIntegrityProtInfoList,
    implementationSpecificParams ImplementationSpecificParams OPTIONAL,
    -- User equipment IEs
    u-RNTI                     U-RNTI,
    c-RNTI                     C-RNTI OPTIONAL,
    ue-RadioAccessCapability   UE-RadioAccessCapability,
    -- Other IEs
    interRATMessage            InterRATMessage OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity               URA-Identity OPTIONAL,
    -- Core network IEs
    cn-CommonGSM-MAP-NAS-SysInfo NAS-SystemInformationGSM-MAP,
    cn-DomainInformationList    CN-DomainInformationList OPTIONAL,
    -- Measurement IEs
    ongoingMeasRepList         OngoingMeasRepList OPTIONAL,
    -- Radio bearer IEs
    preConfigStatusInfo        PreConfigStatusInfo,
    srb-InformationList         SRB-InformationSetupList,
    rab-InformationList         RAB-InformationSetupList OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo       UL-CommonTransChInfo OPTIONAL,
    ul-TransChInfoList         UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificInfo           CHOICE {
        fdd                     SEQUENCE {
            cpch-SetID           CPCH-SetID OPTIONAL,
            transChDRAC-Info     DRAC-StaticInformationList OPTIONAL
        },
        tdd                     NULL
    },
    dl-CommonTransChInfo       DL-CommonTransChInfo OPTIONAL,
    dl-TransChInfoList         DL-AddReconfTransChInfoList OPTIONAL,
}

```

```

-- Measurement report
  measurementReport          MeasurementReport          OPTIONAL,
  nonCriticalExtensions      SEQUENCE {
-- In case of TDD only this IE is present otherwise this IE is absent
  up-IPDL-Parameter-TDD     UP-IPDL-Parameter-TDD     OPTIONAL,
-- Extension mechanism for non-release4 information
  nonCriticalExtensions      SEQUENCE {}              OPTIONAL
}

-- RRC Container definition, target RNC to source RNC
-- Nothing new, only re-using RRC PDUs
--
-- RRC Container definition, target RNC to source system
-- Nothing new, re-using RRC PDUs (HandoverToUTRANCommand)

-- IE definitions

CalculationTimeForCiphering ::= SEQUENCE {
  cell-Id          CellIdentity,
  sfn              INTEGER (0..4095)
}

CipheringInfoPerRB ::= SEQUENCE {
  dl-START        START-Value,
  ul-START        START-Value
}

-- TABULAR: Multiplicity value numberOfRadioBearers has been replaced
-- with maxRB.
CipheringInfoPerRB-List ::= SEQUENCE (SIZE (1..maxRB)) OF
  CipheringInfoPerRB

CipheringStatus ::= ENUMERATED {
  started, notStarted }

ImplementationSpecificParams ::= BIT STRING (SIZE (1..512))

IntegrityProtectionStatus ::= ENUMERATED {
  started, notStarted }

MeasurementCommandWithType ::= CHOICE {
  setup          MeasurementType,
  modify         NULL,
  release        NULL
}

OngoingMeasRep ::= SEQUENCE {
  measurementIdentity          MeasurementIdentity,
  measurementCommandWithType  MeasurementCommandWithType,
-- TABULAR: The CHOICE Measurement in the tabular description is included
-- in the IE above.
  measurementReportingMode     MeasurementReportingMode          OPTIONAL,
  additionalMeasurementID-List AdditionalMeasurementID-List          OPTIONAL
}

OngoingMeasRepList ::= SEQUENCE (SIZE (1..maxNoOfMeas)) OF
  OngoingMeasRep

PreConfigStatusInfo ::= SEQUENCE (SIZE (1..maxPredefConfig)) OF
  PredefinedConfigValueTag

SRB-SpecificIntegrityProtInfo ::= SEQUENCE {
  rb-Identity          RB-Identity          OPTIONAL,
  ul-RRC-HFN          BIT STRING (SIZE (28)),
  dl-RRC-HFN          BIT STRING (SIZE (28)),
  ul-RRC-SequenceNumber RRC-MessageSequenceNumber,
  dl-RRC-SequenceNumber RRC-MessageSequenceNumber
}

SRB-SpecificIntegrityProtInfoList ::= SEQUENCE (SIZE (4..maxSRBsetup)) OF
  SRB-SpecificIntegrityProtInfo

StateOfRRC ::= ENUMERATED {
  cell-DCH, cell-FACH,
  cell-PCH, ura-PCH }

StateOfRRC-Procedure ::= ENUMERATED {

```

```
awaitNoRRC-Message,  
awaitRRC-ConnectionRe-establishmentComplete,  
awaitRB-SetupComplete,  
awaitRB-ReconfigurationComplete,  
awaitTransportCH-ReconfigurationComplete,  
awaitPhysicalCH-ReconfigurationComplete,  
awaitActiveSetUpdateComplete,  
awaitHandoverComplete,  
sendCellUpdateConfirm,  
sendUraUpdateConfirm,  
sendRrcConnectionReestablishment,  
otherStates }
```

END

---

## 12 Message transfer syntax

Transfer syntax for RRC PDUs is derived from their ASN.1 definitions by use of Packed Encoding Rules, unaligned (X.691), and with adapted final padding. If special encoding is used, it is indicated in the ECN module defined for each ASN.1 module. How special encoding is used is defined in TR 25.921.

### 12.1 Structure of encoded RRC messages

An RRC PDU, which is the bit string that is exchanged between peer entities/ across the radio interface, is the concatenation of a basic production, an extension and padding, in that order.

#### 12.1.1 Basic production

The 'basic production' is obtained by applying UNALIGNED PER to the abstract syntax value (the ASN.1 description) as specified in X.691, except for the 0 to 7 bits added at the end to produce a multiple of 8 bits. The basic production can have any positive number of bits, not necessarily a multiple of 8 bits.


#### 12.1.2 Extension

Emitters compliant with this version of the specification of the protocol shall, unless indicated otherwise on a PDU type basis, set the extension part empty. Emitters compliant with a later version might send non empty extensions.

#### 12.1.3 Padding

Emitters compliant with this version of the specification of the protocol shall, unless indicated otherwise on a PDU type basis, pad the basic production with the smallest number of bits required to meet the size constraints of the lower layers. Padding bits shall be set to 0.

Receivers compliant with this version of the specification have no need to distinguish the extension and padding parts, and shall, unless indicated otherwise on a PDU type basis, accept RRC PDUs with any bit string in the extension and padding parts.

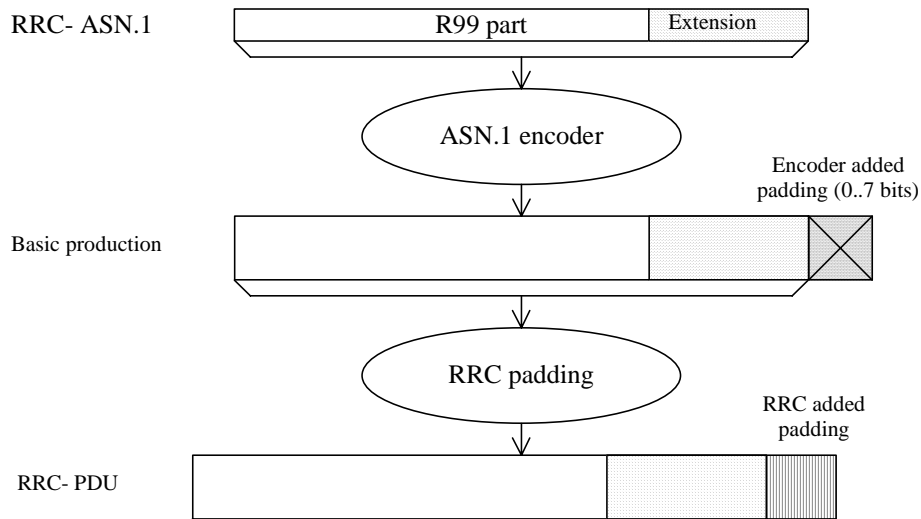


**Figure 61: Padding**

When using AM or UM mode, RLC requires that the RRC PDU length is a multiple of 8 bits.

When using Tr mode, RLC does neither impose size requirements nor perform padding. This implies that RRC has to take into account the transport format set defined for the transport channel across which the message is to be sent. RRC shall select the smallest transport format that fits the RRC PDU and shall add the lowest number of padding bits required to fit the size specified for the selected transport format.

For system information blocks, building the PDU involves two steps. The first step is the building of the SIBs, in which step padding is not applied (the rules for extension apply). The second step is the building of the RRC PDUs, involving segmentation and concatenation of SIBs, and then padding as described above for Tr mode. The procedure is shown by means of an example as described in Figure 62. The example includes two SIBs, SIBn and SIBn+1, of which only SIBn includes a protocol extension. The two SIBs used in the example don't require segmentation and are concatenated into one SYSTEM INFORMATION message.

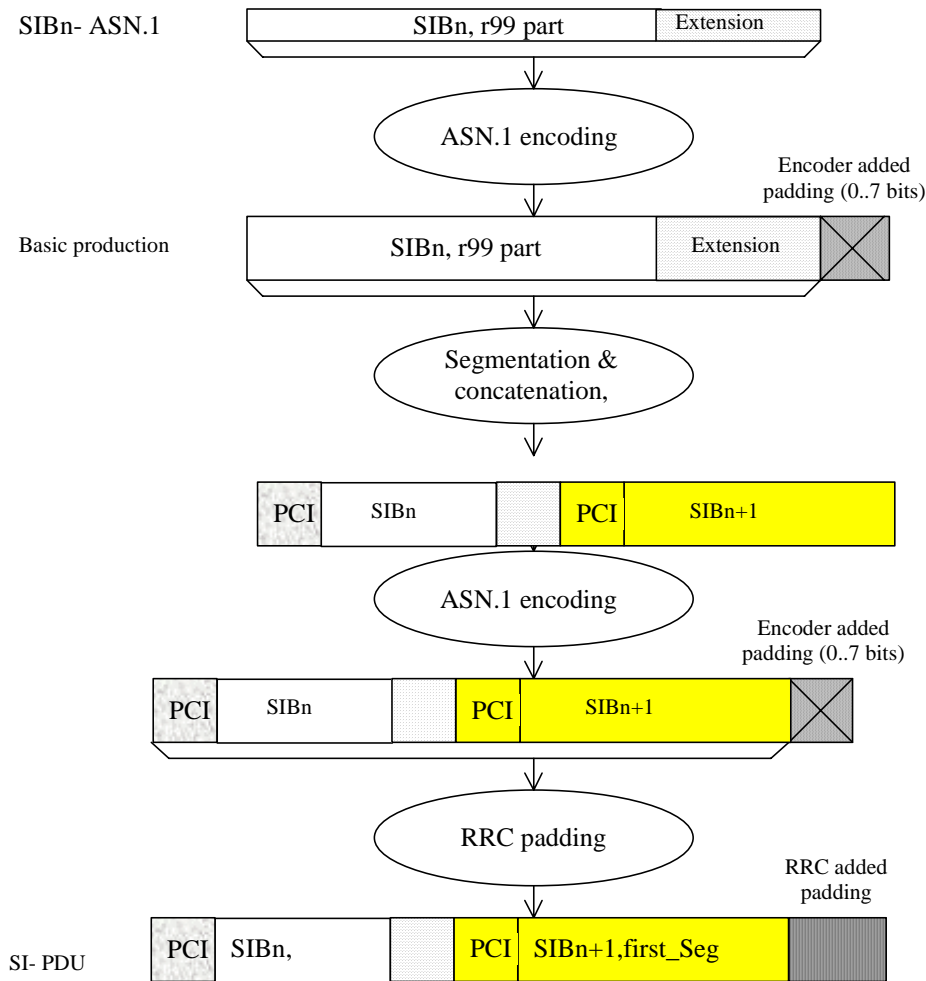

**Figure 62: Padding for System Information**

PCI: Protocol control information at SYSTEM INFORMATION message level

SI: SYSTEM INFORMATION message

## 12.2 ECN link module for RRC

```

RRC-ECN-Link-Module LINK-DEFINITIONS ::=
BEGIN
  Class-definitions ENCODED BY perUnaligned WITH Class-definitions-ECN-Module
  PDU-definitions ENCODED BY perUnaligned WITH PDU-definitions-ECN-Module
  CoreNetwork-IEs ENCODED BY perUnaligned WITH CoreNetwork-IEs-ECN-Module
  UTRANMobility-IEs ENCODED BY perUnaligned WITH UTRANMobility-IEs-ECN-Module
  UserEquipment-IEs ENCODED BY perUnaligned WITH UserEquipment-IEs-ECN-Module
  RadioBearer-IEs ENCODED BY perUnaligned WITH RadioBearer-IEs-ECN-Module
  TransportChannel-IEs ENCODED BY perUnaligned WITH TransportChannel-IEs-ECN-Module
  PhysicalChannel-IEs ENCODED BY perUnaligned WITH PhysicalChannel-IEs-ECN-Module
  Measurement-IEs ENCODED BY perUnaligned WITH Measurement-IEs-ECN-Module
  Other-IEs ENCODED BY perUnaligned WITH Other-IEs-ECN-Module
  ANSI-41-IEs ENCODED BY perUnaligned WITH ANSI-41-IEs-ECN-Module
END

```



## 12.3 ECN modules for RRC

```
Class-definitions-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
PDU-definitions-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
Corenetwork-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
UTRANMobility-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
UserEquipment-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
RadioBearer-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
TransportChannel-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
PhysicalChannel-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
Measurement-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
Other-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```

```
ANSI-41-IEs-ECN-Module ENCODING-DEFINITIONS ::=
BEGIN
END
```