

TSG RAN Meeting #11
13-16 March, 2001
Palm Springs, CA, USA

TSGR#11(01)0172

Source: Rapporteur

Agenda Item: 6.1.1.2 TDD Base Station Classification

Title: TR 25.952 Version 1.1.0

Document for: Information

Abstract of document:

This TR reflects the progress in WG4 on the TDD portion of the base station classification work item. This TR contains the RF system scenarios, criteria for BS classification, and the derivation of new radio requirements.

Changes since last presentation to TSG-RAN Meeting:

Table 1 contains a summary of the changes approved in TSG RAN WG4 meeting #16.

Table 1: Summary of Changes for Local Area BS

Clause	Description	New Requirement
5.4	Propagation conditions for local area base stations	Case 3 (high speed terminal) not applicable
6.1	Base station class criteria	Assumed 40 dB BS-UE MCL
7.1.1	New text for base station classes	BS-UE MCL < 53 dB
7.1.2	Frequency stability	+/- 0.1 ppm
7.1.6.2.2	ACLR in case of operation in proximity to TDD BS or FDD BS operating on adjacent frequency	-30 dBm at $\pm 5/10$ MHz offset
7.1.6.2.3	ACLR in case of co-siting with FDD BS operating on adjacent frequency	-47 dBm at $\pm 5/10$ MHz offset
7.1.7	Reference Sensitivity Level	-95 dBm
7.1.8	ACS	Interfering signal level -38 dBm.
7.1.9	Blocking Characteristics	WCDMA blocking level -30 dBm.
7.1.10	Intermodulation Characteristics	Interfering signal level -38 dBm
7.1.11	Demodulation in static propagation conditions	loc test signal -74 dBm.
7.1.12	Demodulation of DCH in multipath fading conditions	loc test signal -74 dBm.
9.2	Measurements performance for UTRAN	Measurement range from -91 dBm to -60 dBm.

Outstanding Issues:

The following requirements have not been finalized: ACLR for all scenarios, ACS, blocking, and intermodulation.

Contentious Issues:

3G TR 25.952 1.01.0 (~~2000~~2001-4203)

Technical Report

3rd Generation Partnership Project; Technical Specification Group Radio Access Network; TDD Base Station Classification (Release 2000)



The present document has been developed within the 3rd Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organisational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organisational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organisational Partners' Publications Offices.

Keywords

<keyword[, keyword]>

3GPP

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 2000, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).
All rights reserved.

Contents

Foreword	5
1 Scope	6
2 References	6
3 Definitions, symbols and abbreviations	6
3.1 Definitions	6
3.2 Symbols	6
3.3 Abbreviations	6
4 General	6
5 System scenarios	7
5.1 Indoor Environment	7
5.1.1 Path Loss Model	7
5.2 Mixed Indoor – Outdoor Environment	7
5.2.1 Propagation Model	7
5.3 Minimum coupling loss (MCL)	9
5.3.1 MCL for Local Area scenario	9
5.4 Propagation conditions for local area base stations	9
6 Base station classes	10
6.1 Base station class criteria	10
7 Changes with respect to Release 99	10
7.1 Changes in 25.105	10
7.1.1.1 New requirement	10
7.1.1.2 New text for frequency stability	11
7.1.4 Transmit On/Off Time Mask	11
7.1.5 Spectrum emission mask	12
7.1.6 Adjacent Channel Leakage power Ratio (ACLR)	12
7.1.6.2 Text proposal for ACLR	13
7.1.6.2.1 Minimum Requirement	14
7.1.6.2.2 Requirement in case of operation in proximity to TDD BS or FDD BS operating on an adjacent frequency	14
7.1.6.2.3 Requirement in case of co-siting with FDD local area BS operating on an adjacent frequency	14
7.1.7 New text for Reference sensitivity level	15
7.1.7.1 Minimum Requirement	15
7.1.8 Adjacent Channel Selectivity (ACS)	15
7.1.8.1 Minimum Requirement	15
7.1.9 Blocking characteristics	15
7.1.10 Intermodulation characteristics	17
7.1.11 Demodulation in static propagation conditions	17
7.1.11.1 Demodulation of DCH	17
7.1.11.1.1 Minimum requirement	17
7.1.12 Demodulation of DCH in multipath fading conditions	18
7.1.12.1 Multipath fading Case 1	18
7.1.12.1.1 Minimum requirement	18
7.1.12.2 New text for Multipath fading Case 2	18
7.1.12.3 New text for Multipath fading Case 3	18
7.2 Changes in 25.123	18
9.2 Measurements Performance for UTRAN	18
9.2.1 Performance for UTRAN Measurements in Uplink (RX)	19
9.2.1.1 RSCP	19
9.2.1.1.1 Absolute accuracy requirements	19
9.2.1.1.2 Relative accuracy requirements	19
9.2.1.1.3 Range/mapping	19

9.2.1.2 Timeslot ISCP.....20

9.2.1.2.1 Absolute accuracy requirements.....20

9.2.1.2.2 Range/mapping.....20

9.2.1.3 RECEIVED TOTAL WIDE BAND POWER.....20

9.2.1.3.1 Absolute accuracy requirements.....21

9.2.1.3.2 Range/mapping.....21

A.9.2 Measurement Performance for UTRAN21

A.9.2.1 UTRAN RX measurements21

7.3 Changes in 25.142.....22

8 Impacts to other WGs.....22

8.1 WG1.....22

8.2 WG2.....22

8.3 WG3.....23

9 Backward Compatibility23

History23

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

This document is a Technical Report on Release 2000 work item “TDD Base Station Classification”.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.105
 - [2] 3G TS 25.123
 - [3] 3G TS 25.142
 - [4] 3G TR 25.942
 - [5] UMTS 30.03
-

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

Example: text used to clarify abstract rules by applying them literally.

3.2 Symbols

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

4 General

Current TSG RAN WG4 specifications have been done according to the requirements for the macrocell base stations (NodeBs). For the UTRA evolution requirement specifications for other types of base stations are needed as well to take into account different use scenarios and radio environments. In this technical report, base station classification is described and requirements for each base station class are derived.

5 System scenarios

This section describes the system scenarios for UTRA operation that are considered when defining base station classes. It also includes typical radio parameters that are used to derive requirements.

5.1 Indoor Environment

5.1.1 Path Loss Model

The indoor path loss model expressed in dB is in the following form, which is derived from the COST 231 indoor model:

$$L = 37 + 20 \text{Log}_{10}(R) + \sum k_{wi} L_{wi} + 18.3 n^{((n+2)/(n+1)-0.46)}$$

where:

R transmitter-receiver separation given in metres

k_{wi} number of penetrated walls of type i

L_{wi} loss of wall type i

n number of penetrated floors

Two types of internal walls are considered. Light internal walls with a loss factor of 3.4 dB and regular internal walls with a loss factor of 6.9 dB.

If internal walls are not modelled individually, the indoor path loss model is represented by the following formula:

$$L = 37 + 30 \text{Log}_{10}(R) + 18.3 n^{((n+2)/(n+1)-0.46)}$$

where:

R transmitter-receiver separation given in metres;

n number of penetrated floors

Slow fading deviation in pico environment is assumed to be 6 dB.

5.2 Mixed Indoor – Outdoor Environment

5.2.1 Propagation Model

Distance attenuation inside a building is a pico cell model as defined in Chapter 5.1.1. In outdoors UMTS30.03 model is used.

Attenuation from outdoors to indoors is sketched in Figure 5.2.1.1 below. In figure star denotes receiving object and circle transmitting object. Receivers are projected to virtual positions. Attenuation is calculated using micro propagation model between transmitter and each virtual position. Indoor attenuation is calculated between virtual transmitters and the receiver. Finally, lowest pathloss is selected for further calculations. Only one floor is considered.

The total pathloss between outdoor transmitter and indoor receiver is calculated as

$$L = L_{\text{micro}} + L_{\text{OW}} + \sum k_{wi} L_{wi} + a * R ,$$

where:

- L_{micro} Micro cell pathloss according UMTS30.03 Outdoor to Indoor and Pedestrian Test Environment pathloss model
- L_{OW} outdoor wall penetration loss [dB]
- R is the virtual transmitter-receiver separation given in metres;
- k_{wi} number of penetrated walls of type i;
- L_{wi} loss of wall type i;
- $a = 0.8$ attenuation [dB/m]

<Editor Note: a reference to the source of the formula is required>

Slow fading deviation in mixed pico-micro environment shall be 6 dB

Propagation from indoors to outdoors would be symmetrical with above models.

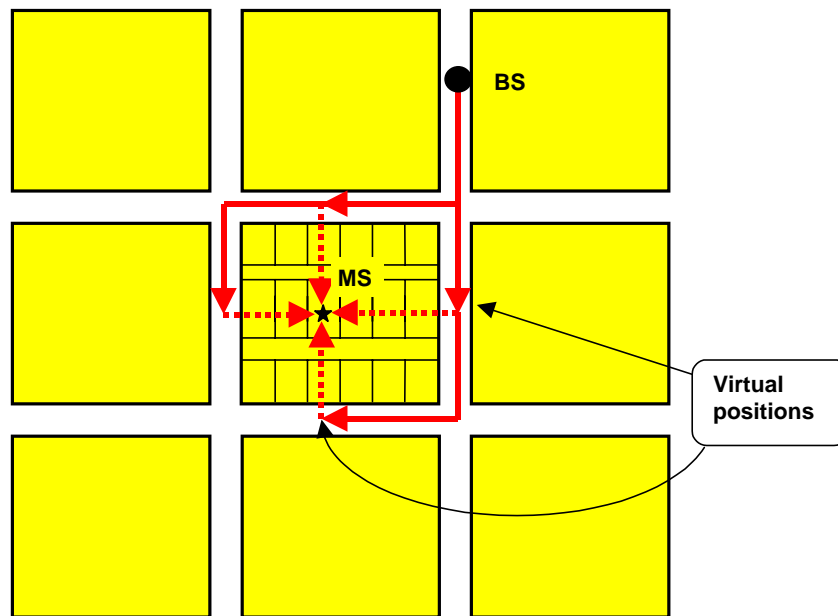


Figure 5.2.1.1. Simulation scenario and propagation model.

Parameters related to propagation models are summarised in Table 5.1.

Table 5.1. Parameters related to mixed indoor - outdoor propagation model

Parameter	value
Inside wall loss	6.9dB
Outside wall loss	10 dB
Slow fading deviation in indoors	6dB
Slow fading deviation in outdoors	6dB
Building size	110 x 110 meters
Street size	110 x 15 meters
Room size	22 x 25 meters
Number of rooms	5 rooms in 4 rows
Corridor size	110 x 5 meters
Number of corridors	2
Size of entrance point	5 meters
Number of base stations	4 .. 6
BS coordinates	tba

5.3 Minimum coupling loss (MCL)

Minimum Coupling Loss (MCL) is defined as the minimum distance loss including antenna gain measured between antenna connectors.

5.3.1 MCL for Local Area scenario

The minimum coupling loss between UEs is independent of the scenario, therefore the same minimum coupling loss is assumed for all environments.

Local area BSs are usually mounted under the ceiling, on wall or some other exposed position. In [4] chapter 4.1.1.2 a minimal separation of 2 metres between UE and indoor BS is assumed. Free space path loss is defined in [4] as:

$$\text{Path loss [dB]} = 38.25 + 20 \log_{10}(d \text{ [m]})$$

Taking into account 0 dBi antenna gain for Local area BS and UE and a body loss of 1 dB at the terminal, a MCL of 45.27 dB is obtained. The additional 2 dB cable loss at the BS as proposed in TR 25.942 is not considered.

The assumed MCL values are summarised in table 3.

Table 3. Minimum Coupling Losses

	MCL
MS ↔ MS	40 dB
Local area BS ↔ MS	45 dB
Local area BS ↔ Local area BS	45 dB

5.4 Propagation conditions for local area base stations

The demodulation of DCH in multipath fading conditions in TS 25.105 considers three different test environments:

Case 1: Typical indoor environment delay spread, low terminal speed

Case 2: Large delay spread (12 us), low terminal speed

Case 3: Typical vehicular environment delay spread, high terminal speed (120 km/h)

The local area BS is intended for small cells as can be usually found in indoor environments or outdoor hot spot areas. The large delay spread in Case 2 and the high terminal speed in Case 3 ~~is-are~~ not typical for these scenarios. Therefore, requirements defined for Case 2 and Case 3 shall not be applied to the local area BS. The Case 1 propagation condition shall apply for both the local area and wide area BS.

~~Case 1 and case 3 propagation conditions are well applicable for the local area BS and this should be tested.~~

6 Base station classes

This section describes how the base station classes are defined.

6.1 Base station class criteria

Minimum Coupling Loss between BS and UE is used as criteria for classification. Two classes are defined: Wide Area BS class and Local Area BS class.

Wide Area BS class assumes relatively high MCL, as is typically found in outdoor macro and outdoor micro environments, where the BS antennas are located off masts, roof tops or high above street level. Existing requirements are used, as they are in [1], for the Wide Area BS class. [Requirements have been derived assuming 53dB and 70dB MCL for micro and macro scenarios, respectively.](#)

Local Area BS class assumes relatively low MCL, as is typically found indoors (offices, subway stations etc) where antennas are located on the ceilings or walls or possibly built-in in the BS on the wall. Low-CL can also be found outdoors on hot spot areas like market place, high street or railway station. New requirements, as defined in this TR, are set for the Local Area BS class. [Requirements have been derived assuming 40dB MCL.](#)

7 Changes with respect to Release 99

7.1 Changes in 25.105

This section describes the considered changes to requirements on BS minimum RF characteristics, with respect to Release 1999 requirements in TS25.105.

7.1.1 New text for base station classes

The requirements in this specification apply to ~~base station intended for general purpose applications, both Wide Area Base Stations and Local Area Base Stations, unless otherwise stated.~~

~~Wide Area Base Stations are characterised by BS to UE coupling losses equal to or higher than 53dB.~~

~~Local Area Base Stations are characterised by BS to UE coupling losses less than 53dB.~~

~~In the future further classes of base stations may be defined; the requirements for these may be different than for general purpose applications.~~

7.1.2 Frequency stability

7.1.1.1 New requirement

In the present system the mobile has to be designed to work with a Doppler shift caused by speeds up to 250 km/h at 2100 MHz. This corresponds to a frequency offset of

[Doppler shift, Hz] = [UE velocity, m/s] * [Carrier frequency, Hz] / [speed of light, m/s]

$$= (250 * 1000/3600) * 2.1 * 10^9 / (3 * 10^8) \text{ Hz}$$

$$\approx 486 \text{ Hz}$$

At present, the BS requirement is 0.05 ppm, corresponding to 105 Hz at 2100 MHz.

In this case, the mobile must be able to successfully decode signals with offset of

[present UE decode offset, Hz] = [frequency error, Hz] + [max. Doppler shift, Hz]

$$\underline{= 486 \text{ Hz} + 105 \text{ Hz}}$$

$$\underline{= 591 \text{ Hz}}$$

The frequency error requirement for local area BS class is proposed to be relaxed to 0.1ppm.

[frequency error, ppm] = 0.1 ppm

This corresponds to a maximum UE speed of 155km/h.

[max. new Doppler shift] = [present UE decode offset] - [frequency error, Hz]

$$\underline{= 591 \text{ Hz} - 210 \text{ Hz}}$$

$$\underline{= 301 \text{ Hz}}$$

[UE velocity, km/h] = [speed of light, km/h] * [Doppler shift, Hz] / [Carrier frequency, Hz]

$$\underline{= (3 * 10^8 * 301 * 3600) / (2.1 * 10^9 * 1000)}$$

$$\underline{= 155 \text{ km/h}}$$

7.1.1.2 New text for frequency stability

The modulated carrier frequency of the BS shall be accurate to within ± 0.05 ppm is observed over a period of one power control group (timeslot).

Table 6.n: Frequency error minimum requirement

<u>BS class</u>	<u>accuracy</u>
<u>wide area BS</u>	<u>± 0.05 ppm</u>
<u>local area BS</u>	<u>± 0.1 ppm</u>

Frequency stability is ability of the BS to transmit at the assigned carrier frequency. The BS shall use the same frequency source for both RF frequency generation and the chip clock.

7.1.2.1 Minimum Requirement

This requirement is independent of the BS class. For the local area BS the same requirement as specified in chapter 6.3.1 of TS 25.105 for the wide area BS shall apply.

7.1.3 Minimum Transmit Power

7.1.4 Transmit On/Off Time Mask

The time mask transmit ON/OFF defines the ramping time allowed for the BS between transmit OFF power and transmit ON power.

7.1.4.1 Minimum Requirement

This requirement is independent of the BS class. For the local area BS the same requirement as specified in chapter 6.5.2.1 of TS 25.105 for the wide area BS shall apply.

7.1.5 Spectrum emission mask

The same requirement as for the wide area BS shall apply to the local area BS.

7.1.6 Adjacent Channel Leakage power Ratio (ACLR)

7.1.6.1 Justification

Three different requirements for the local area BS are defined in a similar way as for the wide area BS to consider different deployment scenarios. A minimum requirement, which is based on MS-BS interference and BS-BS interference in case of unsynchronised TDD operation on adjacent carriers with a sufficient de-coupling, and two ACLR requirements, which are based on BS-BS interference in proximity and co-siting of unsynchronised TDD operation.

1. Minimum Requirement

In the technical report TR25.942 RF System Scenarios simulation results for TDD/TDD and TDD/FDD co-existence in pico environments are listed. Additional results were presented in Tdoc R4-000966 for the co-existence of FDD wide area BS and TDD local area BS. All the simulations were performed with an ACLR of 45 dB for the TDD local area BS. The relative capacity loss in these scenarios was always below 1 %. (In Tdoc R4-000966, the relative capacity loss was above 2 %, if the BS-BS site separation was not sufficient. Please note that BS-BS interference is covered in the close proximity and co-siting ACLR requirement.) Therefore it is proposed to set the minimum ACLR requirement for the local area BS to 45 dB as for the wide area BS.

This requirement maybe also applied in case of unsynchronised TDD operation on adjacent carriers, if the base stations have a certain de-coupling. The required path-loss between base stations is calculated in the following. For the local area BS, a maximum transmit power of 26 dBm and an allowed interference level of 3 dB below the receiver noise is assumed.

	Unit	Local area BS to local area BS	Local area BS to wide area BS	Wide area BS to local area BS
Maximum transmit power	dBm	26	26	43
TX antenna gain	dBi	0	0	11
RX antenna gain	dBi	0	11	0
ACLR	dBc	45	45	45
Allowed interference	dBm	-92	-106	-92
Required path loss	dB	73	98	101
Required distance free space	m	43	759	1071
Required distance indoor	m	16	108	136

A line of sight between local area base stations and in particular between wide area base stations and local area base stations is not considered to be typical. Assuming the indoor path loss model given in TR25.942, the required site separation between local area base stations seems to be already reasonable for the minimum requirement. For the local area to wide area base station, the indoor path loss model is quite pessimistic as it does not take into account outside walls. Further, it is observed that the interference from the wide area BS to the local area BS is higher than the interference from the local area BS to the wide area BS. Thus, the interference from wide area BS to the local area BS limits the minimum required site separation.

Additional requirements to cope with BS-BS interference are covered in the close proximity and co-siting requirement.

2. Requirement in case of operation in proximity to TDD BS or FDD BS operating on an adjacent frequency

This requirement covers the BS-BS interference without considering the worst case of co-located base stations. This requirement should consider typical installations. The requirement is set in an absolute manner to be independent of the

maximum transmit power. The required path loss is listed in the table below, where for the wide area BS a transmit power of 43 dBm and an ACLR of 70 dB is assumed. This corresponds to an absolute ACLR of -27 dBm.

	Unit	Local area BS to local area BS	Local area BS to wide area BS	Wide area BS to local area BS
Absolute ACLR	dBm	-30 dBm	-30 dBm	-27 dBm
TX antenna gain	dB _i	0	0	11
RX antenna gain	dB _i	0	11	0
Allowed interference	dBm	-92	-106	-92
Required path loss	dB	62	87	76
Required distance free space	m	12	213	60
Required distance indoor	m	6,8	46	20

With an absolute ACLR of -30 dBm for the local area BS, the required distance between local area base stations is 12 metres at the most (line of sight). This seems to be sufficient for a typical installations. It is proposed to use this value as the requirement for proximity.

3. Requirement in case of co-siting with TDD BS or FDD BS operating on an adjacent frequency

The co-siting requirement defines an ACLR requirement, which is based on the worst case BS-BS interference of co-located base stations. Only the co-siting of base stations belonging to one class is considered. In the following table the ACLR for co-sited local area base stations is calculated.

	Unit	Local area BS to local area BS
BS-BS MCL	dB	45
Allowed interference	dBm	-92
ACLR	dBm	-47

For the co-location of local area BSs an absolute ACLR of -47 dBm is required.

If base stations of different classes are co-sited, it is assumed that the MCL between the base stations has to be increased. In the following table the required MCL for co-siting of local and wide area base stations is calculated.

	Unit	Local area BS to wide area BS	Wide area BS to local area BS
ACLR	dBm	-47	-80
Allowed interference	dBm	-106	-92
BS-BS MCL	dB	59	12

If wide area and local area base stations are co-located the de-coupling has to be increased to 59 dB to protect the receiver of the wide area BS.

7.1.6.2 Text proposal for ACLR

Adjacent Channel Leakage power Ratio (ACLR) is the ratio of the transmitted power to the power measured in an adjacent channel. Both the transmitted and the adjacent channel power are measured through a matched filter (Root Raised Cosine and roll-off 0.22) with a noise power bandwidth equal to the chip rate. The requirements shall apply for all configurations of BS (single carrier or multi-carrier), and for all operating modes foreseen by the manufacturer's specification.

7.1.6.2.1 Minimum Requirement

The ACLR shall be higher than the value specified in Table 7.x1.

Table 7.x1: BS ACLR

<u>BS adjacent channel offset</u>	<u>ACLR limit</u>
<u>± 5 MHz</u>	<u>45 dB</u>
<u>± 10 MHz</u>	<u>55 dB</u>

7.1.6.2.2 Requirement in case of operation in proximity to TDD BS or FDD BS operating on an adjacent frequency

In case the equipment is operated in proximity to another TDD BS or FDD BS operating on the first or second adjacent frequency, the requirement is specified in terms of the adjacent channel power level of the BS measured in the adjacent channel. The adjacent channel power shall not exceed the limit in table 7.x2.

Table 7.x2: BS ACLR in case of operation in proximity

<u>BS class</u>	<u>BS adjacent channel offset</u>	<u>Maximum Level</u>	<u>Measurement bandwidth</u>
<u>Local area BS</u>	<u>± 5 MHz</u>	<u>-30 dBm</u>	<u>3.84 MHz</u>
<u>Local area BS</u>	<u>± 10 MHz</u>	<u>-30 dBm</u>	<u>3.84 MHz</u>

7.1.6.2.3 Requirement in case of co-siting with FDD local area BS operating on an adjacent frequency

In case the equipment is co-sited to another TDD BS or FDD BS operating on the first or second adjacent frequency, the requirement is specified in terms of the adjacent channel power level of the BS measured in the adjacent channel. The adjacent channel power shall not exceed the limit in Table 7.x3.

Table 7.x3: BS ACLR in case of co-siting

<u>BS class</u>	<u>BS adjacent channel offset</u>	<u>Maximum Level</u>	<u>Measurement Bandwidth</u>
<u>Wide area BS</u>	<u>± 5 MHz</u>	<u>-80 dBm</u>	<u>3.84 MHz</u>
<u>Wide area BS</u>	<u>± 10 MHz</u>	<u>-80 dBm</u>	<u>3.84 MHz</u>
<u>Local area BS</u>	<u>± 5 MHz</u>	<u>-47 dBm</u>	<u>3.84 MHz</u>
<u>Local area BS</u>	<u>± 10 MHz</u>	<u>-47 dBm</u>	<u>3.84 MHz</u>

Note: The requirement is based on a minimum coupling loss of 30 dB between wide area base stations and a minimum coupling loss of 45 dB between local area base stations. For the co-siting of unsynchronised base stations of different classes operating on adjacent frequencies a minimum coupling loss of 59 dB between wide area and local area base stations is assumed.

7.1.7 New text for Reference sensitivity level

The reference sensitivity is the minimum receiver input power measured at the antenna connector at which the FER/BER does not exceed the specific value indicated in section 7.2.1.

7.1.7.1 Minimum Requirement

For the measurement channel specified in Annex A, the reference sensitivity level and performance of the BS shall be as specified in table 7.1 below.

Table 7.1: BS reference sensitivity levels

<u>BS class</u>	Data rate	BS reference sensitivity level (dBm)	FER/BER
<u>Wide area BS</u>	12.2 kbps	-109 dBm	BER shall not exceed 0.001
<u>Local area BS</u>	<u>12.2 kbps</u>	<u>-95 dBm</u>	<u>BER shall not exceed 0.001</u>

7.1.8 Adjacent Channel Selectivity (ACS)

Adjacent channel selectivity (ACS) is a measure of the receiver ability to receive a wanted signal at its assigned channel frequency in the presence of an adjacent channel signal at a given frequency offset from the center frequency of the assigned channel. ACS is the ratio of the receiver filter attenuation on the assigned channel frequency to the receive filter attenuation on the adjacent channel(s).

7.1.8.1 Minimum Requirement

The BER shall not exceed 0.001 for the parameters specified in table 7.x4.

Table 7.x4 : Adjacent channel selectivity

<u>Parameter</u>		<u>Level</u>	<u>Unit</u>
<u>Data rate</u>		<u>12.2</u>	<u>kbps</u>
<u>Wanted signal</u>		<u>Reference sensitivity level</u> <u>+ 6dB</u>	<u>dBm</u>
<u>Interfering signal</u>	<u>Wide area BS</u>	<u>-52</u>	<u>dBm</u>
	<u>Local area BS</u>	<u>-38</u>	<u>dBm</u>
<u>Fuw (Modulated)</u>		<u>5</u>	<u>MHz</u>

7.1.9 Blocking characteristics

The blocking characteristics is a measure of the receiver ability to receive a wanted signal at its assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the adjacent channels. The blocking performance shall apply at all frequencies as specified in the tables below, using a 1MHz step size.

The static reference performance as specified in clause 7.1.5.1 should be met with a wanted and an interfering signal coupled to BS antenna input using the following parameters.

Table 7.1(a): Blocking requirements for operating bands defined in 5.2(a)

Center Frequency of Interfering Signal	Interfering Signal Level	Wanted Signal Level	Minimum Offset of Interfering Signal	Type of Interfering Signal
1900 – 1920 MHz, 2010 – 2025 MHz	-40 <u>-30</u> dBm	<REFSENS> + 6 dB	10 MHz	WCDMA signal with one code
1880 – 1900 MHz, 1990 – 2010 MHz, 2025 – 2045 MHz	-40 <u>-30</u> dBm	<REFSENS> + 6 dB	10 MHz	WCDMA signal with one code
1920 – 1980 MHz	-40 <u>-30</u> dBm	<REFSENS> + 6 dB	10 MHz	WCDMA signal with one code
1 – 1880 MHz, 1980 – 1990 MHz, 2045 – 12750 MHz	-15 dBm	<REFSENS> + 6 dB	—	CW carrier

Table 7.1 (b) : Blocking requirements for operating bands defined in 5.2(b)

Center Frequency of Interfering Signal	Interfering Signal Level	Wanted Signal Level	Minimum Offset of Interfering Signal	Type of Interfering Signal
1850 – 1990 MHz	-40 <u>-30</u> dBm	<REFSENS> + 6 dB	10 MHz	WCDMA signal with one code
1830 – 1850 MHz, 1990 – 2010 MHz	-40 <u>-30</u> dBm	<REFSENS> + 6 dB	10 MHz	WCDMA signal with one code
1 – 1830 MHz, 2010 – 12750 MHz	-15 dBm	<REFSENS> + 6 dB	—	CW carrier

Table 7.1 (c) : Blocking requirements for operating bands defined in 5.2(c)

Center Frequency of Interfering Signal	Interfering Signal Level	Wanted Signal Level	Minimum Offset of Interfering Signal	Type of Interfering Signal
1910 – 1930 MHz	-40 <u>-30</u> dBm	<REFSENS> + 6 dB	10 MHz	WCDMA signal with one code
1890 – 1910 MHz, 1930 – 1950 MHz	-40 <u>-30</u> dBm	<REFSENS> + 6 dB	10 MHz	WCDMA signal with one code
1 – 1890 MHz, 1950 – 12750 MHz	-15 dBm	<REFSENS> + 6 dB	—	CW carrier

7.1.10 Intermodulation characteristics

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the receiver to receiver a wanted signal on its assigned channel frequency in the presence of two or more interfering signals which have a specific frequency relationship to the wanted signal.

The static reference performance as specified in clause 7.1.5.1 should be met when the following signals are coupled to BS antenna input.

- A wanted signal at the assigned channel frequency, 6 dB above the static reference level.
- Two interfering signals with the following parameters.

Table 7.5 : Intermodulation requirement

Interfering Signal Level	Offset	Type of Interfering Signal
- 48 -38 dBm	10 MHz	CW signal
- 48 -38 dBm	20 MHz	WCDMA signal with one code

7.1.11 Demodulation in static propagation conditions

7.1.11.1 Demodulation of DCH

The performance requirement of DCH in static propagation conditions is determined by the maximum Block Error Rate (BLER) allowed when the receiver input signal is at a specified \hat{I}_{or}/I_{oc} limit. The BLER is calculated for each of the measurement channels supported by the base station.

7.1.11.1.1 Minimum requirement

This [performance](#) requirement is independent of the BS class. [For the parameters specified in table 7.x](#) for the local area BS the same [performance](#) requirement as specified in chapter 8.2.1.1 of TS 25.105 for the wide area BS shall apply.

Table 7.x: Parameters in static propagation conditions

Parameters		Unit	Test 1	Test 2	Test 3	Test 4
Number of DPCH _o			<u>6</u>	<u>4</u>	<u>0</u>	<u>0</u>
$\frac{DPCH_o - E_c}{I_{or}}$		dB	<u>-9</u>	<u>-9.5</u>	<u>0</u>	<u>0</u>
I _{oc}	Wide area BS	dBm/3.84 MHz	<u>-89</u>			
	Local area BS	dBm/3.84 MHz	<u>-74</u>			
Information Data Rate		Kbps	<u>12.2</u>	<u>64</u>	<u>144</u>	<u>384</u>

7.1.12 Demodulation of DCH in multipath fading conditions

7.1.12.1 Multipath fading Case 1

The performance requirement of DCH in multipath fading Case 1 is determined by the maximum Block Error Rate (BLER) allowed when the receiver input signal is at a specified \hat{I}_{or}/I_{oc} limit. The BLER is calculated for each of the measurement channels supported by the base station.

7.1.12.1.1 Minimum requirement

The performance requirement is independent of the BS class. For the parameters specified in table 7.y For the local area BS the same performance requirement as specified in chapter 8.3.1.1 of TS 25.105 for the wide area BS shall apply.

Table 7.y: Parameters in multipath Case 1 channel

Parameters		Unit	Test 1	Test 2	Test 3	Test 4
Number of DPCH _o			6	4	0	0
$\frac{DPCH_o - E_c}{I_{or}}$		dB	-9	-9.5	0	0
I _{oc}	Wide area BS	dBm/3.84 MHz	-89			
	Local area BS	dBm/3.84 MHz	-74			
Information Data Rate		kbps	12.2	64	144	384

7.1.12.2 New text for Multipath fading Case 2

The performance requirement of DCH in multipath fading Case 2 is determined by the maximum Block Error Rate (BLER) allowed when the receiver input signal is at a specified \hat{I}_{or}/I_{oc} limit. The BLER is calculated for each of the measurement channels supported by the base station.

This requirement shall not be applied to Local Area BS.

7.1.12.3 New text for Multipath fading Case 3

The performance requirement of DCH in multipath fading Case 3 is determined by the maximum Block Error Rate (BLER) allowed when the receiver input signal is at a specified \hat{I}_{or}/I_{oc} limit. The BLER is calculated for each of the measurement channels supported by the base station.

This requirement shall not be applied to Local Area BS.

7.2 Changes in 25.123

This section describes the considered changes to requirements on UTRAN measurements, with respect to Release 1999 requirements in TS25.123.

9.2 Measurements Performance for UTRAN

9.2.1 Performance for UTRAN Measurements in Uplink (RX)

9.2.1.1 RSCP

The measurement period shall be [100] ms.

9.2.1.1.1 Absolute accuracy requirements

Table 9.29 RSCP absolute accuracy

<u>Parameter</u>	<u>Unit</u>	<u>Accuracy [dB]</u>		<u>Conditions</u>	<u>BS class</u>
		<u>Normal conditions</u>	<u>Extreme conditions</u>	<u>Io [dBm]</u>	
<u>RSCP</u>	<u>dB</u>	<u>± 6</u>	<u>± 9</u>	<u>-105..-74</u>	<u>Wide area BS</u>
<u>RSCP</u>	<u>dB</u>	<u>± 6</u>	<u>± 9</u>	<u>-91..-60</u>	<u>Local area BS</u>

9.2.1.1.2 Relative accuracy requirements

Table 9.34 RSCP relative accuracy

<u>Parameter</u>	<u>Unit</u>	<u>Accuracy [dB]</u>	<u>Conditions</u>	<u>BS class</u>
			<u>Io [dBm]</u>	
<u>RSCP</u>	<u>dB</u>	<u>± 3 for intra-frequency</u>	<u>-105..-74</u>	<u>Wide area BS</u>
<u>RSCP</u>	<u>dB</u>	<u>± 3 for intra-frequency</u>	<u>-91..-60</u>	<u>Local area BS</u>

9.2.1.1.3 Range/mapping

The reporting range for *RSCP* is from -120 ...-66 dBm.

In table 9.31 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.31

<u>Reported value</u>	<u>Measured quantity value</u>	<u>Unit</u>
<u>RSCP LEV_00</u>	<u>RSCP < -120.0</u>	<u>dBm</u>
<u>RSCP LEV_01</u>	<u>-120.0 ≤ RSCP < -119.5</u>	<u>dBm</u>
<u>RSCP LEV_02</u>	<u>-119.5 ≤ RSCP < -119.0</u>	<u>dBm</u>
<u>...</u>	<u>...</u>	<u>...</u>
<u>RSCP LEV_107</u>	<u>-67.0 ≤ RSCP < -66.5</u>	<u>dBm</u>
<u>RSCP LEV_108</u>	<u>-66.5 ≤ RSCP < -66.0</u>	<u>dBm</u>
<u>RSCP LEV_109</u>	<u>-66.0 ≤ RSCP</u>	<u>dBm</u>

9.2.1.2 Timeslot ISCP

The measurement period shall be [100] ms.

9.2.1.2.1 Absolute accuracy requirements

Table 9.32 Timeslot ISCP Intra frequency absolute accuracy

<u>Parameter</u>	<u>Unit</u>	<u>Accuracy [dB]</u>		<u>Conditions</u>	<u>BS class</u>
		<u>Normal conditions</u>	<u>Extreme conditions</u>		
				<u>Io [dBm]</u>	
<u>Timeslot ISCP</u>	<u>dB</u>	<u>± 6</u>	<u>± 9</u>	<u>-105..-74</u>	<u>Wide area BS</u>
<u>Timeslot ISCP</u>	<u>dB</u>	<u>± 6</u>	<u>± 9</u>	<u>-91..-60</u>	<u>Local area BS</u>

9.2.1.2.2 Range/mapping

The reporting range for *Timeslot ISCP* is from -120...-66 dBm.

In table 9.33 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.33

<u>Reported value</u>	<u>Measured quantity value</u>	<u>Unit</u>
<u>UTRAN TS ISCP LEV 00</u>	<u>Timeslot ISCP < -120,0</u>	<u>dBm</u>
<u>UTRAN TS ISCP LEV 01</u>	<u>-120,0 ≤ Timeslot ISCP < -119,5</u>	<u>dBm</u>
<u>UTRAN TS ISCP LEV 02</u>	<u>-119,5 ≤ Timeslot ISCP < -119,0</u>	<u>dBm</u>
<u>...</u>	<u>...</u>	<u>...</u>
<u>UTRAN TS ISCP LEV 107</u>	<u>-67,0 ≤ Timeslot ISCP < -66,5</u>	<u>dBm</u>
<u>UTRAN TS ISCP LEV 108</u>	<u>-66,5 ≤ Timeslot ISCP < -66,0</u>	<u>dBm</u>
<u>UTRAN TS ISCP LEV 109</u>	<u>-66,0 ≤ Timeslot ISCP</u>	<u>dBm</u>

9.2.1.3 RECEIVED TOTAL WIDE BAND POWER

The measurement period shall be [100] ms.

9.2.1.3.1 Absolute accuracy requirements

Table 9.34 RECEIVED TOTAL WIDE BAND POWER Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]	Conditions	BS class
			lo [dBm]	
<u>RECEIVED TOTAL WIDE BAND POWER</u>	<u>dB</u>	<u>± 4</u>	<u>-105..-74</u>	<u>Wide area BS</u>
<u>RECEIVED TOTAL WIDE BAND POWER</u>	<u>dB</u>	<u>± 4</u>	<u>-91...-60</u>	<u>Local area BS</u>

9.2.1.3.2 Range/mapping

The reporting range for RECEIVED TOTAL WIDE BAND POWER is from -112 ... -50 dBm.

In table 9.35 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.35

Reported value	Measured quantity value	Unit
<u>RECEIVED TOTAL WIDE BAND POWER LEV_000</u>	<u>RECEIVED TOTAL WIDE BAND POWER < -112,0</u>	<u>dBm</u>
<u>RECEIVED TOTAL WIDE BAND POWER LEV_001</u>	<u>-112,0 ≤ RECEIVED TOTAL WIDE BAND POWER < -111,9</u>	<u>dBm</u>
<u>RECEIVED TOTAL WIDE BAND POWER LEV_002</u>	<u>-111,9 ≤ RECEIVED TOTAL WIDE BAND POWER < -111,8</u>	<u>dBm</u>
<u>...</u>	<u>...</u>	<u>...</u>
<u>RECEIVED TOTAL WIDE BAND POWER LEV_619</u>	<u>-50,2 ≤ RECEIVED TOTAL WIDE BAND POWER < -50,1</u>	<u>dBm</u>
<u>RECEIVED TOTAL WIDE BAND POWER LEV_620</u>	<u>-50,1 ≤ RECEIVED TOTAL WIDE BAND POWER < -50,0</u>	<u>dBm</u>
<u>RECEIVED TOTAL WIDE BAND POWER LEV_621</u>	<u>-50,0 ≤ RECEIVED TOTAL WIDE BAND POWER</u>	<u>dBm</u>

A.9.2 Measurement Performance for UTRAN

A.9.2.1 UTRAN RX measurements

If not otherwise stated, the test parameters in table A.9.5-1 for the wide area BS and table 9.5-2 for the local area BS should be applied for UTRAN RX measurements requirements in this clause.

Table A.9.5 Intra frequency test parameters for UTRAN RX Measurements for wide area BS

<u>Parameter</u>	<u>Unit</u>	<u>Cell 1</u>
<u>UTRA RF Channel number</u>		<u>Channel 1</u>
<u>Timeslot</u>		[]
<u>DPCH Ec/Ior</u>	<u>dB</u>	[]
<u>I_{or}/I_{oc}</u>	<u>dB</u>	[]
<u>I_{oc}</u>	<u>dBm/ 3,84 MHz</u>	<u>-89</u>
<u>Range: I_o</u>	<u>dBm</u>	<u>-105..-74</u>
<u>Propagation condition</u>	<u>:</u>	<u>AWGN</u>

Table A.9.5 Intra frequency test parameters for UTRAN RX Measurements for local area BS

<u>Parameter</u>	<u>Unit</u>	<u>Cell 1</u>
<u>UTRA RF Channel number</u>		<u>Channel 1</u>
<u>Timeslot</u>		[]
<u>DPCH Ec/Ior</u>	<u>dB</u>	[]
<u>I_{or}/I_{oc}</u>	<u>dB</u>	[]
<u>I_{oc}</u>	<u>dBm/ 3,84 MHz</u>	<u>-74</u>
<u>Range: I_o</u>	<u>dBm</u>	<u>-91..-60</u>
<u>Propagation condition</u>	<u>:</u>	<u>AWGN</u>

7.3 Changes in 25.142

This section describes the considered changes to base station conformance testing, with respect to Release 1999 requirements in TS25.142.

8 Impacts to other WGs

8.1 WG1

8.2 WG2

8.3 WG3

9 Backward Compatibility

History

Document history		
Date	Version	Comment
14 Sept 2000	0.0.1	Document created
24 Nov 2000	1.0.0	Update based on TSG RAN WG4 meeting #14 approved input documents R4-000860, R4-000880, R4-000882, R4-000883, R4-000884
30 Jan 2001	1.0.1	Update based on TSG RAN WG4 meeting #15 approved input documents R4-010080, R4-010081, R4-010084, R4-010152
05 March 2001	1.1.0	Update based on TSG RAN WG4 meeting #16 approved input documents R4-010067, R4-010068, R4-010069, R4-010070, R4-010071
Editor for 3G TR 25.952 is:		
Timothy A. Axness (Interdigital Communications Corp.) Tel. : 610-878-5646 Fax : 631-878-7841 Email : tim.axness@interdigital.com		
This document is written in Microsoft Word version Word97.		

Annex <X>:
Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New