

Title: Group Release and security discussions.
Technically endorsed Rel-5 CRs to TS 25.331.

Source: TSG-RAN WG2

Agenda item: 7.2.5

Doc-1st-	Status-1st-Level	Spec	CR	Rev	Phase	Subject	Cat	Version-	Version
R2-023229	Technically endorsed	25.331	1799	-	Rel-5	Group release with security	C	5.2.0	5.3.0
R2-023230	Technically endorsed	25.331	1800	-	Rel-5	Group release without security	C	5.2.0	5.3.0

CHANGE REQUEST

⌘ 25.331 CR 1799 ⌘ rev - ⌘ Current version: 5.2.0 ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

Title:	⌘ Group release with security	
Source:	⌘ Ericsson	
Work item code:	⌘ TEI-5	Date: ⌘ November 2002
Category:	⌘ C Use <u>one of the following categories:</u> F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification)	Release: ⌘ REL-5 Use <u>one of the following releases:</u> 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5)
Detailed explanations of the above categories can be found in 3GPP TR 21.900.		

Reason for change: ⌘ After an RNC or CN edge node reset, there is a need to release the UEs for which the context was lost. See also R2-020734, "Actions at RNC reset".
In release 99 and release 4 there exists no optimal method for mass release of UEs.
A more efficient and at the same time secure mechanism for mass release of UEs at RNC reset is therefore necessary.

Summary of change: ⌘ Assignment of Group release indicia
After the establishment of the RRC connection, UTRAN assigns the UE a Group release indicia, which is then stored by the UE. The assignment should be made by the Security mode control procedure (when integrity protection is started). Since the Group release indicia is related to the U-RNTI, a new Group release indicia needs to be conveyed in all messages that can update the U-RNTI. If a new U-RNTI is received, but no Group release indicia, the UE clears the previous received Group release indicia.
UE group addressing at release
Inclusion of UE group addressing in the RRC CONNECTION RELEASE message on CCCH. The group is indicated using a variable length group address (*U-RNTI group*), which is compared to 1-31 most significant bits the UE's U-RNTI. Inclusion of RRC connection release possibility in the PAGING TYPE 1 message, using the same type of group addressing as in the RRC CONNECTION RELEASE message on CCCH. Up to eight U-RNTI groups can be included in one message.
Authentication of group release
When a group release attempt is performed by UTRAN, a Group release key is included in the message. This is the first time the key is sent on the radio interface. The UE calculates a group release indicia "I" from the group release key "KEY" using $fx=(KEY, U_RNTI)$ and compares it to the one received previously.
Detailed changes:
• 8.1.2 (Paging): Group addressing and release possibility added to the

<p>procedure.</p> <ul style="list-style-type: none"> • 8.1.4 (RRC connection release): Group addressing possibility added in the procedure. • 8.6.3.10a, 8.6.3.13, 8.6.3.14: UE actions specified for the IEs "U-RNTI group", "Group release indicia" and "Group release key". Reference added to TS 33.102 regarding how to calculate a Group Release Indicia from the Group Release Key and the U-RNTI. • The optional IE "Group release indicia" is added as a non-critical extension to the CELL UPDATE CONFIRM, PHYSICAL CHANNEL RECONFIGURATION, RADIO BEARER RECONFIGURATION, RADIO BEARER RELEASE, RADIO BEARER SETUP, SECURITY MODE COMMAND, TRANSPORT CHANNEL RECONFIGURATION, URA UPDATE CONFIRM and UTRAN MOBILITY INFORMATION messages. • Inclusion of the IEs "U-RNTI group" and "Group release key" as a critical extension in the RRC CONNECTION RELEASE message for CCCH. • Inclusion of the IEs "U-RNTI group", "Release cause" and "Group release key" as a non-critical extension in the PAGING TYPE 1 message. • Inclusion of definitions of the IEs "U-RNTI group", "Group release indicia" and "Group release key". • Addition of a new variable GROUP_RELEASE_INDICIA.
<p>Consequences if not approved:</p> <p>⌘ Mass release of UEs will still be possible, but will cause high signalling load and possibly side-effects.</p>
<p>Clauses affected:</p> <p>⌘ 8.1.2.1, 8.1.2.3, 8.1.4.3, 8.6.3.10a (new), 8.6.3.13 (new), 8.6.3.14 (new), 10.2.8, 10.2.22, 10.2.30, 10.2.33, 10.2.37, 10.2.43, 10.2.50, 10.2.61, 10.2.62, 10.3.3.14n (new), 10.3.3.14o (new), 10.3.3.23, 10.3.3.32a (new), 10.3.3.47, 10.3.3.47a (new), 10.3.3.48, 10.3.10, 11.2, 11.3, 11.4, 13.4.8n (new).</p>
<p>Other specs affected:</p> <p>⌘ <input checked="" type="checkbox"/> Other core specifications <input checked="" type="checkbox"/> Test specifications <input checked="" type="checkbox"/> O&M Specifications</p>
<p>Other comments:</p> <p>⌘</p>

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: http://www.3gpp.org/3G_Specs/CRs.htm. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

8.1.2 Paging

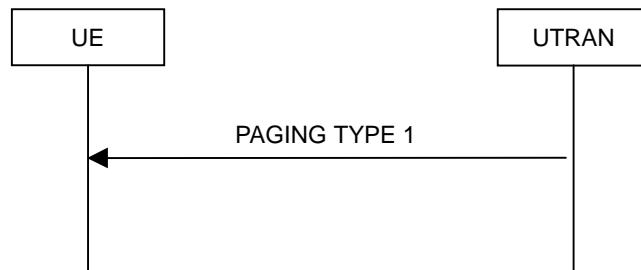


Figure 8.1.2-1: Paging

8.1.2.1 General

This procedure is used to transmit paging information to selected UEs in idle mode, CELL_PCH or URA_PCH state using the paging control channel (PCCH). Upper layers in the network may request paging, to e.g. establish a signalling connection. UTRAN may initiate paging for UEs in CELL_PCH or URA_PCH state to trigger a cell update procedure. In addition, UTRAN may initiate paging for UEs in idle mode, CELL_PCH and URA_PCH state to trigger reading of updated system information. UTRAN may also initiate paging for UEs in CELL_PCH and URA_PCH state to release the RRC connection.

8.1.2.2 Initiation

UTRAN initiates the paging procedure by transmitting a PAGING TYPE 1 message on an appropriate paging occasion on the PCCH.

UTRAN may repeat transmission of a PAGING TYPE 1 message to a UE in several paging occasions to increase the probability of proper reception of a page.

UTRAN may page several UEs in the same paging occasion by including one IE "Paging record" for each UE in the PAGING TYPE 1 message.

For CN originated paging, UTRAN should set the IE "Paging cause" to the cause for paging received from upper layers. If no cause for paging is received from upper layers, UTRAN should set the value "Terminating – cause unknown".

UTRAN may also indicate that system information has been updated, by including the value tag of the master information block in the IE "BCCH modification info" in the PAGING TYPE 1 message. In this case, UTRAN may omit the IEs "Paging record".

8.1.2.3 Reception of a PAGING TYPE 1 message by the UE

A UE in idle mode, CELL_PCH state or URA_PCH state shall receive the paging information for all its monitored paging occasions. For an UE in idle mode, the paging occasions are specified in [4] and depend on the IE "CN domain specific DRX cycle length coefficient", as specified in subclause 8.6.3.1a. For a UE in CELL_PCH state or URA_PCH state, the paging occasions depend also on the IE "UTRAN DRX cycle length coefficient" and the IE "RRC State Indicator", as specified in subclauses 8.6.3.2 and 8.6.3.3 respectively.

When the UE receives a PAGING TYPE 1 message, it shall perform the actions as specified below.

If the UE is in idle mode, for each occurrence of the IE "Paging record" included in the message the UE shall:

- 1> if the IE "Used paging identity" is a CN identity:
- 2> compare the IE "UE identity" with all of its allocated CN UE identities:
- 2> if one match is found:
 - 3> indicate reception of paging; and
 - 3> forward the IE "CN domain identity", the IE "UE identity" and the IE "Paging cause" to the upper layers.

1> otherwise:

2> ignore that paging record.

If the UE is in connected mode, for each occurrence of the IE "Paging record" included in the message the UE shall:

1> if the IE "Used paging identity" is a UTRAN single UE identity and if this U-RNTI is the same as the U-RNTI allocated to the UE stored in the UE variable U_RNTI:

2> if the optional IE "CN originated page to connected mode UE" is included:

3> indicate reception of paging; and

3> forward the IE "CN domain identity", the IE "Paging cause" and the IE "Paging record type identifier" to the upper layers.

2> if the IE "Release indicator" in the IE "RRC connection release information" has the value "Release":

3> release all its radio resources;

3> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to the upper layers;

3> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;

3> clear the variable ESTABLISHED_RABS;

3> pass the value of the IE "Release cause" received in the IE "Release information" to upper layers;

3> enter idle mode;

3> perform the actions specified in subclause 8.5.2 when entering idle mode;

3> and the procedure ends.

2> otherwise:

3> perform a cell update procedure with cause "paging response" as specified in subclause 8.3.1.2.

2> ignore any other remaining IE "Paging record" that may be present in the message.

1> if the IE "Used paging identity" is a UTRAN group identity and there is a group identity match according to subclause 8.6.3.14:

2> if the IE "Release indicator" in the IE "RRC connection release information" has the value "Release":

3> if the authentication of the release was successful according to subclause 8.6.3.14:

4> release all its radio resources;

4> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to the upper layers;

4> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;

4> clear the variable ESTABLISHED_RABS;

4> pass the value of the IE "Release cause" received in the IE "Release information" to upper layers;

4> enter idle mode;

4> perform the actions specified in subclause 8.5.2 when entering idle mode;

4> and the procedure ends.

3> otherwise:

4> ignore that paging record.

2> otherwise:

 3> perform a cell update procedure with cause "paging response" as specified in subclause 8.3.1.2.

 2> ignore any other remaining IE "Paging record" that may be present in the message.

1> otherwise:

 2> ignore that paging record.

If the IE "BCCH modification info" is included, any UE in idle mode, CELL_PCH or URA_PCH state shall perform the actions as specified in subclause 8.1.1 in addition to any actions caused by the IE "Paging record" occurrences in the message as specified above.

8.1.4.3 Reception of an RRC CONNECTION RELEASE message by the UE

The UE shall receive and act on an RRC CONNECTION RELEASE message in states CELL_DCH and CELL_FACH. Furthermore this procedure can interrupt any ongoing procedures with the UE in the above listed states.

When the UE receives the first RRC CONNECTION RELEASE message; and

- 1> if the message is received on the CCCH, and IE "U-RNTI" is present and has the same value as the variable U_RNTI; or
- 1> if the message is received on DCCH:

the UE shall: perform the RRC connection release procedure as specified below.

When the UE receives the first RRC CONNECTION RELEASE message; and

- 1> if the message is received on the CCCH, the IE "UTRAN group identity" is present and there is a group identity match according to 8.6.3.14;

the UE shall authenticate the release according to subclause 8.6.3.14. If the authentication was unsuccessful, the UE shall ignore the RRC CONNECTION RELEASE message and the procedure ends. If the authentication was successful the UE shall perform the RRC connection release procedure as specified below.

The UE shall:

- 1> in state CELL_DCH:
 - 2> initialise the counter V308 to zero;
 - 2> set the IE "RRC transaction identifier" in the RRC CONNECTION RELEASE COMPLETE message to the value of "RRC transaction identifier" in the entry for the RRC CONNECTION RELEASE message in the table "Accepted transactions" in the variable TRANSACTIONS;
 - 2> submit an RRC CONNECTION RELEASE COMPLETE message to the lower layers for transmission using UM RLC on the DCCH to the UTRAN;
 - 2> if the IE "Rplmn information" is present:
 - 3> the UE may:
 - 4> store the IE on the ME together with the PLMN id for which it applies;
 - 3> the UE may then:
 - 4> utilise this information, typically indicating where a number of BCCH frequency ranges of a RAT may be expected to be found, during subsequent Rplmn selections of the indicated PLMN.
 - 2> start timer T308 when the RRC CONNECTION RELEASE COMPLETE message is sent on the radio interface.
- 1> in state CELL_FACH:
 - 2> if the RRC CONNECTION RELEASE message was received on the DCCH:
 - 3> set the IE "RRC transaction identifier" in the RRC CONNECTION RELEASE COMPLETE message to the value of "RRC transaction identifier" in the entry for the RRC CONNECTION RELEASE message in the table "Accepted transactions" in the variable TRANSACTIONS;
 - 3> submit an RRC CONNECTION RELEASE COMPLETE message to the lower layers for transmission using AM RLC on the DCCH to the UTRAN.
 - 3> when the successful transmission of the RRC CONNECTION RELEASE COMPLETE message has been confirmed by the lower layers:
 - 4> release all its radio resources; and

- 4> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to upper layers; and
 - 4> clear any entry for the RRC CONNECTION RELEASE message in the tables "Accepted transactions" and "Rejected transactions" in the variable TRANSACTIONS;
 - 4> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;
 - 4> clear the variable ESTABLISHED_RABS;
 - 4> pass the value of the IE "Release cause" received in the RRC CONNECTION RELEASE message to upper layers;
 - 4> enter idle mode;
 - 4> perform the actions specified in subclause 8.5.2 when entering idle mode.
- 3> and the procedure ends.
- 2> if the RRC CONNECTION RELEASE message was received on the CCCH:
- 3> release all its radio resources;
 - 3> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to the upper layers;
 - 3> clear any entry for the RRC CONNECTION RELEASE message in the tables "Accepted transactions" and "Rejected transactions" in the variable TRANSACTIONS;
 - 3> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;
 - 3> clear the variable ESTABLISHED_RABS;
 - 3> pass the value of the IE "Release cause" received in the RRC CONNECTION RELEASE message to upper layers;
 - 3> enter idle mode;
 - 3> perform the actions specified in subclause 8.5.2 when entering idle mode;
 - 3> and the procedure ends.

8.6.3.12 Capability Update Requirement

If the IE "Capability Update Requirement" is included the UE shall:

- 1> if the IE "UE radio access FDD capability update requirement" has the value TRUE:
 - 2> if the UE supports FDD mode:
 - 3> store its UTRA FDD capabilities and its UTRA capabilities common to FDD and TDD in the IE "UE radio access capability" and the IE "UE radio access capability extension" in variable UE_CAPABILITY_REQUESTED as specified below:
 - 4> if the UE supports multiple UTRA FDD Frequency Bands; or
 - 4> if the UE supports a single UTRA FDD Frequency Band different from 2100 MHz:
 - 5> store the IE "UE radio access capability", excluding IEs "RF capability FDD" and "Measurement capability";
 - 5> store the IE "UE radio access capability extension", including the IEs "RF capability FDD extension" and the "Measurement capability extension" associated with each supported UTRA FDD frequency band indicated in the IE "Frequency band".
 - 4> else:
 - 5> store the IE "UE radio access capability", including the IEs "RF capability FDD" and "Measurement capability" associated with the 2100 MHz UTRA FDD frequency band.
 - 1> if the IE "UE radio access 3.84 Mcps TDD capability update requirement" has the value TRUE:
 - 2> if the UE supports 3.84 Mcps TDD mode:
 - 3> store its UTRAN-specific 3.84 Mcps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD in the variable UE_CAPABILITY_REQUESTED.
 - 1> if the IE "UE radio access 1.28 Mcps TDD capability update requirement" has the value TRUE:
 - 2> if the UE supports 1.28 Mcps TDD mode:
 - 3> store its UTRAN-specific 1.28 Mcps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD in the variable UE_CAPABILITY_REQUESTED.
 - 1> if the IE "System specific capability update requirement list" is present:
 - 2> for each of the RAT requested in the IE "UE system specific capability"
 - 3> if the UE supports the listed RAT:
 - 4> include its inter-RAT radio access capabilities for the listed RAT in the IE "UE system specific capability" from the variable UE_CAPABILITY_REQUESTED.

If the IE " Capability update requirement " is not present, the UE shall:

- 1> assume the default values as specified in subclause 10.3.3.2 and act in accordance with the above.

8.6.3.13 Group release indicia

If the IE "Group release indicia" is included, the UE shall:

- 1> store the value in the variable GROUP_RELEASE_INDICIA.

If the IE "Group release indicia" is not included in a message, and the IE "New U-RNTI" is included in the same message, the UE shall

- 1> clear the variable GROUP_RELEASE_INDICIA.

8.6.3.14 Group release information

The UE shall apply the following procedure to compare the IE “U-RNTI group” with the U-RNTI allocated to the UE stored in the variable U_RNTI.

If the IE “group discriminator” is equal to “All”:

1> consider this as a group identity match.

If the IE “group discriminator” is equal to “U-RNTI mask”:

1> let N be the value of the IE “U-RNTI bit mask index”;

1> if N is equal to b20, b21, ... or b31:

2> compare pairs of bits, starting from bit b31 downto, and including, bit N of the “SRNC identity” of the IE “U-RNTI” with the corresponding bits stored in the variable U_RNTI;

2> if all pairs of bits are equal:

3> consider this as a group identity match.

1> if N is equal to b1, b2, ... or b19:

2> compare pairs of bits, starting from bit b31 downto, and including, bit b20 of the “SRNC identity” in the IE “U-RNTI” with the corresponding bits of the “SRNC identity” stored in the variable U_RNTI;

2> if all pairs of bits are equal:

3> then compare pairs of bits, starting from bit b19 downto, and including, bit N of the “S-RNTI” in the IE “U-RNTI” with the corresponding bits of the “S-RNTI” stored in the variable U_RNTI;

3> if all pairs of bits are equal:

4> consider this as a group identity match.

If there is a group identity match, the UE shall use the following procedure to authenticate the release of RRC connection using the IE “Group release key”:

1> If the variable GROUP_RELEASE_INDICIA is empty:

2> consider the authentication of the RRC connection release as successful.

1> If the variable GROUP_RELEASE_INDICIA is non-empty:

2> calculate an Group release indicia as specified in TS 33.102 [40]. using the received Group release key and the U-RNTI stored in the variable U_RNTI;

2> if the calculated Group release indicia is equal to the value of the variable GROUP_RELEASE_INDICIA:

3> consider the authentication of the RRC connection release as successful.

2> else:

3> consider the authentication of the RRC connection release as unsuccessful.

10.2.8 CELL UPDATE CONFIRM

This message confirms the cell update procedure and can be used to reallocate new RNTI information for the UE valid in the new cell.

RLC-SAP: UM

Logical channel: CCCH or DCCH

Direction: UTRAN→UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE Information Elements					
U-RNTI	CV-CCCH		U-RNTI 10.3.3.47		
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
Activation time	MD		Activation time 10.3.3.1	Default value is "now"	
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
New DSCH-RNTI	OP		DSCH-RNTI 10.3.3.9a		
New H-RNTI	OP		H-RNTI 10.3.3.14a		REL-5
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia 10.3.3.14n</u>		<u>REL-5</u>
RRC State Indicator	MP		RRC State Indicator 10.3.3.10		
UTRAN DRX cycle length coefficient	OP		UTRAN DRX cycle length coefficient 10.3.3.49		
RLC re-establish indicator (RB2, RB3 and RB4)	MP		RLC re-establish indicator 10.3.3.35		
RLC re-establish indicator (RB5 and upwards)	MP		RLC re-establish indicator 10.3.3.35		
CN Information Elements					
CN Information info	OP		CN Information info 10.3.1.3		
UTRAN Information Elements					

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
URA identity	OP		URA identity 10.3.2.6		
RB information elements					
RB information to release list	OP	1 to <maxRB>			
>RB information to release	MP		RB information to release 10.3.4.19		
RB information to reconfigure list	OP	1 to <maxRB>			
>RB information to reconfigure	MP		RB information to reconfigure 10.3.4.18		
RB information to be affected list	OP	1 to <maxRB>			
>RB information to be affected	MP		RB information to be affected 10.3.4.17		
Downlink counter synchronisation info	OP				
>RB with PDCP information list	OP	1 to <maxRBall RABs>			
>>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
	OP				REL-5
>>PDCP context relocation info	OP		PDCP context relocation info 10.3.4.1a	This IE is needed for each RB having PDCP and performing PDCP context relocation	REL-5
TrCH Information Elements					
Uplink transport channels					
UL Transport channel information common for all transport channels	OP		UL Transport channel information common for all transport channels 10.3.5.24		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted UL TrCH information	MP		Deleted UL TrCH information 10.3.5.5		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured UL TrCH information	MP		Added or Reconfigured UL TrCH information 10.3.5.2		
CHOICE mode	MP				

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>FDD					
>>CPCH set ID	OP		CPCH set ID 10.3.5.3		
>>Added or Reconfigured TrCH information for DRAC list	OP	1 to <maxTrCH>			
>>>DRAC static information	MP		DRAC static information 10.3.5.7		
>TDD				(no data)	
Downlink transport channels					
DL Transport channel information common for all transport channels	OP		DL Transport channel information common for all transport channels 10.3.5.6		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted DL TrCH information	MP		Deleted DL TrCH information 10.3.5.4		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured DL TrCH information	MP		Added or Reconfigure d DL TrCH information 10.3.5.1		
PhyCH information elements					
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information	
Uplink radio resources					
Maximum allowed UL TX power	MD		Maximum allowed UL TX power 10.3.6.39	Default value is the existing maximum UL TX power	
CHOICE channel requirement	OP				
>Uplink DPCH info			Uplink DPCH info 10.3.6.88.		
>CPCH SET Info			CPCH SET Info 10.3.6.13		
Downlink radio resources					
CHOICE mode	MP				
>FDD					
>>Downlink PDSCH information	OP		Downlink PDSCH information 10.3.6.30		
>TDD				(no data)	
Downlink HS-PDSCH Information	OP		Downlink HS_PDSCH Information 10.3.6.23a		REL-5
Downlink information common for all radio links	OP		Downlink information common for		

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			all radio links 10.3.6.24		
Downlink information per radio link list	OP	1 to <maxRL>		Send downlink information for each radio link to be set-up	
>Downlink information for each radio link	MP		Downlink information for each radio link 10.3.6.27		

Condition	Explanation
CCCH	This IE is mandatory present when CCCH is used and ciphering is not required and not needed otherwise.

10.2.22 PHYSICAL CHANNEL RECONFIGURATION

This message is used by UTRAN to assign, replace or release a set of physical channels used by a UE.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN → UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE Information Elements					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
Activation time	MD		Activation time 10.3.3.1	Default value is "now"	
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
New DSCH-RNTI	OP		DSCH-RNTI 10.3.3.9a		
New H-RNTI	OP		H-RNTI 10.3.3.14a		REL-5
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia</u> 10.3.3.14n		<u>REL-5</u>
RRC State Indicator	MP		RRC State Indicator 10.3.3.10		
UTRAN DRX cycle length coefficient	OP		UTRAN DRX cycle length coefficient 10.3.3.49		
CN Information Elements					
CN Information info	OP		CN Information info 10.3.1.3		
UTRAN mobility information elements					
URA identity	OP		URA identity 10.3.2.6		
RB information elements					
Downlink counter synchronisation info	OP				
>RB with PDCP information list	OP	1 to <maxRBall RABs>			

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
	OP				REL-5
>>PDCP context relocation info	OP		PDCP context relocation info 10.3.4.1a	This IE is needed for each RB having PDCP and performing PDCP context relocation	REL-5
PhyCH information elements					
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information	
Uplink radio resources					
Maximum allowed UL TX power	MD		Maximum allowed UL TX power 10.3.6.39	Default value is the existing value of the maximum allowed UL TX power	
CHOICE channel requirement	OP				
>Uplink DPCH info			Uplink DPCH info 10.3.6.88		
>CPCH SET Info			CPCH SET Info 10.3.6.13		
>CPCH set ID			CPCH set ID 10.3.5.3		
Downlink radio resources					
CHOICE mode	MP				
>FDD					
>>Downlink PDSCH information	OP		Downlink PDSCH information 10.3.6.30		
>TDD				(no data)	
Downlink HS-PDSCH Information	OP		Downlink HS_PDSCH Information 10.3.6.23a		REL-5
Downlink information common for all radio links	OP		Downlink information common for all radio links 10.3.6.24		
Downlink information per radio link list	OP	1 to <maxRL>		Send downlink information for each radio link	
>Downlink information for each radio link	MP		Downlink information for each radio link 10.3.6.27		

10.2.27 RADIO BEARER RECONFIGURATION

This message is sent from UTRAN to reconfigure parameters related to a change of QoS. This procedure can also change the multiplexing of MAC, reconfigure transport channels and physical channels.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN → UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE Information elements					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
Activation time	MD		Activation time 10.3.3.1	Default value is "now"	
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
New DSCH-RNTI	OP		DSCH-RNTI 10.3.3.9a		
New H-RNTI	OP		H-RNTI 10.3.3.14a		REL-5
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia</u> 10.3.3.14n		<u>REL-5</u>
RRC State Indicator	MP		RRC State Indicator 10.3.3.10		
UTRAN DRX cycle length coefficient	OP		UTRAN DRX cycle length coefficient 10.3.3.49		
CN information elements					
CN Information info	OP		CN Information info 10.3.1.3		
UTRAN mobility information elements					
URA identity	OP		URA identity 10.3.2.6		
RB information elements					
RAB information to reconfigure list	OP	1 to < maxRABsetup >			
>RAB information to reconfigure	MP		RAB information to		

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			reconfigure 10.3.4.11		
RB information to reconfigure list	MP	1 to <maxRB>		Although this IE is not always required, need is MP to align with ASN.1	
	OP				REL-4
>RB information to reconfigure	MP		RB information to reconfigure 10.3.4.18		
RB information to be affected list	OP	1 to <maxRB>			
>RB information to be affected	MP		RB information to be affected 10.3.4.17		
RB with PDCP context relocation info list	OP	1 to <maxRBall RABs>		This IE is needed for each RB having PDCP and performing PDCP context relocation	REL-5
>RB identity	MP		RB identity 10.3.4.16		REL-5
>PDCP context relocation info	MP		PDCP context relocation info 10.3.4.1a		REL-5
TrCH Information Elements					
Uplink transport channels					
UL Transport channel information common for all transport channels	OP		UL Transport channel information common for all transport channels 10.3.5.24		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted UL TrCH information	MP		Deleted UL TrCH information 10.3.5.5		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured UL TrCH information	MP		Added or Reconfigured UL TrCH information 10.3.5.2		
CHOICE mode	OP				
>FDD					
>>CPCH set ID	OP		CPCH set ID 10.3.5.3		
>>Added or Reconfigured TrCH information for DRAC list	OP	1 to <maxTrCH>			
>>>DRAC static information	MP		DRAC static information		

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			10.3.5.7		
>TDD				(no data)	
Downlink transport channels					
DL Transport channel information common for all transport channels	OP		DL Transport channel information common for all transport channels 10.3.5.6		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted DL TrCH information	MP		Deleted DL TrCH information 10.3.5.4		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured DL TrCH information	MP		Added or Reconfigured DL TrCH information 10.3.5.1		
PhyCH information elements					
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information	
Uplink radio resources					
Maximum allowed UL TX power	MD		Maximum allowed UL TX power 10.3.6.39	Default value is the existing maximum UL TX power	
CHOICE channel requirement	OP				
>Uplink DPCH info			Uplink DPCH info 10.3.6.88		
>CPCH SET Info			CPCH SET Info 10.3.6.13		
Downlink radio resources					
CHOICE mode	MP				
>FDD					
>>Downlink PDSCH information	OP		Downlink PDSCH information 10.3.6.30		
>TDD				(no data)	
Downlink HS-PDSCH Information	OP		Downlink HS-PDSCH Information 10.3.6.23a		REL-5
Downlink information common for all radio links	OP		Downlink information common for all radio links 10.3.6.24		
Downlink information per radio link list	MP	1 to <maxRL>		Although this IE is not always required, need is MP to align with ASN.1	
	OP				REL-4

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>Downlink information for each radio link	MP		Downlink information for each radio link 10.3.6.27		

10.2.30 RADIO BEARER RELEASE

This message is used by UTRAN to release a radio bearer. It can also include modifications to the configurations of transport channels and/or physical channels. It can simultaneously indicate release of a signalling connection when UE is connected to more than one CN domain.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN → UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE Information Elements					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
Activation time	MD		Activation time 10.3.3.1	Default value is "now"	
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
New DSCH-RNTI	OP		DSCH-RNTI 10.3.3.9a		
New H-RNTI	OP		H-RNTI 10.3.3.14a		REL-5
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia</u> 10.3.3.14n		<u>REL-5</u>
RRC State Indicator	MP		RRC State Indicator 10.3.3.10		
UTRAN DRX cycle length coefficient	OP		UTRAN DRX cycle length coefficient 10.3.3.49		
CN Information Elements					
CN Information info	OP		CN Information info 10.3.1.3		
Signalling Connection release indication	OP		CN domain identity 10.3.1.1		
UTRAN mobility information elements					
URA identity	OP		URA identity 10.3.2.6		
RB Information Elements					
RAB information to reconfigure list	OP	1 to < maxRABse			

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
		tup >			
>RAB information to reconfigure	MP		RAB information to reconfigure 10.3.4.11		
RB information to release list	MP	1 to <maxRB>			
>RB information to release	MP		RB information to release 10.3.4.19		
RB information to be affected list	OP	1 to <maxRB>			
>RB information to be affected	MP		RB information to be affected 10.3.4.17		
Downlink counter synchronisation info	OP				
>>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
	OP				REL-5
>>PDCP context relocation info	OP		PDCP context relocation info 10.3.4.1a	This IE is needed for each RB having PDCP and performing PDCP context relocation	REL-5
TrCH Information Elements					
Uplink transport channels					
UL Transport channel information common for all transport channels	OP		UL Transport channel information common for all transport channels 10.3.5.24		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted UL TrCH information	MP		Deleted UL TrCH information 10.3.5.5		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured UL TrCH information	MP		Added or Reconfigured UL TrCH information 10.3.5.2		
CHOICE mode	OP				
>FDD					
>>CPCH set ID	OP		CPCH set ID 10.3.5.3		
>>Added or Reconfigured TrCH information for DRAC list	OP	1 to <maxTrCH>			
>>>DRAC static information	MP		DRAC static		

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			information 10.3.5.7		
>TDD				(no data)	
Downlink transport channels					
DL Transport channel information common for all transport channels	OP		DL Transport channel information common for all transport channels 10.3.5.6		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted DL TrCH information	MP		Deleted DL TrCH information 10.3.5.4		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured DL TrCH information	MP		Added or Reconfigured DL TrCH information 10.3.5.1		
PhyCH information elements					
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information	
Uplink radio resources					
Maximum allowed UL TX power	MD		Maximum allowed UL TX power 10.3.6.39	Default value is the existing maximum UL TX power	
<i>CHOICE channel requirement</i>	OP				
>Uplink DPCH info			Uplink DPCH info 10.3.6.88		
>CPCH SET Info			CPCH SET Info 10.3.6.13		
Downlink radio resources					
<i>CHOICE mode</i>	MP				
>FDD					
>>Downlink PDSCH information	OP		Downlink PDSCH information 10.3.6.30		
>TDD				(no data)	
Downlink HS-PDSCH Information	OP		Downlink HS-PDSCH Information 10.3.6.23a		REL-5
Downlink information common for all radio links	OP		Downlink information common for all radio links 10.3.6.24		
Downlink information per radio link list	OP	1 to <maxRL>		Send downlink information for each radio link to be set-up	
>Downlink information for each	MP		Downlink		

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
radio link			information for each radio link 10.3.6.27		

10.2.33 RADIO BEARER SETUP

This message is sent by UTRAN to the UE to establish new radio bearer(s). It can also include modifications to the configurations of transport channels and/or physical channels.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN → UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE Information Elements					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
Activation time	MD		Activation time 10.3.3.1	Default value is "now"	
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
New DSCH-RNTI	OP		DSCH-RNTI 10.3.3.9a		
New H-RNTI	OP		H-RNTI 10.3.3.14a		REL-5
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia 10.3.3.14n</u>		<u>REL-5</u>
RRC State Indicator	MP		RRC State Indicator 10.3.3.10		
UTRAN DRX cycle length coefficient	OP		UTRAN DRX cycle length coefficient 10.3.3.49		
CN Information Elements					
CN Information info	OP		CN Information info 10.3.1.3		
UTRAN mobility information elements					
URA identity	OP		URA identity 10.3.2.6		
RB Information Elements					
Signalling RB information to setup list	OP	1 to <maxSRBs etup>		For each signalling radio bearer established	
>Signalling RB information to setup	MP		Signalling RB information		

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			to setup 10.3.4.24		
RAB information to setup list	OP	1 to <maxRABs etup>		For each RAB established	
>RAB information for setup	MP		RAB information for setup 10.3.4.10		
RB information to be affected list	OP	1 to <maxRB>			
>RB information to be affected	MP		RB information to be affected 10.3.4.17		
Downlink counter synchronisation info	OP				
>>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
	OP				REL-5
>>PDCP context relocation info	OP		PDCP context relocation info 10.3.4.1a	This IE is needed for each RB having PDCP and performing PDCP context relocation	REL-5
TrCH Information Elements					
Uplink transport channels					
UL Transport channel information common for all transport channels	OP		UL Transport channel information common for all transport channels 10.3.5.24		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted UL TrCH information	MP		Deleted UL TrCH information 10.3.5.5		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured UL TrCH information	MP		Added or Reconfigured UL TrCH information 10.3.5.2		
CHOICE mode	OP				
>FDD					
>>CPCH set ID	OP		CPCH set ID 10.3.5.3		
>>Added or Reconfigured TrCH information for DRAC list	OP	1 to <maxTrCH>			
>>>DRAC static information	MP		DRAC static information 10.3.5.7		
>TDD				(no data)	

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Downlink transport channels					
DL Transport channel information common for all transport channels	OP		DL Transport channel information common for all transport channels 10.3.5.6		
Deleted TrCH information list	OP	1 to <maxTrCH>			
>Deleted DL TrCH information	MP		Deleted DL TrCH information 10.3.5.4		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured DL TrCH information	MP		Added or Reconfigured DL TrCH information 10.3.5.1		
PhyCH information elements					
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information	
Uplink radio resources					
Maximum allowed UL TX power	MD		Maximum allowed UL TX power 10.3.6.39	Default value is the existing maximum UL TX power	
<i>CHOICE channel requirement</i>	OP				
>Uplink DPCCH info			Uplink DPCCH info 10.3.6.88		
>CPCH SET Info			CPCH SET Info 10.3.6.13		
Downlink radio resources					
<i>CHOICE mode</i>	MP				
>FDD					
>>Downlink PDSCH information	OP		Downlink PDSCH information 10.3.6.30		
>TDD				(no data)	
Downlink HS-PDSCH Information	OP		Downlink HS-PDSCH Information 10.3.6.23a		REL-5
Downlink information common for all radio links	OP		Downlink information common for all radio links 10.3.6.24		
Downlink information per radio link list	OP	1 to <maxRL>		Send downlink information for each radio link	
>Downlink information for each radio link	MP		Downlink information for each radio link 10.3.6.27		

10.2.37 RRC CONNECTION RELEASE

This message is sent by UTRAN to release the RRC connection. The message also releases the signalling connection and all radio bearers between the UE and UTRAN.

RLC-SAP: UM

Logical channel: CCCH or DCCH

Direction: UTRAN→UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE information elements					
<u>CHOICE identity type</u>	<u>CV-CCCH</u>				<u>REL-5</u>
≥U-RNTI	<u>CV-CCCH</u>		U-RNTI 10.3.3.47		
> Group identity		<u>1 to <maxURN Tlgroup></u>			<u>REL-5</u>
>>Group release information	MP		<u>Group release information 10.3.3.14o</u>		<u>REL-5</u>
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CV-DCCH		Integrity check info 10.3.3.16	Integrity check info is included if integrity protection is applied	
N308	CH- <i>Cell_DCH</i>		Integer(1..8)		
Release cause	MP		Release cause 10.3.3.32		
Other information elements					
Rplmn information	OP		Rplmn information 10.3.8.15		

Condition	Explanation
CCCH	This IE is mandatory present when CCCH is used and not needed otherwise.
DCCH	This IE is mandatory present when DCCH is used and not needed otherwise.
Cell_DCH	This IE is mandatory present when UE is in CELL_DCH state and not needed otherwise.

10.2.43 SECURITY MODE COMMAND

This message is sent by UTRAN to start or reconfigure ciphering and/or integrity protection parameters.

RLC-SAP: AM

Logical channel: DCCH

Direction: UTRAN to UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE information elements					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	MP		Integrity check info 10.3.3.16		
Security capability	MP		Security capability 10.3.3.37		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5	Only present if ciphering shall be controlled	
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19	Only present if integrity protection shall be controlled	
Group release indicia	OP		Group release indicia 10.3.3.14n		REL-5
CN Information elements					
CN domain identity	MP		CN domain identity 10.3.1.1	Indicates which cipher and integrity protection keys are applicable	
Other information elements					
UE system specific security capability	CH	1 to <maxInter SysMessages>		This IE is included if the IE "Inter-RAT UE radio access capability" was included in RRC CONNECTION SETUP COMPLETE message	
>Inter-RAT UE security capability	MP		Inter-RAT UE security capability 10.3.8.8a		

10.2.50 TRANSPORT CHANNEL RECONFIGURATION

This message is used by UTRAN to configure the transport channel of a UE. This also includes a possible reconfiguration of physical channels. The message can also be used to assign a TFC subset and reconfigure physical channel.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN → UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE Information Elements					
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16		
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
Activation time	MD		Activation time 10.3.3.1	Default value is "now"	
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
New DSCH-RNTI	OP		DSCH-RNTI 10.3.3.9a		
New H-RNTI	OP		H-RNTI 10.3.3.14a		REL-5
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia 10.3.3.14n</u>		<u>REL-5</u>
RRC State Indicator	MP		RRC State Indicator 10.3.3.10		
UTRAN DRX cycle length coefficient	OP		UTRAN DRX cycle length coefficient 10.3.3.49		
CN Information Elements					
CN Information info	OP		CN Information info 10.3.1.3		
UTRAN mobility information elements					
URA identity	OP		URA identity 10.3.2.6		
RB information elements					
Downlink counter synchronisation info	OP				

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
	OP				REL-5
>>PDCP context relocation info	OP		PDCP context relocation info 10.3.4.1a	This IE is needed for each RB having PDCP and performing PDCP context relocation	REL-5
TrCH Information Elements					
Uplink transport channels					
UL Transport channel information common for all transport channels	OP		UL Transport channel information common for all transport channels 10.3.5.24		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured UL TrCH information	MP		Added or Reconfigured UL TrCH information 10.3.5.2		
CHOICE mode	OP				
>FDD					
>>CPCH set ID	OP		CPCH set ID 10.3.5.3		
>>Added or Reconfigured TrCH information for DRAC list	OP	1 to <maxTrCH>			
>>>DRAC static information	MP		DRAC static information 10.3.5.7		
>TDD				(no data)	
Downlink transport channels					
DL Transport channel information common for all transport channels	OP		DL Transport channel information common for all transport channels 10.3.5.6		
Added or Reconfigured TrCH information list	OP	1 to <maxTrCH>			
>Added or Reconfigured DL TrCH information	MP		Added or Reconfigured DL TrCH information 10.3.5.1		
PhyCH information elements					
Frequency info	MD		Frequency info 10.3.6.36	Default value is the existing value of frequency information	
Uplink radio resources					
Maximum allowed UL TX power	MD		Maximum allowed UL TX power	Default value is the existing maximum UL TX	

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
			10.3.6.39	power	
CHOICE channel requirement	OP				
>Uplink DPCH info			Uplink DPCH info 10.3.6.88		
>CPCH SET Info			CPCH SET Info 10.3.6.13		
Downlink radio resources					
CHOICE mode	MP				
>FDD					
>>Downlink PDSCH information	OP		Downlink PDSCH information 10.3.6.30		
>TDD				(no data)	
Downlink HS-PDSCH Information	OP		Downlink HS-PDSCH Information 10.3.6.23a		REL-5
Downlink information common for all radio links	OP		Downlink information common for all radio links 10.3.6.24		
Downlink information per radio link list	OP	1 to <maxRL>		Send downlink information for each radio link	
>Downlink information for each radio link	MP		Downlink information for each radio link 10.3.6.27		

10.2.61 URA UPDATE CONFIRM

This message confirms the URA update procedure and can be used to reallocate new RNTI information for the UE valid after the URA update.

RLC-SAP: UM

Logical channel: CCCH or DCCH

Direction: UTRAN→UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE information elements					
U-RNTI	CV-CCCH		U-RNTI 10.3.3.47		
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CH		Integrity check info 10.3.3.16	Integrity check info is included if integrity protection is applied	
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia 10.3.3.14n</u>		<u>REL-5</u>
RRC State Indicator	MP		RRC State Indicator 10.3.3.10		
UTRAN DRX cycle length coefficient	OP		UTRAN DRX cycle length coefficient 10.3.3.49		
CN Information Elements					
CN Information info	OP		CN Information info 10.3.1.3		
UTRAN mobility information elements					
URA identity	OP		URA identity 10.3.2.6		
RB information elements					
Downlink counter synchronisation info	OP				
>>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
	OP				REL-5

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
>>PDCP context relocation info	OP		PDCP context relocation info 10.3.4.1a	This IE is needed for each RB having PDCP and performing PDCP context relocation	REL-5

Condition	Explanation
CCCH	This IE is mandatory present when CCCH is used and not needed otherwise.

10.2.62 UTRAN MOBILITY INFORMATION

This message is used by UTRAN to allocate a new RNTI and to convey other UTRAN mobility related information to a UE.

RLC-SAP: AM or UM

Logical channel: DCCH

Direction: UTRAN→UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE Information Elements					
Integrity check info	CH		Integrity check info 10.3.3.16		
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity protection mode info	OP		Integrity protection mode info 10.3.3.19		
Ciphering mode info	OP		Ciphering mode info 10.3.3.5		
New U-RNTI	OP		U-RNTI 10.3.3.47		
New C-RNTI	OP		C-RNTI 10.3.3.8		
<u>Group release indicia</u>	<u>OP</u>		<u>Group release indicia 10.3.3.14n</u>		<u>REL-5</u>
UE Timers and constants in connected mode	OP		UE Timers and constants in connected mode 10.3.3.43		
CN Information Elements					
CN Information info	OP		CN Information info full 10.3.1.3a		
UTRAN Information Elements					
URA identity	OP		URA identity 10.3.2.6		
RB Information elements					
Downlink counter synchronisation info	OP				
>>RB with PDCP information	MP		RB with PDCP information 10.3.4.22	This IE is needed for each RB having PDCP in the case of lossless SRNS relocation	
>>PDCP context relocation info	OP		PDCP context relocation info	This IE is needed for each RB having PDCP and performing PDCP	REL-5

Information Element/Group name	Need	Multi	Type and reference	Semantics description	<u>Version</u>
			10.3.4.1a	context relocation	

10.3.3.14 Failure cause and error information

Cause for failure to perform the requested procedure.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Failure cause	MP		Failure cause 10.3.3.13	
Protocol error information	CV- <i>ProtErr</i>		Protocol error information 10.3.8.12	
Deleted TGPSI	CV- <i>CompMod eErr</i>		TGPSI 10.3.6.82	

Condition	Explanation
<i>ProtErr</i>	The IE is mandatory present if the IE "Failure cause" has the value "Protocol error"; otherwise it is not needed in the message.
<i>CompModeErr</i>	The IE is mandatory present if the IE "Failure cause" has the value "Compressed mode runtime error"; otherwise it is not needed in the message

10.3.3.14n Group release indicia

Contains information sent prior to an RRC connection group release, to be used to authenticate the group release.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Group release indicia	MP		Bit string (128)		REL-5

10.3.3.14o Group release information

Contains addressing and authentication information to perform a release of a group of RRC connections.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
U-RNTI group	MP		U-RNTI group 10.3.3.47a		REL-5
Group release key	MP		Bit string (128)		REL-5

10.3.3.14a H-RNTI

The H-RNTI identifies an UE having a HS-PDSCH assignment within a cell.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
H-RNTI	MP		bit string(16)		REL-5

10.3.3.23 Paging record

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE Used paging identity	MP				
>CN identity					
>>Paging cause	MP		Paging cause 10.3.3.22		
>>CN domain identity	MP		CN domain identity 10.3.1.1		
>>CHOICE UE Identity	MP			Three spare values are needed.	
>>>IMSI (GSM-MAP)			IMSI (GSM-MAP) 10.3.1.5		
>>>TMSI (GSM-MAP)			TMSI (GSM-MAP) 10.3.1.17		
>>>P-TMSI (GSM-MAP)			P-TMSI (GSM-MAP) 10.3.1.13		
>>>IMSI (DS-41)			TIA/EIA/IS-2000-4		
>>>TMSI (DS-41)			TIA/EIA/IS-2000-4		
>UTRAN single UE identity					
>>U-RNTI	MP		U-RNTI 10.3.3.47		
>>CN originated page to connected mode UE	OP				
>>>Paging cause	MP		Paging cause 10.3.3.22		
>>>CN domain identity	MP		CN domain identity 10.3.1.1		
>>>Paging record type identifier	MP		Paging record type identifier 10.3.1.10		
>>RRC connection release information	MP		RRC connection release information 10.3.3.32a		REL-5
>UTRAN group identity		1 to <maxURN Tlgroup>			REL-5
>>RRC connection release information	MP		RRC connection release information 10.3.3.32a		REL-5
>>Group release information	MP		Group release information 10.3.3.14o		REL-5

Condition	Explanation
CHOICE <i>Used paging identity</i>	Condition under which the given <i>used paging identity</i> is chosen
CN identity	For CN originating pages (for idle mode UEs)
UTRAN <u>single UE</u> identity	For UTRAN originating pages (for connected mode UEs), <u>addressing a single UE</u>
UTRAN group identity	For UTRAN originating pages (for connected mode UEs), addressing a group of UEs

10.3.3.32 Release cause

Cause for release of RRC connection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Release cause	MP		Enumerated (normal event, unspecified, pre-emptive release, congestion, re-establishment reject, user inactivity), directed signalling connection re-establishment)	One spare value is needed.

10.3.3.32a RRC connection release information

Indicates whether the UE shall perform a release of the RRC connection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<u>CHOICE Release indicator</u>	<u>MD</u>			<u>Default value is "No release"</u>	<u>REL-5</u>
>No release					<u>REL-5</u>
>Release					<u>REL-5</u>
>>Release cause	<u>MP</u>		<u>Release cause</u> 10.3.3.32		<u>REL-5</u>

10.3.3.33 RF capability FDD

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
UE power class	MP		Enumerated(1..4)	as defined in [21]	
Tx/Rx frequency separation	MP		Enumerated(190, 174.8-205.2, 134.8-245.2)	In MHz as defined in [21]. NOTE: Not applicable if UE is not operating in frequency band a (as defined in [21]).	

10.3.3.47 U-RNTI

The U-RNTI (UTRAN Radio Network Temporary Identity) is allocated to an UE having a RRC connection and identifies the UE within UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SRNC identity	MP		bit string(12)	The SRNC identity bits are numbered b20 to b31, where b20 is the least significant bit.
S-RNTI	MP		bit string(20)	The S-RNTI bits are numbered b0 to b19, where b0 is the least significant bit.

10.3.3.47a U-RNTI group

The U-RNTI group is used to identify a group of UEs having an RRC connection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<u>CHOICE group discriminator</u>	<u>MP</u>				REL-5
<u>>All</u>				(no data)	REL-5
<u>>U-RNTI mask</u>					REL-5
<u>>>U-RNTI</u>	<u>MP</u>		<u>U-RNTI</u> <u>10.3.3.47</u>	<u>The bits that are less significant than the bit position indicated by the U-RNTI bit mask index shall be ignored.</u>	REL-5
<u>>>U-RNTI bit mask index</u>	<u>MP</u>		<u>Enumerated(b1, b2...b31)</u>	<u>Values b1 to b19 indicate bit positions in the S-RNTI. Values b20 to b31 indicate bit positions in the SRNC identity.</u>	REL-5

10.3.3.48 U-RNTI Short

The U-RNTI (UTRAN Radio Network Temporary Identity) is allocated to an UE having a RRC connection and identifies the UE within UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SRNC identity	MP		bit string(12)	The SRNC identity bits are numbered b20 to b31, where b20 is the least significant bit.
S-RNTI 2	MP		bit string(10)	The S-RNTI 2 bits are numbered b0 to b9, where b0 is the least significant bit.

10.3.10 Multiplicity values and type constraint values

The following table includes constants that are either used as multi bounds (name starting with "max") or as high or low value in a type specification (name starting with "lo" or "hi"). Constants are specified only for values appearing more than once in the RRC specification. In case a constant is related to one or more other constants, an expression is included in the "value" column instead of the actual value.

Constant	Explanation	Value
CN information		
maxCNdomains	Maximum number of CN domains	4
UTRAN mobility information		
maxRAT	Maximum number of Radio Access Technologies	maxOtherRAT + 1
maxOtherRAT	Maximum number of other Radio Access Technologies	15
maxURA	Maximum number of URAs in a cell	8
maxInterSysMessages	Maximum number of Inter System Messages	4
maxRABsetup	Maximum number of RABs to be established	16
UE information		
maxtransactions	Maximum number of parallel RRC transactions in downlink	25
maxPDCPalgoType	Maximum number of PDCP algorithm types	8
maxDRACclasses	Maximum number of UE classes which would require different DRAC parameters	8
maxFreqBandsFDD	Maximum number of frequency bands supported by the UE as defined in [21]	8
maxFreqBandsTDD	Maximum number of frequency bands supported by the UE as defined in [22]	4
maxFreqBandsGSM	Maximum number of frequency bands supported by the UE as defined in [45]	16
maxPage1	Number of UEs paged in the Paging Type 1 message	8
maxSystemCapability	Maximum number of system specific capabilities that can be requested in one message.	16
MaxURNTIgroup	Maximum number of U-RNTI groups in one message	8
RB information		
maxPredefConfig	Maximum number of predefined configurations	16
maxRB	Maximum number of RBs	32
maxSRBsetup	Maximum number of signalling RBs to be established	8
maxRBperRAB	Maximum number of RBs per RAB	8
maxRBallRABs	Maximum number of non signalling RBs	27
maxRBMuxOptions	Maximum number of RB multiplexing options	8
maxLoCHperRLC	Maximum number of logical channels per RLC entity	2
TrCH information		
maxTrCH	Maximum number of transport channels used in one direction (UL or DL)	32
maxTrCHpreconf	Maximum number of preconfigured Transport channels, per direction	16
maxCCTrCH	Maximum number of CCTrCHs	8
maxTF	Maximum number of different transport formats that can be included in the Transport format set for one transport channel	32
maxTF-CPCH	Maximum number of TFs in a CPCH set	16
maxTFC	Maximum number of Transport Format Combinations	1024
maxTFCI-1-Combs	Maximum number of TFCI (field 1) combinations	512
maxTFCI-2-Combs	Maximum number of TFCI (field 2) combinations	512
maxCPCHsets	Maximum number of CPCH sets per cell	16
maxSIBperMsg	Maximum number of complete system information blocks per SYSTEM INFORMATION message	16
maxSIB	Maximum number of references to other system information blocks.	32
maxSIB-FACH	Maximum number of references to system information blocks on the FACH	8
PhyCH information		
maxPCPCH-APsubCH	Maximum number of available sub-channels for AP signature on PCPCH	12
maxPCPCH-CDsubCH	Maximum number of available sub-channels for CD	12

Constant	Explanation	Value
	signature on PCPCH	
maxPCPCH-APsig	Maximum number of available signatures for AP on PCPCH	16
maxPCPCH-CDsig	Maximum number of available signatures for CD on PCPCH	16
maxAC	Maximum number of access classes	16
maxASC	Maximum number of access service classes	8
maxASCmap	Maximum number of access class to access service classes mappings	7
maxASCpersist	Maximum number of access service classes for which persistence scaling factors are specified	6
maxPRACH	Maximum number of PRACHs in a cell	16
maxFACHPCH	Maximum number of FACHs and PCHs mapped onto one secondary CCPCHs	8
maxRL	Maximum number of radio links	8
maxSCCPCH	Maximum number of secondary CCPCHs per cell	16
maxDPDCH-UL	Maximum number of DPDCHs per cell	6
maxDPCH-DLchan	Maximum number of channelisation codes used for DL DPCPCH	8
maxPUSCH	Maximum number of PUSCHs	(8)
maxPDSCH	Maximum number of PDSCHs	8
maxPDSCHcodes	Maximum number of codes for PDSCH	16
maxPDSCH-TFCIgroups	Maximum number of TFCI groups for PDSCH	256
maxPDSCHcodeGroups	Maximum number of code groups for PDSCH	256
maxPCPCHs	Maximum number of PCPCH channels in a CPCH Set	64
maxPCPCH-SF	Maximum number of available SFs on PCPCH	7
maxTS	Maximum number of timeslots used in one direction (UL or DL)	14
hiPUSCHidentities	Maximum number of PUSCH Identities	64
hiPDSCHidentities	Maximum number of PDSCH Identities	64
Measurement information		
maxTGPS	Maximum number of transmission gap pattern sequences	6
maxAdditionalMeas	Maximum number of additional measurements for a given measurement identity	4
maxMeasEvent	Maximum number of events that can be listed in measurement reporting criteria	8
maxMeasParEvent	Maximum number of measurement parameters (e.g. thresholds) per event	2
maxMeasIntervals	Maximum number of intervals that define the mapping function between the measurements for the cell quality Q of a cell and the representing quality value	1
maxCellMeas	Maximum number of cells to measure	32
maxReportedGSMCells	Maximum number of GSM cells to be reported	6
maxFreq	Maximum number of frequencies to measure	8
maxSat	Maximum number of satellites to measure	16
HiRM	Maximum number that could be set as rate matching attribute for a transport channel	256
Frequency information		
maxFDDFreqList	Maximum number of FDD carrier frequencies to be stored in USIM	4
maxTDDFreqList	Maximum number of TDD carrier frequencies to be stored in USIM	4
maxFDDFreqCellList	Maximum number of neighbouring FDD cells to be stored in USIM	32
maxTDDFreqCellList	Maximum number of neighbouring TDD cells to be stored in USIM	32
maxGSMCellList	Maximum number of GSM cells to be stored in USIM	32
Other information		
maxNumGSMFreqRanges	Maximum number of GSM Frequency Ranges to store	32
maxNumFDDFreqs	Maximum number of FDD centre frequencies to store	8
maxNumTDDFreqs	Maximum number of TDD centre frequencies to store	8
maxNumCDMA2000Freqs	Maximum number of CDMA2000 centre frequencies to store	8

11.2 PDU definitions

```
--*****
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--*****
PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--*****
-- IE parameter types from other modules
--*****
IMPORTS

-- Core Network IEs :
CN-DomainIdentity,
CN-InformationInfo,
CN-InformationInfoFull,
NAS-Message,
PagingRecordTypeID,
-- UTRAN Mobility IEs :
CellIdentity,
CellIdentity-PerRL-List,
URA-Identity,
-- User Equipment IEs :
ActivationTime,
C-RNTI,
CapabilityUpdateRequirement,
CapabilityUpdateRequirement-r4,
CapabilityUpdateRequirement-r4-ext,
CellUpdateCause,
CipheringAlgorithm,
CipheringModeInfo,
DSCH-RNTI,
EstablishmentCause,
FailureCauseWithProtErr,
FailureCauseWithProtErrTrId,
GroupReleaseIndicia,
GroupReleaseInformation,
H-RNTI,
InitialUE-Identity,
IntegrityProtActivationInfo,
IntegrityProtectionModeInfo,
N-308,
PagingCause,
PagingRecordList,
PagingRecordList-r5,
ProtocolErrorIndicator,
ProtocolErrorIndicatorWithMoreInfo,
Rb-timer-indicator,
RedirectionInfo,
RejectionCause,
ReleaseCause,
RRC-StateIndicator,
RRC-TransactionIdentifier,
SecurityCapability,
START-Value,
STARTList,
U-RNTI,
U-RNTI-Short,
UE-RadioAccessCapability,
UE-RadioAccessCapability-r4-ext,
UE-RadioAccessCapability-r5-ext,
UE-RadioAccessCapability-v370ext,
UE-RadioAccessCapability-v380ext,
UE-RadioAccessCapability-v3a0ext,
UE-RadioAccessCapability-v4xyext,
```

```

DL-PhysChCapabilityFDD-v380ext,
UE-ConnTimersAndConstants,
UE-ConnTimersAndConstants-v3a0ext,
UE-ConnTimersAndConstants-r5,
UE-SecurityInformation,
URA-UpdateCause,
UTRAN-DRX-CycleLengthCoefficient,
WaitTime,
-- Radio Bearer IEs :
DefaultConfigIdentity,
DefaultConfigIdentity-r4,
DefaultConfigMode,
DL-CounterSynchronisationInfo,
DL-CounterSynchronisationInfo-r5,
PredefinedConfigIdentity,
PredefinedConfigStatusList,
RAB-Info,
RAB-Info-Post,
RAB-InformationList,
RAB-InformationReconfigList,
RAB-InformationSetupList,
RAB-InformationSetupList-r4,
RB-ActivationTimeInfoList,
RB-COUNT-C-InformationList,
RB-COUNT-C-MSB-InformationList,
RB-IdentityList,
RB-InformationAffectedList,
RB-InformationAffectedList-r5,
RB-InformationReconfigList,
RB-InformationReconfigList-r4,
RB-InformationReconfigList-r5,
RB-InformationReleaseList,
RB-PDCPContextRelocationList,
SRB-InformationSetupList,
SRB-InformationSetupList2,
UL-CounterSynchronisationInfo,
-- Transport Channel IEs:
CPCH-SetID,
DL-AddReconfTransChInfo2List,
DL-AddReconfTransChInfoList,
DL-AddReconfTransChInfoList-r4,
DL-AddReconfTransChInfoList-r5,
DL-CommonTransChInfo,
DL-CommonTransChInfo-r4,
DL-DeletedTransChInfoList,
DL-DeletedTransChInfoList-r5,
DRAC-StaticInformationList,
TFC-Subset,
TFCS-Identity,
UL-AddReconfTransChInfoList,
UL-CommonTransChInfo,
UL-CommonTransChInfo-r4,
UL-DeletedTransChInfoList,
-- Physical Channel IEs :
Alpha,
CCTrCH-PowerControlInfo,
CCTrCH-PowerControlInfo-r4,
ConstantValue,
ConstantValueTdd,
CPCH-SetInfo,
DL-CommonInformation,
DL-CommonInformation-r4,
DL-CommonInformationPost,
DL-HSPDSCH-Information,
DL-InformationPerRL,
DL-InformationPerRL-List,
DL-InformationPerRL-List-r4,
DL-InformationPerRL-List-r5,
DL-InformationPerRL-ListPostFDD,
DL-InformationPerRL-PostTDD,
DL-InformationPerRL-PostTDD-LCR-r4,
DL-PDSCH-Information,
DPCH-CompressedModeStatusInfo,
FrequencyInfo,
FrequencyInfoFDD,
FrequencyInfoTDD,
MaxAllowedUL-TX-Power,
OpenLoopPowerControl-IPDL-TDD-r4,

```

```

PDSCH-CapacityAllocationInfo,
PDSCH-CapacityAllocationInfo-r4,
PDSCH-Identity,
PrimaryCCPCH-TX-Power,
PUSCH-CapacityAllocationInfo,
PUSCH-CapacityAllocationInfo-r4,
PUSCH-Identity,
RL-AdditionInformationList,
RL-RemovalInformationList,
SpecialBurstScheduling,
SSDT-Information,
TFC-ControlDuration,
SSDT-UL-r4,
TimeslotList,
TimeslotList-r4,
TX-DiversityMode,
UL-ChannelRequirement,
UL-ChannelRequirement-r4,
UL-ChannelRequirement-r5,
UL-ChannelRequirementWithCPCH-SetID,
UL-ChannelRequirementWithCPCH-SetID-r4,
UL-ChannelRequirementWithCPCH-SetID-r5,
UL-DPCH-Info,
UL-DPCH-Info-r4,
UL-DPCH-InfoPostFDD,
UL-DPCH-InfoPostTDD,
UL-DPCH-InfoPostTDD-LCR-r4,
UL-SynchronisationParameters-r4,
UL-TimingAdvance,
UL-TimingAdvanceControl,
UL-TimingAdvanceControl-r4,
-- Measurement IEs :
AdditionalMeasurementID-List,
Frequency-Band,
EventResults,
InterFreqEventResults-LCR-r4-ext,
InterRAT-TargetCellDescription,
MeasuredResults,
MeasuredResults-v390ext,
MeasuredResultsList,
MeasuredResultsList-LCR-r4-ext,
MeasuredResultsOnRACH,
MeasurementCommand,
MeasurementCommand-r4,
MeasurementIdentity,
MeasurementReportingMode,
PrimaryCCPCH-RSCP,
SFN-Offset-Validity,
TimeslotListWithISCP,
TrafficVolumeMeasuredResultsList,
UE-Positioning-GPS-AssistanceData,
UE-Positioning-Measurement-v390ext,
UE-Positioning-OTDOA-AssistanceData,
UE-Positioning-OTDOA-AssistanceData-r4ext,
UE-Positioning-OTDOA-AssistanceData-UEB,
UE-Positioning-IPDL-Parameters-TDD-r4-ext,
-- Other IEs :
BCCH-ModificationInfo,
CDMA2000-MessageList,
GSM-MessageList,
InterRAT-ChangeFailureCause,
InterRAT-HO-FailureCause,
InterRAT-UE-RadioAccessCapabilityList,
InterRAT-UE-SecurityCapList,
IntraDomainNasNodeSelector,
ProtocolErrorMoreInformation,
Rplmn-Information,
Rplmn-Information-r4,
SegCount,
SegmentIndex,
SPN-Prime,
SIB-Data-fixed,
SIB-Data-variable,
SIB-Type
FROM InformationElements

| MaxSIBperMsg_,
| maxURNTI-Group
| FROM Constant-definitions;

```

```

-- ****
-- ACTIVE SET UPDATE (FDD only)
--
-- ****

ActiveSetUpdate ::= CHOICE {
    r3
        SEQUENCE {
            activeSetUpdate-r3
                ActiveSetUpdate-r3-IEs,
                v4xyNonCriticalExtensions
                    SEQUENCE {
                        activeSetUpdate-v4xyext
                            ActiveSetUpdate-v4xyext-IEs,
                            nonCriticalExtensions
                                SEQUENCE {} OPTIONAL
                        } OPTIONAL
                    },
                later-than-r3
                    SEQUENCE {
                        rrc-TransactionIdentifier
                            RRC-TransactionIdentifier,
                        criticalExtensions
                            SEQUENCE {}
                    }
    }
}

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        -- dummy and dummy2 are not used in this version of the specification, they should
        -- not be sent and if received they should be ignored.
        dummy                  IntegrityProtectionModeInfo      OPTIONAL,
        dummy2                 CipheringModeInfo          OPTIONAL,
        activationTime          ActivationTime           OPTIONAL,
        newU-RNTI              U-RNTI                   OPTIONAL,
    -- Core network IEs
        cn-InformationInfo          CN-InformationInfo       OPTIONAL,
    -- Radio bearer IEs
        -- dummy3 is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy3                 DL-CounterSynchronisationInfo   OPTIONAL,
    -- Physical channel IEs
        maxAllowedUL-TX-Power      MaxAllowedUL-TX-Power     OPTIONAL,
        rl-AdditionInformationList RL-AdditionInformationList  OPTIONAL,
        rl-RemovalInformationList  RL-RemovalInformationList  OPTIONAL,
        tx-DiversityMode           TX-DiversityMode         OPTIONAL,
        ssdt-Information           SSDT-Information        OPTIONAL
}
}

ActiveSetUpdate-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
        -- ssdt-UL extends SSDT-Information. FDD only.
        ssdt-UL                  SSDT-UL-r4             OPTIONAL,
        -- The order of the RLs in IE cell-id-PerRL-List is the same as
        -- in IE RL-AdditionInformationList included in this message
        cell-id-PerRL-List        CellIdentity-PerRL-List   OPTIONAL
}
}

-- ****
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- ****

ActiveSetUpdateComplete ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        -- dummy is not used in this version of the specification, it should
        -- not be sent and if received it should be ignored.
        dummy                  IntegrityProtActivationInfo   OPTIONAL,
    -- Radio bearer IEs
        -- dummy2 and dummy3 are not used in this version of the specification, they should
        -- not be sent and if received they should be ignored.
        dummy2                 RB-ActivationTimeInfoList  OPTIONAL,
        dummy3                 UL-CounterSynchronisationInfo  OPTIONAL,
    -- Extension mechanism for non-release99 information
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
}
}

-- ****
-- ACTIVE SET UPDATE FAILURE (FDD only)

```

```

-- ****
-- ActiveSetUpdateFailure ::= SEQUENCE {
--   User equipment IEs
--     rrc-TransactionIdentifier      RRC-TransactionIdentifier,
--     failureCause                  FailureCauseWithProtErr,
--   Extension mechanism for non- release99 information
--     nonCriticalExtensions        SEQUENCE {} OPTIONAL
}

-- ****
-- Assistance Data Delivery
-- ****

AssistanceDataDelivery ::= CHOICE {
  r3
    SEQUENCE {
      assistanceDataDelivery-r3      AssistanceDataDelivery-r3-IEs,
      v3aoNonCriticalExetensions    SEQUENCE {
        assistanceDataDelivery-v3a0ext  AssistanceDataDelivery-v3a0ext,
        v4xyNonCriticalExtensions     SEQUENCE {
          assistanceDataDelivery-v4xyext
          AssistanceDataDelivery-v4xyext-IEs,
          nonCriticalExtensions        SEQUENCE {} OPTIONAL
        } OPTIONAL
      } OPTIONAL
    } OPTIONAL
  },
  later-than-r3
    SEQUENCE {
      rrc-TransactionIdentifier      RRC-TransactionIdentifier,
      criticalExtensions            SEQUENCE {}
    }
}

AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
  User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  Measurement Information Elements
  ue-positioning-GPS-AssistanceData      UE-Positioning-GPS-AssistanceData
  OPTIONAL,
  ue-positioning-OTDOA-AssistanceData-UEB      UE-Positioning-OTDOA-AssistanceData-UEB
  OPTIONAL
}

AssistanceDataDelivery-v3a0ext ::= SEQUENCE {
  sfn-Offset-Validity           SFN-Offset-Validity      OPTIONAL
}

AssistanceDataDelivery-v4xyext-IEs ::= SEQUENCE {
  ue-Positioning-OTDOA-AssistanceData-r4ext  UE-Positioning-OTDOA-AssistanceData-r4ext  OPTIONAL
}

-- ****
-- CELL CHANGE ORDER FROM UTRAN
-- ****

CellChangeOrderFromUTRAN ::= CHOICE {
  r3
    SEQUENCE {
      cellChangeOrderFromUTRAN-IEs      CellChangeOrderFromUTRAN-r3-IEs,
      nonCriticalExtensions            SEQUENCE {} OPTIONAL
    },
  later-than-r3
    SEQUENCE {
      rrc-TransactionIdentifier      RRC-TransactionIdentifier,
      criticalExtensions            SEQUENCE {}
    }
}

CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
  User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  -- dummy is not used in this version of the specification, it should
  -- not be sent and if received it should be ignored.
  dummy                          IntegrityProtectionModeInfo      OPTIONAL,
  activationTime                 ActivationTime                OPTIONAL,
  -- the IE rab-InformationList is not used in this version of the specification, it should

```

```

-- not be sent and if received it should be ignored. The IE may be used in a later
-- version of the protocol and hence it is not changed into a dummy
    rab-InformationList          RAB-InformationList           OPTIONAL,
    interRAT-TargetCellDescription InterRAT-TargetCellDescription
}

-- ****
-- CELL CHANGE ORDER FROM UTRAN FAILURE
-- ****

CellChangeOrderFromUTRANFailure ::= CHOICE {
    r3
        SEQUENCE {
            cellChangeOrderFromUTRANFailure-r3
                CellChangeOrderFromUTRANFailure-r3-IEs,
            nonCriticalExtensions
                SEQUENCE {} OPTIONAL
        },
    -- dummy is not used in this version of the specification and it
    -- should be ignored.
    dummy
        SEQUENCE {
            rrc-TransactionIdentifier      RRC-TransactionIdentifier,
            criticalExtensions
                SEQUENCE {}
        }
}
}

CellChangeOrderFromUTRANFailure-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy
        IntegrityProtectionModeInfo      OPTIONAL,
    interRAT-ChangeFailureCause     InterRAT-ChangeFailureCause
}
}

-- ****
-- CELL UPDATE
-- ****

CellUpdate ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI
        U-RNTI,
    startList
        STARTList,
    am-RLC-ErrorIndicationRb2-3or4
        BOOLEAN,
    am-RLC-ErrorIndicationRb5orAbove
        BOOLEAN,
    cellUpdateCause
        CellUpdateCause,
    -- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
    failureCause
        FailureCauseWithProtErrTrId
            OPTIONAL,
    rb-timer-indicator
        Rb-timer-indicator,
    -- Measurement IEs
    measuredResultsOnRACH
        MeasuredResultsOnRACH
            OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions
        SEQUENCE {} OPTIONAL
}
}

-- ****
-- CELL UPDATE CONFIRM
-- ****

CellUpdateConfirm ::= CHOICE {
    r3
        SEQUENCE {
            cellUpdateConfirm-r3
                CellUpdateConfirm-r3-IEs,
            v3a0NonCriticalExtensions
                SEQUENCE {
                    cellUpdateConfirm-v3a0ext
                        CellUpdateConfirm-v3a0ext,
                    v4xyNonCriticalExtensions
                        SEQUENCE {
                            cellUpdateConfirm-v4xyext
                                CellUpdateConfirm-v4xyext-IEs,
                            v5xyNonCriticalExtensions
                                SEQUENCE {
                                    cellUpdateConfirm-v5xyext
                                        CellUpdateConfirm-v5xyext-IEs,
                                    nonCriticalExtensions
                                        SEQUENCE {} OPTIONAL
                                } OPTIONAL
                            } OPTIONAL
                        } OPTIONAL
                    } OPTIONAL
                },
    later-than-r3
        SEQUENCE {

```

```

    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
criticalExtensions           CHOICE {
    r4                         SEQUENCE {
        cellUpdateConfirm-r4      CellUpdateConfirm-r4-IEs,
        v5xyNonCriticalExtensions SEQUENCE {
            cellUpdateConfirm-v5xyext      CellUpdateConfirm-v5xyext-IEs,
            nonCriticalExtensions       SEQUENCE {} OPTIONAL
        }
    }
},
criticalExtensions           CHOICE {
    r5                         SEQUENCE {
        cellUpdateConfirm-r5      CellUpdateConfirm-r5-IEs,
        nonCriticalExtensions     SEQUENCE {} OPTIONAL
    },
criticalExtensions           SEQUENCE {}
}
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo             CipheringModeInfo OPTIONAL,
    activationTime                ActivationTime OPTIONAL,
    new-U-RNTI                   U-RNTI OPTIONAL,
    new-C-RNTI                   C-RNTI OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    rlc-Re-establishIndicatorRb2-3or4   BOOLEAN,
    rlc-Re-establishIndicatorRb5orAbove   BOOLEAN,
-- CN information elements
    cn-InformationInfo           CN-InformationInfo OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity                 URA-Identity OPTIONAL,
-- Radio bearer IEs
    rb-InformationReleaseList    RB-InformationReleaseList OPTIONAL,
    rb-InformationReconfigList   RB-InformationReconfigList OPTIONAL,
    rb-InformationAffectedList  RB-InformationAffectedList OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
-- Transport channel IEs
    ul-CommonTransChInfo         UL-CommonTransChInfo OPTIONAL,
    ul-deletedTransChInfoList   UL-DeletedTransChInfoList OPTIONAL,
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo     CHOICE {
        fdd                         SEQUENCE {
            cpch-SetID               CPCH-SetID OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                         NULL
    },
    dl-CommonTransChInfo         DL-CommonTransChInfo OPTIONAL,
    dl-DeletedTransChInfoList   DL-DeletedTransChInfoList OPTIONAL,
    dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList OPTIONAL,
-- Physical channel IEs
    frequencyInfo                FrequencyInfo OPTIONAL,
    maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power OPTIONAL,
    ul-ChannelRequirement       UL-ChannelRequirement OPTIONAL,
    modeSpecificPhysChInfo     CHOICE {
        fdd                         SEQUENCE {
            dl-PDSCH-Information   DL-PDSCH-Information OPTIONAL
        },
        tdd                         NULL
    },
    dl-CommonInformation         DL-CommonInformation OPTIONAL,
    dl-InformationPerRL-List    DL-InformationPerRL-List OPTIONAL
}

CellUpdateConfirm-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI              DSCH-RNTI OPTIONAL
}

CellUpdateConfirm-v4xyext-IEs ::= SEQUENCE {
-- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                     SSDT-UL-r4 OPTIONAL,
}

```

```

-- The order of the RLs in IE cell-id-PerRL-List is the same as
-- in IE DL-InformationPerRL-List included in this message
cell-id-PerRL-List           CellIdentity-PerRL-List          OPTIONAL
}

CellUpdateConfirm-r4-IES ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo   IntegrityProtectionModeInfo  OPTIONAL,
    cipheringModeInfo             CipheringModeInfo        OPTIONAL,
    activationTime                ActivationTime            OPTIONAL,
    new-U-RNTI                   U-RNTI                  OPTIONAL,
    new-C-RNTI                   C-RNTI                  OPTIONAL,
    new-DSCH-RNTI                DSCH-RNTI              OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator       OPTIONAL,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    rlc-ResetIndicatorC-Plane    BOOLEAN                 OPTIONAL,
    rlc-ResetIndicatorU-Plane    BOOLEAN                 OPTIONAL,
    -- CN information elements
    cn-InformationInfo          CN-InformationInfo      OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity            OPTIONAL,
    -- Radio bearer IEs
    rb-InformationReleaseList    RB-InformationReleaseList OPTIONAL,
    rb-InformationReconfigList   RB-InformationReconfigList-r4 OPTIONAL,
    rb-InformationAffectedList  RB-InformationAffectedList OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo         UL-CommonTransChInfo-r4  OPTIONAL,
    ul-deletedTransChInfoList   UL-DeletedTransChInfoList  OPTIONAL,
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList  OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                      SEQUENCE {
            cpch-SetID            CPCH-SetID            OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                      NULL
    },
    dl-CommonTransChInfo         DL-CommonTransChInfo-r4  OPTIONAL,
    dl-DeletedTransChInfoList   DL-DeletedTransChInfoList  OPTIONAL,
    dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList-r4 OPTIONAL,
    -- Physical channel IEs
    frequencyInfo               FrequencyInfo           OPTIONAL,
    maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power     OPTIONAL,
    ul-ChannelRequirement       UL-ChannelRequirement-r4  OPTIONAL,
    modeSpecificPhysChInfo      CHOICE {
        fdd                      SEQUENCE {
            dl-PDSCH-Information DL-PDSCH-Information      OPTIONAL
        },
        tdd                      NULL
    },
    dl-CommonInformation         DL-CommonInformation-r4  OPTIONAL,
    dl-InformationPerRL-List    DL-InformationPerRL-List-r4 OPTIONAL
}

CellUpdateConfirm-v5xyext-IES ::= SEQUENCE {
    -- User equipment IEs
    groupReleaseIndicia          GroupReleaseIndicia      OPTIONAL
}

CellUpdateConfirm-r5-IES ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo   IntegrityProtectionModeInfo  OPTIONAL,
    cipheringModeInfo             CipheringModeInfo        OPTIONAL,
    activationTime                ActivationTime            OPTIONAL,
    new-U-RNTI                   U-RNTI                  OPTIONAL,
    new-C-RNTI                   C-RNTI                  OPTIONAL,
    new-DSCH-RNTI                DSCH-RNTI              OPTIONAL,
    new-H-RNTI                   H-RNTI                  OPTIONAL,
    groupReleaseIndicia          GroupReleaseIndicia      OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator       OPTIONAL,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    rlc-ResetIndicatorC-Plane    BOOLEAN                 OPTIONAL,
    rlc-ResetIndicatorU-Plane    BOOLEAN                 OPTIONAL,
    -- CN information elements
    cn-InformationInfo          CN-InformationInfo      OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity            OPTIONAL,
    -- Radio bearer IEs
}

```

```

rb-InformationReleaseList          RB-InformationReleaseList      OPTIONAL,
rb-InformationReconfigList        RB-InformationReconfigList-r5   OPTIONAL,
rb-InformationAffectedList        RB-InformationAffectedList-r5   OPTIONAL,
dl-CounterSynchronisationInfo    DL-CounterSynchronisationInfo-r5  OPTIONAL,
-- Transport channel IEs
ul-CommonTransChInfo             UL-CommonTransChInfo-r4       OPTIONAL,
ul-deletedTransChInfoList        UL-DeletedTransChInfoList     OPTIONAL,
ul-AddReconfTransChInfoList      UL-AddReconfTransChInfoList   OPTIONAL,
modeSpecificTransChInfo          CHOICE {
    fdd                         SEQUENCE {
        cpch-SetID                CPCH-SetID                  OPTIONAL,
        addReconfTransChDRAC-Info DRAC-StaticInformationList   OPTIONAL
    },
    tdd                         NULL
},
dl-CommonTransChInfo             DL-CommonTransChInfo-r4       OPTIONAL,
dl-DeletedTransChInfoList        DL-DeletedTransChInfoList-r5   OPTIONAL,
dl-AddReconfTransChInfoList      DL-AddReconfTransChInfoList-r5  OPTIONAL,
-- Physical channel IEs
frequencyInfo                   FrequencyInfo               OPTIONAL,
maxAllowedUL-TX-Power           MaxAllowedUL-TX-Power      OPTIONAL,
ul-ChannelRequirement           UL-ChannelRequirement-r5    OPTIONAL,
modeSpecificPhysChInfo          CHOICE {
    fdd                         SEQUENCE {
        dl-PDSCH-Information    DL-PDSCH-Information        OPTIONAL
    },
    tdd                         NULL
},
dl-HSPDSCH-Information          DL-HSPDSCH-Information      OPTIONAL,
dl-CommonInformation            DL-CommonInformation-r4    OPTIONAL,
dl-InformationPerRL-List         DL-InformationPerRL-List-r5  OPTIONAL
}

}
-- *****
-- 
-- CELL UPDATE CONFIRM for CCCH
-- 
-- *****

CellUpdateConfirm-CCCH ::= CHOICE {
    r3                         SEQUENCE {
        -- User equipment IEs
        u-RNTI                     U-RNTI,
        -- The rest of the message is identical to the one sent on DCCH.
        cellUpdateConfirm-r3          CellUpdateConfirm-r3-IEs,
        v4xyNonCriticalExtensions    SEQUENCE {
            cellUpdateConfirm-v4xyext  CellUpdateConfirm-v4xyext-IEs,
            v5xyNonCriticalExtensions SEQUENCE {
                cellUpdateConfirm-v5xyext  CellUpdateConfirm-v5xyext-IEs,
                nonCriticalExtensions    SEQUENCE {} OPTIONAL
            } OPTIONAL
        } OPTIONAL
    } OPTIONAL
},
later-than-r3                    SEQUENCE {
    u-RNTI                     U-RNTI,
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    criticalExtensions          CHOICE {
        r4                         SEQUENCE {
            -- The rest of the message is identical to the one sent on DCCH.
            cellUpdateConfirm-r4          CellUpdateConfirm-r4-IEs,
            v5xyNonCriticalExtensions    SEQUENCE {
                cellUpdateConfirm-v5xyext  CellUpdateConfirm-v5xyext-IEs,
                nonCriticalExtensions    SEQUENCE {} OPTIONAL
            } OPTIONAL
        },
        criticalExtensions          CHOICE {
            r5                         SEQUENCE {
                cellUpdateConfirm-r5          CellUpdateConfirm-r5-IEs,
                nonCriticalExtensions    SEQUENCE {} OPTIONAL
            },
            criticalExtensions          SEQUENCE {}
        }
    }
}
-- *****
-- 
```

```

-- COUNTER CHECK
--
-- ****
CounterCheck ::= CHOICE {
    r3                               SEQUENCE {
        counterCheck-r3           CounterCheck-r3-IEs,
        nonCriticalExtensions     SEQUENCE {} OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier RRC-TransactionIdentifier,
        criticalExtensions       SEQUENCE {}
    }
}

CounterCheck-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- Radio bearer IEs
    rb-COUNT-C-MSB-InformationList RB-COUNT-C-MSB-InformationList
}

-- ****
-- COUNTER CHECK RESPONSE
--
-- ****

CounterCheckResponse ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- Radio bearer IEs
    rb-COUNT-C-InformationList    RB-COUNT-C-InformationList
                                OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
}

-- ****
-- DOWNLINK DIRECT TRANSFER
--
-- ****

DownlinkDirectTransfer ::= CHOICE {
    r3                               SEQUENCE {
        downlinkDirectTransfer-r3   DownlinkDirectTransfer-r3-IEs,
        nonCriticalExtensions      SEQUENCE {} OPTIONAL
    },
    later-than-r3                   SEQUENCE {
        rrc-TransactionIdentifier RRC-TransactionIdentifier,
        criticalExtensions       SEQUENCE {}
    }
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity,
    nas-Message                     NAS-Message
}

-- ****
-- HANOVER TO UTRAN COMMAND
--
-- ****

HandoverToUTRANCommand ::= CHOICE {
    r3                               SEQUENCE {
        handoverToUTRANCommand-r3   HandoverToUTRANCommand-r3-IEs,
        v4xyNonCriticalExtensions   SEQUENCE {
            handoverToUTRANCommand-v4xyext HandoverToUTRANCommand-v4xyext-IEs,
            nonCriticalExtensions        SEQUENCE {} OPTIONAL
        } OPTIONAL
    },
    criticalExtensions               CHOICE {

```

```

r4
    handoverToUTRANCommand-r4
        nonCriticalExtensions
    },
    criticalExtensions
}
}

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    new-U-RNTI
    -- dummy is not used in this version of specification, it should
    -- not be sent and if received it should be ignored.
    dummy
    cipheringAlgorithm
    -- Radio bearer IEs
    -- Specification mode information
    specificationMode
        CHOICE {
            complete
                SEQUENCE {
                    srb-InformationSetupList
                    rab-InformationSetupList
                    ul-CommonTransChInfo
                    ul-AddReconfTransChInfoList
                    dl-CommonTransChInfo
                    dl-AddReconfTransChInfoList
                    ul-DPCH-Info
                    modeSpecificInfo
                        fdd
                            d1-PDSCH-Information
                            cpch-SetInfo
                        },
                        tdd
                    },
                    dl-CommonInformation
                    dl-InformationPerRL-List
                    frequencyInfo
                },
                preconfiguration
                    SEQUENCE {
                        -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
                        -- one for the FDD only elements and one for the TDD only elements, so that one
                        -- FDD/TDD choice in this level is sufficient.
                        preConfigMode
                            predefinedConfigIdentity
                            defaultConfig
                                defaultConfigMode
                                defaultConfigIdentity
                            },
                            rab-Info
                            modeSpecificInfo
                                fdd
                                    ul-DPCH-Info
                                    dl-CommonInformationPost
                                    dl-InformationPerRL-List
                                    frequencyInfo
                                },
                                tdd
                                    ul-DPCH-Info
                                    dl-CommonInformationPost
                                    dl-InformationPerRL
                                    frequencyInfo
                                    primaryCCPCH-TX-Power
                            },
                            }
                        },
                        -- Physical channel IEs
                        maxAllowedUL-TX-Power
}
}

HandoverToUTRANCommand-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL
    cell-id
}

```

```

HandoverToUTRANCommand-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    new-U-RNTI                      U-RNTI-Short,
    cipheringAlgorithm                CipheringAlgorithm
                                         OPTIONAL,
    -- Radio bearer IEs
    rab-Info                          RAB-Info-Post,
    -- Specification mode information
    specificationMode                 CHOICE {
        complete                       SEQUENCE {
            srb-InformationSetupList   SRB-InformationSetupList,
            rab-InformationSetupList  RAB-InformationSetupList-r4
                                         OPTIONAL,
            ul-CommonTransChInfo      UL-CommonTransChInfo,
            ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
            dl-CommonTransChInfo      DL-CommonTransChInfo,
            dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
            ul-DPCH-Info              UL-DPCH-Info-r4,
            modeSpecificInfo          CHOICE {
                fdd                  SEQUENCE {
                    dl-PDSCH-Information  DL-PDSCH-Information OPTIONAL,
                    cpch-SetInfo           CPCH-SetInfo      OPTIONAL
                },
                tdd                  NULL
            },
            dl-CommonInformation     DL-CommonInformation-r4,
            dl-InformationPerRL-List DL-InformationPerRL-List-r4,
            frequencyInfo            FrequencyInfo
        },
        preconfiguration           SEQUENCE {
            -- All IEs that include an FDD/TDD choice are split in two IEs for this message,
            -- one for the FDD only elements and one for the TDD only elements, so that one
            -- FDD/TDD choice in this level is sufficient.
            preConfigMode             CHOICE {
                predefinedConfigIdentity PredefinedConfigIdentity,
                defaultConfig           SEQUENCE {
                    defaultConfigMode   DefaultConfigMode,
                    defaultConfigIdentity DefaultConfigIdentity-r4
                }
            },
            rab-Info                 RAB-Info-Post      OPTIONAL,
            modeSpecificInfo         CHOICE {
                fdd                  SEQUENCE {
                    ul-DPCH-Info       UL-DPCH-InfoPostFDD,
                    dl-CommonInformationPost DL-CommonInformationPost,
                    dl-InformationPerRL-List DL-InformationPerRL-ListPostFDD,
                    frequencyInfo       FrequencyInfoFDD
                },
                tdd                  CHOICE {
                    tdd384              SEQUENCE {
                        ul-DPCH-Info       UL-DPCH-InfoPostTDD,
                        dl-InformationPerRL DL-InformationPerRL-PostTDD,
                        frequencyInfo       FrequencyInfoTDD,
                        primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
                    },
                    tdd128              SEQUENCE {
                        ul-DPCH-Info       UL-DPCH-InfoPostTDD-LCR-r4,
                        dl-InformationPerRL DL-InformationPerRL-PostTDD-LCR-r4,
                        frequencyInfo       FrequencyInfoTDD,
                        primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
                    }
                }
            }
        },
        -- Physical channel IEs
        maxAllowedUL-TX-Power      MaxAllowedUL-TX-Power
    }
}

-- ****
-- HANOVER TO UTRAN COMPLETE
-- ****

HandoverToUTRANComplete ::= SEQUENCE {
    --TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    -- TABULAR: startList is conditional on history.
}

```

```

startList                      STARTList           OPTIONAL,
-- Radio bearer IEs
count-C-ActivationTime        ActivationTime    OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

-- ****
-- 
-- INITIAL DIRECT TRANSFER
-- 
-- ****

InitialDirectTransfer ::= SEQUENCE {
  -- Core network IEs
  cn-DomainIdentity          CN-DomainIdentity,
  intraDomainNasNodeSelector  IntraDomainNasNodeSelector,
  nas-Message                 NAS-Message,
  -- Measurement IEs
  measuredResultsOnRACH       MeasuredResultsOnRACH   OPTIONAL,
  v3a0NonCriticalExtensions   SEQUENCE {
    initialDirectTransfer-v3a0ext InitialDirectTransfer-v3a0ext,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions       SEQUENCE {}      OPTIONAL
  }                           OPTIONAL
}

InitialDirectTransfer-v3a0ext ::= SEQUENCE {
  -- start-value shall always be included in this version of the protocol
  start-Value                 START-Value        OPTIONAL
}

-- ****
-- 
-- HANOVER FROM UTRAN COMMAND
-- 
-- ****

HandoverFromUTRANCommand-GSM ::= CHOICE {
  r3                         SEQUENCE {
    handoverFromUTRANCommand-GSM-r3
      HandoverFromUTRANCommand-GSM-r3-IES,
      nonCriticalExtensions     SEQUENCE {} OPTIONAL
  },
  later-than-r3                SEQUENCE {
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    criticalExtensions        SEQUENCE {}
  }
}

HandoverFromUTRANCommand-GSM-r3-IES ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier   RRC-TransactionIdentifier,
  activationTime               ActivationTime        OPTIONAL,
  -- Radio bearer IEs
  toHandover-Info              RAB-Info           OPTIONAL,
  -- Measurement IEs
  frequency-band                Frequency-Band,
  -- Other IEs
  gsm-message                  CHOICE {
    -- In the single-GSM-Message case, what follows the basic production is a variable
    -- length bit string with no length field, containing the GSM message including GSM
    -- padding up to end of container, to be analysed according to GSM specifications
    single-GSM-Message          SEQUENCE {},
    gsm-MessageList              SEQUENCE {
      gsm-Messages               GSM-MessageList
    }
  }
}

HandoverFromUTRANCommand-CDMA2000 ::= CHOICE {
  r3                         SEQUENCE {
    handoverFromUTRANCommand-CDMA2000-r3
      HandoverFromUTRANCommand-CDMA2000-r3-IES,
      nonCriticalExtensions     SEQUENCE {} OPTIONAL
  },
  later-than-r3                SEQUENCE {
}

```

```

        rrc-TransactionIdentifier          RRC-TransactionIdentifier,
        criticalExtensions               SEQUENCE {}
    }

}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    activationTime                    ActivationTime
                                         OPTIONAL,
    -- Radio bearer IEs
    toHandover-Info                  RAB-Info
                                         OPTIONAL,
    -- Other IEs
    cdma2000-MessageList            CDMA2000-MessageList
}

-- ****
-- 
-- HANOVER FROM UTRAN FAILURE
-- 
-- ****

HandoverFromUTRANFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    -- Other IEs
    interRAT-HO-FailureCause         InterRAT-HO-FailureCause
                                         OPTIONAL,
    interRATMessage                  CHOICE {
        gsm                           SEQUENCE {
            gsm-MessageList           GSM-MessageList
        },
        cdma2000                      SEQUENCE {
            cdma2000-MessageList     CDMA2000-MessageList
        }
    }
                                         OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions            SEQUENCE {}      OPTIONAL
}

-- ****
-- 
-- INTER RAT HANDOVER INFO
-- 
-- ****

InterRATHandoverInfo ::= SEQUENCE {
    -- This structure is defined for historical reasons, backward compatibility with 04.18
    predefinedConfigStatusList        CHOICE {
        absent                         NULL,
        present                        PredefinedConfigStatusList
    },
    uE-SecurityInformation           CHOICE {
        absent                         NULL,
        present                        UE-SecurityInformation
    },
    ue-CapabilityContainer           CHOICE {
        absent                         NULL,
        -- present is an octet aligned string containing IE UE-RadioAccessCapabilityInfo
        present                        OCTET STRING (SIZE (0..63))
    },
    -- Non critical extensions
    v390NonCriticalExtensions        CHOICE {
        absent                         NULL,
        present                        SEQUENCE {
            interRATHandoverInfo-v390ext   InterRATHandoverInfo-v390ext-IEs,
            v3a0NonCriticalExtensions    SEQUENCE {
                interRATHandoverInfo-v3a0ext   InterRATHandoverInfo-v3a0ext,
                v4xyNonCriticalExtensions    SEQUENCE {
                    interRATHandoverInfo-v4xyext  InterRATHandoverInfo-v4xyext-IEs,
                    -- Reserved for future non critical extension
                    nonCriticalExtensions       SEQUENCE {} OPTIONAL
                }
            }
        }
    }
}

InterRATHandoverInfo-v390ext-IEs ::= SEQUENCE {
    -- User equipment IEs

```

```

        ue-RadioAccessCapability-v380ext    UE-RadioAccessCapability-v380ext      OPTIONAL,
        dl-PhysChCapabilityFDD-v380ext     DL-PhysChCapabilityFDD-v380ext
    }

InterRATHandoverInfo-v3a0ext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v3a0ext    UE-RadioAccessCapability-v3a0ext      OPTIONAL
}

InterRATHandoverInfo-v4xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v4xyext    UE-RadioAccessCapability-v4xyext
}

-- ****
-- MEASUREMENT CONTROL
-- ****

MeasurementControl ::= CHOICE {
    r3                      SEQUENCE {
        measurementControl-r3          MeasurementControl-r3-IEs,
        v390nonCriticalExtensions     SEQUENCE {
            measurementControl-v390ext   MeasurementControl-v390ext,
            v3a0NonCriticalExtensions   SEQUENCE {
                measurementControl-v3a0ext   MeasurementControl-v3a0ext,
                v4xyNonCriticalExtensions  SEQUENCE{
                    measurementControl-v4xyext   MeasurementControl-v4xyext-IEs,
                    nonCriticalExtensions     SEQUENCE {}           OPTIONAL
                }
                OPTIONAL
            }
            OPTIONAL
        }
    },
    later-than-r3             SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions         CHOICE {
            r4                     SEQUENCE {
                measurementControl-r4       MeasurementControl-r4-IEs,
                nonCriticalExtensions     SEQUENCE {}           OPTIONAL
            },
            criticalExtensions        SEQUENCE {}
        }
    }
}

MeasurementControl-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    -- Measurement IEs
    measurementIdentity         MeasurementIdentity,
    -- TABULAR: The measurement type is included in MeasurementCommand.
    measurementCommand          MeasurementCommand,
    measurementReportingMode    MeasurementReportingMode      OPTIONAL,
    additionalMeasurementList   AdditionalMeasurementID-List  OPTIONAL,
    -- Physical channel IEs
    dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo  OPTIONAL
}

MeasurementControl-v4xyext-IEs ::= SEQUENCE {
    ue-Positioning-OTDOA-AssistanceData-r4ext   UE-Positioning-OTDOA-AssistanceData-r4ext  OPTIONAL
}

MeasurementControl-v390ext ::= SEQUENCE {
    ue-Positioning-Measurement-v390ext        UE-Positioning-Measurement-v390ext  OPTIONAL
}

MeasurementControl-v3a0ext ::= SEQUENCE {
    sfn-Offset-Validity                  SFN-Offset-Validity      OPTIONAL
}

MeasurementControl-r4-IEs ::= SEQUENCE {
    -- Measurement IEs
    measurementIdentity         MeasurementIdentity,
    -- TABULAR: The measurement type is included in measurementCommand.
    measurementCommand          MeasurementCommand-r4,
    measurementReportingMode    MeasurementReportingMode      OPTIONAL,
    additionalMeasurementList   AdditionalMeasurementID-List  OPTIONAL,
}

```

```

-- Physical channel IEs
    dpch-CompressedModeStatusInfo      DPCH-CompressedModeStatusInfo           OPTIONAL
}

-- ****
-- MEASUREMENT CONTROL FAILURE
-- ****

MeasurementControlFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    failureCause                    FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}           OPTIONAL
}

-- ****
-- MEASUREMENT REPORT
-- ****

MeasurementReport ::= SEQUENCE {
    -- Measurement IEs
    measurementIdentity       MeasurementIdentity,
    measuredResults            MeasuredResults           OPTIONAL,
    measuredResultsOnRACH     MeasuredResultsOnRACH   OPTIONAL,
    additionalMeasuredResults  MeasuredResultsList    OPTIONAL,
    eventResults               EventResults             OPTIONAL,
    -- Non-critical extensions
    v390nonCriticalExtensions  SEQUENCE {
        measurementReport-v390ext      MeasurementReport-v390ext,
        v4xyNonCriticalExtensions    SEQUENCE {
            measurementReport-v4xyext  MeasurementReport-v4xyext-IEs,
            -- Extension mechanism for non-Rel4 information
            nonCriticalExtensions     SEQUENCE {}           OPTIONAL
        }
    }
}

MeasurementReport-v390ext ::= SEQUENCE {
    measuredResults-v390ext         MeasuredResults-v390ext           OPTIONAL
}

MeasurementReport-v4xyext-IEs ::= SEQUENCE {
    interFreqEventResults-LCR      InterFreqEventResults-LCR-r4-ext   OPTIONAL,
    additionalMeasuredResults-LCR  MeasuredResultsList-LCR-r4-ext   OPTIONAL
}

-- ****
-- PAGING TYPE 1
-- ****

PagingType1 ::= SEQUENCE {
    -- User equipment IEs
    pagingRecordList                PagingRecordList           OPTIONAL,
    -- Other IEs
    bcch-ModificationInfo          BCCH-ModificationInfo    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {
        pagingType1-v3-5ext        PagingType1-v3-5ext-IEs,
        nonCriticalExtensions     SEQUENCE {}           OPTIONAL
    }
}

PagingType1-v3-5ext-IEs ::= SEQUENCE {
    -- User equipment IEs
    pagingRecordList                PagingRecordList-r5        OPTIONAL
}

-- ****
-- PAGING TYPE 2
-- ****

```

```

-- ****
PagingType2 ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    pagingCause                   PagingCause,
    -- Core network IEs
    cn-DomainIdentity             CN-DomainIdentity,
    pagingRecordTypeID            PagingRecordTypeID,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION
-- ****

PhysicalChannelReconfiguration ::= CHOICE {
    r3      SEQUENCE {
        physicalChannelReconfiguration-r3
            PhysicalChannelReconfiguration-r3-IEs,
        v3a0NonCriticalExtensions   SEQUENCE {
            physicalChannelReconfiguration-v3a0ext   PhysicalChannelReconfiguration-v3a0ext ,
            v4xyNonCriticalExtensions   SEQUENCE {
                physicalChannelReconfiguration-v4xyext
                    PhysicalChannelReconfiguration-v4xyext-IEs,
                nonCriticalExtensions           SEQUENCE {
                    v5xyNonCriticalExtensions   SEQUENCE {
                        physicalChannelReconfiguration-v5xyext
                            PhysicalChannelReconfiguration-v5xyext-IEs,
                        nonCriticalExtensions     SEQUENCE {} OPTIONAL
                    } OPTIONAL
                } OPTIONAL
            } OPTIONAL
        } OPTIONAL
    },
    later-than-r3                 SEQUENCE {
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        criticalExtensions            CHOICE {
            r4      SEQUENCE {
                physicalChannelReconfiguration-r4
                    PhysicalChannelReconfiguration-r4-IEs,
                nonCriticalExtensions       SEQUENCE {
                    v5xyNonCriticalExtensions   SEQUENCE {
                        physicalChannelReconfiguration-v5xyext
                            PhysicalChannelReconfiguration-v5xyext-IEs,
                        nonCriticalExtensions     SEQUENCE {} OPTIONAL
                    } OPTIONAL
                } OPTIONAL
            },
            criticalExtensions          CHOICE {
                r5      SEQUENCE {
                    physicalChannelReconfiguration-r5
                        PhysicalChannelReconfiguration-r5-IEs,
                    nonCriticalExtensions       SEQUENCE {} OPTIONAL
                },
                criticalExtensions         SEQUENCE {}
            }
        }
    }
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo              CipheringModeInfo            OPTIONAL,
    activationTime                 ActivationTime               OPTIONAL,
    new-U-RNTI                     U-RNTI                      OPTIONAL,
    new-C-RNTI                     C-RNTI                      OPTIONAL,
    rrc-StateIndicator              RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo             CN-InformationInfo          OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                   URA-Identity                OPTIONAL,
}

```

```

-- Radio bearer IEs
  dl-CounterSynchronisationInfo  DL-CounterSynchronisationInfo  OPTIONAL,
-- Physical channel IEs
  frequencyInfo                  FrequencyInfo                OPTIONAL,
  maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power    OPTIONAL,
  -- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
  -- between UL DPCH info, CPCH SET info and CPCH set ID.
  ul-ChannelRequirement        UL-ChannelRequirementWithCPCH-SetID  OPTIONAL,
  modeSpecificInfo              CHOICE {
    fdd                         SEQUENCE {
      dl-PDSCH-Information     DL-PDSCH-Information    OPTIONAL
    },
    tdd                         NULL
  },
  dl-CommonInformation          DL-CommonInformation       OPTIONAL,
  dl-InformationPerRL-List     DL-InformationPerRL-List  OPTIONAL
}

PhysicalChannelReconfiguration-v3a0ext ::= SEQUENCE {
  new-DSCH-RNTI                DSCH-RNTI                  OPTIONAL
}

PhysicalChannelReconfiguration-v4xyext-IEs ::= SEQUENCE {
  -- Physical channel IEs
  -- ssdt-UL extends SSDT-Information, which is included in
  -- DL-CommonInformation. FDD only.
  ssdt-UL                      SSDT-UL-r4                OPTIONAL,
  -- The order of the RLS in IE cell-id-PerRL-List is the same as
  -- in IE DL-InformationPerRL-List included in this message
  cell-id-PerRL-List            CellIdentity-PerRL-List  OPTIONAL
}

PhysicalChannelReconfiguration-r4-IEs ::= SEQUENCE {
  -- User equipment IEs
  integrityProtectionModeInfo   IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo             CipheringModeInfo        OPTIONAL,
  activationTime                 ActivationTime           OPTIONAL,
  new-U-RNTI                    U-RNTI                   OPTIONAL,
  new-C-RNTI                    C-RNTI                   OPTIONAL,
  new-DSCH-RNTI                 DSCH-RNTI                OPTIONAL,
  rrc-StateIndicator            RRC-StateIndicator       OPTIONAL,
  utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- Core network IEs
  cn-InformationInfo           CN-InformationInfo      OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                  URA-Identity             OPTIONAL,
  -- Radio bearer IEs
  dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                  FrequencyInfo                OPTIONAL,
  maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power    OPTIONAL,
  -- TABULAR: UL-ChannelRequirementWithCPCH-SetID-r4 contains the choice
  -- between UL DPCH info, CPCH SET info and CPCH set ID.
  ul-ChannelRequirement        UL-ChannelRequirementWithCPCH-SetID-r4  OPTIONAL,
  modeSpecificInfo              CHOICE {
    fdd                         SEQUENCE {
      dl-PDSCH-Information     DL-PDSCH-Information    OPTIONAL
    },
    tdd                         NULL
  },
  dl-CommonInformation          DL-CommonInformation-r4       OPTIONAL,
  dl-InformationPerRL-List     DL-InformationPerRL-List-r4  OPTIONAL
}

PhysicalChannelReconfiguration-v5xyext-IEs ::= SEQUENCE {
  -- User equipment IEs
  groupReleaseIndicia           GroupReleaseIndicia        OPTIONAL
}

PhysicalChannelReconfiguration-r5-IEs ::= SEQUENCE {
  -- User equipment IEs
  integrityProtectionModeInfo   IntegrityProtectionModeInfo OPTIONAL,
  cipheringModeInfo             CipheringModeInfo        OPTIONAL,
  activationTime                 ActivationTime           OPTIONAL,
  new-U-RNTI                    U-RNTI                   OPTIONAL,
  new-C-RNTI                    C-RNTI                   OPTIONAL,
  new-DSCH-RNTI                 DSCH-RNTI                OPTIONAL,
  new-H-RNTI                    H-RNTI                   OPTIONAL,
}

```

```

|   groupReleaseIndicia           GroupReleaseIndicia          OPTIONAL,
|   rrc-StateIndicator            RRC-StateIndicator           OPTIONAL,
|   utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- Core network IEs
|   cn-InformationInfo          CN-InformationInfo          OPTIONAL,
-- UTRAN mobility IEs
|   ura-Identity                 URA-Identity                  OPTIONAL,
-- Radio bearer IEs
|   dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo-r5 OPTIONAL,
-- Physical channel IEs
|   frequencyInfo                FrequencyInfo               OPTIONAL,
|   maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power        OPTIONAL,
-- TABULAR: UL-ChannelRequirementWithCPCH-SetID-r4 contains the choice
-- between UL DPCH info, CPCH SET info and CPCH set ID.
|   ul-ChannelRequirement       UL-ChannelRequirementWithCPCH-SetID-r5 OPTIONAL,
|   modeSpecificInfo             CHOICE {
|       fdd                      SEQUENCE {
|           dl-PDSCH-Information    DL-PDSCH-Information        OPTIONAL
|       },
|       tdd                      NULL
|   },
|   dl-HSPDSCH-Information      DL-HSPDSCH-Information        OPTIONAL,
|   dl-CommonInformation         DL-CommonInformation-r4        OPTIONAL,
|   dl-InformationPerRL-List    DL-InformationPerRL-List-r5      OPTIONAL
}

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
-- ****

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance               UL-TimingAdvance
    -- Radio bearer IEs
    count-C-ActivationTime         ActivationTime
    rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList
    ul-CounterSynchronisationInfo  UL-CounterSynchronisationInfo
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}           OPTIONAL
}

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
-- ****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier
    failureCause                   FailureCauseWithProtErr
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}           OPTIONAL
}

-- ****
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
-- ****

PhysicalSharedChannelAllocation ::= CHOICE {
    r3                         SEQUENCE {
        physicalSharedChannelAllocation-r3
        PhysicalSharedChannelAllocation-r3-IES,
        nonCriticalExtensions        SEQUENCE {}           OPTIONAL
    },
    later-than-r3                 SEQUENCE {
        dsch-RNTI                  DSCH-RNTI
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions          CHOICE {
            r4                     SEQUENCE {
                physicalSharedChannelAllocation-r4
            }
        }
    }
}

```

```

    nonCriticalExtensions           PhysicalSharedChannelAllocation-r4-IEs,
},                                     SEQUENCE {}      OPTIONAL
    criticalExtensions             SEQUENCE {}

}
}

PhysicalSharedChannelAllocation-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
    dsch-RNTI                   DSCH-RNTI
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,          OPTIONAL,
-- Physical channel IEs
    ul-TimingAdvance            UL-TimingAdvanceControl          OPTIONAL,
    pusch-CapacityAllocationInfo PUSCH-CapacityAllocationInfo    OPTIONAL,
    pdsch-CapacityAllocationInfo PDSCH-CapacityAllocationInfo    OPTIONAL,
-- TABULAR: If the above value is not present, the default value "No Confirm"
-- shall be used as specified in 10.2.25.
    confirmRequest               ENUMERATED {
                                confirmPDSCH, confirmPUSCH }   OPTIONAL,
    trafficVolumeReportRequest   INTEGER (0..255)                 OPTIONAL,
    iscpTimeslotList            TimeslotList                  OPTIONAL,
    requestPCCPCHRSCP          BOOLEAN
}

PhysicalSharedChannelAllocation-r4-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- Physical channel IEs
    ul-TimingAdvance           UL-TimingAdvanceControl-r4        OPTIONAL,
    pusch-CapacityAllocationInfo PUSCH-CapacityAllocationInfo-r4    OPTIONAL,
    pdsch-CapacityAllocationInfo PDSCH-CapacityAllocationInfo-r4    OPTIONAL,
-- TABULAR: If confirmRequest is not present, the default value "No Confirm"
-- shall be used as specified in 10.2.25.
    confirmRequest               ENUMERATED {
                                confirmPDSCH, confirmPUSCH }   OPTIONAL,
    iscpTimeslotList            TimeslotList-r4                OPTIONAL,
    requestPCCPCHRSCP          BOOLEAN
}

-- ****
-- 
-- PUSCH CAPACITY REQUEST (TDD only)
-- 
-- ****

PUSCHCapacityRequest ::= SEQUENCE {
-- User equipment IEs
    dsch-RNTI                   DSCH-RNTI
-- Measurement IEs
    trafficVolume                TrafficVolumeMeasuredResultsList,
    timeslotListWithISCP         TimeslotListWithISCP
    primaryCCPCH-RSCP            PrimaryCCPCH-RSCP
    allocationConfirmation       CHOICE {
        pdschConfirmation        PDSCH-Identity,
        puschConfirmation        PUSCH-Identity
    }
    protocolErrorIndicator       ProtocolErrorIndicatorWithMoreInfo,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
}

-- ****
-- 
-- RADIO BEARER RECONFIGURATION
-- 
-- ****

RadioBearerReconfiguration ::= CHOICE {
r3
    SEQUENCE {
        radioBearerReconfiguration-r3   RadioBearerReconfiguration-r3-IEs,
        v3a0NonCriticalExtensions     SEQUENCE {
            radioBearerReconfiguration-v3a0ext  RadioBearerReconfiguration-v3a0ext,
            v4xyNonCriticalExtensions      SEQUENCE {
                radioBearerReconfiguration-v4xyext
                    RadioBearerReconfiguration-v4xyext-IEs,
                nonCriticalExtensions        SEQUENCE {
                    v5xyNonCriticalExtensions  SEQUENCE {
                }
            }
        }
    }
}

```

```

radioBearerReconfiguration-v5xyext
    RadioBearerReconfiguration-v5xyext-IEs,
        nonCriticalExtensions      SEQUENCE {} OPTIONAL
            } OPTIONAL
        } OPTIONAL
    } OPTIONAL
},
later-than-r3           SEQUENCE {
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    criticalExtensions          CHOICE {
        r4                     SEQUENCE {
            radioBearerReconfiguration-r4   RadioBearerReconfiguration-r4-IEs,
            nonCriticalExtensions       SEQUENCE {
                v5xyNonCriticalExtensions   SEQUENCE {
                    radioBearerReconfiguration-v5xyext
                        RadioBearerReconfiguration-v5xyext-IEs,
                    nonCriticalExtensions     SEQUENCE {} OPTIONAL
                } OPTIONAL
            } OPTIONAL
        },
        criticalExtensions          CHOICE {
            r5                     SEQUENCE {
                radioBearerReconfiguration-r5   RadioBearerReconfiguration-r5-IEs,
                nonCriticalExtensions       SEQUENCE {} OPTIONAL
            },
            criticalExtensions         SEQUENCE {}
        }
    }
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo           CipheringModeInfo OPTIONAL,
    activationTime               ActivationTime OPTIONAL,
    new-U-RNTI                  U-RNTI OPTIONAL,
    new-C-RNTI                  C-RNTI OPTIONAL,
    rrc-StateIndicator           RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo          CN-InformationInfo OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity OPTIONAL,
    -- Radio bearer IEs
    rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,
    -- NOTE: IE rb-InformationReconfigList should be optional in later versions
    -- of this message
    rb-InformationReconfigList   RB-InformationReconfigList,
    rb-InformationAffectedList   RB-InformationAffectedList OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo         UL-CommonTransChInfo OPTIONAL,
    ul-deletedTransChInfoList   UL-DeletedTransChInfoList OPTIONAL,
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                     SEQUENCE {
            cpch-SetID             CPCH-SetID OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                     NULL OPTIONAL
    }
    dl-CommonTransChInfo         DL-CommonTransChInfo OPTIONAL,
    dl-DeletedTransChInfoList   DL-DeletedTransChInfoList OPTIONAL,
    dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                FrequencyInfo OPTIONAL,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power OPTIONAL,
    ul-ChannelRequirement        UL-ChannelRequirement OPTIONAL,
    modeSpecificPhysChInfo       CHOICE {
        fdd                     SEQUENCE {
            dl-PDSCH-Information   DL-PDSCH-Information OPTIONAL
        },
        tdd                     NULL
    }
    dl-CommonInformation          DL-CommonInformation OPTIONAL,
    -- NOTE: IE dl-InformationPerRL-List should be optional in later versions
}

```

```

-- of this message
dl-InformationPerRL-List      DL-InformationPerRL-List
}

RadioBearerReconfiguration-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI           DSCH-RNTI
}                                         OPTIONAL

RadioBearerReconfiguration-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                 SSDT-UL-r4
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List       CellIdentity-PerRL-List
}                                         OPTIONAL

RadioBearerReconfiguration-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo
    cipheringModeInfo          CipheringModeInfo
    activationTime              ActivationTime
    new-U-RNTI                 U-RNTI
    new-C-RNTI                 C-RNTI
    new-DSCH-RNTI              DSCH-RNTI
    rrc-StateIndicator          RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient
    -- Core network IEs
    cn-InformationInfo         CN-InformationInfo
    -- UTRAN mobility IEs
    ura-Identity               URA-Identity
    -- Radio bearer IEs
    rab-InformationReconfigList RAB-InformationReconfigList
    rb-InformationReconfigList RB-InformationReconfigList-r4
    rb-InformationAffectedList RB-InformationAffectedList
    -- Transport channel IEs
    ul-CommonTransChInfo        UL-CommonTransChInfo-r4
    ul-deletedTransChInfoList   UL-DeletedTransChInfoList
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList
    modeSpecificTransChInfo     CHOICE {
        fdd                   SEQUENCE {
            cpch-SetID          CPCH-SetID
            addReconfTransChDRAC-Info DRAC-StaticInformationList
        },
        tdd                   NULL
    }
    dl-CommonTransChInfo        DL-CommonTransChInfo-r4
    dl-DeletedTransChInfoList   DL-DeletedTransChInfoList
    dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List
    -- Physical channel IEs
    frequencyInfo               FrequencyInfo
    maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power
    ul-ChannelRequirement       UL-ChannelRequirement-r4
    modeSpecificPhysChInfo      CHOICE {
        fdd                   SEQUENCE {
            dl-PDSCH-Information
        },
        tdd                   NULL
    },
    dl-CommonInformation         DL-CommonInformation-r4
    dl-InformationPerRL-List    DL-InformationPerRL-List-r4
}
}

RadioBearerReconfiguration-v5xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
    groupReleaseIndicia         GroupReleaseIndicia
}                                         OPTIONAL

RadioBearerReconfiguration-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo
    cipheringModeInfo          CipheringModeInfo
    activationTime              ActivationTime
    new-U-RNTI                 U-RNTI
    new-C-RNTI                 C-RNTI
    new-DSCH-RNTI              DSCH-RNTI
    new-H-RNTI                 H-RNTI
}

```

```

|   groupReleaseIndicia           GroupReleaseIndicia          OPTIONAL,
|     rrc-StateIndicator          RRC-StateIndicator,
|     utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
|   -- Core network IEs          CN-InformationInfo        OPTIONAL,
|     cn-InformationInfo         CN-InformationInfo        OPTIONAL,
|   -- UTRAN mobility IEs       ura-Identity              OPTIONAL,
|     ura-Identity                URA-Identity              OPTIONAL,
|   -- Radio bearer IEs          rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,
|     rb-InformationReconfigList RB-InformationReconfigList-r5 OPTIONAL,
|     rb-InformationAffectedList RB-InformationAffectedList-r5 OPTIONAL,
|     rb-PDCPContextRelocationList RB-PDCPContextRelocationList OPTIONAL,
|   -- Transport channel IEs      ul-CommonTransChInfo      UL-CommonTransChInfo-r4 OPTIONAL,
|     ul-deletedTransChInfoList  UL-DeletedTransChInfoList    OPTIONAL,
|     ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList  OPTIONAL,
|     modeSpecificTransChInfo    CHOICE {
|       fdd                      SEQUENCE {
|         cpch-SetID               CPCH-SetID                OPTIONAL,
|         addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
|       },
|       tdd                      NULL
|     }
|     dl-CommonTransChInfo        DL-CommonTransChInfo-r4    OPTIONAL,
|     dl-DeletedTransChInfoList  DL-DeletedTransChInfoList-r5  OPTIONAL,
|     dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList-r5  OPTIONAL,
|   -- Physical channel IEs      frequencyInfo            FrequencyInfo          OPTIONAL,
|     maxAllowedUL-TX-Power      MaxAllowedUL-TX-Power      OPTIONAL,
|     ul-ChannelRequirement      UL-ChannelRequirement-r5    OPTIONAL,
|     modeSpecificPhysChInfo    CHOICE {
|       fdd                      SEQUENCE {
|         dl-PDSCH-Information    DL-PDSCH-Information        OPTIONAL
|       },
|       tdd                      NULL
|     }
|     dl-HSPDSCH-Information     DL-HSPDSCH-Information      OPTIONAL,
|     dl-CommonInformation       DL-CommonInformation-r4    OPTIONAL,
|     dl-InformationPerRL-List  DL-InformationPerRL-List-r5  OPTIONAL
}

-- ****
-- 
-- RADIO BEARER RECONFIGURATION COMPLETE
-- 
-- ****

RadioBearerReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo    IntegrityProtActivationInfo OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance              UL-TimingAdvance             OPTIONAL,
  -- Radio bearer IEs
    count-C-ActivationTime        ActivationTime            OPTIONAL,
    rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList OPTIONAL,
    ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo OPTIONAL,
  -- Extension mechanism for non-release99 information
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
}

-- ****
-- 
-- RADIO BEARER RECONFIGURATION FAILURE
-- 
-- ****

RadioBearerReconfigurationFailure ::= SEQUENCE {
  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
  -- Radio bearer IEs
    potentiallySuccessfulBearerList RB-IdentityList        OPTIONAL,
  -- Extension mechanism for non-release99 information
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
}

```

```

--  

-- RADIO BEARER RELEASE  

--  

-- ****  

RadioBearerRelease ::= CHOICE {  

    r3           SEQUENCE {  

        radioBearerRelease-r3          RadioBearerRelease-r3-IEs,  

        v3a0NonCriticalExtensions     SEQUENCE {  

            radioBearerRelease-v3a0ext   RadioBearerRelease-v3a0ext,  

            v4xyNonCriticalExtensions   SEQUENCE {  

                radioBearerRelease-v4xyext  RadioBearerRelease-v4xyext-IEs,  

                nonCriticalExtensions      SEQUENCE {  

                    v5xyNonCriticalExtensions SEQUENCE {  

                        radioBearerRelease-v5xyext  RadioBearerRelease-v5xyext-IEs,  

                        nonCriticalExtensions     SEQUENCE {} OPTIONAL  

                    } OPTIONAL  

                } OPTIONAL  

            } OPTIONAL  

        } OPTIONAL  

    },  

    later-than-r3          SEQUENCE {  

        rrc-TransactionIdentifier   RRC-TransactionIdentifier,  

        criticalExtensions         CHOICE {  

            r4           SEQUENCE {  

                radioBearerRelease-r4      RadioBearerRelease-r4-IEs,  

                nonCriticalExtensions     SEQUENCE {  

                    v5xyNonCriticalExtensions SEQUENCE {  

                        radioBearerRelease-v5xyext  RadioBearerRelease-v5xyext-IEs,  

                        nonCriticalExtensions     SEQUENCE {} OPTIONAL  

                    } OPTIONAL  

                } OPTIONAL  

            } OPTIONAL  

        },  

        criticalExtensions         CHOICE {  

            r5           SEQUENCE {  

                radioBearerRelease-r5      RadioBearerRelease-r5-IEs,  

                nonCriticalExtensions     SEQUENCE {} OPTIONAL  

            },  

            criticalExtensions         SEQUENCE {}  

        }  

    }  

}  

}  

RadioBearerRelease-r3-IEs ::= SEQUENCE {  

    -- User equipment IEs  

    rrc-TransactionIdentifier   RRC-TransactionIdentifier,  

    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,  

    cipheringModeInfo          CipheringModeInfo OPTIONAL,  

    activationTime              ActivationTime OPTIONAL,  

    new-U-RNTI                 U-RNTI OPTIONAL,  

    new-C-RNTI                 C-RNTI OPTIONAL,  

    rrc-StateIndicator          RRC-StateIndicator,  

    utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,  

    -- Core network IEs  

    cn-InformationInfo          CN-InformationInfo OPTIONAL,  

    signallingConnectionRelIndication CN-DomainIdentity OPTIONAL,  

    -- UTRAN mobility IEs  

    ura-Identity                URA-Identity OPTIONAL,  

    -- Radio bearer IEs  

    rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,  

    rb-InformationReleaseList   RB-InformationReleaseList OPTIONAL,  

    rb-InformationAffectedList  RB-InformationAffectedList OPTIONAL,  

    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,  

    -- Transport channel IEs  

    ul-CommonTransChInfo        UL-CommonTransChInfo OPTIONAL,  

    ul-deletedTransChInfoList   UL-DeletedTransChInfoList OPTIONAL,  

    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,  

    modeSpecificTransChInfo     CHOICE {  

        fdd           SEQUENCE {  

            cpch-SetID      CPCH-SetID OPTIONAL,  

            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL  

        },  

        tdd           NULL OPTIONAL  

    }  

    dl-CommonTransChInfo        DL-CommonTransChInfo OPTIONAL,  

    dl-DeletedTransChInfoList   DL-DeletedTransChInfoList OPTIONAL,  

    dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List OPTIONAL,
}

```

```

-- Physical channel IEs
frequencyInfo FrequencyInfo OPTIONAL,
maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
ul-ChannelRequirement UL-ChannelRequirement OPTIONAL,
modeSpecificPhysChInfo CHOICE {
    fdd SEQUENCE {
        dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
    },
    tdd NULL
},
dl-CommonInformation DL-CommonInformation OPTIONAL,
dl-InformationPerRL-List DL-InformationPerRL-List OPTIONAL
}

RadioBearerRelease-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI DSCH-RNTI OPTIONAL
}

RadioBearerRelease-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- IE ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL SSDT-UL-r4 OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List CellIdentity-PerRL-List OPTIONAL
}

RadioBearerRelease-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo CipheringModeInfo OPTIONAL,
    activationTime ActivationTime OPTIONAL,
    new-U-RNTI U-RNTI OPTIONAL,
    new-C-RNTI C-RNTI OPTIONAL,
    new-DSCH-RNTI DSCH-RNTI OPTIONAL,
    rrc-StateIndicator RRC-StateIndicator OPTIONAL,
    utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo CN-InformationInfo OPTIONAL,
    signallingConnectionRelIndication CN-DomainIdentity OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity URA-Identity OPTIONAL,
    -- Radio bearer IEs
    rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,
    rb-InformationReleaseList RB-InformationReleaseList OPTIONAL,
    rb-InformationAffectedList RB-InformationAffectedList OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo UL-CommonTransChInfo-r4 OPTIONAL,
    ul-deletedTransChInfoList UL-DeletedTransChInfoList OPTIONAL,
    ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo CHOICE {
        fdd SEQUENCE {
            cpch-SetID CPCH-SetID OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd NULL
    }
    dl-CommonTransChInfo DL-CommonTransChInfo-r4 OPTIONAL,
    dl-DeletedTransChInfoList DL-DeletedTransChInfoList OPTIONAL,
    dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List OPTIONAL,
    -- Physical channel IEs
    frequencyInfo FrequencyInfo OPTIONAL,
    maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
    ul-ChannelRequirement UL-ChannelRequirement-r4 OPTIONAL,
    modeSpecificPhysChInfo CHOICE {
        fdd SEQUENCE {
            dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
        },
        tdd NULL
    }
    dl-CommonInformation DL-CommonInformation-r4 OPTIONAL,
    dl-InformationPerRL-List DL-InformationPerRL-List-r4 OPTIONAL
}

RadioBearerRelease-v5xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
}

```

groupReleaseIndicia	GroupReleaseIndicia	OPTIONAL
RadioBearerRelease-r5-IEs ::= SEQUENCE {		
-- User equipment IEs		
integrityProtectionModeInfo	IntegrityProtectionModeInfo	OPTIONAL,
cipheringModeInfo	CipheringModeInfo	OPTIONAL,
activationTime	ActivationTime	OPTIONAL,
new-U-RNTI	U-RNTI	OPTIONAL,
new-C-RNTI	C-RNTI	OPTIONAL,
new-DSCH-RNTI	DSCH-RNTI	OPTIONAL,
new-H-RNTI	H-RNTI	OPTIONAL,
groupReleaseIndicia	GroupReleaseIndicia	OPTIONAL,
rrc-StateIndicator	RRC-StateIndicator,	
utran-DRX-CycleLengthCoeff	UTRAN-DRX-CycleLengthCoefficient	OPTIONAL,
-- Core network IEs		
cn-InformationInfo	CN-InformationInfo	OPTIONAL,
signallingConnectionRelIndication	CN-DomainIdentity	OPTIONAL,
-- UTRAN mobility IEs		
ura-Identity	URA-Identity	OPTIONAL,
-- Radio bearer IEs		
rab-InformationReconfigList	RAB-InformationReconfigList	OPTIONAL,
rb-InformationReleaseList	RB-InformationReleaseList,	
rb-InformationAffectedList	RB-InformationAffectedList-r5	OPTIONAL,
dl-CounterSynchronisationInfo	DL-CounterSynchronisationInfo-r5	OPTIONAL,
-- Transport channel IEs		
ul-CommonTransChInfo	UL-CommonTransChInfo-r4	OPTIONAL,
ul-deletedTransChInfoList	UL-DeletedTransChInfoList	OPTIONAL,
ul-AddReconfTransChInfoList	UL-AddReconfTransChInfoList	OPTIONAL,
modeSpecificTransChInfo	CHOICE {	
fdd	SEQUENCE {	
cpch-SetID	CPCH-SetID	OPTIONAL,
addReconfTransChDRAC-Info	DRAC-StaticInformationList	OPTIONAL
},	NULL	
tdd		
},		
dl-CommonTransChInfo	DL-CommonTransChInfo-r4	OPTIONAL,
dl-DeletedTransChInfoList	DL-DeletedTransChInfoList-r5	OPTIONAL,
dl-AddReconfTransChInfoList	DL-AddReconfTransChInfoList-r5	OPTIONAL,
-- Physical channel IEs		
frequencyInfo	FrequencyInfo	OPTIONAL,
maxAllowedUL-TX-Power	MaxAllowedUL-TX-Power	OPTIONAL,
ul-ChannelRequirement	UL-ChannelRequirement-r5	OPTIONAL,
modeSpecificPhysChInfo	CHOICE {	
fdd	SEQUENCE {	
dl-PDSCH-Information	DL-PDSCH-Information	OPTIONAL
},	NULL	
tdd		
},		
dl-HSPDSCH-Information	DL-HSPDSCH-Information	OPTIONAL,
dl-CommonInformation	DL-CommonInformation-r4	OPTIONAL,
dl-InformationPerRL-List	DL-InformationPerRL-List-r5	OPTIONAL
}		
-- *****		
--		
-- RADIO BEARER RELEASE COMPLETE		
--		
-- *****		
RadioBearerReleaseComplete ::= SEQUENCE {		
-- User equipment IEs		
rrc-TransactionIdentifier	RRC-TransactionIdentifier,	
ul-IntegProtActivationInfo	IntegrityProtActivationInfo	OPTIONAL,
-- TABULAR: UL-TimingAdvance is applicable for TDD mode only.		
ul-TimingAdvance	UL-TimingAdvance	OPTIONAL,
-- Radio bearer IEs		
count-C-ActivationTime	ActivationTime	OPTIONAL,
rb-UL-CiphActivationTimeInfo	RB-ActivationTimeInfoList	OPTIONAL,
ul-CounterSynchronisationInfo	UL-CounterSynchronisationInfo	OPTIONAL,
-- Extension mechanism for non- release99 information		
nonCriticalExtensions	SEQUENCE {}	OPTIONAL
}		
-- *****		
--		
-- RADIO BEARER RELEASE FAILURE		

```

-- ****
-- RadioBearerReleaseFailure ::= SEQUENCE {
  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
  -- Radio bearer IEs
    potentiallySuccessfulBearerList RB-IdentityList
                                         OPTIONAL,
  -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}     OPTIONAL
}

-- ****
-- RADIO BEARER SETUP
-- ****

RadioBearerSetup ::= CHOICE {
  r3
    SEQUENCE {
      radioBearerSetup-r3           RadioBearerSetup-r3-IEs,
      v3a0NonCriticalExtensions    SEQUENCE {
        radioBearerSetup-v3a0ext    RadioBearerSetup-v3a0ext,
        v4xyNonCriticalExtensions   SEQUENCE {
          radioBearerSetup-v4xyext  RadioBearerSetup-v4xyext-IEs,
          nonCriticalExtensions     SEQUENCE {
            v5xyNonCriticalExtensions SEQUENCE {
              radioBearerSetup-v5xyext RadioBearerSetup-v5xyext-IEs,
              nonCriticalExtensions   SEQUENCE {} OPTIONAL
            } OPTIONAL
          } OPTIONAL
        } OPTIONAL
      } OPTIONAL
    },
  later-than-r3
    SEQUENCE {
      rrc-TransactionIdentifier      RRC-TransactionIdentifier,
      criticalExtensions            CHOICE {
        r4
          SEQUENCE {
            radioBearerSetup-r4           RadioBearerSetup-r4-IEs,
            nonCriticalExtensions        SEQUENCE {
              v5xyNonCriticalExtensions   SEQUENCE {
                radioBearerSetup-v5xyext  RadioBearerSetup-v5xyext-IEs,
                nonCriticalExtensions   SEQUENCE {} OPTIONAL
              } OPTIONAL
            } OPTIONAL
          } OPTIONAL
        },
      criticalExtensions            CHOICE {
        r5
          SEQUENCE {
            radioBearerSetup-r5           RadioBearerSetup-r5-IEs,
            nonCriticalExtensions        SEQUENCE {} OPTIONAL
          },
        criticalExtensions            SEQUENCE {}
      }
    }
}

RadioBearerSetup-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo
                                         OPTIONAL,
    cipheringModeInfo             CipheringModeInfo
                                         OPTIONAL,
    activationTime                 ActivationTime
                                         OPTIONAL,
    new-U-RNTI                    U-RNTI
                                         OPTIONAL,
    new-C-RNTI                    C-RNTI
                                         OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient
                                         OPTIONAL,
  -- UTRAN mobility IEs
    ura-Identity                  URA-Identity
                                         OPTIONAL,
  -- Core network IEs
    cn-InformationInfo            CN-InformationInfo
                                         OPTIONAL,
  -- Radio bearer IEs
    srb-InformationSetupList      SRB-InformationSetupList
                                         OPTIONAL,
    rab-InformationSetupList      RAB-InformationSetupList
                                         OPTIONAL,
    rb-InformationAffectedList   RB-InformationAffectedList
                                         OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo
                                         OPTIONAL,
  -- Transport channel IEs
}

```

```

    ul-CommonTransChInfo          UL-CommonTransChInfo          OPTIONAL,
    ul-deletedTransChInfoList     UL-DeletedTransChInfoList   OPTIONAL,
    ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                      SEQUENCE {
            cpch-SetID           CPCH-SetID           OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                      NULL                 OPTIONAL,
    }
    dl-CommonTransChInfo          DL-CommonTransChInfo          OPTIONAL,
    dl-DeletedTransChInfoList     DL-DeletedTransChInfoList   OPTIONAL,
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList OPTIONAL,
-- Physical channel IEs
    frequencyInfo                FrequencyInfo                OPTIONAL,
    maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power   OPTIONAL,
    ul-ChannelRequirement       UL-ChannelRequirement   OPTIONAL,
    modeSpecificPhysChInfo      CHOICE {
        fdd                      SEQUENCE {
            dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
        },
        tdd                      NULL                 OPTIONAL
    },
    dl-CommonInformation         DL-CommonInformation        OPTIONAL,
    dl-InformationPerRL-List    DL-InformationPerRL-List   OPTIONAL
}

RadioBearerSetup-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI              DSCH-RNTI                  OPTIONAL
}

RadioBearerSetup-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                     SSDT-UL-r4               OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List          CellIdentity-PerRL-List OPTIONAL
}

RadioBearerSetup-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo            CipheringModeInfo        OPTIONAL,
    activationTime                ActivationTime           OPTIONAL,
    new-U-RNTI                   U-RNTI                  OPTIONAL,
    new-C-RNTI                   C-RNTI                  OPTIONAL,
    new-DSCH-RNTI                DSCH-RNTI               OPTIONAL,
    rrc-StateIndicator           RRC-StateIndicator     OPTIONAL,
    utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- UTRAN mobility IE
    ura-Identity                 URA-Identity             OPTIONAL,
    -- Core network IE
    cn-InformationInfo          CN-InformationInfo    OPTIONAL,
    -- Radio bearer IE
    srb-InformationSetupList    SRB-InformationSetupList OPTIONAL,
    rab-InformationSetupList    RAB-InformationSetupList-r4 OPTIONAL,
    rb-InformationAffectedList  RB-InformationAffectedList OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
    -- Transport channel IE
    ul-CommonTransChInfo         UL-CommonTransChInfo-r4  OPTIONAL,
    ul-deletedTransChInfoList    UL-DeletedTransChInfoList   OPTIONAL,
    ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                      SEQUENCE {
            cpch-SetID           CPCH-SetID           OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                      NULL                 OPTIONAL
    }
    dl-CommonTransChInfo          DL-CommonTransChInfo-r4   OPTIONAL,
    dl-DeletedTransChInfoList     DL-DeletedTransChInfoList   OPTIONAL,
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList-r4 OPTIONAL,
-- Physical channel IEs
    frequencyInfo                FrequencyInfo                OPTIONAL,
    maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power   OPTIONAL,
    ul-ChannelRequirement       UL-ChannelRequirement-r4   OPTIONAL,
}

```

```

        modeSpecificPhysChInfo          CHOICE {
          fdd                           SEQUENCE {
            dl-PDSCH-Information       DL-PDSCH-Information      OPTIONAL
          },
          tdd                           NULL
        },
        dl-CommonInformation           DL-CommonInformation-r4   OPTIONAL,
        dl-InformationPerRL-List      DL-InformationPerRL-List-r4 OPTIONAL
      }

      RadioBearerSetup-v5xyext-IEs ::= SEQUENCE {
        -- User equipment IEs
        groupReleaseIndicia          GroupReleaseIndicia    OPTIONAL
      }

      RadioBearerSetup-r5-IEs ::= SEQUENCE {
        -- User equipment IEs
        integrityProtectionModeInfo  IntegrityProtectionModeInfo OPTIONAL,
        cipheringModeInfo             CipheringModeInfo      OPTIONAL,
        activationTime                ActivationTime        OPTIONAL,
        new-U-RNTI                   U-RNTI                 OPTIONAL,
        new-C-RNTI                   C-RNTI                 OPTIONAL,
        new-DSCH-RNTI                DSCH-RNTI              OPTIONAL,
        new-H-RNTI                   H-RNTI                 OPTIONAL,
        groupReleaseIndicia          GroupReleaseIndicia  OPTIONAL,
        rrc-StateIndicator            RRC-StateIndicator,
        utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
        -- UTRAN mobility IEs
        ura-Identity                 URA-Identity          OPTIONAL,
        -- Core network IEs
        cn-InformationInfo           CN-InformationInfo  OPTIONAL,
        -- Radio bearer IEs
        srb-InformationSetupList     SRB-InformationSetupList OPTIONAL,
        rab-InformationSetupList     RAB-InformationSetupList-r4 OPTIONAL,
        rb-InformationAffectedList   RB-InformationAffectedList-r5 OPTIONAL,
        dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo-r5 OPTIONAL,
        -- Transport channel IEs
        ul-CommonTransChInfo         UL-CommonTransChInfo-r4  OPTIONAL,
        ul-deletedTransChInfoList    UL-DeletedTransChInfoList OPTIONAL,
        ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList OPTIONAL,
        modeSpecificTransChInfo      CHOICE {
          fdd                           SEQUENCE {
            cpch-SetID                  CPCH-SetID            OPTIONAL,
            addReconfTransChDRAC-Info   DRAC-StaticInformationList OPTIONAL
          },
          tdd                           NULL
        }
        dl-CommonTransChInfo          DL-CommonTransChInfo-r4  OPTIONAL,
        dl-DeletedTransChInfoList    DL-DeletedTransChInfoList-r5 OPTIONAL,
        dl-AddReconfTransChInfoList  DL-AddReconfTransChInfoList-r5 OPTIONAL,
        -- Physical channel IEs
        frequencyInfo                FrequencyInfo          OPTIONAL,
        maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power  OPTIONAL,
        ul-ChannelRequirement        UL-ChannelRequirement-r5 OPTIONAL,
        modeSpecificPhysChInfo      CHOICE {
          fdd                           SEQUENCE {
            dl-PDSCH-Information       DL-PDSCH-Information      OPTIONAL
          },
          tdd                           NULL
        }
        dl-HSPDSCH-Information       DL-HSPDSCH-Information  OPTIONAL,
        dl-CommonInformation          DL-CommonInformation-r4  OPTIONAL,
        dl-InformationPerRL-List     DL-InformationPerRL-List-r5 OPTIONAL
      }

      ****
      -- RADIO BEARER SETUP COMPLETE
      --
      ****

      RadioBearerSetupComplete ::= SEQUENCE {
        -- User equipment IEs
        rrc-TransactionIdentifier    RRC-TransactionIdentifier, OPTIONAL,
        ul-IntegProtActivationInfo   IntegrityProtActivationInfo,
        -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
        ul-TimingAdvance             UL-TimingAdvance        OPTIONAL,
        start-Value                  START-Value            OPTIONAL,

```

```

-- Radio bearer IEs
count-C-ActivationTime      ActivationTime          OPTIONAL,
rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL,
ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions       SEQUENCE {}           OPTIONAL
}

-- ****
-- 
-- RADIO BEARER SETUP FAILURE
-- 
-- ****

RadioBearerSetupFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Radio bearer IEs
    potentiallySuccessfulBearerList RB-IdentityList          OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}           OPTIONAL
}

-- ****
-- 
-- RRC CONNECTION REJECT
-- 
-- ****

RRCConnectionReject ::= CHOICE {
    r3
        rrcConnectionReject-r3            SEQUENCE {
            RRCCconnectionReject-r3-IES,
            nonCriticalExtensions         SEQUENCE {} OPTIONAL
        },
        later-than-r3                   SEQUENCE {
            initialUE-Identity           InitialUE-Identity,
            rrc-TransactionIdentifier   RRC-TransactionIdentifier,
            criticalExtensions          SEQUENCE {}
        }
    }
}

RRCCconnectionReject-r3-IES ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity           InitialUE-Identity,
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    rejectionCause                RejectionCause,
    waitTime                      WaitTime,
    redirectionInfo               RedirectionInfo          OPTIONAL
}

-- ****
-- 
-- RRC CONNECTION RELEASE
-- 
-- ****

RRCConnectionRelease ::= CHOICE {
    r3
        rrcConnectionRelease-r3          SEQUENCE {
            RRCCconnectionRelease-r3-IES,
            nonCriticalExtensions         SEQUENCE {} OPTIONAL
        },
        later-than-r3                   SEQUENCE {
            rrc-TransactionIdentifier   RRC-TransactionIdentifier,
            criticalExtensions          CHOICE {
                r4
                    rrcConnectionRelease-r4  SEQUENCE {
                        RRCCconnectionRelease-r4-IES,
                        nonCriticalExtensions SEQUENCE {} OPTIONAL
                    },
                    criticalExtensions      SEQUENCE {}
                }
            }
    }
}

RRCCconnectionRelease-r3-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,

```

```

-- n-308 is conditional on the UE state
n-308                                N-308                               OPTIONAL,
releaseCause                           ReleaseCause,
rplmn-information                      Rplmn-Information                               OPTIONAL
}

RRCConnectionRelease-r4-IEs ::= SEQUENCE {
  -- User equipment IEs
  -- n-308 is conditional on the UE state.
  n-308                                N-308                               OPTIONAL,
  releaseCause                           ReleaseCause,
  rplmn-information                      Rplmn-Information-r4                         OPTIONAL
}

RRCConnectionRelease-r5-IEs ::= SEQUENCE {
  -- User equipment IEs
  -- n-308 is conditional on the UE state.
  n-308                                N-308                               OPTIONAL,
  releaseCause                           ReleaseCause,
  rplmn-information                      Rplmn-Information-r4                         OPTIONAL
}

-- ****
-- 
-- RRC CONNECTION RELEASE for CCCH
-- 
-- ****

RRCConnectionRelease-CCCH ::= CHOICE {
  r3          SEQUENCE {
    rrcConnectionRelease-CCCH-r3      RRCConnectionRelease-CCCH-r3-IEs,
    nonCriticalExtensions           SEQUENCE {} OPTIONAL
  },
  later-than-r3           SEQUENCE {
    u-RNTI                     U-RNTI,
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,
    criticalExtensions           CHOICE {
      r4          SEQUENCE {
        rrcConnectionRelease-CCCH-r4      RRCConnectionRelease-CCCH-r4-IEs,
        nonCriticalExtensions           SEQUENCE {} OPTIONAL
      },
      criticalExtensions             CHOICE {
        r5          SEQUENCE {
          rrcConnectionRelease-CCCH-r5      RRCConnectionRelease-CCCH-r5-IEs,
          nonCriticalExtensions           SEQUENCE {} OPTIONAL
        },
        criticalExtensions            SEQUENCE {}
      }
    }
  }
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                     U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease          RRCConnectionRelease-r3-IEs
}

RRCConnectionRelease-CCCH-r4-IEs ::= SEQUENCE {
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease          RRCConnectionRelease-r4-IEs
}

RRCConnectionRelease-CCCH-r5-IEs ::= SEQUENCE {
  --
  -- TABULAR:
  -- CHOICE IdentityType (U-RNTI, GroupIdentity) is replaced with
  -- an optional IE GroupIdentity, since the U-RNTI is mandatory in ASN.1.
  -- In case CHOICE IdentityType is equal to GroupIdentity
  -- the value of the U-RNTI shall be ignored by a UE
  -- complying with this version of the message.
  --
  -- User equipment IEs
  groupIdentity                 SEQUENCE ( SIZE (1 .. maxURNTI-Group) ) OF
                                GroupReleaseInformation OPTIONAL,
  -- The rest of the message is identical to the one sent on DCCH.
  rrcConnectionRelease          RRCConnectionRelease-r5-IEs
}

```

```

}

-- ****
-- RRC CONNECTION RELEASE COMPLETE
--
-- ****

RRCConnectionReleaseComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    errorIndication                FailureCauseWithProtErr
                                    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
-- RRC CONNECTION REQUEST
--
-- ****

RRCConnectionRequest ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity            InitialUE-Identity,
    establishmentCause             EstablishmentCause,
    -- protocolErrorIndicator is MD, but for compactness reasons no default value
    -- has been assigned to it.
    protocolErrorIndicator         ProtocolErrorIndicator,
    -- Measurement IEs
    measuredResultsOnRACH          MeasuredResultsOnRACH
                                    OPTIONAL,
    v4xyNonCriticalExtensions     SEQUENCE {
        rrcConnectionRequest-v4xyext   RRCConnectionRequest-v4xyext-IEs,
        -- Reserved for future non critical extension
        nonCriticalExtensions          SEQUENCE {}      OPTIONAL
    }                                OPTIONAL
}

RRCConnectionRequest-v4xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v4xyext   UE-RadioAccessCapability-v4xyext
}

-- ****
-- RRC CONNECTION SETUP
--
-- ****

RRCConnectionSetup ::= CHOICE {
    r3                               SEQUENCE {
        rrcConnectionSetup-r3           RRCConnectionSetup-r3-IEs,
        v4xyNonCriticalExtensions     SEQUENCE {
            rrcConnectionSetup-v4xyext   RRCConnectionSetup-v4xyext-IEs,
        }
        -- Extension mechanism for non- release99 information
        nonCriticalExtensions          SEQUENCE {}      OPTIONAL
    }                                OPTIONAL
},
    later-than-r3                   SEQUENCE {
        initialUE-Identity            InitialUE-Identity,
        rrc-TransactionIdentifier     RRC-TransactionIdentifier,
        criticalExtensions            CHOICE {
            r4                           SEQUENCE {
                rrcConnectionSetup-r4       RRCConnectionSetup-r4-IEs,
                nonCriticalExtensions      SEQUENCE {}      OPTIONAL
            },
            criticalExtensions          SEQUENCE {}
        }
    }
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity            InitialUE-Identity,
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,
    activationTime                 ActivationTime
                                    OPTIONAL,
}

```

```

new-U-RNTI           U-RNTI,
new-c-RNTI          C-RNTI
rrc-StateIndicator   RRC-StateIndicator,
utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient,
-- TABULAR: If capacityUpdateRequest is not present, the default value
-- defined in 10.3.3.2 shall be used.
capabilityUpdateRequirement  CapabilityUpdateRequirement      OPTIONAL,
-- Radio bearer IEs
    srb-InformationSetupList   SRB-InformationSetupList2,
-- Transport channel IEs
    ul-CommonTransChInfo      UL-CommonTransChInfo      OPTIONAL,
    -- NOTE: ul-AddReconfTransChInfoList should be optional in later versions of
    -- this message
    ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo      DL-CommonTransChInfo      OPTIONAL,
    -- NOTE: dl-AddReconfTransChInfoList should be optional in later versions
    -- of this message
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList,
-- Physical channel IEs
    frequencyInfo            FrequencyInfo      OPTIONAL,
    maxAllowedUL-TX-Power    MaxAllowedUL-TX-Power  OPTIONAL,
    ul-ChannelRequirement   UL-ChannelRequirement  OPTIONAL,
    dl-CommonInformation    DL-CommonInformation  OPTIONAL,
    dl-InformationPerRL-List  DL-InformationPerRL-List  OPTIONAL
}

RRCConnectionSetup-v4xyext-IEs ::= SEQUENCE {
    capabilityUpdateRequirement-r4-ext  CapabilityUpdateRequirement-r4-ext  OPTIONAL,
-- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                  SSDT-UL-r4          OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List        CellIdentity-PerRL-List  OPTIONAL
}

RRCConnectionSetup-r4-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    activationTime            ActivationTime      OPTIONAL,
    new-U-RNTI                U-RNTI,
    new-c-RNTI                C-RNTI
    rrc-StateIndicator         RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient,
    -- TABULAR: If capabilityUpdateRequirements is not present, the default value
    -- defined in 10.3.3.2 shall be used.
    capabilityUpdateRequirement  CapabilityUpdateRequirement-r4      OPTIONAL,
-- Radio bearer IEs
    srb-InformationSetupList   SRB-InformationSetupList2,
-- Transport channel IEs
    ul-CommonTransChInfo      UL-CommonTransChInfo      OPTIONAL,
    ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList  OPTIONAL,
    dl-CommonTransChInfo      DL-CommonTransChInfo-r4  OPTIONAL,
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList  OPTIONAL,
-- Physical channel IEs
    frequencyInfo            FrequencyInfo      OPTIONAL,
    maxAllowedUL-TX-Power    MaxAllowedUL-TX-Power  OPTIONAL,
    ul-ChannelRequirement   UL-ChannelRequirement-r4  OPTIONAL,
    dl-CommonInformation    DL-CommonInformation-r4  OPTIONAL,
    dl-InformationPerRL-List  DL-InformationPerRL-List-r4  OPTIONAL
}

-- *****
-- RRC CONNECTION SETUP COMPLETE
-- *****
RRCConnectionSetupComplete ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    startList                  STARTList,
    ue-RadioAccessCapability   UE-RadioAccessCapability      OPTIONAL,
-- Other IEs
    ue-RATSpecificCapability  InterRAT-UE-RadioAccessCapabilityList  OPTIONAL,
-- Non critical extensions
    v370NonCriticalExtensions  SEQUENCE {

```

```

        rrcConnectionSetupComplete-v370ext  RRCConnectionSetupComplete-v370ext,
v380NonCriticalExtensions           SEQUENCE {
    rrcConnectionSetupComplete-v380ext  RRCConnectionSetupComplete-v380ext-IEs,
    -- Reserved for future non critical extension
    v3a0NonCriticalExtensions         SEQUENCE {
        rrcConnectionSetupComplete-v3a0ext  RRCConnectionSetupComplete-v3a0ext,
        v4xyNonCriticalExtensions       SEQUENCE {
            rrcConnectionSetupComplete-v4xyext  RRCConnectionSetupComplete-v4xyext-IEs,
            nonCriticalExtensions          SEQUENCE {}      OPTIONAL
        }
        OPTIONAL
    }
    OPTIONAL
}
}

RRCConnectionSetupComplete-v370ext ::= SEQUENCE {
    -- User equipment IE
    ue-RadioAccessCapability-v370ext     UE-RadioAccessCapability-v370ext     OPTIONAL
}

RRCConnectionSetupComplete-v380ext-IEs ::= SEQUENCE {
    -- User equipment IE
    ue-RadioAccessCapability-v380ext     UE-RadioAccessCapability-v380ext     OPTIONAL,
    dl-PhysChCapabilityFDD-v380ext      DL-PhysChCapabilityFDD-v380ext
}

RRCConnectionSetupComplete-v3a0ext ::= SEQUENCE {
    -- User equipment IE
    ue-RadioAccessCapability-v3a0ext     UE-RadioAccessCapability-v3a0ext     OPTIONAL
}

RRCConnectionSetupComplete-v4xyext-IEs ::= SEQUENCE {
    -- User equipment IE
    ue-RadioAccessCapability-r4-ext     UE-RadioAccessCapability-r4-ext     OPTIONAL
}

-- *****
-- 
-- RRC FAILURE INFO
-- 
-- *****

RRC-FailureInfo ::= CHOICE {
    r3                               SEQUENCE {
        rRC-FailureInfo-r3            RRC-FailureInfo-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions               SEQUENCE {}
}

RRC-FailureInfo-r3-IEs ::= SEQUENCE {
    -- Non-RRC IE
    failureCauseWithProtErr       FailureCauseWithProtErr
}

-- *****
-- 
-- RRC STATUS
-- 
-- *****

RRCStatus ::= SEQUENCE {
    -- Other IE
    -- TABULAR: Identification of received message is nested in
    -- ProtocolErrorMoreInformation
    protocolErrorInformation        ProtocolErrorMoreInformation,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- *****
-- 
-- SECURITY MODE COMMAND
-- 
-- *****

SecurityModeCommand ::= CHOICE {
    r3                               SEQUENCE {

```

```

    securityModeCommand-r3           SecurityModeCommand-r3-IEs,
    v5xyNnonCriticalExtensions     SEQUENCE {
        securityModeCommand-v5xyext SecurityModeCommand-v5xyext-IEs,
        nonCriticalExtensions      SEQUENCE {} OPTIONAL
    }                                OPTIONAL
},
later-than-r3                      SEQUENCE {
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,
    criticalExtensions            SEQUENCE {}
}
}

SecurityModeCommand-r3-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.
-- User equipment IEs
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,
    securityCapability            SecurityCapability,
    cipheringModeInfo             CipheringModeInfo          OPTIONAL,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo OPTIONAL,
-- Core network IEs
    cn-DomainIdentity             CN-DomainIdentity,
-- Other IEs
    ue-SystemSpecificSecurityCap InterRAT-UE-SecurityCapList   OPTIONAL
}

SecurityModeCommand-v5xyext-IEs ::= SEQUENCE {
-- User equipment IEs
    groupReleaseIndicia          GroupReleaseIndicia        OPTIONAL
}

-- *****
-- SECURITY MODE COMPLETE
-- *****
SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.

-- User equipment IEs
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo    IntegrityProtActivationInfo OPTIONAL,
-- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList    OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

-- *****
-- SECURITY MODE FAILURE
-- *****
SecurityModeFailure ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

-- *****
-- SIGNALLING CONNECTION RELEASE
-- *****
SignallingConnectionRelease ::= CHOICE {
    r3                           SEQUENCE {
        signallingConnectionRelease-r3 SignallingConnectionRelease-r3-IEs,
        nonCriticalExtensions       SEQUENCE {}      OPTIONAL
    },
    later-than-r3                 SEQUENCE {
        rrc-TransactionIdentifier     RRC-TransactionIdentifier,
        criticalExtensions            SEQUENCE {}
    }
}

```

```

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    -- Core network IEs
    cn-DomainIdentity                 CN-DomainIdentity
}

-- ****
-- 
-- SIGNALLING CONNECTION RELEASE INDICATION
-- 
-- ****

SignallingConnectionReleaseIndication ::= SEQUENCE {
    -- Core network IEs
    cn-DomainIdentity                 CN-DomainIdentity,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions            SEQUENCE {}      OPTIONAL
}

-- ****
-- 
-- SYSTEM INFORMATION for BCH
-- 
-- ****

SystemInformation-BCH ::= SEQUENCE {
    -- Other information elements
    sfn-Prime                         SFN-Prime,
    payload                            CHOICE {
        noSegment                      NULL,
        firstSegment                   FirstSegment,
        subsequentSegment              SubsequentSegment,
        lastSegmentShort               LastSegmentShort,
        lastAndFirst                    SEQUENCE {
            lastSegmentShort           LastSegmentShort,
            firstSegment               FirstSegmentShort
        },
        lastAndComplete                 SEQUENCE {
            lastSegmentShort           LastSegmentShort,
            completeSIB-List           CompleteSIB-List
        },
        lastAndCompleteAndFirst         SEQUENCE {
            lastSegmentShort           LastSegmentShort,
            completeSIB-List           CompleteSIB-List,
            firstSegment               FirstSegmentShort
        },
        completeSIB-List                CompleteSIB-List,
        completeAndFirst                SEQUENCE {
            completeSIB-List           CompleteSIB-List,
            firstSegment               FirstSegmentShort
        },
        completeSIB                     CompleteSIB,
        lastSegment                     LastSegment,
        spare5                          NULL,
        spare4                          NULL,
        spare3                          NULL,
        spare2                          NULL,
        spare1                          NULL
    }
}

-- ****
-- 
-- SYSTEM INFORMATION for FACH
-- 
-- ****

SystemInformation-FACH ::= SEQUENCE {
    -- Other information elements
    payload                            CHOICE {
        noSegment                      NULL,
        firstSegment                   FirstSegment,
        subsequentSegment              SubsequentSegment,
        lastSegmentShort               LastSegmentShort,
        lastAndFirst                    SEQUENCE {
            lastSegmentShort           LastSegmentShort,

```

```

        firstSegment           FirstSegmentShort
    },
    lastAndComplete          SEQUENCE {
        lastSegmentShort,
        completeSIB-List
    },
    lastAndCompleteAndFirst SEQUENCE {
        lastSegmentShort,
        completeSIB-List,
        firstSegment
    },
    completeSIB-List         CompleteSIB-List,
    completeAndFirst         SEQUENCE {
        completeSIB-List,
        firstSegment
    },
    completeSIB              CompleteSIB,
    lastSegment               LastSegment,
    spare5                   NULL,
    spare4                   NULL,
    spare3                   NULL,
    spare2                   NULL,
    spare1                   NULL
}
}

-- ****
-- 
-- First segment
-- 
-- ****

FirstSegment ::=           SEQUENCE {
    -- Other information elements
    sib-Type                 SIB-Type,
    seg-Count                SegCount,
    sib-Data-fixed            SIB-Data-fixed
}

-- ****
-- 
-- First segment (short)
-- 
-- ****

FirstSegmentShort ::=        SEQUENCE {
    -- Other information elements
    sib-Type                 SIB-Type,
    seg-Count                SegCount,
    sib-Data-variable         SIB-Data-variable
}

-- ****
-- 
-- Subsequent segment
-- 
-- ****

SubsequentSegment ::=       SEQUENCE {
    -- Other information elements
    sib-Type                 SIB-Type,
    segmentIndex              SegmentIndex,
    sib-Data-fixed             SIB-Data-fixed
}

-- ****
-- 
-- Last segment
-- 
-- ****

LastSegment ::=              SEQUENCE {
    -- Other information elements
    sib-Type                 SIB-Type,
    segmentIndex              SegmentIndex,
    -- For sib-Data-fixed, in case the SIB data is less than 222 bits, padding
    -- shall be used. The same padding bits shall be used as defined in clause 12.1
    sib-Data-fixed             SIB-Data-fixed
}

```

```

}

LastSegmentShort ::=          SEQUENCE {
  -- Other information elements
  sib-Type                  SIB-Type,
  segmentIndex               SegmentIndex,
  sib-Data-variable          SIB-Data-variable
}

-- ****
-- 
-- Complete SIB
-- 
-- ****

CompleteSIB-List ::=          SEQUENCE (SIZE (1..maxSIBperMsg)) OF
  CompleteSIBshort

CompleteSIB ::=                SEQUENCE {
  -- Other information elements
  sib-Type                  SIB-Type,
  -- For sib-Data-fixed, in case the SIB data is less than 226 bits, padding
  -- shall be used. The same padding bits shall be used as defined in clause 12.1
  sib-Data-fixed             BIT STRING (SIZE (226))
}

CompleteSIBshort ::=          SEQUENCE {
  -- Other information elements
  sib-Type                  SIB-Type,
  sib-Data-variable          SIB-Data-variable
}

-- ****
-- 
-- SYSTEM INFORMATION CHANGE INDICATION
-- 
-- ****

SystemInformationChangeIndication ::=   SEQUENCE {
  -- Other IEs
  bcch-ModificationInfo      BCCH-ModificationInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions     SEQUENCE {} OPTIONAL
}

-- ****
-- 
-- TRANSPORT CHANNEL RECONFIGURATION
-- 
-- ****

TransportChannelReconfiguration ::= CHOICE {
  r3                         SEQUENCE {
    transportChannelReconfiguration-r3
      TransportChannelReconfiguration-r3-IEs,
    v3a0NonCriticalExtensions SEQUENCE {
      transportChannelReconfiguration-v3a0ext
        TransportChannelReconfiguration-v3a0ext,
    v4xyNonCriticalExtensions SEQUENCE {
      transportChannelReconfiguration-v4xyext
        TransportChannelReconfiguration-v4xyext-IEs,
    v5xyNonCriticalExtensions SEQUENCE {
      transportChannelReconfiguration-v5xyext
        TransportChannelReconfiguration-v5xyext-IEs,
    nonCriticalExtensions     SEQUENCE {} OPTIONAL
    } OPTIONAL
  } OPTIONAL
},
  later-than-r3                SEQUENCE {
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    criticalExtensions        CHOICE {
      r4                      SEQUENCE {
        transportChannelReconfiguration-r4
          TransportChannelReconfiguration-r4-IEs,
      v5xyNonCriticalExtensions SEQUENCE {
        transportChannelReconfiguration-v5xyext
          TransportChannelReconfiguration-v5xyext-IEs,
    }
  }
}
}

```

```

    nonCriticalExtensions           SEQUENCE {}      OPTIONAL
    } OPTIONAL
},
criticalExtensions             CHOICE {
r5                         SEQUENCE {
    transportChannelReconfiguration-r5
        TransportChannelReconfiguration-r5-IEs,
    nonCriticalExtensions       SEQUENCE {}      OPTIONAL
},
criticalExtensions             SEQUENCE {}
}
}
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo
    cipheringModeInfo             CipheringModeInfo
    activationTime                 ActivationTime
    new-U-RNTI                    U-RNTI
    new-C-RNTI                    C-RNTI
    rrc-StateIndicator            RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient
-- Core network IEs
    cn-InformationInfo           CN-InformationInfo
-- UTRAN mobility IEs
    ura-Identity                  URA-Identity
-- Radio bearer IEs
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo
-- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo
    ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList
    modeSpecificTransChInfo       CHOICE {
        fdd                         SEQUENCE {
            cpch-SetID                CPCH-SetID
            addReconfTransChDRAC-Info DRAC-StaticInformationList
        },
        tdd                         NULL
    }
    dl-CommonTransChInfo          DL-CommonTransChInfo
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList
-- Physical channel IEs
    frequencyInfo                 FrequencyInfo
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power
    ul-ChannelRequirement        UL-ChannelRequirement
    modeSpecificPhysChInfo       CHOICE {
        fdd                         SEQUENCE {
            dl-PDSCH-Information     DL-PDSCH-Information
        },
        tdd                         NULL
    },
    dl-CommonInformation          DL-CommonInformation
    dl-InformationPerRL-List     DL-InformationPerRL-List
}

TransportChannelReconfiguration-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI                DSCH-RNTI
} OPTIONAL

TransportChannelReconfiguration-v4xyext-IEs ::= SEQUENCE {
-- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                      SSDT-UL-r4
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List            CellIdentity-PerRL-List
} OPTIONAL

TransportChannelReconfiguration-r4-IEs ::= SEQUENCE {
-- User equipment IEs
    integrityProtectionModeInfo   IntegrityProtectionModeInfo
    cipheringModeInfo             CipheringModeInfo
    activationTime                 ActivationTime
    new-U-RNTI                    U-RNTI
    new-C-RNTI                    C-RNTI
}

```

new-DSCH-RNTI	DSCH-RNTI	OPTIONAL,
rrc-StateIndicator	RRC-StateIndicator,	
utran-DRX-CycleLengthCoeff	UTRAN-DRX-CycleLengthCoefficient	OPTIONAL,
-- Core network IEs		
cn-InformationInfo	CN-InformationInfo	OPTIONAL,
-- UTRAN mobility IEs		
ura-Identity	URA-Identity	OPTIONAL,
-- Radio bearer IEs		
dl-CounterSynchronisationInfo	DL-CounterSynchronisationInfo	OPTIONAL,
-- Transport channel IEs		
ul-CommonTransChInfo	UL-CommonTransChInfo-r4	OPTIONAL,
ul-AddReconfTransChInfoList	UL-AddReconfTransChInfoList	OPTIONAL,
modeSpecificTransChInfo	CHOICE {	
fdd	SEQUENCE {	
cpch-SetID	CPCH-SetID	OPTIONAL,
addReconfTransChDRAC-Info	DRAC-StaticInformationList	OPTIONAL
},		
tdd	NULL	
}		
dl-CommonTransChInfo	DL-CommonTransChInfo-r4	OPTIONAL,
dl-AddReconfTransChInfoList	DL-AddReconfTransChInfoList-r4	OPTIONAL,
-- Physical channel IEs		
frequencyInfo	FrequencyInfo	OPTIONAL,
maxAllowedUL-TX-Power	MaxAllowedUL-TX-Power	OPTIONAL,
ul-ChannelRequirement	UL-ChannelRequirement-r4	OPTIONAL,
modeSpecificPhysChInfo	CHOICE {	
fdd	SEQUENCE {	
dl-PDSCH-Information	DL-PDSCH-Information	OPTIONAL
},		
tdd	NULL	
,		
dl-CommonInformation	DL-CommonInformation-r4	OPTIONAL,
dl-InformationPerRL-List	DL-InformationPerRL-List-r4	OPTIONAL
}		

TransportChannelReconfiguration-v5xyext-IEs ::= SEQUENCE {		
-- User equipment IEs		
groupReleaseIndicia	GroupReleaseIndicia	OPTIONAL

TransportChannelReconfiguration-r5-IEs ::= SEQUENCE {		
-- User equipment IEs		
integrityProtectionModeInfo	IntegrityProtectionModeInfo	OPTIONAL,
cipheringModeInfo	CipheringModeInfo	OPTIONAL,
activationTime	ActivationTime	OPTIONAL,
new-U-RNTI	U-RNTI	OPTIONAL,
new-C-RNTI	C-RNTI	OPTIONAL,
new-DSCH-RNTI	DSCH-RNTI	OPTIONAL,
new-H-RNTI	H-RNTI	OPTIONAL,
groupReleaseIndicia	GroupReleaseIndicia	OPTIONAL,
rrc-StateIndicator	RRC-StateIndicator,	
utran-DRX-CycleLengthCoeff	UTRAN-DRX-CycleLengthCoefficient	OPTIONAL,
-- Core network IEs		
cn-InformationInfo	CN-InformationInfo	OPTIONAL,
-- UTRAN mobility IEs		
ura-Identity	URA-Identity	OPTIONAL,
-- Radio bearer IEs		
dl-CounterSynchronisationInfo	DL-CounterSynchronisationInfo-r5	OPTIONAL,
-- Transport channel IEs		
ul-CommonTransChInfo	UL-CommonTransChInfo-r4	OPTIONAL,
ul-AddReconfTransChInfoList	UL-AddReconfTransChInfoList	OPTIONAL,
modeSpecificTransChInfo	CHOICE {	
fdd	SEQUENCE {	
cpch-SetID	CPCH-SetID	OPTIONAL,
addReconfTransChDRAC-Info	DRAC-StaticInformationList	OPTIONAL
},		
tdd	NULL	
}		
dl-CommonTransChInfo	DL-CommonTransChInfo-r4	OPTIONAL,
dl-AddReconfTransChInfoList	DL-AddReconfTransChInfoList-r5	OPTIONAL,
-- Physical channel IEs		
frequencyInfo	FrequencyInfo	OPTIONAL,
maxAllowedUL-TX-Power	MaxAllowedUL-TX-Power	OPTIONAL,
ul-ChannelRequirement	UL-ChannelRequirement-r5	OPTIONAL,
modeSpecificPhysChInfo	CHOICE {	
fdd	SEQUENCE {	
dl-PDSCH-Information	DL-PDSCH-Information	OPTIONAL
},		
}		

```

        tdd                         NULL
    },
    dl-HSPDSCH-Information      DL-HSPDSCH-Information           OPTIONAL,
    dl-CommonInformation        DL-CommonInformation-r4          OPTIONAL,
    dl-InformationPerRL-List   DL-InformationPerRL-List-r5        OPTIONAL
}

-- ****
-- 
-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
-- 
-- ****

TransportChannelReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance               UL-TimingAdvance
    OPTIONAL,
    -- Radio bearer IEs
    count-C-ActivationTime         ActivationTime
    rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList
    ul-CounterSynchronisationInfo  UL-CounterSynchronisationInfo
    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
-- 
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
-- 
-- ****

TransportChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                   FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
-- 
-- TRANSPORT FORMAT COMBINATION CONTROL in AM or UM RLC mode
-- 
-- ****

TransportFormatCombinationControl ::= SEQUENCE {
    -- rrc-TransactionIdentifier is always included in this message
    rrc-TransactionIdentifier      RRC-TransactionIdentifier           OPTIONAL,
    modeSpecificInfo                CHOICE {
        fdd                         NULL,
        tdd                         SEQUENCE {
            tfcs-ID                  TFCS-Identity      OPTIONAL
        }
    },
    dpch-TFCS-InUplink              TFC-Subset,
    activationTimeForTFCSSubset     ActivationTime
    OPTIONAL,
    tfc-ControlDuration            TFC-ControlDuration           OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
-- 
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
-- 
-- ****

TransportFormatCombinationControlFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                   FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

```

```

-- UE CAPABILITY ENQUIRY
-- ****
UECapabilityEnquiry ::= CHOICE {
    r3                               SEQUENCE {
        ueCapabilityEnquiry-r3           UECapabilityEnquiry-r3-IEs,
        v4xyNonCriticalExtensions       SEQUENCE {
            ueCapabilityEnquiry-v4xyext   UECapabilityEnquiry-v4xyext-IEs,
            nonCriticalExtensions         SEQUENCE {}                           OPTIONAL
        }                                OPTIONAL
    },
    later-than-r3                     SEQUENCE {
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        criticalExtensions             SEQUENCE {}
    }
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    capabilityUpdateRequirement     CapabilityUpdateRequirement
}

UECapabilityEnquiry-v4xyext-IEs ::= SEQUENCE {
    capabilityUpdateRequirement-r4-ext  CapabilityUpdateRequirement-r4-ext
}

-- ****
-- UE CAPABILITY INFORMATION
-- ****

UECapabilityInformation ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier          OPTIONAL,
    ue-RadioAccessCapability        UE-RadioAccessCapability          OPTIONAL,
    -- Other IEs
    ue-RATSpecificCapability       InterRAT-UE-RadioAccessCapabilityList
    OPTIONAL,
    v370NonCriticalExtensions      SEQUENCE {
        ueCapabilityInformation-v370ext UECapabilityInformation-v370ext,
        v380NonCriticalExtensions     SEQUENCE {
            ueCapabilityInformation-v380ext UECapabilityInformation-v380ext-IEs,
            v3a0NonCriticalExtensions   SEQUENCE {
                ueCapabilityInformation-v3a0ext UECapabilityInformation-v3a0ext,
                -- Reserved for future non critical extension
                v4xyNonCriticalExtensions   SEQUENCE {
                    ueCapabilityInformation-v4xyext UECapabilityInformation-v4xyext,
                    v5xyNonCriticalExtensions SEQUENCE {
                        ueCapabilityInformation-v5xyext UECapabilityInformation-v5xyext,
                        nonCriticalExtensions     SEQUENCE {}                   OPTIONAL
                    }                                OPTIONAL
                }                                OPTIONAL
            }                                OPTIONAL
        }                                OPTIONAL
    }                                OPTIONAL
    OPTIONAL
}

UECapabilityInformation-v370ext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v370ext     UE-RadioAccessCapability-v370ext      OPTIONAL
}

UECapabilityInformation-v380ext-IEs ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v380ext     UE-RadioAccessCapability-v380ext
    OPTIONAL,
    dl-PhysChCapabilityFDD-v380ext      DL-PhysChCapabilityFDD-v380ext
}

UECapabilityInformation-v3a0ext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v3a0ext     UE-RadioAccessCapability-v3a0ext      OPTIONAL
}

```

```

UECapabilityInformation-v4xyext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-r4-ext      UE-RadioAccessCapability-r4-ext      OPTIONAL,
    ue-RadioAccessCapability-v4xyext     UE-RadioAccessCapability-v4xyext
}

UECapabilityInformation-v5xyext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-r5-ext      UE-RadioAccessCapability-r5-ext      OPTIONAL
}

-- ****
-- 
-- UE CAPABILITY INFORMATION CONFIRM
-- 
-- ****

UECapabilityInformationConfirm ::= CHOICE {
    r3           SEQUENCE {
        ueCapabilityInformationConfirm-r3
        nonCriticalExtensions      UECapabilityInformationConfirm-r3-IES,
                                    SEQUENCE {}      OPTIONAL
    },
    later-than-r3          SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions         SEQUENCE {}
    }
}

UECapabilityInformationConfirm-r3-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier
}

-- ****
-- 
-- UPLINK DIRECT TRANSFER
-- 
-- ****

UplinkDirectTransfer ::= SEQUENCE {
    -- Core network IEs
    cn-DomainIdentity           CN-DomainIdentity,
    nas-Message                  NAS-Message,
    -- Measurement IEs
    measuredResultsOnRACH        MeasuredResultsOnRACH
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}      OPTIONAL,
}
}

-- ****
-- 
-- UPLINK PHYSICAL CHANNEL CONTROL
-- 
-- ****

UplinkPhysicalChannelControl ::= CHOICE {
    r3           SEQUENCE {
        uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IES,
        v4xyNonCriticalExtensions     SEQUENCE {
            uplinkPhysicalChannelControl-v4xyext   UplinkPhysicalChannelControl-v4xyext-IES,
            -- Extension mechanism for non- release4 information
            noncriticalExtensions       SEQUENCE {}      OPTIONAL
        }
        OPTIONAL
    },
    later-than-r3          SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions         CHOICE {
            r4           SEQUENCE {
                uplinkPhysicalChannelControl-r4 UplinkPhysicalChannelControl-r4-IES,
                nonCriticalExtensions      SEQUENCE {} OPTIONAL
            },
            criticalExtensions        SEQUENCE {}
        }
    }
}

UplinkPhysicalChannelControl-r3-IES ::= SEQUENCE {

```

```

-- User equipment IEs
  rrc-TransactionIdentifier          RRC-TransactionIdentifier,
-- Physical channel IEs
  ccTrCH-PowerControlInfo           CCTrCH-PowerControlInfo           OPTIONAL,
  timingAdvance                     UL-TimingAdvanceControl          OPTIONAL,
  alpha                            Alpha                           OPTIONAL,
  specialBurstScheduling           SpecialBurstScheduling          OPTIONAL,
  prach-ConstantValue               ConstantValueTdd                OPTIONAL,
  pusch-ConstantValue               ConstantValueTdd                OPTIONAL
}

UplinkPhysicalChannelControl-v4xyext-IEs ::= SEQUENCE {
  -- In case of TDD, openLoopPowerControl-IPDL-TDD is included instead of IE
  -- up-IPDL-Parameters in up-OTDOA-AssistanceData
  openLoopPowerControl-IPDL-TDD    OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL
}

UplinkPhysicalChannelControl-r4-IEs ::= SEQUENCE {
  -- Physical channel IEs
  ccTrCH-PowerControlInfo          CCTrCH-PowerControlInfo-r4        OPTIONAL,
  tddOption                         CHOICE {
    tdd384                           SEQUENCE {
      timingAdvance                  UL-TimingAdvanceControl-r4     OPTIONAL,
      alpha                          Alpha                           OPTIONAL,
      prach-ConstantValue            ConstantValueTdd              OPTIONAL,
      pusch-ConstantValue            ConstantValueTdd              OPTIONAL,
      openLoopPowerControl-IPDL-TDD OpenLoopPowerControl-IPDL-TDD-r4    OPTIONAL
    },
    tdd128                           SEQUENCE {
      ul-SynchronisationParameters UL-SynchronisationParameters-r4 OPTIONAL
    }
  }
}

-- ****
-- 
-- URA UPDATE
-- 
-- ****

URAUpdate ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                           U-RNTI,
  ura-UpdateCause                   URA-UpdateCause,
  protocolErrorIndicator           ProtocolErrorIndicatorWithMoreInfo,
  -- Extension mechanism for non- release99 information
  nonCriticalExtensions             SEQUENCE {}                 OPTIONAL
}

-- ****
-- 
-- URA UPDATE CONFIRM
-- 
-- ****

URAUpdateConfirm ::= CHOICE {
  r3                                SEQUENCE {
    uraUpdateConfirm-r3              URAUpdateConfirm-r3-IEs,
    v5xyNonCriticalExtensions       SEQUENCE {
      uraUpdateConfirm-v5xyext     URAUpdateConfirm-v5xyext-IEs,
      nonCriticalExtensions         SEQUENCE {}                 OPTIONAL
    } OPTIONAL
  },
  later-than-r3                      SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    criticalExtensions              CHOICE {
      r5                                SEQUENCE {
        uraUpdateConfirm-r5          URAUpdateConfirm-r5-IEs,
        nonCriticalExtensions        SEQUENCE {}                 OPTIONAL
      },
      criticalExtensions             SEQUENCE {}
    }
  }
}

URAUpdateConfirm-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier         RRC-TransactionIdentifier,

```

```

integrityProtectionModeInfo      IntegrityProtectionModeInfo    OPTIONAL,
cipheringModeInfo               CipheringModeInfo          OPTIONAL,
new-U-RNTI                      U-RNTI                     OPTIONAL,
new-C-RNTI                      C-RNTI                     OPTIONAL,
rrc-StateIndicator              RRC-StateIndicator         OPTIONAL,
utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- CN information elements
cn-InformationInfo             CN-InformationInfo        OPTIONAL,
-- UTRAN mobility IEs
ura-Identity                    URA-Identity                OPTIONAL,
-- Radio bearer IEs
dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL
}

URAUpdateConfirm-v5xyext-IEs ::= SEQUENCE {
  -- User equipment IEs
  groupReleaseIndicia           GroupReleaseIndicia        OPTIONAL
}

URAUpdateConfirm-r5-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier     RRC-TransactionIdentifier, OPTIONAL,
  integrityProtectionModeInfo   IntegrityProtectionModeInfo  OPTIONAL,
  cipheringModeInfo             CipheringModeInfo          OPTIONAL,
  new-U-RNTI                   U-RNTI                     OPTIONAL,
  new-C-RNTI                   C-RNTI                     OPTIONAL,
  groupReleaseIndicia           GroupReleaseIndicia        OPTIONAL,
  rrc-StateIndicator            RRC-StateIndicator         OPTIONAL,
  utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- CN information elements
  cn-InformationInfo           CN-InformationInfo        OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                 URA-Identity                OPTIONAL,
  -- Radio bearer IEs
  dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo-r5 OPTIONAL
}

*****  

--  

-- URA UPDATE CONFIRM for CCCH  

--  

-- *****

URAUpdateConfirm-CCCH ::= CHOICE {
  r3                         SEQUENCE {
    uraUpdateConfirm-CCCH-r3       URAUpdateConfirm-CCCH-r3-IEs,
    v5xyNonCriticalExtensions    SEQUENCE {
      uraUpdateConfirm-v5xyext    URAUpdateConfirm-v5xyext-IEs,
      nonCriticalExtensions      SEQUENCE {}           OPTIONAL
    }                           OPTIONAL
  },
  later-than-r3                SEQUENCE {
    u-RNTI                      U-RNTI,
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    criticalExtensions          SEQUENCE {}
  }
}

URAUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                      U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  uraUpdateConfirm             URAUpdateConfirm-r3-IEs
}

*****  

--  

-- UTRAN MOBILITY INFORMATION  

--  

-- *****

UTRANMobilityInformation ::= CHOICE {
  r3                         SEQUENCE {
    utranMobilityInformation-r3   UTRANMobilityInformation-r3-IEs,
    v3a0NonCriticalExtensions   SEQUENCE {
      utranMobilityInformation-v3a0ext  UTRANMobilityInformation-v3a0ext-IEs,
      v5xyNonCriticalExtensions    SEQUENCE {
        utranMobilityInformation-v5xyext UTRANMobilityInformation-v5xyext-IEs,
      }
    }
  }
}

```

```

    } } nonCriticalExtensions
    } } OPTIONAL
},
later-than-r3           SEQUENCE {
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    criticalExtensions            CHOICE {
        r5                         SEQUENCE {
            utranMobilityInformation-r5   UTRANMobilityInformation-r5-IES,
            nonCriticalExtensions       SEQUENCE {}      OPTIONAL
        },
        criticalExtensions          SEQUENCE {}
    }
}
}

UTRANMobilityInformation-r3-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo
    cipheringModeInfo             CipheringModeInfo
    new-U-RNTI                    U-RNTI
    new-C-RNTI                    C-RNTI
    ue-ConnTimersAndConstants     UE-ConnTimersAndConstants
    -- CN information elements
    cn-InformationInfo           CN-InformationInfoFull
    -- UTRAN mobility IEs
    ura-Identity                  URA-Identity
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

UTRANMobilityInformation-v3a0ext-IES ::= SEQUENCE {
    ue-ConnTimersAndConstants-v3a0ext   UE-ConnTimersAndConstants-v3a0ext
}

UTRANMobilityInformation-v5xyext-IES ::= SEQUENCE {
    -- User equipment IEs
    groupReleaseIndicia           GroupReleaseIndicia
    OPTIONAL
}

UTRANMobilityInformation-r5-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo
    cipheringModeInfo             CipheringModeInfo
    new-U-RNTI                    U-RNTI
    new-C-RNTI                    C-RNTI
    groupReleaseIndicia           GroupReleaseIndicia
    OPTIONAL
    ue-ConnTimersAndConstants     UE-ConnTimersAndConstants-r5
    OPTIONAL
    -- CN information elements
    cn-InformationInfo           CN-InformationInfoFull
    -- UTRAN mobility IEs
    ura-Identity                  URA-Identity
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo-r5
    OPTIONAL
}

-- ****
-- 
-- UTRAN MOBILITY INFORMATION CONFIRM
-- 
-- ****

UTRANMobilityInformationConfirm ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo    IntegrityProtActivationInfo
    OPTIONAL,
    -- Radio bearer IEs
    count-C-ActivationTime        ActivationTime
    rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList
    OPTIONAL,
    ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo
    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

```

```
-- ****
-- UTRAN MOBILITY INFORMATION FAILURE
--
-- ****

UTRANMobilityInformationFailure ::= SEQUENCE {
    -- UE information elements
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

END
```

11.3 Information element definitions

```

InformationElements DEFINITIONS AUTOMATIC TAGS ::=

-- ****
-- CORE NETWORK INFORMATION ELEMENTS (10.3.1)
-- ****

BEGIN

IMPORTS

    hipDSCHidentities,
    hipUSCHidentities,
    hIRM,
    maxAC,
    maxAdditionalMeas,
    maxASC,
    maxASCmap,
    maxASCpersist,
    maxCCTrCH,
    maxCellMeas,
    maxCellMeas-1,
    maxCNdomains,
    maxCPCHsets,
    maxDPCH-DLchan,
    maxDPDCH-UL,
    maxDRACclasses,
    maxFACHPCH,
    maxFreq,
    maxFreqBandsFDD,
    maxFreqBandsTDD,
    maxFreqBandsGSM,
    maxInterSysMessages,
    maxLoCHperRLC,
    maxMeasEvent,
    maxMeasIntervals,
    maxMeasParEvent,
    maxNumCDMA2000Freqs,
    maxNumFDDFreqs,
    maxNumGSMFreqRanges,
    maxNumTDDFreqs,
    maxOtherRAT,
    maxOtherRAT-16,
    maxPage1,
    maxPCPCH-APsig,
    maxPCPCH-APsubCh,
    maxPCPCH-CDsig,
    maxPCPCH-CDsubCh,
    maxPCPCH-SF,
    maxPCPCHs,
    maxPDCPAlgoType,
    maxPDSCH,
    maxPDSCH-TFCIgroups,
    maxPRACH,
    maxPredefConfig,
    maxPUSCH,
    maxRABsetup,
    maxRAT,
    maxRB,
    maxRBallRABs,
    maxRBMuxOptions,
    maxRBperRAB,
    maxReportedGSMCells,
    maxSRBsetup,
    maxRL,
    maxRL-1,
    maxSCCPCH,
    maxSat,
    maxSIB,
    maxSIB-FACH,
    maxSystemCapability,
    maxTF,
    maxTF-CPCH,

```

```

maxTFC,
maxTFCI-2-Combs,
maxTGPS,
maxTrCH,
maxTrCHpreconf,
maxTS,
maxTS-1,
maxURA,
maxURNTI-Group
FROM Constant-definitions;

-- ****
-- USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
-- ****

AccessStratumReleaseIndicator ::= ENUMERATED {
    rel-4, spare15, spare14, spare13,
    spare12, spare11, spare10, spare9, spare8,
    spare7, spare6, spare5, spare4, spare3,
    spare2, spare1 }

-- TABULAR : for ActivationTime, value 'now' always appear as default, and is encoded
-- by absence of the field
ActivationTime ::= INTEGER (0..255)

BackoffControlParams ::= SEQUENCE {
    n-AP-RetransMax,
    n-AccessFails,
    nf-BO-NoAICH,
    ns-BO-Busy,
    nf-BO-AllBusy,
    nf-BO-Mismatch,
    t-CPCH
}

C-RNTI ::= BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::= SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD BOOLEAN,
    -- ue-RadioCapabilityTDDUpdateRequirement-TDD is for 3.84Mcps TDD update requirement
    ue-RadioCapabilityTDDUpdateRequirement-TDD BOOLEAN,
    systemSpecificCapUpdateReqList SystemSpecificCapUpdateReqList OPTIONAL
}

CapabilityUpdateRequirement-r4-ext ::= SEQUENCE {
    ue-RadioCapabilityUpdateRequirement-TDD128 BOOLEAN
}

CapabilityUpdateRequirement-r4 ::= SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD384 BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD128 BOOLEAN,
    systemSpecificCapUpdateReqList SystemSpecificCapUpdateReqList OPTIONAL
}

CellUpdateCause ::= ENUMERATED {
    cellReselection,
    periodicalCellUpdate,
    uplinkDataTransmission,
    utran-pagingResponse,
    re-enteredServiceArea,
    radiolinkFailure,
    rlc-unrecoverableError,
    spare1 }

ChipRateCapability ::= ENUMERATED {
    mcps3-84, mcps1-28 }

CipheringAlgorithm ::= ENUMERATED {
    uea0, uea1 }

CipheringModeCommand ::= CHOICE {
    startRestart,
    dummy
    NULL
}

```

```

CipheringModeInfo ::=           SEQUENCE {
  -- TABULAR: The ciphering algorithm is included in the CipheringModeCommand.
  cipheringModeCommand          CipheringModeCommand,
  activationTimeForDPCH         ActivationTime
  rb-DL-CiphActivationTimeInfo   RB-ActivationTimeInfoList
}                               OPTIONAL,
                                OPTIONAL

CN-DRX-CycleLengthCoefficient ::=  INTEGER (6..9)

CN-PagedUE-Identity ::=          CHOICE {
  imsi-GSM-MAP                 IMSI-GSM-MAP ,
  tmsi-GSM-MAP                 TMSI-GSM-MAP ,
  p-TMSI-GSM-MAP               P-TMSI-GSM-MAP ,
  imsi-DS-41                   IMSI-DS-41 ,
  tmsi-DS-41                   TMSI-DS-41 ,
  spare3                       NULL ,
  spare2                       NULL ,
  spare1                       NULL
}

CompressedModeMeasCapability ::=  SEQUENCE {
  fdd-Measurements              BOOLEAN,
  -- TABULAR: The IEs tdd-Measurements, gsm-Measurements and multiCarrierMeasurements
  -- are made optional since they are conditional based on another information element.
  -- Their absence corresponds to the case where the condition is not true.
  tdd-Measurements              BOOLEAN
  OPTIONAL,
  gsm-Measurements              GSM-Measurements
  OPTIONAL,
  multiCarrierMeasurements      BOOLEAN
  OPTIONAL
}

CompressedModeMeasCapability-LCR-r4 ::= SEQUENCE {
  tdd128-Measurements           BOOLEAN
}                               OPTIONAL

CompressedModeMeasCapabFDDList ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                    CompressedModeMeasCapabFDD

CompressedModeMeasCapabFDD ::=   SEQUENCE {
  radioFrequencyBandFDD         RadioFrequencyBandFDD   OPTIONAL,
  dl-MeasurementsFDD            BOOLEAN,
  ul-MeasurementsFDD            BOOLEAN
}

CompressedModeMeasCapabTDDList ::= SEQUENCE (SIZE (1..maxFreqBandsTDD)) OF
                                    CompressedModeMeasCapabTDD

CompressedModeMeasCapabTDD ::=   SEQUENCE {
  radioFrequencyBandTDD         RadioFrequencyBandTDD,
  dl-MeasurementsTDD            BOOLEAN,
  ul-MeasurementsTDD            BOOLEAN
}

CompressedModeMeasCapabGSMList ::= SEQUENCE (SIZE (1..maxFreqBandsGSM)) OF
                                    CompressedModeMeasCapabGSM

CompressedModeMeasCapabGSM ::=   SEQUENCE {
  radioFrequencyBandGSM          RadioFrequencyBandGSM,
  dl-MeasurementsGSM             BOOLEAN,
  ul-MeasurementsGSM             BOOLEAN
}

CompressedModeMeasCapabMC ::=    SEQUENCE {
  dl-MeasurementsMC              BOOLEAN,
  ul-MeasurementsMC              BOOLEAN
}

CPCH-Parameters ::=             SEQUENCE {
  initialPriorityDelayList       InitialPriorityDelayList
  backoffControlParams           BackoffControlParams,
  -- TABULAR: TPC step size nested inside PowerControlAlgorithm
  powerControlAlgorithm          PowerControlAlgorithm,
  dl-DPCCH-BER                  DL-DPCCH-BER
}                               OPTIONAL,
                                OPTIONAL

DL-DPCCH-BER ::=                INTEGER (0..63)

DL-PhysChCapabilityFDD ::=      SEQUENCE {
  maxNoDPCH-PDSCH-Codes        INTEGER (1..8),
}

```

```

maxNoPhysChBitsReceived           MaxNoPhysChBitsReceived,
supportForSF-512                 BOOLEAN,
supportOfPDSCH                  BOOLEAN,
simultaneousSCCPCH-DPCH-Reception SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityFDD-v380ext ::= SEQUENCE {
    supportOfDedicatedPilotsForChEstimation   SupportOfDedicatedPilotsForChEstimation      OPTIONAL
}

SupportOfDedicatedPilotsForChEstimation ::= ENUMERATED { true }

DL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame                   MaxTS-PerFrame,
    maxPhysChPerFrame               MaxPhysChPerFrame,
    minimumSF                        MinimumSF-DL,
    supportOfPDSCH                  BOOLEAN,
    maxPhysChPerTS                  MaxPhysChPerTS
}

DL-PhysChCapabilityTDD-LCR-r4 ::= SEQUENCE {
    maxTS-PerSubFrame                MaxTS-PerSubFrame-r4,
    maxPhysChPerFrame               MaxPhysChPerSubFrame-r4,
    minimumSF                        MinimumSF-DL,
    supportOfPDSCH                  BOOLEAN,
    maxPhysChPerTS                  MaxPhysChPerTS,
    supportOf8PSK                   BOOLEAN
}

DL-TransChCapability ::= SEQUENCE {
    maxNoBitsReceived              MaxNoBits,
    maxConvCodeBitsReceived         MaxNoBits,
    turboDecodingSupport           TurboSupport,
    maxSimultaneousTransChs        MaxSimultaneousTransChsDL,
    maxSimultaneousCCTrCH-Count   MaxSimultaneousCCTrCH-Count,
    maxReceivedTransportBlocks     MaxTransportBlocksDL,
    maxNumberOfTFC                 MaxNumberOfTFC-DL,
    maxNumberOfTF                  MaxNumberOfTF
}

DRAC-SysInfo ::= SEQUENCE {
    transmissionProbability          TransmissionProbability,
    maximumBitRate                  MaximumBitRate
}

DRAC-SysInfoList ::= SEQUENCE (SIZE (1..maxDRACclasses)) OF
DRAC-SysInfo

DSCH-RNTI ::= BIT STRING (SIZE (16))

ESN-DS-41 ::= BIT STRING (SIZE (32))

EstablishmentCause ::= ENUMERATED {
    originatingConversationalCall,
    originatingStreamingCall,
    originatingInteractiveCall,
    originatingBackgroundCall,
    originatingSubscribedTrafficCall,
    terminatingConversationalCall,
    terminatingStreamingCall,
    terminatingInteractiveCall,
    terminatingBackgroundCall,
    emergencyCall,
    interRAT-CellReselection,
    interRAT-CellChangeOrder,
    registration,
    detach,
    originatingHighPrioritySignalling,
    originatingLowPrioritySignalling,
    callRe-establishment,
    terminatingHighPrioritySignalling,
    terminatingLowPrioritySignalling,
    terminatingCauseUnknown,
    spare12,
    spare11,
    spare10,
    spare9,
    spare8,
}

```

```

                spare7,
                spare6,
                spare5,
                spare4,
                spare3,
                spare2,
                spare1 }

FailureCauseWithProtErr ::= CHOICE {
    configurationUnsupported           NULL,
    physicalChannelFailure           NULL,
    incompatibleSimultaneousReconfiguration
                                         NULL,
    compressedModeRuntimeError       TGPSI,
    protocolError                   ProtocolErrorInformation,
    cellUpdateOccurred              NULL,
    invalidConfiguration             NULL,
    configurationIncomplete          NULL,
    unsupportedMeasurement           NULL,
    spare7                           NULL,
    spare6                           NULL,
    spare5                           NULL,
    spare4                           NULL,
    spare3                           NULL,
    spare2                           NULL,
    spare1                           NULL
}

FailureCauseWithProtErrTrId ::= SEQUENCE {
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    failureCause                    FailureCauseWithProtErr
}

GroupReleaseIndicia ::= BIT STRING (SIZE (128))

GroupReleaseInformation ::= SEQUENCE {
    uRNTI-Group                     U-RNTI-Group,
    groupReleaseKey                  BIT STRING (SIZE (128))
}

GSM-Measurements ::= SEQUENCE {
    gsm900                          BOOLEAN,
    dcs1800                         BOOLEAN,
    gsm1900                         BOOLEAN
}

H-RNTI ::= BIT STRING (SIZE (16))

HSDSCH-capability-class ::= INTEGER (0..63)

IMSI-and-ESN-DS-41 ::= SEQUENCE {
    imsi-DS-41                      IMSI-DS-41,
    esn-DS-41                        ESN-DS-41
}

IMSI-DS-41 ::= OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::= SEQUENCE (SIZE (1..maxASC)) OF
                            NS-IP

InitialUE-Identity ::= CHOICE {
    imsi                           IMSI-GSM-MAP,
    tmsi-and-LAI                   TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI                 P-TMSI-and-RAI-GSM-MAP,
    imei                           IMEI,
    esn-DS-41                      ESN-DS-41,
    imsi-DS-41                     IMSI-DS-41,
    imsi-and-ESN-DS-41              IMSI-and-ESN-DS-41,
    tmsi-DS-41                     TMSI-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode        MessageAuthenticationCode,
    rrc-MessageSequenceNumber       RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList   RRC-MessageSequenceNumberList
}

```

```

}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uial
}

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection           SEQUENCE {
        integrityProtInitNumber       IntegrityProtInitNumber
    },
    modify                            SEQUENCE {
        dl-IntegrityProtActivationInfo   IntegrityProtActivationInfo
    }
}

IntegrityProtectionModeInfo ::= SEQUENCE {
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection initialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionModeCommand    IntegrityProtectionModeCommand,
    integrityProtectionAlgorithm     IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MAC-hs-Capability ::= SEQUENCE {
    totalBufferSize
}

MaxHcContextSpace ::= ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192
}

MaxROHC-ContextSessions-r4 ::= ENUMERATED {
    s2, s4, s8, s12, s16, s24, s32, s48,
    s64, s128, s256, s512, s1024, s16384
}

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am30
}

-- Actual value MaximumBitRate = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600
}

MaxNoBits ::= ENUMERATED {
    b640, b1280, b2560, b3840, b5120,
    b6400, b7680, b8960, b10240,
    b20480, b40960, b81920, b163840
}

MaxNoPhysChBitsReceived ::= ENUMERATED {
    b600, b1200, b2400, b3600,
    b4800, b7200, b9600, b14400,
    b19200, b28800, b38400, b48000,
    b57600, b67200, b76800
}

MaxNoSCCPCH-RL ::= ENUMERATED {
    r11
}

MaxNumberOfTF ::= ENUMERATED {
    tf32, tf64, tf128, tf256,
    tf512, tf1024
}

MaxNumberOfTFC-DL ::= ENUMERATED {
    tfc16, tfc32, tfc48, tfc64, tfc96,
    tfc128, tfc256, tfc512, tfc1024
}

MaxNumberOfTFC-UL ::= ENUMERATED {
    tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
    tfc96, tfc128, tfc256, tfc512, tfc1024
}

```

```

MaxPhysChPerFrame ::= INTEGER (1..224)
MaxPhysChPerSubFrame-r4 ::= INTEGER (1..96)
MaxPhysChPerTimeslot ::= ENUMERATED {
    ts1, ts2 }
MaxPhysChPerTS ::= INTEGER (1..16)
MaxSimultaneousCCTrCH-Count ::= INTEGER (1..8)
MaxSimultaneousTransChsDL ::= ENUMERATED {
    e4, e8, e16, e32 }
MaxSimultaneousTransChsUL ::= ENUMERATED {
    e2, e4, e8, e16, e32 }
MaxTransportBlocksDL ::= ENUMERATED {
    tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }
MaxTransportBlocksUL ::= ENUMERATED {
    tb2, tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }
MaxTS-PerFrame ::= INTEGER (1..14)
MaxTS-PerSubFrame-r4 ::= INTEGER (1..6)

-- TABULAR: MeasurementCapability contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.

MeasurementCapability ::= SEQUENCE {
    downlinkCompressedMode           CompressedModeMeasCapability,
    uplinkCompressedMode             CompressedModeMeasCapability
}

MeasurementCapability-v370 ::= SEQUENCE{
    compressedModeMeasCapabFDDList   CompressedModeMeasCapabFDDList,
    compressedModeMeasCapabTDDList   OPTIONAL,
    compressedModeMeasCapabGSMList  OPTIONAL,
    compressedModeMeasCapabMC       OPTIONAL
}

MeasurementCapability-r4-ext ::= SEQUENCE {
    downlinkCompressedMode-LCR     CompressedModeMeasCapability-LCR-r4,
    uplinkCompressedMode-LCR       CompressedModeMeasCapability-LCR-r4
}

MessageAuthenticationCode ::= BIT STRING (SIZE (32))

MinimumSF-DL ::= ENUMERATED {
    sf1, sf16 }

MinimumSF-UL ::= ENUMERATED {
    sf1, sf2, sf4, sf8, sf16 }

MultiModeCapability ::= ENUMERATED {
    tdd, fdd, fdd-tdd }

MultiRAT-Capability ::= SEQUENCE {
    supportOfGSM           BOOLEAN,
    supportOfMulticarrier  BOOLEAN
}

N-300 ::= INTEGER (0..7)
N-301 ::= INTEGER (0..7)
N-302 ::= INTEGER (0..7)
N-304 ::= INTEGER (0..7)
N-308 ::= INTEGER (1..8)
N-310 ::= INTEGER (0..7)
N-312 ::= ENUMERATED {
    s1, s50, s100, s200, s400,
}

```

```

                                s600, s800, s1000 }

N-312ext ::= ENUMERATED {
                  s2, s4, s10, s20 }

N-312-r5 ::= ENUMERATED {
                  s1, s2, s4, s10, s20,
                  s50, s100, s200, s400,
                  s600, s800, s1000 }

N-313 ::= ENUMERATED {
                  s1, s2, s4, s10, s20,
                  s50, s100, s200 }

N-315 ::= ENUMERATED {
                  s1, s50, s100, s200, s400,
                  s600, s800, s1000 }

N-315ext ::= ENUMERATED {
                  s2, s4, s10, s20 }

N-315-r5 ::= ENUMERATED {
                  s1, s2, s4, s10, s20,
                  s50, s100, s200, s400,
                  s600, s800, s1000 }

N-AccessFails ::= INTEGER (1..64)

N-AP-RetransMax ::= INTEGER (1..64)

NetworkAssistedGPS-Supported ::= ENUMERATED {
                  networkBased,
                  ue-Based,
                  bothNetworkAndUE-Based,
                  noNetworkAssistedGPS }

NF-BO-AllBusy ::= INTEGER (0..31)

NF-BO-NoAICH ::= INTEGER (0..31)

NF-BO-Mismatch ::= INTEGER (0..127)

NS-BO-Busy ::= INTEGER (0..63)

NS-IP ::= INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::= SEQUENCE {
                  p-TMSI,
                  rai
                }

PagingCause ::= ENUMERATED {
                  terminatingConversationalCall,
                  terminatingStreamingCall,
                  terminatingInteractiveCall,
                  terminatingBackgroundCall,
                  terminatingHighPrioritySignalling,
                  terminatingLowPrioritySignalling,
                  terminatingCauseUnknown,
                  spare
                }

PagingRecord ::= CHOICE {
                  cn-Identity {
                    pagingCause,
                    cn-DomainIdentity,
                    cn-pagedUE-Identity
                  },
                  utran-Identity {
                    u-RNTI,
                    cn-OriginatedPage-connectedMode-UE {
                      pagingCause,
                      cn-DomainIdentity,
                      pagingRecordTypeID
                    }
                  }
                }

OPTIONAL
}

```

```

PagingRecord-r5 ::= CHOICE {
    utran-SingleUE-Identity           SEQUENCE {
        u-RNTI                           U-RNTI,
        cn-OriginatedPage-connectedMode-UE SEQUENCE {
            pagingCause                  PagingCause,
            cn-DomainIdentity             CN-DomainIdentity,
            pagingRecordTypeID            PagingRecordTypeID
        }
        rrc-ConnectionReleaseInformation OPTIONAL,
    }
    utran-GroupIdentity               SEQUENCE ( SIZE (1 .. maxURNTI-Group) ) OF
                                         GroupIdentityWithReleaseInformation;
}

GroupIdentityWithReleaseInformation ::= SEQUENCE {
    rrc-ConnectionReleaseInformation   RRC-ConnectionReleaseInformation,
    groupReleaseInformation           GroupReleaseInformation
}

PagingRecordList ::= SEQUENCE (SIZE (1..maxPage1)) OF
                      PagingRecord

PagingRecordList-r5 ::= SEQUENCE (SIZE (1..maxPage1)) OF
                      PagingRecord-r5

PDCP-Capability ::= SEQUENCE {
    losslessSRNS-RelocationSupport   BOOLEAN,
    supportForRfc2507                CHOICE {
        notSupported                 NULL,
        supported                     MaxHcContextSpace
    }
}

PDCP-Capability-r4-ext ::= SEQUENCE {
    supportForRfc3095                CHOICE {
        notSupported                 NULL,
        supported                     SEQUENCE {
            maxROHC-ContextSessions   MaxROHC-ContextSessions-r4 DEFAULT s16,
            reverseCompressionDepth    INTEGER (0..65535)      DEFAULT 0
        }
    }
}

PDCP-Capability-r5-ext ::= SEQUENCE {
    supportForRfc3095ContextRelocation BOOLEAN
}

PhysicalChannelCapability ::= SEQUENCE {
    fddPhysChCapability              SEQUENCE {
        downlinkPhysChCapability     DL-PhysChCapabilityFDD,
        uplinkPhysChCapability       UL-PhysChCapabilityFDD
    }
    -- tddPhysChCapability describes the 3.84Mcps TDD physical channel capability
    tddPhysChCapability             SEQUENCE {
        downlinkPhysChCapability     DL-PhysChCapabilityTDD,
        uplinkPhysChCapability       UL-PhysChCapabilityTDD
    }
}

-- PhysicalChannelCapability-LCR-r4 describes the 1.28Mcps TDD physical channel capability
PhysicalChannelCapability-LCR-r4 ::= SEQUENCE {
    tdd128-PhysChCapability         SEQUENCE {
        downlinkPhysChCapability     DL-PhysChCapabilityTDD-LCR-r4,
        uplinkPhysChCapability       UL-PhysChCapabilityTDD-LCR-r4
    }
}

-- PhysicalChannelCapability-hspdsch-r5 describes the HS-PDSCH physical channel capability
PhysicalChannelCapability-hspdsch-r5 ::= SEQUENCE {
    modeSpecificInfo                CHOICE {
        fdd                           SEQUENCE {
            hspdsch-supported          CHOICE {
                supported               HSDSCH-capability-class,
                notsupported            NULL
            }
        },
        tdd384                         SEQUENCE {
    }
}

```

```

        hspdsch-supported
        supported
        nosupported
    }
},
tdd128
    hspdsch-supported
    supported
    nosupported
}
}
}                                OPTIONAL

PNBSCH-Allocation-r4 ::=          SEQUENCE {
    numberOfRepetitionsPerSFNPeriod ENUMERATED {
        c2, c3, c4, c5, c6, c7, c8, c9, c10,
        c12, c14, c16, c18, c20, c24, c28, c32,
        c36, c40, c48, c56, c64, c72, c80
    }
}

ProtocolErrorCause ::=           ENUMERATED {
    asn1-ViolationOrEncodingError,
    messageTypeNonexistent,
    messageNotCompatibleWithReceiverState,
    ie-ValueNotComprehended,
    informationElementMissing,
    messageExtensionNotComprehended,
    spare2, spare1
}

ProtocolErrorIndicator ::=         ENUMERATED {
    noError, errorOccurred
}

ProtocolErrorIndicatorWithMoreInfo ::= CHOICE {
    noError
    errorOccurred
        rrc-TransactionIdentifier
        protocolErrorInformation
}
}

ProtocolErrorMoreInformation ::=    SEQUENCE {
    diagnosticsType
        CHOICE {
            type1
                CHOICE {
                    asn1-ViolationOrEncodingError      NULL,
                    messageTypeNonexistent           NULL,
                    messageNotCompatibleWithReceiverState IdentificationOfReceivedMessage,
                    ie-ValueNotComprehended          IdentificationOfReceivedMessage,
                    conditionalInformationElementError IdentificationOfReceivedMessage,
                    messageExtensionNotComprehended IdentificationOfReceivedMessage,
                    spare1                           NULL,
                    spare2                           NULL
                },
            spare
                NULL
}
}

RadioFrequencyBandFDD ::=          ENUMERATED {
    fdd2100,
    fdd1900,
    spare6, spare5, spare4, spare3, spare2, spare1
}

RadioFrequencyBandTDDList ::=       ENUMERATED {
    a, b, c, ab, ac, bc, abc, spare
}

RadioFrequencyBandTDD ::=          ENUMERATED {a, b, c, spare}

RadioFrequencyBandGSM ::=          ENUMERATED {
    gsm450,
    gsm480,
    gsm850,
    gsm900P,
    gsm900E,
    gsm1800,
    gsm1900,
    spare9, spare8, spare7, spare6, spare5,
    spare4, spare3, spare2, spare1
}
}

```

```

                                spare4, spare3, spare2, spare1}

Rb-timer-indicator ::=           SEQUENCE {
    t314-expired
    t315-expired
        BOOLEAN,
        BOOLEAN }

Re-EstablishmentTimer ::=         ENUMERATED {
}                                     useT314, useT315

RedirectionInfo ::=               CHOICE {
    frequencyInfo
    interRATInfo
}                                     FrequencyInfo,
                                         InterRATInfo

RejectionCause ::=                ENUMERATED {
}                                     congestion,
                                         unspecified

ReleaseCause ::=                  ENUMERATED {
}                                     normalEvent,
                                         unspecified,
                                         pre-emptiveRelease,
                                         congestion,
                                         re-establishmentReject,
                                         directedsignallingconnectionre-establishment,
                                         userInactivity,
                                         spare }

RF-Capability ::=                SEQUENCE {
    fddRF-Capability
        ue-PowerClass
        txRxFrequencySeparation
    }                                     SEQUENCE {
                                         UE-PowerClass,
                                         TxRxFrequencySeparation
                                         OPTIONAL,
                                         SEQUENCE {
                                             UE-PowerClass,
                                             RadioFrequencyBandTDDList,
                                             chipRateCapability
                                         }                                     OPTIONAL
}
                                         OPTIONAL

tddRF-Capability
    ue-PowerClass
    radioFrequencyBandTDDList
    chipRateCapability
}                                     OPTIONAL

}
                                         OPTIONAL

RF-Capability-r4-ext ::=          SEQUENCE {
    tddRF-Capability
        ue-PowerClass
        radioFrequencyBandTDDList
        chipRateCapability
    }                                     SEQUENCE {
                                         UE-PowerClass,
                                         RadioFrequencyBandTDDList,
                                         ChipRateCapability
                                         OPTIONAL
}
                                         OPTIONAL

}
                                         OPTIONAL

RLC-Capability ::=                SEQUENCE {
    totalRLC-AM-BufferSize
    maximumRLC-WindowSize
    maximumAM-EntityNumber
}                                     TotalRLC-AM-BufferSize,
                                         MaximumRLC-WindowSize,
                                         MaximumAM-EntityNumberRLC-Cap
}

RRC-ConnectionReleaseInformation ::= CHOICE {
    noRelease
        NULL,
    release
        SEQUENCE {
            releaseCause
        }                                     ReleaseCause,
}
                                         ReleaseCause

}
                                         ReleaseCause

RRC-MessageSequenceNumber ::=      INTEGER (0..15)

RRC-MessageSequenceNumberList ::=   SEQUENCE (SIZE (4..5)) OF
}                                     RRC-MessageSequenceNumber

RRC-StateIndicator ::=             ENUMERATED {
}                                     cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::=     INTEGER (0..3)

S-RNTI ::=                         BIT STRING (SIZE (20))

S-RNTI-2 ::=                        BIT STRING (SIZE (10))

```

```

SecurityCapability ::= SEQUENCE {
    cipheringAlgorithmCap      BIT STRING {
        spare15(0),
        spare14(1),
        spare13(2),
        spare12(3),
        spare11(4),
        spare10(5),
        spare9(6),
        spare8(7),
        spare7(8),
        spare6(9),
        spare5(10),
        spare4(11),
        spare3(12),
        spare2(13),
        uea1(14),
        uea0(15)
    }      (SIZE (16)),
    integrityProtectionAlgorithmCap   BIT STRING {
        spare15(0),
        spare14(1),
        spare13(2),
        spare12(3),
        spare11(4),
        spare10(5),
        spare9(6),
        spare8(7),
        spare7(8),
        spare6(9),
        spare5(10),
        spare4(11),
        spare3(12),
        spare2(13),
        uia1(14),
        spare0(15)
    }      (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported          NULL,
    supported             SEQUENCE {
        maxNoSCCPCH-RL           MaxNoSCCPCH-RL,
        -- simultaneousSCCPCH-DPCH-DPDCH-Reception is applicable only if
        -- the IE Support of PDSCH = TRUE
        simultaneousSCCPCH-DPCH-DPDCH-Reception   BOOLEAN
    }
}

SRNC-Identity ::= BIT STRING (SIZE (12))

START-Value ::= BIT STRING (SIZE (20))

STARTList ::= SEQUENCE (SIZE (1..maxCNdomains)) OF
              STARTSingle

STARTSingle ::= SEQUENCE {
    cn-DomainIdentity,
    start-Value
}

SystemSpecificCapUpdateReq ::= ENUMERATED {
    gsm
}

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
                                 SystemSpecificCapUpdateReq

T-300 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000
}

T-301 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
}

```

```

                         ms1800, ms2000, ms3000, ms4000,
                         ms6000, ms8000, spare }

T-302 ::= ENUMERATED {
                         ms100, ms200, ms400, ms600, ms800,
                         ms1000, ms1200, ms1400, ms1600,
                         ms1800, ms2000, ms3000, ms4000,
                         ms6000, ms8000, spare }

T-304 ::= ENUMERATED {
                         ms100, ms200, ms400,
                         ms1000, ms2000, spare3, spare2, spare1 }

T-305 ::= ENUMERATED {
                         noUpdate, m5, m10, m30,
                         m60, m120, m360, m720 }

T-307 ::= ENUMERATED {
                         s5, s10, s15, s20,
                         s30, s40, s50, spare }

T-308 ::= ENUMERATED {
                         ms40, ms80, ms160, ms320 }

T-309 ::= INTEGER (1..8)

T-310 ::= ENUMERATED {
                         ms40, ms80, ms120, ms160,
                         ms200, ms240, ms280, ms320 }

T-311 ::= ENUMERATED {
                         ms250, ms500, ms750, ms1000,
                         ms1250, ms1500, ms1750, ms2000 }

-- The value 0 for T-312 is not used in this version of the specification
T-312 ::= INTEGER (0..15)

T-313 ::= INTEGER (0..15)

T-314 ::= ENUMERATED {
                         s0, s2, s4, s6, s8,
                         s12, s16, s20 }

T-315 ::= ENUMERATED {
                         s0, s10, s30, s60, s180,
                         s600, s1200, s1800 }

T-316 ::= ENUMERATED {
                         s0, s10, s20, s30, s40,
                         s50, s-inf, spare }

T-317 ::= ENUMERATED {
                         s0, s10, s30, s60, s180,
                         s600, s1200, s1800 }

T-CPCH ::= ENUMERATED {
                         ct0, ct1 }

TMSI-and-LAI-GSM-MAP ::= SEQUENCE {
                         tmsi,
                         lai
                       }

TMSI-DS-41 ::= OCTET STRING (SIZE (2..17))

TotalRLC-AM-BufferSize ::= ENUMERATED {
                         kb2, kb10, kb50, kb100,
                         kb150, kb500, kb1000, spare }

TotalBufferSize ::= ENUMERATED {
                         kb50, kb100, kb150, kb200,
                         kb300, spare3, spare2, spare1 }

-- Actual value TransmissionProbability = IE value * 0.125
TransmissionProbability ::= INTEGER (1..8)

TransportChannelCapability ::= SEQUENCE {
                         dl-TransChCapability,

```

```

    ul-TransChCapability          UL-TransChCapability
}

TurboSupport ::= CHOICE {
    notSupported    NULL,
    supported       MaxNoBits
}

TxRxFrequencySeparation ::= ENUMERATED {
    mhz190, mhz174-8-205-2,
    mhz134-8-245-2
}

U-RNTI ::= SEQUENCE {
    srnc-Identity,
    s-RNTI
}

U-RNTI-Group ::= CHOICE {
-- TABULAR: not following the tabular strictly, but this will most likely save bits
    all             NULL,
    u-RNTI-BitMaskIndex-b1      BIT STRING (SIZE (31)),
    u-RNTI-BitMaskIndex-b2      BIT STRING (SIZE (30)),
    u-RNTI-BitMaskIndex-b3      BIT STRING (SIZE (29)),
    u-RNTI-BitMaskIndex-b4      BIT STRING (SIZE (28)),
    u-RNTI-BitMaskIndex-b5      BIT STRING (SIZE (27)),
    u-RNTI-BitMaskIndex-b6      BIT STRING (SIZE (26)),
    u-RNTI-BitMaskIndex-b7      BIT STRING (SIZE (25)),
    u-RNTI-BitMaskIndex-b8      BIT STRING (SIZE (24)),
    u-RNTI-BitMaskIndex-b9      BIT STRING (SIZE (23)),
    u-RNTI-BitMaskIndex-b10     BIT STRING (SIZE (22)),
    u-RNTI-BitMaskIndex-b11     BIT STRING (SIZE (21)),
    u-RNTI-BitMaskIndex-b12     BIT STRING (SIZE (20)),
    u-RNTI-BitMaskIndex-b13     BIT STRING (SIZE (19)),
    u-RNTI-BitMaskIndex-b14     BIT STRING (SIZE (18)),
    u-RNTI-BitMaskIndex-b15     BIT STRING (SIZE (17)),
    u-RNTI-BitMaskIndex-b16     BIT STRING (SIZE (16)),
    u-RNTI-BitMaskIndex-b17     BIT STRING (SIZE (15)),
    u-RNTI-BitMaskIndex-b18     BIT STRING (SIZE (14)),
    u-RNTI-BitMaskIndex-b19     BIT STRING (SIZE (13)),
    u-RNTI-BitMaskIndex-b20     BIT STRING (SIZE (12)),
    u-RNTI-BitMaskIndex-b21     BIT STRING (SIZE (11)),
    u-RNTI-BitMaskIndex-b22     BIT STRING (SIZE (10)),
    u-RNTI-BitMaskIndex-b23     BIT STRING (SIZE (9)),
    u-RNTI-BitMaskIndex-b24     BIT STRING (SIZE (8)),
    u-RNTI-BitMaskIndex-b25     BIT STRING (SIZE (7)),
    u-RNTI-BitMaskIndex-b26     BIT STRING (SIZE (6)),
    u-RNTI-BitMaskIndex-b27     BIT STRING (SIZE (5)),
    u-RNTI-BitMaskIndex-b28     BIT STRING (SIZE (4)),
    u-RNTI-BitMaskIndex-b29     BIT STRING (SIZE (3)),
    u-RNTI-BitMaskIndex-b30     BIT STRING (SIZE (2)),
    u-RNTI-BitMaskIndex-b31     BIT STRING (SIZE (1))
}

U-RNTI-Short ::= SEQUENCE {
    srnc-Identity,
    s-RNTI-2
}

UE-ConnTimersAndConstants ::= SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
-- t-301 and n-301 should not be used by the UE in this version of the specification
    t-301           T-301           DEFAULT ms2000,
    n-301           N-301           DEFAULT 2,
    t-302           T-302           DEFAULT ms4000,
    n-302           N-302           DEFAULT 3,
    t-304           T-304           DEFAULT ms2000,
    n-304           N-304           DEFAULT 2,
    t-305           T-305           DEFAULT m30,
    t-307           T-307           DEFAULT s30,
    t-308           T-308           DEFAULT ms160,
    t-309           T-309           DEFAULT 5,
    t-310           T-310           DEFAULT ms160,
    n-310           N-310           DEFAULT 4,
    t-311           T-311           DEFAULT ms2000,
    t-312           T-312           DEFAULT 1,
-- n-312 shall be ignored if n-312 in UE-ConnTimersAndConstants-v3a0ext is present, and the
-- value of that element shall be used instead.
    n-312           N-312           DEFAULT s1,
}

```

```

t-313                               T-313                         DEFAULT 3,
n-313                               N-313                         DEFAULT s20,
t-314                               T-314                         DEFAULT s12,
t-315                               T-315                         DEFAULT s180,
-- n-315 shall be ignored if n-315 in UE-ConnTimersAndConstants-v3a0ext is present, and the
-- value of that element shall be used instead.
n-315                               N-315                         DEFAULT s1,
t-316                               T-316                         DEFAULT s30,
t-317                               T-317                         DEFAULT s180
}

UE-ConnTimersAndConstants-v3a0ext ::=      SEQUENCE {
    n-312                           N-312ext                      OPTIONAL,
    n-315                           N-315ext                      OPTIONAL
}

UE-ConnTimersAndConstants-r5 ::=      SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
-- t-301 and n-301 should not be used by the UE in this version of the specification
    t-301                           T-301                         DEFAULT ms2000,
    n-301                           N-301                         DEFAULT 2,
    t-302                           T-302                         DEFAULT ms4000,
    n-302                           N-302                         DEFAULT 3,
    t-304                           T-304                         DEFAULT ms2000,
    n-304                           N-304                         DEFAULT 2,
    t-305                           T-305                         DEFAULT ms30,
    t-307                           T-307                         DEFAULT s30,
    t-308                           T-308                         DEFAULT ms160,
    t-309                           T-309                         DEFAULT 5,
    t-310                           T-310                         DEFAULT ms160,
    n-310                           N-310                         DEFAULT 4,
    t-311                           T-311                         DEFAULT ms2000,
    t-312                           T-312                         DEFAULT 1,
    n-312                           N-312-r5                      DEFAULT s1,
    t-313                           T-313                         DEFAULT 3,
    n-313                           N-313                         DEFAULT s20,
    t-314                           T-314                         DEFAULT s12,
    t-315                           T-315                         DEFAULT s180,
    n-315                           N-315-r5                      DEFAULT s1,
    t-316                           T-316                         DEFAULT s30,
    t-317                           T-317                         DEFAULT s180
}

UE-IDLETimersAndConstants ::=      SEQUENCE {
    t-300                           T-300,
    n-300                           N-300,
    t-312                           T-312,
-- n-312 shall be ignored if n-312 in UE-IDLETimersAndConstants-v3a0ext is present, and the
-- value of that element shall be used instead.
    n-312                           N-312
}

UE-IDLETimersAndConstants-v3a0ext ::=      SEQUENCE {
    n-312                           N-312ext                      OPTIONAL
}

UE-MultiModeRAT-Capability ::=      SEQUENCE {
    multiRAT-CapabilityList        MultiRAT-Capability,
    multiModeCapability            MultiModeCapability
}

UE-PowerClass ::=                  INTEGER (1..4)

UE-PowerClass-v370 ::=      ENUMERATED {class1, class2, class3, class4,
                                    spare4, spare3, spare2, spare1 }

UE-RadioAccessCapability ::=      SEQUENCE {
    pdcp-Capability               PDCP-Capability,
    rlc-Capability                RLC-Capability,
    transportChannelCapability     TransportChannelCapability,
    rf-Capability                 RF-Capability,
    physicalChannelCapability     PhysicalChannelCapability,
    ue-MultiModeRAT-Capability   UE-MultiModeRAT-Capability,
    securityCapability             SecurityCapability,
    ue-positioning-Capability    UE-Positioning-Capability,
    measurementCapability         MeasurementCapability OPTIONAL
}

```

```

UE-RadioAccessCapabilityInfo ::= SEQUENCE {
    ue-RadioAccessCapability           UE-RadioAccessCapability,
    ue-RadioAccessCapability-v370ext   UE-RadioAccessCapability-v370ext
}

UE-RadioAccessCapability-v370ext ::= SEQUENCE {
    ue-RadioAccessCapabBandFDDList    UE-RadioAccessCapabBandFDDList
}

UE-RadioAccessCapability-v380ext ::= SEQUENCE {
    ue-PositioningCapabilityExt-v380  UE-PositioningCapabilityExt-v380
}

UE-RadioAccessCapability-v3a0ext ::= SEQUENCE {
    ue-PositioningCapabilityExt-v3a0  UE-PositioningCapabilityExt-v3a0
}

UE-PositioningCapabilityExt-v380 ::= SEQUENCE {
    rx-tx-TimeDifferenceType2Capable BOOLEAN
}

UE-PositioningCapabilityExt-v3a0 ::= SEQUENCE {
    validity-CellPCH-UraPCH          ENUMERATED { true }
}

UE-RadioAccessCapabBandFDDList ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                     UE-RadioAccessCapabBandFDD

UE-RadioAccessCapabBandFDD ::= SEQUENCE {
    radioFrequencyBandFDD             RadioFrequencyBandFDD,
    fddRF-Capability                 SEQUENCE {
        ue-PowerClass                UE-PowerClass-v370,
        txRxFrequencySeparation      TxRxFrequencySeparation
    }                                OPTIONAL,
    measurementCapability            MeasurementCapability-v370
}

UE-RadioAccessCapability-r4-ext ::= SEQUENCE {
    pdcp-Capability-r4-ext          PDCP-Capability-r4-ext,
    rf-Capability                   RF-Capability-r4-ext,
    physicalChannelCapability-LCR  PhysicalChannelCapability-LCR-r4,
    measurementCapability-r4-ext    MeasurementCapability-r4-ext OPTIONAL
}

UE-RadioAccessCapability-v4xyext ::= SEQUENCE {
    -- R99 UEs shall include IE "ue-TestLevelIndicator"
    accessStratumReleaseIndicator   AccessStratumReleaseIndicator
}

UE-RadioAccessCapability-r5-ext ::= SEQUENCE {
    pdcp-Capability-r5-ext          PDCP-Capability-r5-ext,
    mac-hs-Capability               MAC-hs-Capability,
    physicalChannelCapability       PhysicalChannelCapability-hspdsch-r5
}

UL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPDCH-BitsTransmitted     MaxNoDPDCH-BitsTransmitted,
    supportOfPCPCH                 BOOLEAN
}

UL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame                 MaxTS-PerFrame,
    maxPhysChPerTimeslot            MaxPhysChPerTimeslot,
    minimumSF                       MinimumSF-UL,
    supportOfPUSCH                 BOOLEAN
}

UL-PhysChCapabilityTDD-LCR-r4 ::= SEQUENCE {
    maxTS-PerSubFrame               MaxTS-PerSubFrame-r4,
    maxPhysChPerTimeslot            MaxPhysChPerTimeslot,
    minimumSF                       MinimumSF-UL,
    supportOfPUSCH                 BOOLEAN,
    supportOf8PSK                   BOOLEAN
}

UL-TransChCapability ::= SEQUENCE {
    maxNoBitsTransmitted            MaxNoBits,
    maxConvCodeBitsTransmitted      MaxNoBits,
}

```

```

turboEncodingSupport           TurboSupport,
maxSimultaneousTransChs      MaxSimultaneousTransChsUL,
modeSpecificInfo              CHOICE {
    fdd                      NULL,
    tdd                      SEQUENCE {
        maxSimultaneousCCTrCH-Count   MaxSimultaneousCCTrCH-Count
    }
},
maxTransmittedBlocks          MaxTransportBlocksUL,
maxNumberOfTFC                MaxNumberOfTFC-UL,
maxNumberOfTF                 MaxNumberOfTF
}

UE-Positioning-Capability ::= SEQUENCE {
    standaloneLocMethodsSupported BOOLEAN,
    ue-BasedOTDOA-Supported        BOOLEAN,
    networkAssistedGPS-Supported   NetworkAssistedGPS-Supported,
    supportForUE-GPS-TimingOfCellFrames BOOLEAN,
    supportForIPDL                 BOOLEAN
}

UE-SecurityInformation ::= SEQUENCE {
    start-CS                  START-Value
}

URA-UpdateCause ::= ENUMERATED {
    changeOfURA,
    periodicURAUpdate,
    dummy,
    spare1
}

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::= INTEGER (0..15)

```

11.4 Constant definitions

```

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

hiPDSCHidentities      INTEGER ::= 64
hiPUSCHidentities      INTEGER ::= 64
hiRM                    INTEGER ::= 256
maxAC                  INTEGER ::= 16
maxAdditionalMeas       INTEGER ::= 4
maxASC                  INTEGER ::= 8
maxASCmap                INTEGER ::= 7
maxASCPersist            INTEGER ::= 6
maxCCTrCH                INTEGER ::= 8
maxCellMeas              INTEGER ::= 32
maxCellMeas-1            INTEGER ::= 31
maxCNdomains             INTEGER ::= 4
maxCPCHsets              INTEGER ::= 16
maxDPCH-DLchan            INTEGER ::= 8
maxDPDCH-UL                INTEGER ::= 6
maxDRACclasses            INTEGER ::= 8
maxFACHPCH                INTEGER ::= 8
maxFreq                  INTEGER ::= 8
maxFreqBandsFDD            INTEGER ::= 8
maxFreqBandsTDD            INTEGER ::= 4
maxFreqBandsGSM            INTEGER ::= 16
maxInterSysMessages        INTEGER ::= 4
maxLoCHperRLC              INTEGER ::= 2
maxMeasEvent              INTEGER ::= 8
maxMeasIntervals           INTEGER ::= 3
maxMeasParEvent             INTEGER ::= 2
maxNumCDMA2000Freqs        INTEGER ::= 8
maxNumGSMFreqRanges        INTEGER ::= 32
maxNumFDDFreqs              INTEGER ::= 8
maxNumTDDFreqs              INTEGER ::= 8
maxNoOfMeas                INTEGER ::= 16
maxOtherRAT                 INTEGER ::= 15
maxOtherRAT-16              INTEGER ::= 16
maxPage1                  INTEGER ::= 8
maxPCPCH-APsig              INTEGER ::= 16
maxPCPCH-APsubCh            INTEGER ::= 12
maxPCPCH-CDsig              INTEGER ::= 16
maxPCPCH-CDsubCh            INTEGER ::= 12
maxPCPCH-SF                  INTEGER ::= 7
maxPCPCHs                  INTEGER ::= 64
maxPDCAalgoType            INTEGER ::= 8
maxPDSCH                  INTEGER ::= 8
maxPDSCH-TFCIgroups        INTEGER ::= 256
maxPRACH                  INTEGER ::= 16
maxPredefConfig             INTEGER ::= 16
maxPUSCH                  INTEGER ::= 8
maxRABsetup                INTEGER ::= 16
maxRAT                     INTEGER ::= 16
maxRB                      INTEGER ::= 32
maxRBallRABs                INTEGER ::= 27
maxRBmuxOptions             INTEGER ::= 8
maxRBperRAB                 INTEGER ::= 8
maxReportedGSMCells         INTEGER ::= 8
maxRL                      INTEGER ::= 8
maxRL-1                     INTEGER ::= 7
maxSat                     INTEGER ::= 16
maxSCCPCH                  INTEGER ::= 16
maxSIB                     INTEGER ::= 32
maxSIB-FACH                  INTEGER ::= 8
maxSIBperMsg                 INTEGER ::= 16
maxSRBsetup                INTEGER ::= 8
maxSystemCapability          INTEGER ::= 16
maxTF                      INTEGER ::= 32
maxTF-CPCH                  INTEGER ::= 16
maxTFC                     INTEGER ::= 1024
maxTFCI-2-Combs             INTEGER ::= 512
maxTGPS                     INTEGER ::= 6
maxTrCH                     INTEGER ::= 32
-- maxTrCHpreconf should be 16 but has been set to 32 for compatibility
maxTrCHpreconf               INTEGER ::= 32

```

```
maxTS           INTEGER ::= 14
maxTS-1         INTEGER ::= 13
maxURA          INTEGER ::= 8
maxURNTI-Group INTEGER ::= 8
```

END

13.4.8 FAILURE_INDICATOR

This variable indicates whether the procedure has failed for a UE initiated procedure.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Failure indicator	MP		Boolean	TRUE: Procedure has failed. Set to FALSE when entering UTRA RRC connected mode. Set to FALSE when leaving UTRA RRC connected mode.

13.4.8n GROUP_RELEASE_INDICIA

This variable stores information to be used to authenticate a group release of the RRC connection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Group release indicia	OP		Group release indicia 10.3.3.14n		REL-5

NOTE: This IE shall be cleared when entering UTRA RRC connected mode, when leaving UTRA RRC connected mode, when switched off as well as at selection of a new PLMN.

13.4.8o H_RNTI

This variable stores the assigned H-RNTI for this UE when in CELL-DCH state and a HS-DSCH transport channel has been allocated.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
H-RNTI	OP		H-RNTI 10.3.3.14a	Cleared when entering UTRA RRC connected mode when not otherwise stated in the procedure. Cleared when leaving UTRA RRC connected mode.	REL-5

CHANGE REQUEST

⌘ 25.331 CR 1800 ⌘ rev - ⌘ Current version: 5.2.0 ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

Proposed change affects: ⌘ (U)SIM ME/UE Radio Access Network Core Network

Title:	⌘ Group release without security	
Source:	⌘ Ericsson	
Work item code:	⌘ TEI-5	Date: ⌘ November 2002
Category:	⌘ C <i>Use one of the following categories:</i> F (correction) A (corresponds to a correction in an earlier release) B (addition of feature), C (functional modification of feature) D (editorial modification)	Release: ⌘ REL-5 <i>Use one of the following releases:</i> 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) REL-4 (Release 4) REL-5 (Release 5)
<i>Detailed explanations of the above categories can be found in 3GPP TR 21.900.</i>		

Reason for change: ⌘ After an RNC or CN edge node reset, there is a need to release the UEs for which the context was lost. See also R2-020734, "Actions at RNC reset".
In release 99 and release 4 there exists no optimal method for mass release of UEs.
A more efficient and at the same time secure mechanism for mass release of UEs at RNC reset is therefore necessary.

Summary of change: ⌘ UE group addressing at release
Inclusion of UE group addressing in the RRC CONNECTION RELEASE message on CCCH. The group is indicated using a variable length group address (*U-RNTI group*), which is compared to 1-31 most significant bits the UE's U-RNTI. Inclusion of RRC connection release possibility in the PAGING TYPE 1 message, using the same type of group addressing as in the RRC CONNECTION RELEASE message on CCCH. Up to eight U-RNTI groups can be included in one message.

Detailed changes:

- 8.1.2 (Paging): Group addressing and release possibility added to the procedure.
- 8.1.4 (RRC connection release): Group addressing possibility added in the procedure.
- 8.6.3.10a, 8.6.3.13, 8.6.3.14: UE actions specified for the IEs "U-RNTI group"
- Inclusion of the IEs "U-RNTI group" as a critical extension in the RRC CONNECTION RELEASE message for CCCH.
- Inclusion of the IEs "U-RNTI group", "Release cause" as a non-critical extension in the PAGING TYPE 1 message.
- Inclusion of definitions of the IEs "U-RNTI group"

Consequences if not approved:	⌘ Mass release of UEs will still be possible, but will cause high signalling load and possibly side-effects.
Clauses affected:	⌘ 8.1.2.1, 8.1.2.3, 8.1.4.3, 8.6.3.10a (new), 8.6.3.13 (new), 8.6.3.14 (new), 10.2.37, 10.3.3.14o (new), 10.3.3.23, 10.3.3.32a (new), 10.3.3.47, 10.3.3.47a (new), 10.3.3.48, 10.3.10, 11.2, 11.3, 11.4.
Other specs affected:	⌘ <input type="checkbox"/> Other core specifications <input type="checkbox"/> Test specifications <input type="checkbox"/> O&M Specifications
Other comments:	⌘

How to create CRs using this form:

Comprehensive information and tips about how to create CRs can be found at: http://www.3gpp.org/3G_Specs/CRs.htm. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

8.1.2 Paging

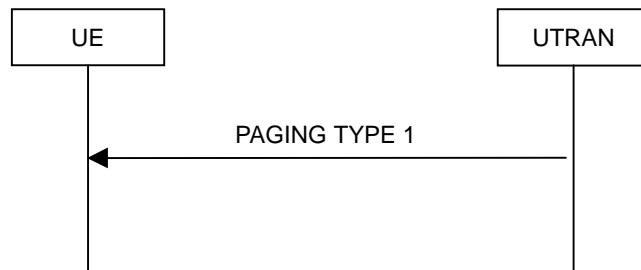


Figure 8.1.2-1: Paging

8.1.2.1 General

This procedure is used to transmit paging information to selected UEs in idle mode, CELL_PCH or URA_PCH state using the paging control channel (PCCH). Upper layers in the network may request paging, to e.g. establish a signalling connection. UTRAN may initiate paging for UEs in CELL_PCH or URA_PCH state to trigger a cell update procedure. In addition, UTRAN may initiate paging for UEs in idle mode, CELL_PCH and URA_PCH state to trigger reading of updated system information. UTRAN may also initiate paging for UEs in CELL_PCH and URA_PCH state to release the RRC connection.

8.1.2.2 Initiation

UTRAN initiates the paging procedure by transmitting a PAGING TYPE 1 message on an appropriate paging occasion on the PCCH.

UTRAN may repeat transmission of a PAGING TYPE 1 message to a UE in several paging occasions to increase the probability of proper reception of a page.

UTRAN may page several UEs in the same paging occasion by including one IE "Paging record" for each UE in the PAGING TYPE 1 message.

For CN originated paging, UTRAN should set the IE "Paging cause" to the cause for paging received from upper layers. If no cause for paging is received from upper layers, UTRAN should set the value "Terminating – cause unknown".

UTRAN may also indicate that system information has been updated, by including the value tag of the master information block in the IE "BCCH modification info" in the PAGING TYPE 1 message. In this case, UTRAN may omit the IEs "Paging record".

8.1.2.3 Reception of a PAGING TYPE 1 message by the UE

A UE in idle mode, CELL_PCH state or URA_PCH state shall receive the paging information for all its monitored paging occasions. For an UE in idle mode, the paging occasions are specified in [4] and depend on the IE "CN domain specific DRX cycle length coefficient", as specified in subclause 8.6.3.1a. For a UE in CELL_PCH state or URA_PCH state, the paging occasions depend also on the IE "UTRAN DRX cycle length coefficient" and the IE "RRC State Indicator", as specified in subclauses 8.6.3.2 and 8.6.3.3 respectively.

When the UE receives a PAGING TYPE 1 message, it shall perform the actions as specified below.

If the UE is in idle mode, for each occurrence of the IE "Paging record" included in the message the UE shall:

- 1> if the IE "Used paging identity" is a CN identity:
- 2> compare the IE "UE identity" with all of its allocated CN UE identities:
- 2> if one match is found:
 - 3> indicate reception of paging; and
 - 3> forward the IE "CN domain identity", the IE "UE identity" and the IE "Paging cause" to the upper layers.

1> otherwise:

2> ignore that paging record.

If the UE is in connected mode, for each occurrence of the IE "Paging record" included in the message the UE shall:

1> if the IE "Used paging identity" is a UTRAN single UE identity and if this U-RNTI is the same as the U-RNTI allocated to the UE stored in the UE variable U_RNTI:

2> if the optional IE "CN originated page to connected mode UE" is included:

3> indicate reception of paging; and

3> forward the IE "CN domain identity", the IE "Paging cause" and the IE "Paging record type identifier" to the upper layers.

2> if the IE "Release indicator" in the IE "RRC connection release information" has the value "Release":

3> release all its radio resources;

3> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to the upper layers;

3> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;

3> clear the variable ESTABLISHED_RABS;

3> pass the value of the IE "Release cause" received in the IE "Release information" to upper layers;

3> enter idle mode:

3> perform the actions specified in subclause 8.5.2 when entering idle mode;

3> and the procedure ends.

2> otherwise:

3> perform a cell update procedure with cause "paging response" as specified in subclause 8.3.1.2.

2> ignore any other remaining IE "Paging record" that may be present in the message.

1> if the IE "Used paging identity" is a UTRAN group identity and there is a group identity match according to subclause 8.6.3.14:

2> if the IE "Release indicator" in the IE "RRC connection release information" has the value "Release":

3> release all its radio resources;

3> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to the upper layers;

3> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;

3> clear the variable ESTABLISHED_RABS;

3> pass the value of the IE "Release cause" received in the IE "Release information" to upper layers;

3> enter idle mode:

3> perform the actions specified in subclause 8.5.2 when entering idle mode;

3> and the procedure ends.

2> otherwise:

3> perform a cell update procedure with cause "paging response" as specified in subclause 8.3.1.2.

| 2> ignore any other remaining IE "Paging record" that may be present in the message.

1> otherwise:

2> ignore that paging record.

If the IE "BCCH modification info" is included, any UE in idle mode, CELL_PCH or URA_PCH state shall perform the actions as specified in subclause 8.1.1 in addition to any actions caused by the IE "Paging record" occurrences in the message as specified above.

8.1.4.3 Reception of an RRC CONNECTION RELEASE message by the UE

The UE shall receive and act on an RRC CONNECTION RELEASE message in states CELL_DCH and CELL_FACH. Furthermore this procedure can interrupt any ongoing procedures with the UE in the above listed states.

When the UE receives the first RRC CONNECTION RELEASE message; and

- 1> if the message is received on the CCCH, and IE "U-RNTI" is present and has the same value as the variable U_RNTI; or
- 1> if the message is received on DCCH:

the UE shall: perform the RRC connection release procedure as specified below.

When the UE receives the first RRC CONNECTION RELEASE message; and

- 1> if the message is received on the CCCH, the IE "UTRAN group identity" is present and there is a group identity match according to 8.6.3.14;

the UE shall perform the RRC connection release procedure as specified below.

The UE shall:

- 1> in state CELL_DCH:
 - 2> initialise the counter V308 to zero;
 - 2> set the IE "RRC transaction identifier" in the RRC CONNECTION RELEASE COMPLETE message to the value of "RRC transaction identifier" in the entry for the RRC CONNECTION RELEASE message in the table "Accepted transactions" in the variable TRANSACTIONS;
 - 2> submit an RRC CONNECTION RELEASE COMPLETE message to the lower layers for transmission using UM RLC on the DCCH to the UTRAN;
 - 2> if the IE "Rplmn information" is present:
 - 3> the UE may:
 - 4> store the IE on the ME together with the PLMN id for which it applies;
 - 3> the UE may then:
 - 4> utilise this information, typically indicating where a number of BCCH frequency ranges of a RAT may be expected to be found, during subsequent Rplmn selections of the indicated PLMN.
 - 2> start timer T308 when the RRC CONNECTION RELEASE COMPLETE message is sent on the radio interface.

- 1> in state CELL_FACH:

- 2> if the RRC CONNECTION RELEASE message was received on the DCCH:

- 3> set the IE "RRC transaction identifier" in the RRC CONNECTION RELEASE COMPLETE message to the value of "RRC transaction identifier" in the entry for the RRC CONNECTION RELEASE message in the table "Accepted transactions" in the variable TRANSACTIONS;
- 3> submit an RRC CONNECTION RELEASE COMPLETE message to the lower layers for transmission using AM RLC on the DCCH to the UTRAN.
- 3> when the successful transmission of the RRC CONNECTION RELEASE COMPLETE message has been confirmed by the lower layers:
 - 4> release all its radio resources; and
 - 4> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to upper layers; and

- 4> clear any entry for the RRC CONNECTION RELEASE message in the tables "Accepted transactions" and "Rejected transactions" in the variable TRANSACTIONS;
 - 4> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;
 - 4> clear the variable ESTABLISHED_RABS;
 - 4> pass the value of the IE "Release cause" received in the RRC CONNECTION RELEASE message to upper layers;
 - 4> enter idle mode;
 - 4> perform the actions specified in subclause 8.5.2 when entering idle mode.
- 3> and the procedure ends.
- 2> if the RRC CONNECTION RELEASE message was received on the CCCH:
- 3> release all its radio resources;
 - 3> indicate the release of the established signalling connections (as stored in the variable ESTABLISHED_SIGNALLING_CONNECTIONS) and established radio access bearers (as stored in the variable ESTABLISHED_RABS) to the upper layers;
 - 3> clear any entry for the RRC CONNECTION RELEASE message in the tables "Accepted transactions" and "Rejected transactions" in the variable TRANSACTIONS;
 - 3> clear the variable ESTABLISHED_SIGNALLING_CONNECTIONS;
 - 3> clear the variable ESTABLISHED_RABS;
 - 3> pass the value of the IE "Release cause" received in the RRC CONNECTION RELEASE message to upper layers;
 - 3> enter idle mode;
 - 3> perform the actions specified in subclause 8.5.2 when entering idle mode;
 - 3> and the procedure ends.

8.6.3.12 Capability Update Requirement

If the IE "Capability Update Requirement" is included the UE shall:

- 1> if the IE "UE radio access FDD capability update requirement" has the value TRUE:
 - 2> if the UE supports FDD mode:
 - 3> store its UTRA FDD capabilities and its UTRA capabilities common to FDD and TDD in the IE "UE radio access capability" and the IE "UE radio access capability extension" in variable UE_CAPABILITY_REQUESTED as specified below:
 - 4> if the UE supports multiple UTRA FDD Frequency Bands; or
 - 4> if the UE supports a single UTRA FDD Frequency Band different from 2100 MHz:
 - 5> store the IE "UE radio access capability", excluding IEs "RF capability FDD" and "Measurement capability";
 - 5> store the IE "UE radio access capability extension", including the IEs "RF capability FDD extension" and the "Measurement capability extension" associated with each supported UTRA FDD frequency band indicated in the IE "Frequency band".
 - 4> else:
 - 5> store the IE "UE radio access capability", including the IEs "RF capability FDD" and "Measurement capability" associated with the 2100 MHz UTRA FDD frequency band.
 - 1> if the IE "UE radio access 3.84 Mcps TDD capability update requirement" has the value TRUE:
 - 2> if the UE supports 3.84 Mcps TDD mode:
 - 3> store its UTRAN-specific 3.84 Mcps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD in the variable UE_CAPABILITY_REQUESTED.
 - 1> if the IE "UE radio access 1.28 Mcps TDD capability update requirement" has the value TRUE:
 - 2> if the UE supports 1.28 Mcps TDD mode:
 - 3> store its UTRAN-specific 1.28 Mcps TDD capabilities and its UTRAN-specific capabilities common to FDD and TDD in the variable UE_CAPABILITY_REQUESTED.
 - 1> if the IE "System specific capability update requirement list" is present:
 - 2> for each of the RAT requested in the IE "UE system specific capability"
 - 3> if the UE supports the listed RAT:
 - 4> include its inter-RAT radio access capabilities for the listed RAT in the IE "UE system specific capability" from the variable UE_CAPABILITY_REQUESTED.

If the IE " Capability update requirement " is not present, the UE shall:

- 1> assume the default values as specified in subclause 10.3.3.2 and act in accordance with the above.

8.6.3.14 Group release information

The UE shall apply the following procedure to compare the IE “U-RNTI group” with the U-RNTI allocated to the UE stored in the variable U_RNTI.

If the IE “group discriminator” is equal to “All”:

- 1> consider this as a group identity match.

If the IE “group discriminator” is equal to “U-RNTI mask”:

1> let N be the value of the IE “U-RNTI bit mask index”;

1> if N is equal to b20, b21, ... or b31:

2> compare pairs of bits, starting from bit b31 downto, and including, bit N of the “SRNC identity” of the IE “U-RNTI” with the corresponding bits stored in the variable U_RNTI;

2> if all pairs of bits are equal:

3> consider this as a group identity match.

1> if N is equal to b1, b2, ... or b19:

2> compare pairs of bits, starting from bit b31 downto, and including, bit b20 of the “SRNC identity” in the IE “U-RNTI” with the corresponding bits of the “SRNC identity” stored in the variable U_RNTI;

2> if all pairs of bits are equal:

3> then compare pairs of bits, starting from bit b19 downto, and including, bit N of the “S-RNTI” in the IE “U-RNTI” with the corresponding bits of the “S-RNTI” stored in the variable U_RNTI;

3> if all pairs of bits are equal:

4> consider this as a group identity match.

10.2.37 RRC CONNECTION RELEASE

This message is sent by UTRAN to release the RRC connection. The message also releases the signalling connection and all radio bearers between the UE and UTRAN.

RLC-SAP: UM

Logical channel: CCCH or DCCH

Direction: UTRAN→UE

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
Message Type	MP		Message Type		
UE information elements					
<u>CHOICE identity type</u>	<u>CV-CCCH</u>				<u>REL-5</u>
≥U-RNTI	<u>CV-CCCH</u>		U-RNTI 10.3.3.47		
> Group identity		<u>1 to <maxURN Tlgroup></u>			<u>REL-5</u>
>>Group release information	MP		<u>Group release information 10.3.3.14o</u>		<u>REL-5</u>
RRC transaction identifier	MP		RRC transaction identifier 10.3.3.36		
Integrity check info	CV-DCCH		Integrity check info 10.3.3.16	Integrity check info is included if integrity protection is applied	
N308	CH- Cell_DCH		Integer(1..8)		
Release cause	MP		Release cause 10.3.3.32		
Other information elements					
Rplmn information	OP		Rplmn information 10.3.8.15		

Condition	Explanation
CCCH	This IE is mandatory present when CCCH is used and not needed otherwise.
DCCH	This IE is mandatory present when DCCH is used and not needed otherwise.
Cell_DCH	This IE is mandatory present when UE is in CELL_DCH state and not needed otherwise.

10.3.3.14 Failure cause and error information

Cause for failure to perform the requested procedure.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Failure cause	MP		Failure cause 10.3.3.13	
Protocol error information	CV- <i>ProtErr</i>		Protocol error information 10.3.8.12	
Deleted TGPSI	CV- <i>CompMod eErr</i>		TGPSI 10.3.6.82	

Condition	Explanation
<i>ProtErr</i>	The IE is mandatory present if the IE "Failure cause" has the value "Protocol error"; otherwise it is not needed in the message.
<i>CompModeErr</i>	The IE is mandatory present if the IE "Failure cause" has the value "Compressed mode runtime error"; otherwise it is not needed in the message

10.3.3.14o Group release information

Contains addressing information to perform a release of a group of RRC connections.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
U-RNTI group	MP		U-RNTI group 10.3.3.47a		REL-5

10.3.3.14a H-RNTI

The H-RNTI identifies an UE having a HS-PDSCH assignment within a cell.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
H-RNTI	MP		bit string(16)		REL-5

10.3.3.23 Paging record

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
CHOICE Used paging identity	MP				
>CN identity					
>>Paging cause	MP		Paging cause 10.3.3.22		
>>CN domain identity	MP		CN domain identity 10.3.1.1		
>>CHOICE UE Identity	MP			Three spare values are needed.	
>>>IMSI (GSM-MAP)			IMSI (GSM-MAP) 10.3.1.5		
>>>TMSI (GSM-MAP)			TMSI (GSM-MAP) 10.3.1.17		
>>>P-TMSI (GSM-MAP)			P-TMSI (GSM-MAP) 10.3.1.13		
>>>IMSI (DS-41)			TIA/EIA/IS-2000-4		
>>>TMSI (DS-41)			TIA/EIA/IS-2000-4		
>UTRAN single UE identity					
>>U-RNTI	MP		U-RNTI 10.3.3.47		
>>CN originated page to connected mode UE	OP				
>>>Paging cause	MP		Paging cause 10.3.3.22		
>>>CN domain identity	MP		CN domain identity 10.3.1.1		
>>>Paging record type identifier	MP		Paging record type identifier 10.3.1.10		
>>RRC connection release information	MP		RRC connection release information 10.3.3.32a		REL-5
>UTRAN group identity		1 to <maxURN Tlgroup>			REL-5
>>RRC connection release information	MP		RRC connection release information 10.3.3.32a		REL-5
>>Group release information	MP		Group release information 10.3.3.14o		REL-5

Condition	Explanation
CHOICE <i>Used paging identity</i>	Condition under which the given <i>used paging identity</i> is chosen
CN identity	For CN originating pages (for idle mode UEs)
UTRAN <u>single UE</u> identity	For UTRAN originating pages (for connected mode UEs), <u>addressing a single UE</u>
UTRAN group identity	For UTRAN originating pages (for connected mode UEs), addressing a group of UEs

10.3.3.32 Release cause

Cause for release of RRC connection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
Release cause	MP		Enumerated (normal event, unspecified, pre-emptive release, congestion, re-establishment reject, user inactivity), directed signalling connection re-establishment)	One spare value is needed.

10.3.3.32a RRC connection release information

Indicates whether the UE shall perform a release of the RRC connection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<u>CHOICE Release indicator</u>	<u>MD</u>			<u>Default value is "No release"</u>	<u>REL-5</u>
>No release					<u>REL-5</u>
>Release					<u>REL-5</u>
>>Release cause	<u>MP</u>		<u>Release cause</u> 10.3.3.32		<u>REL-5</u>

10.3.3.33 RF capability FDD

Information Element/Group name	Need	Multi	Type and Reference	Semantics description	Version
UE power class	MP		Enumerated(1..4)	as defined in [21]	
Tx/Rx frequency separation	MP		Enumerated(190, 174.8-205.2, 134.8-245.2)	In MHz as defined in [21]. NOTE: Not applicable if UE is not operating in frequency band a (as defined in [21]).	

10.3.3.47 U-RNTI

The U-RNTI (UTRAN Radio Network Temporary Identity) is allocated to an UE having a RRC connection and identifies the UE within UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SRNC identity	MP		bit string(12)	The SRNC identity bits are numbered b20 to b31, where b20 is the least significant bit.
S-RNTI	MP		bit string(20)	The S-RNTI bits are numbered b0 to b19, where b0 is the least significant bit.

10.3.3.47a U-RNTI group

The U-RNTI group is used to identify a group of UEs having an RRC connection.

Information Element/Group name	Need	Multi	Type and reference	Semantics description	Version
<u>CHOICE group discriminator</u>	<u>MP</u>				REL-5
<u>>All</u>				(no data)	REL-5
<u>>U-RNTI mask</u>					REL-5
<u>>>U-RNTI</u>	<u>MP</u>		<u>U-RNTI</u> <u>10.3.3.47</u>	<u>The bits that are less significant than the bit position indicated by the U-RNTI bit mask index shall be ignored.</u>	REL-5
<u>>>U-RNTI bit mask index</u>	<u>MP</u>		<u>Enumerated(b1, b2...b31)</u>	<u>Values b1 to b19 indicate bit positions in the S-RNTI. Values b20 to b31 indicate bit positions in the SRNC identity.</u>	REL-5

10.3.3.48 U-RNTI Short

The U-RNTI (UTRAN Radio Network Temporary Identity) is allocated to an UE having a RRC connection and identifies the UE within UTRAN.

Information Element/Group name	Need	Multi	Type and reference	Semantics description
SRNC identity	MP		bit string(12)	The SRNC identity bits are numbered b20 to b31, where b20 is the least significant bit.
S-RNTI 2	MP		bit string(10)	The S-RNTI 2 bits are numbered b0 to b9, where b0 is the least significant bit.

10.3.10 Multiplicity values and type constraint values

The following table includes constants that are either used as multi bounds (name starting with "max") or as high or low value in a type specification (name starting with "lo" or "hi"). Constants are specified only for values appearing more than once in the RRC specification. In case a constant is related to one or more other constants, an expression is included in the "value" column instead of the actual value.

Constant	Explanation	Value
CN information		
maxCNdomains	Maximum number of CN domains	4
UTRAN mobility information		
maxRAT	Maximum number of Radio Access Technologies	maxOtherRAT + 1
maxOtherRAT	Maximum number of other Radio Access Technologies	15
maxURA	Maximum number of URAs in a cell	8
maxInterSysMessages	Maximum number of Inter System Messages	4
maxRABsetup	Maximum number of RABs to be established	16
UE information		
maxtransactions	Maximum number of parallel RRC transactions in downlink	25
maxPDCPalgoType	Maximum number of PDCP algorithm types	8
maxDRACclasses	Maximum number of UE classes which would require different DRAC parameters	8
maxFreqBandsFDD	Maximum number of frequency bands supported by the UE as defined in [21]	8
maxFreqBandsTDD	Maximum number of frequency bands supported by the UE as defined in [22]	4
maxFreqBandsGSM	Maximum number of frequency bands supported by the UE as defined in [45]	16
maxPage1	Number of UEs paged in the Paging Type 1 message	8
maxSystemCapability	Maximum number of system specific capabilities that can be requested in one message.	16
MaxURNTIgroup	Maximum number of U-RNTI groups in one message	8
RB information		
maxPredefConfig	Maximum number of predefined configurations	16
maxRB	Maximum number of RBs	32
maxSRBsetup	Maximum number of signalling RBs to be established	8
maxRBperRAB	Maximum number of RBs per RAB	8
maxRBallRABs	Maximum number of non signalling RBs	27
maxRBMuxOptions	Maximum number of RB multiplexing options	8
maxLoCHperRLC	Maximum number of logical channels per RLC entity	2
TrCH information		
maxTrCH	Maximum number of transport channels used in one direction (UL or DL)	32
maxTrCHpreconf	Maximum number of preconfigured Transport channels, per direction	16
maxCCTrCH	Maximum number of CCTrCHs	8
maxTF	Maximum number of different transport formats that can be included in the Transport format set for one transport channel	32
maxTF-CPCH	Maximum number of TFs in a CPCH set	16
maxTFC	Maximum number of Transport Format Combinations	1024
maxTFCI-1-Combs	Maximum number of TFCI (field 1) combinations	512
maxTFCI-2-Combs	Maximum number of TFCI (field 2) combinations	512
maxCPCHsets	Maximum number of CPCH sets per cell	16
maxSIBperMsg	Maximum number of complete system information blocks per SYSTEM INFORMATION message	16
maxSIB	Maximum number of references to other system information blocks.	32
maxSIB-FACH	Maximum number of references to system information blocks on the FACH	8
PhyCH information		
maxPCPCH-APsubCH	Maximum number of available sub-channels for AP signature on PCPCH	12
maxPCPCH-CDsubCH	Maximum number of available sub-channels for CD	12

Constant	Explanation	Value
	signature on PCPCH	
maxPCPCH-APsig	Maximum number of available signatures for AP on PCPCH	16
maxPCPCH-CDsig	Maximum number of available signatures for CD on PCPCH	16
maxAC	Maximum number of access classes	16
maxASC	Maximum number of access service classes	8
maxASCmap	Maximum number of access class to access service classes mappings	7
maxASCpersist	Maximum number of access service classes for which persistence scaling factors are specified	6
maxPRACH	Maximum number of PRACHs in a cell	16
maxFACHPCH	Maximum number of FACHs and PCHs mapped onto one secondary CCPCHs	8
maxRL	Maximum number of radio links	8
maxSCCPCH	Maximum number of secondary CCPCHs per cell	16
maxDPDCH-UL	Maximum number of DPDCHs per cell	6
maxDPCH-DLchan	Maximum number of channelisation codes used for DL DPCPCH	8
maxPUSCH	Maximum number of PUSCHs	(8)
maxPDSCH	Maximum number of PDSCHs	8
maxPDSCHcodes	Maximum number of codes for PDSCH	16
maxPDSCH-TFCIgroups	Maximum number of TFCI groups for PDSCH	256
maxPDSCHcodeGroups	Maximum number of code groups for PDSCH	256
maxPCPCHs	Maximum number of PCPCH channels in a CPCH Set	64
maxPCPCH-SF	Maximum number of available SFs on PCPCH	7
maxTS	Maximum number of timeslots used in one direction (UL or DL)	14
hiPUSCHidentities	Maximum number of PUSCH Identities	64
hiPDSCHidentities	Maximum number of PDSCH Identities	64
Measurement information		
maxTGPS	Maximum number of transmission gap pattern sequences	6
maxAdditionalMeas	Maximum number of additional measurements for a given measurement identity	4
maxMeasEvent	Maximum number of events that can be listed in measurement reporting criteria	8
maxMeasParEvent	Maximum number of measurement parameters (e.g. thresholds) per event	2
maxMeasIntervals	Maximum number of intervals that define the mapping function between the measurements for the cell quality Q of a cell and the representing quality value	1
maxCellMeas	Maximum number of cells to measure	32
maxReportedGSMCells	Maximum number of GSM cells to be reported	6
maxFreq	Maximum number of frequencies to measure	8
maxSat	Maximum number of satellites to measure	16
HiRM	Maximum number that could be set as rate matching attribute for a transport channel	256
Frequency information		
maxFDDFreqList	Maximum number of FDD carrier frequencies to be stored in USIM	4
maxTDDFreqList	Maximum number of TDD carrier frequencies to be stored in USIM	4
maxFDDFreqCellList	Maximum number of neighbouring FDD cells to be stored in USIM	32
maxTDDFreqCellList	Maximum number of neighbouring TDD cells to be stored in USIM	32
maxGSMCellList	Maximum number of GSM cells to be stored in USIM	32
Other information		
maxNumGSMFreqRanges	Maximum number of GSM Frequency Ranges to store	32
maxNumFDDFreqs	Maximum number of FDD centre frequencies to store	8
maxNumTDDFreqs	Maximum number of TDD centre frequencies to store	8
maxNumCDMA2000Freqs	Maximum number of CDMA2000 centre frequencies to store	8

11.2 PDU definitions

```
--*****
-- TABULAR: The message type and integrity check info are not
-- visible in this module as they are defined in the class module.
-- Also, all FDD/TDD specific choices have the FDD option first
-- and TDD second, just for consistency.
--*****
PDU-definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

--*****
-- IE parameter types from other modules
--*****
IMPORTS

-- Core Network IEs :
CN-DomainIdentity,
CN-InformationInfo,
CN-InformationInfoFull,
NAS-Message,
PagingRecordTypeID,
-- UTRAN Mobility IEs :
CellIdentity,
CellIdentity-PerRL-List,
URA-Identity,
-- User Equipment IEs :
ActivationTime,
C-RNTI,
CapabilityUpdateRequirement,
CapabilityUpdateRequirement-r4,
CapabilityUpdateRequirement-r4-ext,
CellUpdateCause,
CipheringAlgorithm,
CipheringModeInfo,
DSCH-RNTI,
EstablishmentCause,
FailureCauseWithProtErr,
FailureCauseWithProtErrTrId,
GroupReleaseInformation,
H-RNTI,
InitialUE-Identity,
IntegrityProtActivationInfo,
IntegrityProtectionModeInfo,
N-308,
PagingCause,
PagingRecordList,
PagingRecordList-r5,
ProtocolErrorIndicator,
ProtocolErrorIndicatorWithMoreInfo,
Rb-timer-indicator,
RedirectionInfo,
RejectionCause,
ReleaseCause,
RRC-StateIndicator,
RRC-TransactionIdentifier,
SecurityCapability,
START-Value,
STARTList,
U-RNTI,
U-RNTI-Short,
UE-RadioAccessCapability,
UE-RadioAccessCapability-r4-ext,
UE-RadioAccessCapability-r5-ext,
UE-RadioAccessCapability-v370ext,
UE-RadioAccessCapability-v380ext,
UE-RadioAccessCapability-v3a0ext,
UE-RadioAccessCapability-v4xyext,
DL-PhysChCapabilityFDD-v380ext,
```

```

UE-ConnTimersAndConstants,
UE-ConnTimersAndConstants-v3a0ext,
UE-ConnTimersAndConstants-r5,
UE-SecurityInformation,
URA-UpdateCause,
UTRAN-DRX-CycleLengthCoefficient,
WaitTime,
-- Radio Bearer IEs :
DefaultConfigIdentity,
DefaultConfigIdentity-r4,
DefaultConfigMode,
DL-CounterSynchronisationInfo,
DL-CounterSynchronisationInfo-r5,
PredefinedConfigIdentity,
PredefinedConfigStatusList,
RAB-Info,
RAB-Info-Post,
RAB-InformationList,
RAB-InformationReconfigList,
RAB-InformationSetupList,
RAB-InformationSetupList-r4,
RB-ActivationTimeInfoList,
RB-COUNT-C-InformationList,
RB-COUNT-C-MSB-InformationList,
RB-IdentityList,
RB-InformationAffectedList,
RB-InformationAffectedList-r5,
RB-InformationReconfigList,
RB-InformationReconfigList-r4,
RB-InformationReconfigList-r5,
RB-InformationReleaseList,
RB-PDCPContextRelocationList,
SRB-InformationSetupList,
SRB-InformationSetupList2,
UL-CounterSynchronisationInfo,
-- Transport Channel IEs:
CPCH-SetID,
DL-AddReconfTransChInfo2List,
DL-AddReconfTransChInfoList,
DL-AddReconfTransChInfoList-r4,
DL-AddReconfTransChInfoList-r5,
DL-CommonTransChInfo,
DL-CommonTransChInfo-r4,
DL-DeletedTransChInfoList,
DL-DeletedTransChInfoList-r5,
DRAC-StaticInformationList,
TFC-Subset,
TFCS-Identity,
UL-AddReconfTransChInfoList,
UL-CommonTransChInfo,
UL-CommonTransChInfo-r4,
UL-DeletedTransChInfoList,
-- Physical Channel IEs :
Alpha,
CCTrCH-PowerControlInfo,
CCTrCH-PowerControlInfo-r4,
ConstantValue,
ConstantValueTdd,
CPCH-SetInfo,
DL-CommonInformation,
DL-CommonInformation-r4,
DL-CommonInformationPost,
DL-HSPDSCH-Information,
DL-InformationPerRL,
DL-InformationPerRL-List,
DL-InformationPerRL-List-r4,
DL-InformationPerRL-List-r5,
DL-InformationPerRL-ListPostFDD,
DL-InformationPerRL-PostTDD,
DL-InformationPerRL-PostTDD-LCR-r4,
DL-PDSCH-Information,
DPCH-CompressedModeStatusInfo,
FrequencyInfo,
FrequencyInfoFDD,
FrequencyInfoTDD,
MaxAllowedUL-TX-Power,
OpenLoopPowerControl-IPDL-TDD-r4,
PDSCH-CapacityAllocationInfo,

```

```

PDSCH-CapacityAllocationInfo-r4,
PDSCH-Identity,
PrimaryCCPCH-TX-Power,
PUSCH-CapacityAllocationInfo,
PUSCH-CapacityAllocationInfo-r4,
PUSCH-Identity,
RL-AdditionInformationList,
RL-RemovalInformationList,
SpecialBurstScheduling,
SSDT-Information,
TFC-ControlDuration,
SSDT-UL-r4,
TimeslotList,
TimeslotList-r4,
TX-DiversityMode,
UL-ChannelRequirement,
UL-ChannelRequirement-r4,
UL-ChannelRequirement-r5,
UL-ChannelRequirementWithCPCH-SetID,
UL-ChannelRequirementWithCPCH-SetID-r4,
UL-ChannelRequirementWithCPCH-SetID-r5,
UL-DPCH-Info,
UL-DPCH-Info-r4,
UL-DPCH-InfoPostFDD,
UL-DPCH-InfoPostTDD,
UL-DPCH-InfoPostTDD-LCR-r4,
UL-SynchronisationParameters-r4,
UL-TimingAdvance,
UL-TimingAdvanceControl,
UL-TimingAdvanceControl-r4,
-- Measurement IEs :
AdditionalMeasurementID-List,
Frequency-Band,
EventResults,
InterFreqEventResults-LCR-r4-ext,
InterRAT-TargetCellDescription,
MeasuredResults,
MeasuredResults-v390ext,
MeasuredResultsList,
MeasuredResultsList-LCR-r4-ext,
MeasuredResultsOnRACH,
MeasurementCommand,
MeasurementCommand-r4,
MeasurementIdentity,
MeasurementReportingMode,
PrimaryCCPCH-RSCP,
SFN-Offset-Validity,
TimeslotListWithISCP,
TrafficVolumeMeasuredResultsList,
UE-Positioning-GPS-AssistanceData,
UE-Positioning-Measurement-v390ext,
UE-Positioning-OTDOA-AssistanceData,
UE-Positioning-OTDOA-AssistanceData-r4ext,
UE-Positioning-OTDOA-AssistanceData-UEB,
UE-Positioning-IPDL-Parameters-TDD-r4-ext,
-- Other IEs :
BCCH-ModificationInfo,
CDMA2000-MessageList,
GSM-MessageList,
InterRAT-ChangeFailureCause,
InterRAT-HO-FailureCause,
InterRAT-UE-RadioAccessCapabilityList,
InterRAT-UE-SecurityCapList,
IntraDomainNasNodeSelector,
ProtocolErrorMoreInformation,
Rplmn-Information,
Rplmn-Information-r4,
SegCount,
SegmentIndex,
SFN-Prime,
SIB-Data-fixed,
SIB-Data-variable,
SIB-Type
FROM InformationElements

| MaxSIBperMsg_
| maxURNTI-Group
FROM Constant-definitions;

```

```

-- ****
-- ACTIVE SET UPDATE (FDD only)
--
-- ****

ActiveSetUpdate ::= CHOICE {
    r3                               SEQUENCE {
        activeSetUpdate-r3            ActiveSetUpdate-r3-IEs,
        v4xyNonCriticalExtensions     SEQUENCE {
            activeSetUpdate-v4xyext   ActiveSetUpdate-v4xyext-IEs,
            nonCriticalExtensions    SEQUENCE {} OPTIONAL
        } OPTIONAL
    },
    later-than-r3                     SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions          SEQUENCE {}
    }
}

ActiveSetUpdate-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- dummy and dummy2 are not used in this version of the specification, they should
    -- not be sent and if received they should be ignored.
    dummy                           IntegrityProtectionModeInfo      OPTIONAL,
    dummy2                          CipheringModeInfo           OPTIONAL,
    activationTime                 ActivationTime                OPTIONAL,
    newU-RNTI                      U-RNTI                      OPTIONAL,
    -- Core network IEs
    cn-InformationInfo             CN-InformationInfo         OPTIONAL,
    -- Radio bearer IEs
    -- dummy3 is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy3                          DL-CounterSynchronisationInfo OPTIONAL,
    -- Physical channel IEs
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power        OPTIONAL,
    rl-AdditionInformationList     RL-AdditionInformationList  OPTIONAL,
    rl-RemovalInformationList      RL-RemovalInformationList  OPTIONAL,
    tx-DiversityMode               TX-DiversityMode           OPTIONAL,
    ssdt-Information               SSDT-Information           OPTIONAL
}

ActiveSetUpdate-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information. FDD only.
    ssdt-UL                         SSDT-UL-r4                  OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE RL-AdditionInformationList included in this message
    cell-id-PerRL-List              CellIdentity-PerRL-List    OPTIONAL
}

-- ****
-- ACTIVE SET UPDATE COMPLETE (FDD only)
--
-- ****

ActiveSetUpdateComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                           IntegrityProtActivationInfo OPTIONAL,
    -- Radio bearer IEs
    -- dummy2 and dummy3 are not used in this version of the specification, they should
    -- not be sent and if received they should be ignored.
    dummy2                          RB-ActivationTimeInfoList  OPTIONAL,
    dummy3                          UL-CounterSynchronisationInfo OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

-- ****
-- ACTIVE SET UPDATE FAILURE (FDD only)
--

```

```

-- ****
ActiveSetUpdateFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
}

-- ****
-- Assistance Data Delivery
-- ****

AssistanceDataDelivery ::= CHOICE {
    r3                         SEQUENCE {
        assistanceDataDelivery-r3          AssistanceDataDelivery-r3-IEs,
        v3aoNonCriticalExetensions        SEQUENCE {
            assistanceDataDelivery-v3a0ext  AssistanceDataDelivery-v3a0ext,
            v4xyNonCriticalExtensions     SEQUENCE {
                assistanceDataDelivery-v4xyext
                                            AssistanceDataDelivery-v4xyext-IEs,
                nonCriticalExtensions       SEQUENCE {} OPTIONAL
            } OPTIONAL
        } OPTIONAL
    },
    later-than-r3                 SEQUENCE {
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        criticalExtensions           SEQUENCE {}
    }
}

AssistanceDataDelivery-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- Measurement Information Elements
    ue-positioning-GPS-AssistanceData   UE-Positioning-GPS-AssistanceData
    OPTIONAL,
    ue-positioning-OTDOA-AssistanceData-UEB  UE-Positioning-OTDOA-AssistanceData-UEB
    OPTIONAL
}

AssistanceDataDelivery-v3a0ext ::= SEQUENCE {
    sfn-Offset-Validity           SFN-Offset-Validity      OPTIONAL
}

AssistanceDataDelivery-v4xyext-IEs ::= SEQUENCE {
    ue-Positioning-OTDOA-AssistanceData-r4ext  UE-Positioning-OTDOA-AssistanceData-r4ext  OPTIONAL
}

-- ****
-- CELL CHANGE ORDER FROM UTRAN
-- ****

CellChangeOrderFromUTRAN ::= CHOICE {
    r3                         SEQUENCE {
        cellChangeOrderFromUTRAN-IEs    CellChangeOrderFromUTRAN-r3-IEs,
        nonCriticalExtensions         SEQUENCE {} OPTIONAL
    },
    later-than-r3                 SEQUENCE {
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        criticalExtensions           SEQUENCE {}
    }
}

CellChangeOrderFromUTRAN-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy                          IntegrityProtectionModeInfo      OPTIONAL,
    activationTime                 ActivationTime             OPTIONAL,
    -- the IE rab-InformationList is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored. The IE may be used in a later
}

```

```

-- version of the protocol and hence it is not changed into a dummy
rab-InformationList      RAB-InformationList           OPTIONAL,
interRAT-TargetCellDescription InterRAT-TargetCellDescription
}

-- ****
-- CELL CHANGE ORDER FROM UTRAN FAILURE
-- ****

CellChangeOrderFromUTRANFailure ::= CHOICE {
    r3           SEQUENCE {
        cellChangeOrderFromUTRANFailure-r3
                    CellChangeOrderFromUTRANFailure-r3-IEs,
        nonCriticalExtensions   SEQUENCE {} OPTIONAL
    },
    -- dummy is not used in this version of the specification and it
    -- should be ignored.
    dummy         SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions        SEQUENCE {}
    }
}

CellChangeOrderFromUTRANFailure-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    -- dummy is not used in this version of the specification, it should
    -- not be sent and if received it should be ignored.
    dummy         IntegrityProtectionModeInfo           OPTIONAL,
    interRAT-ChangeFailureCause InterRAT-ChangeFailureCause
}

-- ****
-- CELL UPDATE
-- ****

CellUpdate ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI                  U-RNTI,
    startList     STARTList,
    am-RLC-ErrorIndicationRb2-3or4   BOOLEAN,
    am-RLC-ErrorIndicationRb5orAbove  BOOLEAN,
    cellUpdateCause   CellUpdateCause,
    -- TABULAR: RRC transaction identifier is nested in FailureCauseWithProtErrTrId
    failureCause   FailureCauseWithProtErrTrId          OPTIONAL,
    rb-timer-indicator   Rb-timer-indicator,
    -- Measurement IEs
    measuredResultsOnRACH   MeasuredResultsOnRACH        OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions   SEQUENCE {} OPTIONAL
}

-- ****
-- CELL UPDATE CONFIRM
-- ****

CellUpdateConfirm ::= CHOICE {
    r3           SEQUENCE {
        cellUpdateConfirm-r3
                    CellUpdateConfirm-r3-IEs,
        v3a0NonCriticalExtensions   SEQUENCE {
            cellUpdateConfirm-v3a0ext
                        CellUpdateConfirm-v3a0ext,
            v4xyNonCriticalExtensions SEQUENCE {
                cellUpdateConfirm-v4xyext
                            CellUpdateConfirm-v4xyext-IEs,
                nonCriticalExtensions   SEQUENCE {} OPTIONAL
            }
        }
    }
    later-than-r3           SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions        CHOICE {
            r4           SEQUENCE {
                cellUpdateConfirm-r4
                            CellUpdateConfirm-r4-IEs,
            }
        }
    }
}

```

```

        nonCriticalExtensions           SEQUENCE {}      OPTIONAL
    },
    criticalExtensions             CHOICE {
        r5                         CHOICE {
            cellUpdateConfirm-r5      SEQUENCE {
                CellUpdateConfirm-r5-IES,
                SEQUENCE {}          OPTIONAL
            },
            criticalExtensions       SEQUENCE {}
        }
    }
}

CellUpdateConfirm-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo              CipheringModeInfo          OPTIONAL,
    activationTime                 ActivationTime            OPTIONAL,
    new-U-RNTI                     U-RNTI                   OPTIONAL,
    new-C-RNTI                     C-RNTI                   OPTIONAL,
    rrc-StateIndicator              RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient      OPTIONAL,
    rlc-Re-establishIndicatorRb2-3or4  BOOLEAN,
    rlc-Re-establishIndicatorRb5orAbove  BOOLEAN,
    -- CN information elements
    cn-InformationInfo            CN-InformationInfo        OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                  URA-Identity            OPTIONAL,
    -- Radio bearer IEs
    rb-InformationReleaseList     RB-InformationReleaseList      OPTIONAL,
    rb-InformationReconfigList    RB-InformationReconfigList      OPTIONAL,
    rb-InformationAffectedList   RB-InformationAffectedList      OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo      OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo        OPTIONAL,
    ul-deletedTransChInfoList    UL-DeletedTransChInfoList      OPTIONAL,
    ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList      OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                         SEQUENCE {
            cpch-SetID               CPCH-SetID            OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList  OPTIONAL
        },
        tdd                         NULL
    },
    dl-CommonTransChInfo          DL-CommonTransChInfo        OPTIONAL,
    dl-DeletedTransChInfoList    DL-DeletedTransChInfoList      OPTIONAL,
    dl-AddReconfTransChInfoList  DL-AddReconfTransChInfoList      OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                 FrequencyInfo            OPTIONAL,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power      OPTIONAL,
    ul-ChannelRequirement        UL-ChannelRequirement      OPTIONAL,
    modeSpecificPhysChInfo      CHOICE {
        fdd                         SEQUENCE {
            dl-PDSCH-Information   DL-PDSCH-Information      OPTIONAL
        },
        tdd                         NULL
    },
    dl-CommonInformation          DL-CommonInformation        OPTIONAL,
    dl-InformationPerRL-List     DL-InformationPerRL-List      OPTIONAL
}

CellUpdateConfirm-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI                DSCH-RNTI                  OPTIONAL
}

CellUpdateConfirm-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                      SSDT-UL-r4            OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List            CellIdentity-PerRL-List  OPTIONAL
}

CellUpdateConfirm-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
}

```

```

integrityProtectionModeInfo           IntegrityProtectionModeInfo      OPTIONAL,
cipheringModeInfo                   CipheringModeInfo            OPTIONAL,
activationTime                      ActivationTime              OPTIONAL,
new-U-RNTI                          U-RNTI                     OPTIONAL,
new-C-RNTI                          C-RNTI                     OPTIONAL,
new-DSCH-RNTI                       DSCH-RNTI                 OPTIONAL,
rrc-StateIndicator                  RRC-StateIndicator         OPTIONAL,
utran-DRX-CycleLengthCoeff          UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
rlc-ResetIndicatorC-Plane           BOOLEAN                   OPTIONAL,
rlc-ResetIndicatorU-Plane           BOOLEAN                   OPTIONAL,
-- CN information elements
cn-InformationInfo                 CN-InformationInfo        OPTIONAL,
-- UTRAN mobility IEs
ura-Identity                        URA-Identity              OPTIONAL,
-- Radio bearer IEs
rb-InformationReleaseList           RB-InformationReleaseList OPTIONAL,
rb-InformationReconfigList          RB-InformationReconfigList-r4 OPTIONAL,
rb-InformationAffectedList          RB-InformationAffectedList OPTIONAL,
dl-CounterSynchronisationInfo      DL-CounterSynchronisationInfo OPTIONAL,
-- Transport channel IEs
ul-CommonTransChInfo                UL-CommonTransChInfo-r4   OPTIONAL,
ul-deletedTransChInfoList           UL-DeletedTransChInfoList OPTIONAL,
ul-AddReconfTransChInfoList         UL-AddReconfTransChInfoList OPTIONAL,
modeSpecificTransChInfo             CHOICE {
    fdd                                SEQUENCE {
        cpch-SetID                         CPCH-SetID               OPTIONAL,
        addReconfTransChDRAC-Info          DRAC-StaticInformationList OPTIONAL
    },
    tdd                                NULL
},
dl-CommonTransChInfo                DL-CommonTransChInfo-r4   OPTIONAL,
dl-DeletedTransChInfoList           DL-DeletedTransChInfoList OPTIONAL,
dl-AddReconfTransChInfoList         DL-AddReconfTransChInfoList-r4 OPTIONAL,
-- Physical channel IEs
frequencyInfo                       FrequencyInfo             OPTIONAL,
maxAllowedUL-TX-Power              MaxAllowedUL-TX-Power    OPTIONAL,
ul-ChannelRequirement              UL-ChannelRequirement-r4  OPTIONAL,
modeSpecificPhysChInfo             CHOICE {
    fdd                                SEQUENCE {
        dl-PDSCH-Information           DL-PDSCH-Information       OPTIONAL
    },
    tdd                                NULL
},
dl-CommonInformation                DL-CommonInformation-r4  OPTIONAL,
dl-InformationPerRL-List           DL-InformationPerRL-List-r4 OPTIONAL
}

```

```

CellUpdateConfirm-r5-IEs ::= SEQUENCE {
-- User equipment IEs
integrityProtectionModeInfo           IntegrityProtectionModeInfo      OPTIONAL,
cipheringModeInfo                   CipheringModeInfo            OPTIONAL,
activationTime                      ActivationTime              OPTIONAL,
new-U-RNTI                          U-RNTI                     OPTIONAL,
new-C-RNTI                          C-RNTI                     OPTIONAL,
new-DSCH-RNTI                       DSCH-RNTI                 OPTIONAL,
new-H-RNTI                          H-RNTI                     OPTIONAL,
rrc-StateIndicator                  RRC-StateIndicator         OPTIONAL,
utran-DRX-CycleLengthCoeff          UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
rlc-ResetIndicatorC-Plane           BOOLEAN                   OPTIONAL,
rlc-ResetIndicatorU-Plane           BOOLEAN                   OPTIONAL,
-- CN information elements
cn-InformationInfo                 CN-InformationInfo        OPTIONAL,
-- UTRAN mobility IEs
ura-Identity                        URA-Identity              OPTIONAL,
-- Radio bearer IEs
rb-InformationReleaseList           RB-InformationReleaseList OPTIONAL,
rb-InformationReconfigList          RB-InformationReconfigList-r5 OPTIONAL,
rb-InformationAffectedList          RB-InformationAffectedList-r5 OPTIONAL,
dl-CounterSynchronisationInfo      DL-CounterSynchronisationInfo-r5 OPTIONAL,
-- Transport channel IEs
ul-CommonTransChInfo                UL-CommonTransChInfo-r4   OPTIONAL,
ul-deletedTransChInfoList           UL-DeletedTransChInfoList OPTIONAL,
ul-AddReconfTransChInfoList         UL-AddReconfTransChInfoList OPTIONAL,
modeSpecificTransChInfo             CHOICE {
    fdd                                SEQUENCE {
        cpch-SetID                         CPCH-SetID               OPTIONAL,
        addReconfTransChDRAC-Info          DRAC-StaticInformationList OPTIONAL
    },
}

```

```

        tdd                         NULL
    },
    dl-CommonTransChInfo          DL-CommonTransChInfo-r4           OPTIONAL,
    dl-DeletedTransChInfoList     DL-DeletedTransChInfoList-r5      OPTIONAL,
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList-r5    OPTIONAL,
-- Physical channel IEs
    frequencyInfo                 FrequencyInfo                  OPTIONAL,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power            OPTIONAL,
    ul-ChannelRequirement         UL-ChannelRequirement-r5       OPTIONAL,
    modeSpecificPhysChInfo       CHOICE {
        fdd                         SEQUENCE {
            dl-PDSCH-Information  DL-PDSCH-Information          OPTIONAL
        },
        tdd                         NULL
    },
    dl-HSPDSCH-Information       DL-HSPDSCH-Information          OPTIONAL,
    dl-CommonInformation         DL-CommonInformation-r4        OPTIONAL,
    dl-InformationPerRL-List     DL-InformationPerRL-List-r5      OPTIONAL
}

-- *****
-- CELL UPDATE CONFIRM for CCCH
-- *****

CellUpdateConfirm-CCCH ::= CHOICE {
    r3                         SEQUENCE {
        -- User equipment IEs
        u-RNTI                      U-RNTI,
        -- The rest of the message is identical to the one sent on DCCH.
        cellUpdateConfirm-r3          CellUpdateConfirm-r3-IEs,
        v4xyNonCriticalExtensions    SEQUENCE {
            cellUpdateConfirm-v4xyext  CellUpdateConfirm-v4xyext-IEs,
            nonCriticalExtensions     SEQUENCE {} OPTIONAL
        } OPTIONAL
    },
    later-than-r3                SEQUENCE {
        u-RNTI                      U-RNTI,
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions          CHOICE {
            r4                         SEQUENCE {
                -- The rest of the message is identical to the one sent on DCCH.
                cellUpdateConfirm-r4          CellUpdateConfirm-r4-IEs,
                nonCriticalExtensions       SEQUENCE {} OPTIONAL
            },
            criticalExtensions          SEQUENCE {}
        }
    }
}

-- *****
-- COUNTER CHECK
-- *****

CounterCheck ::= CHOICE {
    r3                         SEQUENCE {
        counterCheck-r3            CounterCheck-r3-IEs,
        nonCriticalExtensions      SEQUENCE {} OPTIONAL
    },
    later-than-r3                SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions          SEQUENCE {}
    }
}

CounterCheck-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    -- Radio bearer IEs
    rb-COUNT-C-MSB-InformationList RB-COUNT-C-MSB-InformationList
}

-- *****
-- COUNTER CHECK RESPONSE

```

```

-- ****
-- **** CounterCheckResponse ::= SEQUENCE {
--   User equipment IEs
--     rrc-TransactionIdentifier      RRC-TransactionIdentifier,
--   Radio bearer IEs
--     rb-COUNT-C-InformationList    RB-COUNT-C-InformationList      OPTIONAL,
--   Extension mechanism for non- release99 information
--     nonCriticalExtensions        SEQUENCE {} OPTIONAL
}

-- ****
-- **** DOWNLINK DIRECT TRANSFER
-- ****
-- ****

DownlinkDirectTransfer ::= CHOICE {
  r3
    SEQUENCE {
      downlinkDirectTransfer-r3      DownlinkDirectTransfer-r3-IEs,
      nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
  later-than-r3
    SEQUENCE {
      rrc-TransactionIdentifier      RRC-TransactionIdentifier,
      criticalExtensions            SEQUENCE {}
    }
}

DownlinkDirectTransfer-r3-IEs ::= SEQUENCE {
  User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
  Core network IEs
    cn-DomainIdentity             CN-DomainIdentity,
    nas-Message                   NAS-Message
}

-- ****
-- **** HANOVER TO UTRAN COMMAND
-- ****
-- ****

HandoverToUTRANCommand ::= CHOICE {
  r3
    SEQUENCE {
      handoverToUTRANCommand-r3      HandoverToUTRANCommand-r3-IEs,
      v4xyNonCriticalExtensions     SEQUENCE {
        handoverToUTRANCommand-v4xyext HandoverToUTRANCommand-v4xyext-IEs,
        nonCriticalExtensions         SEQUENCE {} OPTIONAL
      } OPTIONAL
    },
  criticalExtensions
    CHOICE {
      r4
        SEQUENCE {
          handoverToUTRANCommand-r4      HandoverToUTRANCommand-r4-IEs,
          nonCriticalExtensions         SEQUENCE {} OPTIONAL
        },
      criticalExtensions            SEQUENCE {}
    }
}

HandoverToUTRANCommand-r3-IEs ::= SEQUENCE {
  User equipment IEs
    new-U-RNTI                  U-RNTI-Short,
    -- dummy is not used in this version of specification, it should
    -- not be sent and if received it should be ignored.
    dummy                         ActivationTime      OPTIONAL,
    cipheringAlgorithm           CipheringAlgorithm  OPTIONAL,
  Radio bearer IEs
  Specification mode information
    specificationMode
      CHOICE {
        complete
          SEQUENCE {
            srb-InformationSetupList   SRB-InformationSetupList,
            rab-InformationSetupList   RAB-InformationSetupList      OPTIONAL,
            ul-CommonTransChInfo       UL-CommonTransChInfo,
            ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList,
            dl-CommonTransChInfo       DL-CommonTransChInfo,
            dl-AddReconfTransChInfoList DL-AddReconfTransChInfoList,
          }
      }
}

```

```

    ul-DPCH-Info
    modeSpecificInfo
      fdd
        dl-PDSCH-Information
        cpch-SetInfo
      },
      tdd
    },
    dl-CommonInformation
    dl-InformationPerRL-List
    frequencyInfo
  },
  preconfiguration
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
  preConfigMode
    predefinedConfigIdentity
    defaultConfig
      defaultConfigMode
      defaultConfigIdentity
    },
  },
  rab-Info
  modeSpecificInfo
    fdd
      ul-DPCH-Info
      dl-CommonInformationPost
      dl-InformationPerRL-List
      frequencyInfo
    },
    tdd
      ul-DPCH-Info
      dl-CommonInformationPost
      dl-InformationPerRL
      frequencyInfo
      primaryCCPCH-TX-Power
  },
  }
},
-- Physical channel IEs
  maxAllowedUL-TX-Power
}
}

HandoverToUTRANCommand-v4xyext-IEs ::= SEQUENCE {
  -- Physical channel IEs
  -- ssdt-UL extends SSDT-Information, which is included in
  -- DL-CommonInformation. FDD only.
  ssdt-UL
  cell-id
}
}

HandoverToUTRANCommand-r4-IEs ::= SEQUENCE {
  -- User equipment IEs
  new-U-RNTI
  cipheringAlgorithm
  -- Radio bearer IEs
  rab-Info
  -- Specification mode information
  specificationMode
    complete
      srb-InformationSetupList
      rab-InformationSetupList
      ul-CommonTransChInfo
      ul-AddReconfTransChInfoList
      dl-CommonTransChInfo
      dl-AddReconfTransChInfoList
      ul-DPCH-Info
      modeSpecificInfo
        fdd
          dl-PDSCH-Information
          cpch-SetInfo
        },
        tdd
      },
      dl-CommonInformation
}

```

```

        dl-InformationPerRL-List      DL-InformationPerRL-List-r4,
        frequencyInfo                 FrequencyInfo
    },
    preconfiguration             SEQUENCE {
-- All IEs that include an FDD/TDD choice are split in two IEs for this message,
-- one for the FDD only elements and one for the TDD only elements, so that one
-- FDD/TDD choice in this level is sufficient.
    preConfigMode                CHOICE {
        predefinedConfigIdentity PredefinedConfigIdentity,
        defaultConfig           SEQUENCE {
            defaultConfigMode   DefaultConfigMode,
            defaultConfigIdentity DefaultConfigIdentity-r4
        }
    },
    rab-Info                     RAB-Info-Post      OPTIONAL,
    modeSpecificInfo             CHOICE {
        fdd                      SEQUENCE {
            ul-DPCH-Info       UL-DPCH-InfoPostFDD,
            dl-CommonInformationPost DL-CommonInformationPost,
            dl-InformationPerRL-List DL-InformationPerRL-ListPostFDD,
            frequencyInfo        FrequencyInfoFDD
        },
        tdd                      CHOICE {
            tdd384               SEQUENCE {
                ul-DPCH-Info       UL-DPCH-InfoPostTDD,
                dl-InformationPerRL DL-InformationPerRL-PostTDD,
                frequencyInfo        FrequencyInfoTDD,
                primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
            },
            tdd128               SEQUENCE {
                ul-DPCH-Info       UL-DPCH-InfoPostTDD-LCR-r4,
                dl-InformationPerRL DL-InformationPerRL-PostTDD-LCR-r4,
                frequencyInfo        FrequencyInfoTDD,
                primaryCCPCH-TX-Power PrimaryCCPCH-TX-Power
            }
        }
    }
},
-- Physical channel IEs
maxAllowedUL-TX-Power      MaxAllowedUL-TX-Power
}

-- ****
-- HANOVER TO UTRAN COMPLETE
-- ****

HandoverToUTRANComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
-- TABULAR: startList is conditional on history.
    startList                  STARTList          OPTIONAL,
-- Radio bearer IEs
    count-C-ActivationTime     ActivationTime    OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions     SEQUENCE {}        OPTIONAL
}

-- ****
-- INITIAL DIRECT TRANSFER
-- ****

InitialDirectTransfer ::= SEQUENCE {
-- Core network IEs
    cn-DomainIdentity         CN-DomainIdentity,
    intraDomainNasNodeSelector IntraDomainNasNodeSelector,
    nas-Message                NAS-Message,
-- Measurement IEs
    measuredResultsOnRACH     MeasuredResultsOnRACH    OPTIONAL,
    v3a0NonCriticalExtensions SEQUENCE {
        initialDirectTransfer-v3a0ext InitialDirectTransfer-v3a0ext,
-- Extension mechanism for non- release99 information
        nonCriticalExtensions     SEQUENCE {}        OPTIONAL
    }                           OPTIONAL
}

```

```

}

InitialDirectTransfer-v3a0ext ::= SEQUENCE {
    -- start-value shall always be included in this version of the protocol
    start-Value                      START-Value          OPTIONAL
}

-- ****
-- HANOVER FROM UTRAN COMMAND
-- ****

HandoverFromUTRANCommand-GSM ::= CHOICE {
    r3                               SEQUENCE {
        handoverFromUTRANCommand-GSM-r3
            HandoverFromUTRANCommand-GSM-r3-IEs,
            nonCriticalExtensions      SEQUENCE {} OPTIONAL
    },
    later-than-r3
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions         SEQUENCE {}
}
}

HandoverFromUTRANCommand-GSM-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        activationTime               ActivationTime           OPTIONAL,
    -- Radio bearer IEs
        toHandover-Info             RAB-Info              OPTIONAL,
    -- Measurement IEs
        frequency-band              Frequency-Band,
    -- Other IEs
        gsm-message                 CHOICE {
            -- In the single-GSM-Message case, what follows the basic production is a variable
            -- length bit string with no length field, containing the GSM message including GSM
            -- padding up to end of container, to be analysed according to GSM specifications
            single-GSM-Message          SEQUENCE {},
            gsm-MessageList             SEQUENCE {
                gsm-Messages            GSM-MessageList
            }
        }
}
}

HandoverFromUTRANCommand-CDMA2000 ::= CHOICE {
    r3                               SEQUENCE {
        handoverFromUTRANCommand-CDMA2000-r3
            HandoverFromUTRANCommand-CDMA2000-r3-IEs,
            nonCriticalExtensions    SEQUENCE {} OPTIONAL
    },
    later-than-r3
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions         SEQUENCE {}
}
}

HandoverFromUTRANCommand-CDMA2000-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        activationTime               ActivationTime           OPTIONAL,
    -- Radio bearer IEs
        toHandover-Info             RAB-Info              OPTIONAL,
    -- Other IEs
        cdma2000-MessageList       CDMA2000-MessageList
}
}

-- ****
-- HANOVER FROM UTRAN FAILURE
-- ****

HandoverFromUTRANFailure ::= SEQUENCE {
    -- User equipment IEs
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    -- Other IEs

```

```

interRAT-HO-FailureCause           InterRAT-HO-FailureCause          OPTIONAL,
interRATMessage
  gsm                               CHOICE {
    gsm-MessageList                SEQUENCE {
      GSM-MessageList
    },
  cdma2000                         SEQUENCE {
    cdma2000-MessageList          CDMA2000-MessageList
  }
}
OPTIONAL,
-- Extension mechanism for non- release99 information
nonCriticalExtensions             SEQUENCE {}           OPTIONAL
}

-- ****
-- INTER RAT HANDOVER INFO
--
-- ****

InterRATHandoverInfo ::= SEQUENCE {
  -- This structure is defined for historical reasons, backward compatibility with 04.18
  predefinedConfigStatusList        CHOICE {
    absent                         NULL,
    present                        PredefinedConfigStatusList
  },
  uE-SecurityInformation           CHOICE {
    absent                         NULL,
    present                        UE-SecurityInformation
  },
  ue-CapabilityContainer          CHOICE {
    absent                         NULL,
    -- present is an octet aligned string containing IE UE-RadioAccessCapabilityInfo
    present                        OCTET STRING (SIZE (0..63))
  },
  -- Non critical extensions
  v390NonCriticalExtensions       CHOICE {
    absent                         NULL,
    present                        SEQUENCE {
      interRATHandoverInfo-v390ext   InterRATHandoverInfo-v390ext-IEs,
      v3a0NonCriticalExtensions     SEQUENCE {
        interRATHandoverInfo-v3a0ext   InterRATHandoverInfo-v3a0ext,
        v4xyNonCriticalExtensions    SEQUENCE {
          interRATHandoverInfo-v4xyext   InterRATHandoverInfo-v4xyext-IEs,
          -- Reserved for future non critical extension
          nonCriticalExtensions        SEQUENCE {} OPTIONAL
        } OPTIONAL
      } OPTIONAL
    } OPTIONAL
  }
}

InterRATHandoverInfo-v390ext-IEs ::= SEQUENCE {
  -- User equipment IEs
  ue-RadioAccessCapability-v380ext   UE-RadioAccessCapability-v380ext          OPTIONAL,
  dl-PhysChCapabilityFDD-v380ext    DL-PhysChCapabilityFDD-v380ext
}

InterRATHandoverInfo-v3a0ext ::= SEQUENCE {
  -- User equipment IEs
  ue-RadioAccessCapability-v3a0ext   UE-RadioAccessCapability-v3a0ext          OPTIONAL
}

InterRATHandoverInfo-v4xyext-IEs ::= SEQUENCE {
  -- User equipment IEs
  ue-RadioAccessCapability-v4xyext   UE-RadioAccessCapability-v4xyext
}

-- ****
-- MEASUREMENT CONTROL
--
-- ****

MeasurementControl ::= CHOICE {
  r3                               SEQUENCE {
    measurementControl-r3            MeasurementControl-r3-IEs,
  v390nonCriticalExtensions        SEQUENCE {
    measurementControl-v390ext      MeasurementControl-v390ext,
  }
}

```

```

    v3a0NonCriticalExtensions      SEQUENCE {
        measurementControl-v3a0ext   MeasurementControl-v3a0ext,
        v4xyNonCriticalExtensions    SEQUENCE{
            measurementControl-v4xyext MeasurementControl-v4xyext-IEs,
            nonCriticalExtensions     SEQUENCE {}           OPTIONAL
        }                           OPTIONAL
    }                           OPTIONAL
},
later-than-r3                  SEQUENCE {
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    criticalExtensions          CHOICE {
        r4                      SEQUENCE {
            measurementControl-r4  MeasurementControl-r4-IEs,
            nonCriticalExtensions SEQUENCE {}           OPTIONAL
        },
        criticalExtensions        SEQUENCE {}
    }
}

MeasurementControl-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    -- Measurement IEs
    measurementIdentity         MeasurementIdentity,
    -- TABULAR: The measurement type is included in MeasurementCommand.
    measurementCommand          MeasurementCommand,
    measurementReportingMode    MeasurementReportingMode           OPTIONAL,
    additionalMeasurementList   AdditionalMeasurementID-List       OPTIONAL,
    -- Physical channel IEs
    dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo   OPTIONAL
}

MeasurementControl-v4xyext-IEs ::= SEQUENCE {
    ue-Positioning-OTDOA-AssistanceData-r4ext   UE-Positioning-OTDOA-AssistanceData-r4ext   OPTIONAL
}

MeasurementControl-v390ext ::= SEQUENCE {
    ue-Positioning-Measurement-v390ext         UE-Positioning-Measurement-v390ext   OPTIONAL
}

MeasurementControl-v3a0ext ::= SEQUENCE {
    sfn-Offset-Validity                   SFN-Offset-Validity           OPTIONAL
}

MeasurementControl-r4-IEs ::= SEQUENCE {
    -- Measurement IEs
    measurementIdentity         MeasurementIdentity,
    -- TABULAR: The measurement type is included in measurementCommand.
    measurementCommand          MeasurementCommand-r4,
    measurementReportingMode    MeasurementReportingMode           OPTIONAL,
    additionalMeasurementList   AdditionalMeasurementID-List       OPTIONAL,
    -- Physical channel IEs
    dpch-CompressedModeStatusInfo DPCH-CompressedModeStatusInfo   OPTIONAL
}

-- ****
-- 
-- MEASUREMENT CONTROL FAILURE
-- 
-- ****

MeasurementControlFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    failureCause                FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions       SEQUENCE {}           OPTIONAL
}

-- ****
-- 
-- MEASUREMENT REPORT
-- 
-- ****

MeasurementReport ::= SEQUENCE {

```

```

-- Measurement IEs
measurementIdentity      MeasurementIdentity,
measuredResults          MeasuredResults
measuredResultsOnRACH    MeasuredResultsOnRACH
additionalMeasuredResults MeasuredResultsList
eventResults              EventResults
OPTIONAL,
OPTIONAL,
OPTIONAL,
OPTIONAL,
-- Non-critical extensions
v390nonCriticalExtensions SEQUENCE {
    measurementReport-v390ext     MeasurementReport-v390ext,
    v4xyNonCriticalExtensions    SEQUENCE {
        measurementReport-v4xyext   MeasurementReport-v4xyext-IEs,
        -- Extension mechanism for non-Rel4 information
        nonCriticalExtensions     SEQUENCE {}
    }
    OPTIONAL
}
OPTIONAL
}

MeasurementReport-v390ext ::= SEQUENCE {
    measuredResults-v390ext       MeasuredResults-v390ext
} OPTIONAL

MeasurementReport-v4xyext-IEs ::= SEQUENCE {
    interFreqEventResults-LCR    InterFreqEventResults-LCR-r4-ext
    additionalMeasuredResults-LCR MeasuredResultsList-LCR-r4-ext
} OPTIONAL,
OPTIONAL

-- ****
-- PAGING TYPE 1
-- ****

PagingType1 ::= SEQUENCE {
    -- User equipment IEs
    pagingRecordList            PagingRecordList
    OPTIONAL,
    -- Other IEs
    bcch-ModificationInfo       BCCH-ModificationInfo
    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions       SEQUENCE {
        pagingType1-v3-5ext      PagingType1-v3-5ext-IEs,
        nonCriticalExtensions    SEQUENCE {} OPTIONAL
    }
    OPTIONAL
}

PagingType1-v3-5ext-IEs ::= SEQUENCE {
    -- User equipment IEs
    pagingRecordList             PagingRecordList-r5
} OPTIONAL

-- ****
-- PAGING TYPE 2
-- ****

PagingType2 ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    pagingCause                  PagingCause,
    -- Core network IEs
    cn-DomainIdentity           CN-DomainIdentity,
    pagingRecordTypeID           PagingRecordTypeID,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {} OPTIONAL
}

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION
-- ****

PhysicalChannelReconfiguration ::= CHOICE {
    r3                      SEQUENCE {
        physicalChannelReconfiguration-r3
        PhysicalChannelReconfiguration-r3-IEs,
    }
    v3a0NonCriticalExtensions SEQUENCE {
        physicalChannelReconfiguration-v3a0ext   PhysicalChannelReconfiguration-v3a0ext,
    }
}

```

```

    v4xyNonCriticalExtensns      SEQUENCE {
        physicalChannelReconfiguration-v4xyext
            PhysicalChannelReconfiguration-v4xyext-IEs,
            nonCriticalExtensions      SEQUENCE {} OPTIONAL
        } OPTIONAL
    } OPTIONAL
},
later-than-r3           SEQUENCE {
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    criticalExtensions          CHOICE {
        r4                     SEQUENCE {
            physicalChannelReconfiguration-r4
                PhysicalChannelReconfiguration-r4-IEs,
            nonCriticalExtensions  SEQUENCE {} OPTIONAL
        },
        criticalExtensions       CHOICE {
            r5                     SEQUENCE {
                physicalChannelReconfiguration-r5
                    PhysicalChannelReconfiguration-r5-IEs,
            nonCriticalExtensions  SEQUENCE {} OPTIONAL
        },
        criticalExtensions       SEQUENCE {}
    }
}
}

PhysicalChannelReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo           CipheringModeInfo OPTIONAL,
    activationTime               ActivationTime OPTIONAL,
    new-U-RNTI                  U-RNTI OPTIONAL,
    new-C-RNTI                  C-RNTI OPTIONAL,
    rrc-StateIndicator           RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo          CN-InformationInfo OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity OPTIONAL,
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                FrequencyInfo OPTIONAL,
    maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power OPTIONAL,
    -- TABULAR: UL-ChannelRequirementWithCPCH-SetID contains the choice
    -- between UL DPCH info, CPCH SET info and CPCH set ID.
    ul-ChannelRequirement       UL-ChannelRequirementWithCPCH-SetID OPTIONAL,
    modeSpecificInfo             CHOICE {
        fdd                     SEQUENCE {
            dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
        },
        tdd                     NULL
    },
    dl-CommonInformation         DL-CommonInformation OPTIONAL,
    dl-InformationPerRL-List     DL-InformationPerRL-List OPTIONAL
}

PhysicalChannelReconfiguration-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI              DSCH-RNTI OPTIONAL
}

PhysicalChannelReconfiguration-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                     SSDT-UL-r4 OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List           CellIdentity-PerRL-List OPTIONAL
}

PhysicalChannelReconfiguration-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo           CipheringModeInfo OPTIONAL,
    activationTime               ActivationTime OPTIONAL,
}

```

```

new-U-RNTI           U-RNTI           OPTIONAL,
new-C-RNTI           C-RNTI           OPTIONAL,
new-DSCH-RNTI        DSCH-RNTI        OPTIONAL,
rrc-StateIndicator   RRC-StateIndicator, OPTIONAL,
utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- Core network IEs
cn-InformationInfo CN-InformationInfo OPTIONAL,
-- UTRAN mobility IEs
ura-Identity         URA-Identity      OPTIONAL,
-- Radio bearer IEs
dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
-- Physical channel IEs
frequencyInfo        FrequencyInfo     OPTIONAL,
maxAllowedUL-TX-Power MaxAllowedUL-TX-Power OPTIONAL,
-- TABULAR: UL-ChannelRequirementWithCPCH-SetID-r4 contains the choice
-- between UL DPCH info, CPCH SET info and CPCH set ID.
ul-ChannelRequirement UL-ChannelRequirementWithCPCH-SetID-r4 OPTIONAL,
modeSpecificInfo      CHOICE {
    fdd             SEQUENCE {
        dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
    },
    tdd             NULL
},
dl-CommonInformation DL-CommonInformation-r4 OPTIONAL,
dl-InformationPerRL-List DL-InformationPerRL-List-r4 OPTIONAL
}

PhysicalChannelReconfiguration-r5-IEs ::= SEQUENCE {
-- User equipment IEs
integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
cipheringModeInfo            CipheringModeInfo    OPTIONAL,
activationTime                ActivationTime       OPTIONAL,
new-U-RNTI                   U-RNTI           OPTIONAL,
new-C-RNTI                   C-RNTI           OPTIONAL,
new-DSCH-RNTI                DSCH-RNTI        OPTIONAL,
new-H-RNTI                   H-RNTI           OPTIONAL,
rrc-StateIndicator            RRC-StateIndicator, OPTIONAL,
utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- Core network IEs
cn-InformationInfo          CN-InformationInfo OPTIONAL,
-- UTRAN mobility IEs
ura-Identity                 URA-Identity      OPTIONAL,
-- Radio bearer IEs
dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo-r5 OPTIONAL,
-- Physical channel IEs
frequencyInfo                FrequencyInfo     OPTIONAL,
maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power OPTIONAL,
-- TABULAR: UL-ChannelRequirementWithCPCH-SetID-r4 contains the choice
-- between UL DPCH info, CPCH SET info and CPCH set ID.
ul-ChannelRequirement        UL-ChannelRequirementWithCPCH-SetID-r5 OPTIONAL,
modeSpecificInfo              CHOICE {
    fdd             SEQUENCE {
        dl-PDSCH-Information DL-PDSCH-Information OPTIONAL
    },
    tdd             NULL
},
dl-HSPDSCH-Information       DL-HSPDSCH-Information OPTIONAL,
dl-CommonInformation         DL-CommonInformation-r4 OPTIONAL,
dl-InformationPerRL-List    DL-InformationPerRL-List-r5 OPTIONAL
}

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION COMPLETE
-- ****

PhysicalChannelReconfigurationComplete ::= SEQUENCE {
-- User equipment IEs
rrc-TransactionIdentifier   RRC-TransactionIdentifier, OPTIONAL,
ul-IntegProtActivationInfo  IntegrityProtActivationInfo OPTIONAL,
-- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
ul-TimingAdvance             UL-TimingAdvance       OPTIONAL,
-- Radio bearer IEs
count-C-ActivationTime      ActivationTime      OPTIONAL,
rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList OPTIONAL,
ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo OPTIONAL,
-- Extension mechanism for non- release99 information

```

```

        nonCriticalExtensions           SEQUENCE {}      OPTIONAL
    }

-- ****
-- PHYSICAL CHANNEL RECONFIGURATION FAILURE
-- ****

PhysicalChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier          OPTIONAL,
    failureCause                   FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}      OPTIONAL
}

-- ****
-- PHYSICAL SHARED CHANNEL ALLOCATION (TDD only)
-- ****

PhysicalSharedChannelAllocation ::= CHOICE {
    r3                         SEQUENCE {
        physicalSharedChannelAllocation-r3
            PhysicalSharedChannelAllocation-r3-IES,
        nonCriticalExtensions     SEQUENCE {} OPTIONAL
    },
    later-than-r3                SEQUENCE {
        dsch-RNTI                 DSCH-RNTI                      OPTIONAL,
        rrc-TransactionIdentifier RRC-TransactionIdentifier,
        criticalExtensions        CHOICE {
            r4                     SEQUENCE {
                physicalSharedChannelAllocation-r4
                    PhysicalSharedChannelAllocation-r4-IES,
                nonCriticalExtensions SEQUENCE {} OPTIONAL
            },
            criticalExtensions      SEQUENCE {}
        }
    }
}

PhysicalSharedChannelAllocation-r3-IES ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    dsch-RNTI                  DSCH-RNTI                      OPTIONAL,
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    -- Physical channel IEs
    ul-TimingAdvance           UL-TimingAdvanceControl        OPTIONAL,
    pusch-CapacityAllocationInfo PUSCH-CapacityAllocationInfo  OPTIONAL,
    pdsch-CapacityAllocationInfo PDSCH-CapacityAllocationInfo  OPTIONAL,
    -- TABULAR: If the above value is not present, the default value "No Confirm"
    -- shall be used as specified in 10.2.25.
    confirmRequest              ENUMERATED {
        confirmPDSCH, confirmPUSCH }    OPTIONAL,
    trafficVolumeReportRequest  INTEGER (0..255)               OPTIONAL,
    iscpTimeslotList            TimeslotList                  OPTIONAL,
    requestPCCPCHRSCP          BOOLEAN                      OPTIONAL
}

PhysicalSharedChannelAllocation-r4-IES ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- Physical channel IEs
    ul-TimingAdvance           UL-TimingAdvanceControl-r4       OPTIONAL,
    pusch-CapacityAllocationInfo PUSCH-CapacityAllocationInfo-r4  OPTIONAL,
    pdsch-CapacityAllocationInfo PDSCH-CapacityAllocationInfo-r4  OPTIONAL,
    -- TABULAR: If confirmRequest is not present, the default value "No Confirm"
    -- shall be used as specified in 10.2.25.
    confirmRequest              ENUMERATED {
        confirmPDSCH, confirmPUSCH }    OPTIONAL,
    iscpTimeslotList            TimeslotList-r4                OPTIONAL,
    requestPCCPCHRSCP          BOOLEAN                      OPTIONAL
}

-- ****
-- PUSCH CAPACITY REQUEST (TDD only)
-- ****

```

```

-- ****
-- **** PUSCHCapacityRequest ::= SEQUENCE {
--   User equipment IEs
--     dsch-RNTI                   DSCH-RNTI                               OPTIONAL,
--   Measurement IEs
--     trafficVolume                TrafficVolumeMeasuredResultsList,
--     timeslotListWithISCP         TimeslotListWithISCP                         OPTIONAL,
--     primaryCCPCH-RSCP           PrimaryCCPCH-RSCP                         OPTIONAL,
--     allocationConfirmation      CHOICE {
--       pdschConfirmation          PDSCH-Identity,
--       pushConfirmation           PUSCH-Identity
--     }                           OPTIONAL,
--     protocolErrorIndicator      ProtocolErrorIndicatorWithMoreInfo,
--   Extension mechanism for non- release99 information
--     nonCriticalExtensions       SEQUENCE {} OPTIONAL
}

-- ****
-- **** RADIO BEARER RECONFIGURATION
-- ****
-- **** RadioBearerReconfiguration ::= CHOICE {
r3   SEQUENCE {
    radioBearerReconfiguration-r3  RadioBearerReconfiguration-r3-IEs,
    v3a0NonCriticalExtensions    SEQUENCE {
      radioBearerReconfiguration-v3a0ext  RadioBearerReconfiguration-v3a0ext,
      v4xyNonCriticalExtensions    SEQUENCE {
        radioBearerReconfiguration-v4xyext
          RadioBearerReconfiguration-v4xyext-IEs,
        nonCriticalExtensions       SEQUENCE {} OPTIONAL
      }                           OPTIONAL
    }                           OPTIONAL
  },
  later-than-r3                 SEQUENCE {
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    criticalExtensions          CHOICE {
      r4                     SEQUENCE {
        radioBearerReconfiguration-r4  RadioBearerReconfiguration-r4-IEs,
        nonCriticalExtensions       SEQUENCE {} OPTIONAL
      },
      criticalExtensions          CHOICE {
        r5                     SEQUENCE {
          radioBearerReconfiguration-r5  RadioBearerReconfiguration-r5-IEs,
          nonCriticalExtensions       SEQUENCE {} OPTIONAL
        },
        criticalExtensions          SEQUENCE {}
      }
    }
  }
}

RadioBearerReconfiguration-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier   RRC-TransactionIdentifier,
  integrityProtectionModeInfo IntegrityProtectionModeInfo   OPTIONAL,
  cipheringModeInfo           CipheringModeInfo           OPTIONAL,
  activationTime               ActivationTime             OPTIONAL,
  new-U-RNTI                  U-RNTI                    OPTIONAL,
  new-C-RNTI                  C-RNTI                    OPTIONAL,
  rrc-StateIndicator          RRC-StateIndicator,
  utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- Core network IEs
  cn-InformationInfo          CN-InformationInfo        OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                 URA-Identity              OPTIONAL,
  -- Radio bearer IEs
  rab-InformationReconfigList RAB-InformationReconfigList OPTIONAL,
  -- NOTE: IE rb-InformationReconfigList should be optional in later versions
  -- of this message
  rb-InformationReconfigList   RB-InformationReconfigList,
  rb-InformationAffectedList   RB-InformationAffectedList OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo         UL-CommonTransChInfo        OPTIONAL,
  ul-deletedTransChInfoList   UL-DeletedTransChInfoList  OPTIONAL,
}

```

```

    ul-AddReconfTransChInfoList      UL-AddReconfTransChInfoList      OPTIONAL,
    modeSpecificTransChInfo          CHOICE {
        fdd                         SEQUENCE {
            cpch-SetID                CPCH-SetID           OPTIONAL,
            addReconfTransChDRAC-Info   DRAC-StaticInformationList OPTIONAL
        },
        tdd                         NULL
    }
    dl-CommonTransChInfo            DL-CommonTransChInfo          OPTIONAL,
    dl-DeletedTransChInfoList       DL-DeletedTransChInfoList     OPTIONAL,
    dl-AddReconfTransChInfoList     DL-AddReconfTransChInfo2List  OPTIONAL,
-- Physical channel IEs
    frequencyInfo                  FrequencyInfo             OPTIONAL,
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power        OPTIONAL,
    ul-ChannelRequirement          UL-ChannelRequirement        OPTIONAL,
    modeSpecificPhysChInfo         CHOICE {
        fdd                         SEQUENCE {
            dl-PDSCH-Information     DL-PDSCH-Information      OPTIONAL
        },
        tdd                         NULL
    },
    dl-CommonInformation            DL-CommonInformation        OPTIONAL,
-- NOTE: IE dl-InformationPerRL-List should be optional in later versions
-- of this message
    dl-InformationPerRL-List       DL-InformationPerRL-List
}

RadioBearerReconfiguration-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI                 DSCH-RNTI                  OPTIONAL
}

RadioBearerReconfiguration-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                        SSDT-UL-r4                OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List              CellIdentity-PerRL-List  OPTIONAL
}

RadioBearerReconfiguration-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo    IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo               CipheringModeInfo        OPTIONAL,
    activationTime                  ActivationTime           OPTIONAL,
    new-U-RNTI                      U-RNTI                    OPTIONAL,
    new-C-RNTI                      C-RNTI                    OPTIONAL,
    new-DSCH-RNTI                   DSCH-RNTI                OPTIONAL,
    rrc-StateIndicator               RRC-StateIndicator       OPTIONAL,
    utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo              CN-InformationInfo      OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                     URA-Identity             OPTIONAL,
    -- Radio bearer IEs
    rab-InformationReconfigList     RAB-InformationReconfigList OPTIONAL,
    rb-InformationReconfigList       RB-InformationReconfigList-r4 OPTIONAL,
    rb-InformationAffectedList       RB-InformationAffectedList OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo            UL-CommonTransChInfo-r4  OPTIONAL,
    ul-deletedTransChInfoList       UL-DeletedTransChInfoList OPTIONAL,
    ul-AddReconfTransChInfoList     UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo         CHOICE {
        fdd                         SEQUENCE {
            cpch-SetID                CPCH-SetID           OPTIONAL,
            addReconfTransChDRAC-Info   DRAC-StaticInformationList OPTIONAL
        },
        tdd                         NULL
    }
    dl-CommonTransChInfo            DL-CommonTransChInfo-r4  OPTIONAL,
    dl-DeletedTransChInfoList       DL-DeletedTransChInfoList     OPTIONAL,
    dl-AddReconfTransChInfoList     DL-AddReconfTransChInfo2List  OPTIONAL,
-- Physical channel IEs
    frequencyInfo                  FrequencyInfo             OPTIONAL,
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power        OPTIONAL,
    ul-ChannelRequirement          UL-ChannelRequirement-r4    OPTIONAL,
    modeSpecificPhysChInfo         CHOICE {

```

```

        fdd                               SEQUENCE {
          dl-PDSCH-Information           DL-PDSCH-Information      OPTIONAL
        },
        tdd                               NULL
      },
      dl-CommonInformation             DL-CommonInformation-r4    OPTIONAL,
      dl-InformationPerRL-List       DL-InformationPerRL-List-r4  OPTIONAL
}

RadioBearerReconfiguration-r5-IEs ::= SEQUENCE {
  -- User equipment IEs
  integrityProtectionModeInfo   IntegrityProtectionModeInfo  OPTIONAL,
  cipheringModeInfo              CipheringModeInfo         OPTIONAL,
  activationTime                 ActivationTime            OPTIONAL,
  new-U-RNTI                     U-RNTI                  OPTIONAL,
  new-C-RNTI                     C-RNTI                  OPTIONAL,
  new-DSCH-RNTI                  DSCH-RNTI               OPTIONAL,
  new-H-RNTI                     H-RNTI                  OPTIONAL,
  rrc-StateIndicator              RRC-StateIndicator        OPTIONAL,
  utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
  -- Core network IEs
  cn-InformationInfo             CN-InformationInfo      OPTIONAL,
  -- UTRAN mobility IEs
  ura-Identity                   URA-Identity            OPTIONAL,
  -- Radio bearer IEs
  rab-InformationReconfigList   RAB-InformationReconfigList OPTIONAL,
  rb-InformationReconfigList     RB-InformationReconfigList-r5 OPTIONAL,
  rb-InformationAffectedList     RB-InformationAffectedList-r5 OPTIONAL,
  rb-PDCPContextRelocationList  RB-PDCPContextRelocationList OPTIONAL,
  -- Transport channel IEs
  ul-CommonTransChInfo           UL-CommonTransChInfo-r4  OPTIONAL,
  ul-deletedTransChInfoList      UL-DeletedTransChInfoList OPTIONAL,
  ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList OPTIONAL,
  modeSpecificTransChInfo        CHOICE {
    fdd                               SEQUENCE {
      cpch-SetID                    CPCH-SetID            OPTIONAL,
      addReconfTransChDRAC-Info     DRAC-StaticInformationList OPTIONAL
    },
    tdd                               NULL
  }
  dl-CommonTransChInfo           DL-CommonTransChInfo-r4  OPTIONAL,
  dl-DeletedTransChInfoList      DL-DeletedTransChInfoList OPTIONAL,
  dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList OPTIONAL,
  -- Physical channel IEs
  frequencyInfo                  FrequencyInfo          OPTIONAL,
  maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power    OPTIONAL,
  ul-ChannelRequirement          UL-ChannelRequirement-r5  OPTIONAL,
  modeSpecificPhysChInfo         CHOICE {
    fdd                               SEQUENCE {
      dl-PDSCH-Information           DL-PDSCH-Information      OPTIONAL
    },
    tdd                               NULL
  },
  dl-HSPDSCH-Information         DL-HSPDSCH-Information    OPTIONAL,
  dl-CommonInformation            DL-CommonInformation-r4  OPTIONAL,
  dl-InformationPerRL-List       DL-InformationPerRL-List-r5  OPTIONAL
}

-- ****
-- 
-- RADIO BEARER RECONFIGURATION COMPLETE
-- 
-- ****

RadioBearerReconfigurationComplete ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier      RRC-TransactionIdentifier, OPTIONAL,
  ul-IntegProtActivationInfo     IntegrityProtActivationInfo OPTIONAL,
  -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
  ul-TimingAdvance               UL-TimingAdvance          OPTIONAL,
  -- Radio bearer IEs
  count-C-ActivationTime         ActivationTime          OPTIONAL,
  rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList OPTIONAL,
  ul-CounterSynchronisationInfo  UL-CounterSynchronisationInfo OPTIONAL,
  -- Extension mechanism for non-release99 information
  nonCriticalExtensions          SEQUENCE {} OPTIONAL
}

```

```

-- ****
-- RADIO BEARER RECONFIGURATION FAILURE
-- ****

RadioBearerReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Radio bearer IEs
    potentiallySuccessfulBearerList RB-IdentityList
                                    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {} OPTIONAL
}

-- ****
-- RADIO BEARER RELEASE
-- ****

RadioBearerRelease ::= CHOICE {
    r3                         SEQUENCE {
        radioBearerRelease-r3           RadioBearerRelease-r3-IEs,
        v3a0NonCriticalExtensions     SEQUENCE {
            radioBearerRelease-v3a0ext   RadioBearerRelease-v3a0ext,
            v4xyNonCriticalExtensions   SEQUENCE {
                radioBearerRelease-v4xyext RadioBearerRelease-v4xyext-IEs,
                nonCriticalExtensions     SEQUENCE {} OPTIONAL
            } OPTIONAL
        } OPTIONAL
    } OPTIONAL
},
later-than-r3          SEQUENCE {
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    criticalExtensions             CHOICE {
        r4                         SEQUENCE {
            radioBearerRelease-r4       RadioBearerRelease-r4-IEs,
            nonCriticalExtensions     SEQUENCE {} OPTIONAL
        },
        criticalExtensions           CHOICE {
            r5                         SEQUENCE {
                radioBearerRelease-r5       RadioBearerRelease-r5-IEs,
                nonCriticalExtensions     SEQUENCE {} OPTIONAL
            },
            criticalExtensions         SEQUENCE {}
        }
    }
}
}

RadioBearerRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo
                                    OPTIONAL,
    cipheringModeInfo              CipheringModeInfo
                                    OPTIONAL,
    activationTime                 ActivationTime
                                    OPTIONAL,
    new-U-RNTI                    U-RNTI
                                    OPTIONAL,
    new-C-RNTI                    C-RNTI
                                    OPTIONAL,
    rrc-StateIndicator             RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff    UTRAN-DRX-CycleLengthCoefficient
                                    OPTIONAL,
    -- Core network IEs
    cn-InformationInfo            CN-InformationInfo
                                    OPTIONAL,
    signallingConnectionRelIndication CN-DomainIdentity
                                    OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                  URA-Identity
                                    OPTIONAL,
    -- Radio bearer IEs
    rab-InformationReconfigList   RAB-InformationReconfigList
                                    OPTIONAL,
    rb-InformationReleaseList     RB-InformationReleaseList,
                                    OPTIONAL,
    rb-InformationAffectedList   RB-InformationAffectedList
                                    OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo
                                    OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo
                                    OPTIONAL,
    ul-deletedTransChInfoList    UL-DeletedTransChInfoList
                                    OPTIONAL,
    ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList
                                    OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                         SEQUENCE {
            cpch-SetID                CPCH-SetID
        }
    }
}

```

```

        addReconfTransChDRAC-Info      DRAC-StaticInformationList  OPTIONAL
    },
    tdd                                NULL
}
dl-CommonTransChInfo      DL-CommonTransChInfo      OPTIONAL,
dl-DeletedTransChInfoList  DL-DeletedTransChInfoList  OPTIONAL,
dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List OPTIONAL,
-- Physical channel IEs
frequencyInfo          FrequencyInfo          OPTIONAL,
maxAllowedUL-TX-Power  MaxAllowedUL-TX-Power  OPTIONAL,
ul-ChannelRequirement  UL-ChannelRequirement  OPTIONAL,
modeSpecificPhysChInfo CHOICE {
    fdd      SEQUENCE {
        dl-PDSCH-Information
    },
    tdd      NULL
},
dl-CommonInformation      DL-CommonInformation  OPTIONAL,
dl-InformationPerRL-List  DL-InformationPerRL-List  OPTIONAL
}

RadioBearerRelease-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI           DSCH-RNTI           OPTIONAL
}

RadioBearerRelease-v4xyext-IEs ::= SEQUENCE {
-- Physical channel IEs
-- IE ssdt-UL extends SSDT-Information, which is included in
-- DL-CommonInformation. FDD only.
ssdt-UL                  SSDT-UL-r4           OPTIONAL,
-- The order of the RLs in IE cell-id-PerRL-List is the same as
-- in IE DL-InformationPerRL-List included in this message
cell-id-PerRL-List       CellIdentity-PerRL-List  OPTIONAL
}

RadioBearerRelease-r4-IEs ::= SEQUENCE {
-- User equipment IEs
integrityProtectionModeInfo IntegrityProtectionModeInfo  OPTIONAL,
cipheringModeInfo           CipheringModeInfo      OPTIONAL,
activationTime              ActivationTime         OPTIONAL,
new-U-RNTI                 U-RNTI                OPTIONAL,
new-C-RNTI                 C-RNTI                OPTIONAL,
new-DSCH-RNTI              DSCH-RNTI             OPTIONAL,
rrc-StateIndicator          RRC-StateIndicator,   OPTIONAL,
utran-DRX-CycleLengthCoeff UTRAN-DRX-CycleLengthCoefficient  OPTIONAL,
-- Core network IEs
cn-InformationInfo          CN-InformationInfo  OPTIONAL,
signallingConnectionRelIndication  CN-DomainIdentity  OPTIONAL,
-- UTRAN mobility IEs
ura-Identity               URA-Identity         OPTIONAL,
-- Radio bearer IEs
rab-InformationReconfigList RAB-InformationReconfigList  OPTIONAL,
rb-InformationReleaseList   RB-InformationReleaseList  OPTIONAL,
rb-InformationAffectedList  RB-InformationAffectedList  OPTIONAL,
dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo  OPTIONAL,
-- Transport channel IEs
ul-CommonTransChInfo        UL-CommonTransChInfo-r4  OPTIONAL,
ul-deletedTransChInfoList   UL-DeletedTransChInfoList  OPTIONAL,
ul-AddReconfTransChInfoList UL-AddReconfTransChInfoList  OPTIONAL,
modeSpecificTransChInfo CHOICE {
    fdd      SEQUENCE {
        cpch-SetID      CPCH-SetID      OPTIONAL,
        addReconfTransChDRAC-Info DRAC-StaticInformationList  OPTIONAL
    },
    tdd      NULL
},
dl-CommonTransChInfo        DL-CommonTransChInfo-r4  OPTIONAL,
dl-DeletedTransChInfoList   DL-DeletedTransChInfoList  OPTIONAL,
dl-AddReconfTransChInfoList DL-AddReconfTransChInfo2List OPTIONAL,
-- Physical channel IEs
frequencyInfo          FrequencyInfo          OPTIONAL,
maxAllowedUL-TX-Power  MaxAllowedUL-TX-Power  OPTIONAL,
ul-ChannelRequirement  UL-ChannelRequirement-r4  OPTIONAL,
modeSpecificPhysChInfo CHOICE {
    fdd      SEQUENCE {
        dl-PDSCH-Information
    },
    tdd      NULL
}
}

```

```

        },
        dl-CommonInformation          DL-CommonInformation-r4           OPTIONAL,
        dl-InformationPerRL-List     DL-InformationPerRL-List-r4        OPTIONAL
    }

RadioBearerRelease-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo   IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo             CipheringModeInfo            OPTIONAL,
    activationTime                ActivationTime                 OPTIONAL,
    new-U-RNTI                   U-RNTI                         OPTIONAL,
    new-C-RNTI                   C-RNTI                         OPTIONAL,
    new-DSCH-RNTI                DSCH-RNTI                     OPTIONAL,
    new-H-RNTI                   H-RNTI                         OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator           OPTIONAL,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo           CN-InformationInfo          OPTIONAL,
    signallingConnectionRelIndication CN-DomainIdentity    OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity                  OPTIONAL,
    -- Radio bearer IEs
    rab-InformationReconfigList  RAB-InformationReconfigList    OPTIONAL,
    rb-InformationReleaseList    RB-InformationReleaseList   OPTIONAL,
    rb-InformationAffectedList   RB-InformationAffectedList-r5  OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo-r5 OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo-r4       OPTIONAL,
    ul-deletedTransChInfoList    UL-DeletedTransChInfoList    OPTIONAL,
    ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList   OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                      SEQUENCE {
            cpch-SetID              CPCH-SetID                  OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                      NULL
    }
    dl-CommonTransChInfo          DL-CommonTransChInfo-r4           OPTIONAL,
    dl-DeletedTransChInfoList    DL-DeletedTransChInfoList-r5    OPTIONAL,
    dl-AddReconfTransChInfoList  DL-AddReconfTransChInfoList-r5  OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                FrequencyInfo                 OPTIONAL,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power       OPTIONAL,
    ul-ChannelRequirement        UL-ChannelRequirement-r5    OPTIONAL,
    modeSpecificPhysChInfo      CHOICE {
        fdd                      SEQUENCE {
            dl-PDSCH-Information DL-PDSCH-Information        OPTIONAL
        },
        tdd                      NULL
    }
    dl-HSPDSCH-Information       DL-HSPDSCH-Information        OPTIONAL,
    dl-CommonInformation         DL-CommonInformation-r4        OPTIONAL,
    dl-InformationPerRL-List     DL-InformationPerRL-List-r5    OPTIONAL
}

-- *****
-- 
-- RADIO BEARER RELEASE COMPLETE
-- 
-- *****

RadioBearerReleaseComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo   IntegrityProtActivationInfo   OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance             UL-TimingAdvance               OPTIONAL,
    -- Radio bearer IEs
    count-C-ActivationTime       ActivationTime               OPTIONAL,
    rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList    OPTIONAL,
    ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}                 OPTIONAL
}
-- *****
-- 
```

```

-- RADIO BEARER RELEASE FAILURE
--
-- ****
RadioBearerReleaseFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Radio bearer IEs
    potentiallySuccessfulBearerList RB-IdentityList
                                    OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}     OPTIONAL
}
}

-- ****
-- RADIO BEARER SETUP
--
-- ****

RadioBearerSetup ::= CHOICE {
    r3                               SEQUENCE {
        radioBearerSetup-r3           RadioBearerSetup-r3-IEs,
        v3a0NonCriticalExtensions    SEQUENCE {
            radioBearerSetup-v3a0ext   RadioBearerSetup-v3a0ext,
            v4xyNonCriticalExtensions SEQUENCE {
                radioBearerSetup-v4xyext RadioBearerSetup-v4xyext-IEs,
                nonCriticalExtensions   SEQUENCE {} OPTIONAL
            } OPTIONAL
        } OPTIONAL
    } OPTIONAL
},
later-than-r3                      SEQUENCE {
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    criticalExtensions             CHOICE {
        r4                           SEQUENCE {
            radioBearerSetup-r4       RadioBearerSetup-r4-IEs,
            nonCriticalExtensions   SEQUENCE {} OPTIONAL
        },
        criticalExtensions          CHOICE {
            r5                           SEQUENCE {
                radioBearerSetup-r5       RadioBearerSetup-r5-IEs,
                nonCriticalExtensions   SEQUENCE {} OPTIONAL
            },
            criticalExtensions        SEQUENCE {}
        }
    }
}
}

RadioBearerSetup-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo
                                    OPTIONAL,
    cipheringModeInfo             CipheringModeInfo
                                    OPTIONAL,
    activationTime                 ActivationTime
                                    OPTIONAL,
    new-U-RNTI                    U-RNTI
                                    OPTIONAL,
    new-C-RNTI                    C-RNTI
                                    OPTIONAL,
    rrc-StateIndicator             RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient
                                    OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                  URA-Identity
                                    OPTIONAL,
    -- Core network IEs
    cn-InformationInfo            CN-InformationInfo
                                    OPTIONAL,
    -- Radio bearer IEs
    srb-InformationSetupList      SRB-InformationSetupList
                                    OPTIONAL,
    rab-InformationSetupList      RAB-InformationSetupList
                                    OPTIONAL,
    rb-InformationAffectedList   RB-InformationAffectedList
                                    OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo
                                    OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo
                                    OPTIONAL,
    ul-deletedTransChInfoList    UL-DeletedTransChInfoList
                                    OPTIONAL,
    ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList
                                    OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                           SEQUENCE {
            cpch-SetID                CPCH-SetID
            addReconfTransChDRAC-Info DRAC-StaticInformationList
        },
        tdd                           NULL
    }
}

```

```

        }
        dl-CommonTransChInfo          DL-CommonTransChInfo          OPTIONAL,
        dl-DeletedTransChInfoList    DL-DeletedTransChInfoList    OPTIONAL,
        dl-AddReconfTransChInfoList  DL-AddReconfTransChInfoList  OPTIONAL,
-- Physical channel IEs
        frequencyInfo                FrequencyInfo                OPTIONAL,
        maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power       OPTIONAL,
        ul-ChannelRequirement       UL-ChannelRequirement       OPTIONAL,
        modeSpecificPhysChInfo      CHOICE {
            fdd                      SEQUENCE {
                dl-PDSCH-Information  DL-PDSCH-Information
            },
            tdd                      NULL
        },
        dl-CommonInformation         DL-CommonInformation         OPTIONAL,
        dl-InformationPerRL-List    DL-InformationPerRL-List    OPTIONAL
    }

RadioBearerSetup-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI              DSCH-RNTI                  OPTIONAL
}

RadioBearerSetup-v4xyext-IEs ::= SEQUENCE {
-- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                     SSDT-UL-r4                OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List           CellIdentity-PerRL-List   OPTIONAL
}

RadioBearerSetup-r4-IEs ::= SEQUENCE {
-- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo            CipheringModeInfo          OPTIONAL,
    activationTime               ActivationTime             OPTIONAL,
    new-U-RNTI                  U-RNTI                    OPTIONAL,
    new-C-RNTI                  C-RNTI                    OPTIONAL,
    new-DSCH-RNTI               DSCH-RNTI                 OPTIONAL,
    rrc-StateIndicator           RRC-StateIndicator        OPTIONAL,
    utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
-- UTRAN mobility IEs
    ura-Identity                URA-Identity               OPTIONAL,
-- Core network IEs
    cn-InformationInfo          CN-InformationInfo        OPTIONAL,
-- Radio bearer IEs
    srb-InformationSetupList    SRB-InformationSetupList  OPTIONAL,
    rab-InformationSetupList    RAB-InformationSetupList-r4 OPTIONAL,
    rb-InformationAffectedList  RB-InformationAffectedList OPTIONAL,
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
-- Transport channel IEs
    ul-CommonTransChInfo         UL-CommonTransChInfo-r4  OPTIONAL,
    ul-deletedTransChInfoList   UL-DeletedTransChInfoList  OPTIONAL,
    ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo      CHOICE {
        fdd                      SEQUENCE {
            cpch-SetID            CPCH-SetID               OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                      NULL
    },
    dl-CommonTransChInfo         DL-CommonTransChInfo-r4  OPTIONAL,
    dl-DeletedTransChInfoList   DL-DeletedTransChInfoList  OPTIONAL,
    dl-AddReconfTransChInfoList  DL-AddReconfTransChInfoList-r4 OPTIONAL,
-- Physical channel IEs
    frequencyInfo                FrequencyInfo                OPTIONAL,
    maxAllowedUL-TX-Power       MaxAllowedUL-TX-Power       OPTIONAL,
    ul-ChannelRequirement       UL-ChannelRequirement-r4  OPTIONAL,
    modeSpecificPhysChInfo      CHOICE {
        fdd                      SEQUENCE {
            dl-PDSCH-Information  DL-PDSCH-Information
        },
        tdd                      NULL
    },
    dl-CommonInformation         DL-CommonInformation-r4  OPTIONAL,
    dl-InformationPerRL-List    DL-InformationPerRL-List-r4  OPTIONAL
}

```

```

RadioBearerSetup-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo      IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo                CipheringModeInfo             OPTIONAL,
    activationTime                   ActivationTime                 OPTIONAL,
    new-U-RNTI                      U-RNTI                         OPTIONAL,
    new-C-RNTI                      C-RNTI                         OPTIONAL,
    new-DSCH-RNTI                   DSCH-RNTI                     OPTIONAL,
    new-H-RNTI                      H-RNTI                         OPTIONAL,
    rrc-StateIndicator               RRC-StateIndicator            OPTIONAL,
    utran-DRX-CycleLengthCoeff     UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                    URA-Identity                  OPTIONAL,
    -- Core network IEs
    cn-InformationInfo              CN-InformationInfo           OPTIONAL,
    -- Radio bearer IEs
    srb-InformationSetupList        SRB-InformationSetupList      OPTIONAL,
    rab-InformationSetupList        RAB-InformationSetupList-r4   OPTIONAL,
    rb-InformationAffectedList      RB-InformationAffectedList-r5  OPTIONAL,
    dl-CounterSynchronisationInfo  DL-CounterSynchronisationInfo-r5 OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo           UL-CommonTransChInfo-r4       OPTIONAL,
    ul-deletedTransChInfoList      UL-DeletedTransChInfoList      OPTIONAL,
    ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList      OPTIONAL,
    modeSpecificTransChInfo        CHOICE {
        fdd                           SEQUENCE {
            cpch-SetID                 CPCH-SetID                  OPTIONAL,
            addReconfTransChDRAC-Info  DRAC-StaticInformationList    OPTIONAL
        },
        tdd                           NULL                         OPTIONAL
    }
    dl-CommonTransChInfo           DL-CommonTransChInfo-r4       OPTIONAL,
    dl-DeletedTransChInfoList      DL-DeletedTransChInfoList-r5   OPTIONAL,
    dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList-r5  OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                  FrequencyInfo                OPTIONAL,
    maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power         OPTIONAL,
    ul-ChannelRequirement          UL-ChannelRequirement-r5      OPTIONAL,
    modeSpecificPhysChInfo        CHOICE {
        fdd                           SEQUENCE {
            dl-PDSCH-Information      DL-PDSCH-Information        OPTIONAL
        },
        tdd                           NULL                         OPTIONAL
    },
    dl-HSPDSCH-Information         DL-HSPDSCH-Information        OPTIONAL,
    dl-CommonInformation           DL-CommonInformation-r4      OPTIONAL,
    dl-InformationPerRL-List       DL-InformationPerRL-List-r5  OPTIONAL
}

-- *****
-- 
-- RADIO BEARER SETUP COMPLETE
-- 
-- *****

RadioBearerSetupComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo    IntegrityProtActivationInfo   OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance              UL-TimingAdvance             OPTIONAL,
    start-Value                   START-Value                 OPTIONAL,
    -- Radio bearer IEs
    count-C-ActivationTime         ActivationTime              OPTIONAL,
    rb-UL-CiphActivationTimeInfo  RB-ActivationTimeInfoList   OPTIONAL,
    ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo OPTIONAL,
    -- Extension mechanism for non-release99 information
    nonCriticalExtensions         SEQUENCE {}                 OPTIONAL
}

-- *****
-- 
-- RADIO BEARER SETUP FAILURE
-- 
-- *****

RadioBearerSetupFailure ::= SEQUENCE {
}

```

```

-- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
-- Radio bearer IEs
    potentiallySuccessfulBearerList RB-IdentityList
                                         OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}   OPTIONAL
}

-- ****
-- 
-- RRC CONNECTION REJECT
-- 
-- ****

RRCConnectionReject ::= CHOICE {
    r3
        rrcConnectionReject-r3
        nonCriticalExtensions
    },
    later-than-r3
        initialUE-Identity
        rrc-TransactionIdentifier
        criticalExtensions
}
}

RRCConnectionReject-r3-IES ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity, InitialUE-Identity,
    rrc-TransactionIdentifier, RRC-TransactionIdentifier,
    rejectionCause, RejectionCause,
    waitTime, WaitTime,
    redirectionInfo, RedirectionInfo
                                         OPTIONAL
}

-- ****
-- 
-- RRC CONNECTION RELEASE
-- 
-- ****

RRCConnectionRelease ::= CHOICE {
    r3
        rrcConnectionRelease-r3
        nonCriticalExtensions
    },
    later-than-r3
        rrc-TransactionIdentifier
        criticalExtensions
        r4
            rrcConnectionRelease-r4
            nonCriticalExtensions
        },
        criticalExtensions
}
}

RRCConnectionRelease-r3-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- n-308 is conditional on the UE state
    n-308                          N-308
                                         OPTIONAL,
    releaseCause                   ReleaseCause,
    rplmn-information             Rplmn-Information
                                         OPTIONAL
}

RRCConnectionRelease-r4-IES ::= SEQUENCE {
    -- User equipment IEs
    -- n-308 is conditional on the UE state.
    n-308                          N-308
                                         OPTIONAL,
    releaseCause                   ReleaseCause,
    rplmn-information             Rplmn-Information-r4
                                         OPTIONAL
}

RRCConnectionRelease-r5-IES ::= SEQUENCE {
}

```

```

-- User equipment IEs
-- n-308 is conditional on the UE state.
n-308 N-308 OPTIONAL,
releaseCause ReleaseCause,
rplmn-information Rplmn-Information-r4 OPTIONAL
}

-- ****
-- RRC CONNECTION RELEASE for CCCH
-- ****

RRCConnectionRelease-CCCH ::= CHOICE {
    r3           SEQUENCE {
        rrcConnectionRelease-CCCH-r3   RRCConnectionRelease-CCCH-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    later-than-r3      SEQUENCE {
        u-RNTI                  U-RNTI,
        rrc-TransactionIdentifier RRC-TransactionIdentifier,
        criticalExtensions       CHOICE {
            r4           SEQUENCE {
                rrcConnectionRelease-CCCH-r4   RRCConnectionRelease-CCCH-r4-IEs,
                nonCriticalExtensions        SEQUENCE {} OPTIONAL
            },
            criticalExtensions          CHOICE {
                r5           SEQUENCE {
                    rrcConnectionRelease-CCCH-r5   RRCConnectionRelease-CCCH-r5-IEs,
                    nonCriticalExtensions        SEQUENCE {} OPTIONAL
                },
                criticalExtensions          SEQUENCE {}
            }
        }
    }
}

RRCConnectionRelease-CCCH-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI                  U-RNTI,
    -- The rest of the message is identical to the one sent on DCCH.
    rrcConnectionRelease     RRCConnectionRelease-r3-IEs
}

RRCConnectionRelease-CCCH-r4-IEs ::= SEQUENCE {
    -- The rest of the message is identical to the one sent on DCCH.
    rrcConnectionRelease     RRCConnectionRelease-r4-IEs
}

RRCConnectionRelease-CCCH-r5-IEs ::= SEQUENCE {
    --
    -- TABULAR:
    -- CHOICE IdentityType (U-RNTI, GroupIdentity) is replaced with
    -- an optional IE GroupIdentity, since the U-RNTI is mandatory in ASN.1.
    -- In case CHOICE IdentityType is equal to GroupIdentity
    -- the value of the U-RNTI shall be ignored by a UE
    -- complying with this version of the message.
    --
    -- User equipment IEs
    groupIdentity           SEQUENCE ( SIZE (1 .. maxURNTI-Group) ) OF
                             GroupReleaseInformation OPTIONAL,
    -- The rest of the message is identical to the one sent on DCCH.
    rrcConnectionRelease     RRCConnectionRelease-r5-IEs
}

-- ****
-- RRC CONNECTION RELEASE COMPLETE
-- ****

RRCConnectionReleaseComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier RRC-TransactionIdentifier,
    errorIndication           FailureCauseWithProtErr OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions     SEQUENCE {} OPTIONAL
}

```

```

-- ****
-- RRC CONNECTION REQUEST
-- ****

RRCConnectionRequest ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity           InitialUE-Identity,
    establishmentCause            EstablishmentCause,
    -- protocolErrorIndictator is MD, but for compactness reasons no default value
    -- has been assigned to it.
    protocolErrorIndicator        ProtocolErrorIndicator,
    -- Measurement IEs
    measuredResultsOnRACH         MeasuredResultsOnRACH           OPTIONAL,
    v4xyNonCriticalExtensions     SEQUENCE {
        rrcConnectionRequest-v4xyext   RRCConnectionRequest-v4xyext-IEs,
        -- Reserved for future non critical extension
        nonCriticalExtensions        SEQUENCE {}      OPTIONAL
    } OPTIONAL
}

RRCConnectionRequest-v4xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v4xyext   UE-RadioAccessCapability-v4xyext
}

-- ****
-- RRC CONNECTION SETUP
-- ****

RRCConnectionSetup ::= CHOICE {
    r3                         SEQUENCE {
        rrcConnectionSetup-r3       RRCConnectionSetup-r3-IEs,
        v4xyNonCriticalExtensions SEQUENCE {
            rrcConnectionSetup-v4xyext   RRCConnectionSetup-v4xyext-IEs,
            -- Extension mechanism for non- release99 information
            nonCriticalExtensions     SEQUENCE {}      OPTIONAL
        } OPTIONAL
    },
    later-than-r3                SEQUENCE {
        initialUE-Identity          InitialUE-Identity,
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions          CHOICE {
            r4                     SEQUENCE {
                rrcConnectionSetup-r4   RRCConnectionSetup-r4-IEs,
                nonCriticalExtensions SEQUENCE {}      OPTIONAL
            },
            criticalExtensions       SEQUENCE {}
        }
    }
}

RRCConnectionSetup-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall not be performed on this message.
    -- User equipment IEs
    initialUE-Identity           InitialUE-Identity,
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    activationTime                ActivationTime           OPTIONAL,
    new-U-RNTI                   U-RNTI,
    new-c-RNTI                   C-RNTI                  OPTIONAL,
    rrc-StateIndicator           RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient,
    -- TABULAR: If capacityUpdateRequest is not present, the default value
    -- defined in 10.3.3.2 shall be used.
    capabilityUpdateRequirement  CapabilityUpdateRequirement OPTIONAL,
    -- Radio bearer IEs
    srb-InformationSetupList     SRB-InformationSetupList2,
    -- Transport channel IEs
    ul-CommonTransChInfo         UL-CommonTransChInfo           OPTIONAL,
    -- NOTE: ul-AddReconfTransChInfoList should be optional in later versions of
    -- this message
    ul-AddReconfTransChInfoList  UL-AddReconfTransChInfoList,
    dl-CommonTransChInfo         DL-CommonTransChInfo           OPTIONAL,
}

```

```

-- NOTE: dl-AddReconfTransChInfoList should be optional in later versions
-- of this message
dl-AddReconfTransChInfoList      DL-AddReconfTransChInfoList,
-- Physical channel IEs
frequencyInfo                  FrequencyInfo          OPTIONAL,
maxAllowedUL-TX-Power          MaxAllowedUL-TX-Power    OPTIONAL,
ul-ChannelRequirement          UL-ChannelRequirement    OPTIONAL,
dl-CommonInformation           DL-CommonInformation    OPTIONAL,
dl-InformationPerRL-List       DL-InformationPerRL-List  OPTIONAL
}

RRCConnectionSetup-v4xyext-IEs ::= SEQUENCE {
  capabilityUpdateRequirement-r4-ext  CapabilityUpdateRequirement-r4-ext  OPTIONAL,
-- Physical channel IEs
  -- ssdt-UL extends SSDT-Information, which is included in
  -- DL-CommonInformation. FDD only.
  ssdt-UL                      SSDT-UL-r4            OPTIONAL,
  -- The order of the RLs in IE cell-id-PerRL-List is the same as
  -- in IE DL-InformationPerRL-List included in this message
  cell-id-PerRL-List             CellIdentity-PerRL-List  OPTIONAL
}

RRCConnectionSetup-r4-IEs ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
  activationTime                ActivationTime        OPTIONAL,
  new-U-RNTI                   U-RNTI,               OPTIONAL,
  new-c-RNTI                   C-RNTI,               OPTIONAL,
  rrc-StateIndicator            RRC-StateIndicator,   ,
  utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient,
-- TABULAR: If capabilityUpdateRequirements is not present, the default value
-- defined in 10.3.3.2 shall be used.
  capabilityUpdateRequirement   CapabilityUpdateRequirement-r4  OPTIONAL,
-- Radio bearer IEs
  srb-InformationSetupList     SRB-InformationSetupList2,
-- Transport channel IEs
  ul-CommonTransChInfo          UL-CommonTransChInfo    OPTIONAL,
  ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList  OPTIONAL,
  dl-CommonTransChInfo          DL-CommonTransChInfo-r4  OPTIONAL,
  dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList  OPTIONAL,
-- Physical channel IEs
  frequencyInfo                FrequencyInfo          OPTIONAL,
  maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power    OPTIONAL,
  ul-ChannelRequirement         UL-ChannelRequirement-r4  OPTIONAL,
  dl-CommonInformation          DL-CommonInformation-r4  OPTIONAL,
  dl-InformationPerRL-List     DL-InformationPerRL-List-r4  OPTIONAL
}

-- ****
-- 
-- RRC CONNECTION SETUP COMPLETE
-- 
-- ****

RRCConnectionSetupComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall not be performed on this message.
-- User equipment IEs
  rrc-TransactionIdentifier     RRC-TransactionIdentifier,
  startList                     STARTList,
  ue-RadioAccessCapability     UE-RadioAccessCapability  OPTIONAL,
-- Other IEs
  ue-RATSpecificCapability     InterRAT-UE-RadioAccessCapabilityList  OPTIONAL,
-- Non critical extensions
  v370NonCriticalExtensions    SEQUENCE {
    rrcConnectionSetupComplete-v370ext  RRCConnectionSetupComplete-v370ext,
    v380NonCriticalExtensions         SEQUENCE {
      rrcConnectionSetupComplete-v380ext  RRCConnectionSetupComplete-v380ext-IEs,
      -- Reserved for future non critical extension
      v3a0NonCriticalExtensions        SEQUENCE {
        rrcConnectionSetupComplete-v3a0ext  RRCConnectionSetupComplete-v3a0ext,
        v4xyNonCriticalExtensions       SEQUENCE {
          rrcConnectionSetupComplete-v4xyext  RRCConnectionSetupComplete-v4xyext-IEs,
          nonCriticalExtensions          SEQUENCE {}  OPTIONAL
        }
      }
    }
  }
}

```

```

RRCConnectionSetupComplete-v370ext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v370ext     UE-RadioAccessCapability-v370ext     OPTIONAL
}

RRCConnectionSetupComplete-v380ext-IEs ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v380ext     UE-RadioAccessCapability-v380ext     OPTIONAL,
    dl-PhysChCapabilityFDD-v380ext      DL-PhysChCapabilityFDD-v380ext
}

RRCConnectionSetupComplete-v3a0ext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v3a0ext     UE-RadioAccessCapability-v3a0ext     OPTIONAL
}

RRCConnectionSetupComplete-v4xyext-IEs ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-r4-ext     UE-RadioAccessCapability-r4-ext     OPTIONAL
}

-- *****
-- RRC FAILURE INFO
-- *****

RRC-FailureInfo ::= CHOICE {
    r3                               SEQUENCE {
        rRC-FailureInfo-r3            RRC-FailureInfo-r3-IEs,
        nonCriticalExtensions        SEQUENCE {} OPTIONAL
    },
    criticalExtensions                SEQUENCE {}
}

RRC-FailureInfo-r3-IEs ::= SEQUENCE {
    -- Non-RRC IEs
    failureCauseWithProtErr       FailureCauseWithProtErr
}

-- *****
-- RRC STATUS
-- *****

RRCStatus ::= SEQUENCE {
    -- Other IEs
    -- TABULAR: Identification of received message is nested in
    -- ProtocolErrorMoreInformation
    protocolErrorInformation        ProtocolErrorMoreInformation,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}     OPTIONAL
}

-- *****
-- SECURITY MODE COMMAND
-- *****

SecurityModeCommand ::= CHOICE {
    r3                               SEQUENCE {
        securityModeCommand-r3        SecurityModeCommand-r3-IEs,
        nonCriticalExtensions        SEQUENCE {}     OPTIONAL
    },
    later-than-r3                    SEQUENCE {
        rrc-TransactionIdentifier   RRC-TransactionIdentifier,
        criticalExtensions          SEQUENCE {}
    }
}

SecurityModeCommand-r3-IEs ::= SEQUENCE {
    -- TABULAR: Integrity protection shall always be performed on this message.
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    securityCapability             SecurityCapability,
    cipheringModeInfo              CipheringModeInfo
}

```

```

    integrityProtectionModeInfo      IntegrityProtectionModeInfo      OPTIONAL,
-- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity,
-- Other IEs
    ue-SystemSpecificSecurityCap  InterRAT-UE-SecurityCapList   OPTIONAL
}

-- ****
-- SECURITY MODE COMPLETE
-- ****

SecurityModeComplete ::= SEQUENCE {
-- TABULAR: Integrity protection shall always be performed on this message.

    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo     IntegrityProtActivationInfo   OPTIONAL,
-- Radio bearer IEs
    rb-UL-CiphActivationTimeInfo   RB-ActivationTimeInfoList    OPTIONAL,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
-- SECURITY MODE FAILURE
-- ****

SecurityModeFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
-- SIGNALLING CONNECTION RELEASE
-- ****

SignallingConnectionRelease ::= CHOICE {
    r3                         SEQUENCE {
        signallingConnectionRelease-r3  SignallingConnectionRelease-r3-IEs,
        nonCriticalExtensions          SEQUENCE {}      OPTIONAL
    },
    later-than-r3                SEQUENCE {
        rrc-TransactionIdentifier      RRC-TransactionIdentifier,
        criticalExtensions            SEQUENCE {}
    }
}

SignallingConnectionRelease-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    -- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity
}

-- ****
-- SIGNALLING CONNECTION RELEASE INDICATION
-- ****

SignallingConnectionReleaseIndication ::= SEQUENCE {
    -- Core network IEs
    cn-DomainIdentity              CN-DomainIdentity,
-- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

```

```

-- SYSTEM INFORMATION for BCH
--
-- ****
SystemInformation-BCH ::= SEQUENCE {
    -- Other information elements
    sfn-Prime                      SFN-Prime,
    payload                         CHOICE {
        noSegment                   NULL,
        firstSegment                FirstSegment,
        subsequentSegment           SubsequentSegment,
        lastSegmentShort            LastSegmentShort,
        lastAndFirst                 SEQUENCE {
            lastSegmentShort         LastSegmentShort,
            firstSegment              FirstSegmentShort
        },
        lastAndComplete               SEQUENCE {
            lastSegmentShort         LastSegmentShort,
            completeSIB-List          CompleteSIB-List
        },
        lastAndCompleteAndFirst      SEQUENCE {
            lastSegmentShort         LastSegmentShort,
            completeSIB-List          CompleteSIB-List,
            firstSegment              FirstSegmentShort
        },
        completeSIB-List             CompleteSIB-List,
        completeAndFirst              SEQUENCE {
            completeSIB-List          CompleteSIB-List,
            firstSegment              FirstSegmentShort
        },
        completeSIB                  CompleteSIB,
        lastSegment                  LastSegment,
        spare5                       NULL,
        spare4                       NULL,
        spare3                       NULL,
        spare2                       NULL,
        spare1                       NULL
    }
}
-- ****
-- SYSTEM INFORMATION for FACH
--
-- ****
SystemInformation-FACH ::= SEQUENCE {
    -- Other information elements
    payload                         CHOICE {
        noSegment                   NULL,
        firstSegment                FirstSegment,
        subsequentSegment           SubsequentSegment,
        lastSegmentShort            LastSegmentShort,
        lastAndFirst                 SEQUENCE {
            lastSegmentShort         LastSegmentShort,
            firstSegment              FirstSegmentShort
        },
        lastAndComplete               SEQUENCE {
            lastSegmentShort         LastSegmentShort,
            completeSIB-List          CompleteSIB-List
        },
        lastAndCompleteAndFirst      SEQUENCE {
            lastSegmentShort         LastSegmentShort,
            completeSIB-List          CompleteSIB-List,
            firstSegment              FirstSegmentShort
        },
        completeSIB-List             CompleteSIB-List,
        completeAndFirst              SEQUENCE {
            completeSIB-List          CompleteSIB-List,
            firstSegment              FirstSegmentShort
        },
        completeSIB                  CompleteSIB,
        lastSegment                  LastSegment,
        spare5                       NULL,
        spare4                       NULL,
        spare3                       NULL,
        spare2                       NULL,
        spare1                       NULL
    }
}

```

```

        }
    }

-- ****
-- First segment
--
-- ****

FirstSegment ::=           SEQUENCE {
    -- Other information elements
    sib-Type                  SIB-Type,
    seg-Count                 SegCount,
    sib-Data-fixed            SIB-Data-fixed
}

-- ****
-- First segment (short)
--
-- ****

FirstSegmentShort ::=        SEQUENCE {
    -- Other information elements
    sib-Type                  SIB-Type,
    seg-Count                 SegCount,
    sib-Data-variable         SIB-Data-variable
}

-- ****
-- Subsequent segment
--
-- ****

SubsequentSegment ::=       SEQUENCE {
    -- Other information elements
    sib-Type                  SIB-Type,
    segmentIndex               SegmentIndex,
    sib-Data-fixed             SIB-Data-fixed
}

-- ****
-- Last segment
--
-- ****

LastSegment ::=              SEQUENCE {
    -- Other information elements
    sib-Type                  SIB-Type,
    segmentIndex               SegmentIndex,
    -- For sib-Data-fixed, in case the SIB data is less than 222 bits, padding
    -- shall be used. The same padding bits shall be used as defined in clause 12.1
    sib-Data-fixed             SIB-Data-fixed
}

LastSegmentShort ::=         SEQUENCE {
    -- Other information elements
    sib-Type                  SIB-Type,
    segmentIndex               SegmentIndex,
    sib-Data-variable          SIB-Data-variable
}

-- ****
-- Complete SIB
--
-- ****

CompleteSIB-List ::=         SEQUENCE (SIZE (1..maxSIBperMsg)) OF
                             CompleteSIBshort

CompleteSIB ::=                SEQUENCE {
    -- Other information elements
    sib-Type                  SIB-Type,
    -- For sib-Data-fixed, in case the SIB data is less than 226 bits, padding
    -- shall be used. The same padding bits shall be used as defined in clause 12.1
    sib-Data-fixed             SIB-Data-fixed
}

```

```

        sib-Data-fixed           BIT STRING (SIZE (226))
    }

CompleteSIBshort ::=          SEQUENCE {
    -- Other information elements
    sib-Type                 SIB-Type,
    sib-Data-variable        SIB-Data-variable
}

-- ****
-- 
-- SYSTEM INFORMATION CHANGE INDICATION
-- 
-- ****

SystemInformationChangeIndication ::=   SEQUENCE {
    -- Other IEs
    bcch-ModificationInfo      BCCH-ModificationInfo,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions     SEQUENCE {} OPTIONAL
}

-- ****
-- 
-- TRANSPORT CHANNEL RECONFIGURATION
-- 
-- ****

TransportChannelReconfiguration ::= CHOICE {
    r3           SEQUENCE {
        transportChannelReconfiguration-r3
            TransportChannelReconfiguration-r3-IEs,
        v3a0NonCriticalExtensions   SEQUENCE {
            transportChannelReconfiguration-v3a0ext
                TransportChannelReconfiguration-v3a0ext,
            v4xyNonCriticalExtensions SEQUENCE {
                transportChannelReconfiguration-v4xyext
                    TransportChannelReconfiguration-v4xyext-IEs,
                nonCriticalExtensions    SEQUENCE {} OPTIONAL
            }                         OPTIONAL
        }                         OPTIONAL
    },
    later-than-r3             SEQUENCE {
        rrc-TransactionIdentifier RRC-TransactionIdentifier,
        criticalExtensions       CHOICE {
            r4           SEQUENCE {
                transportChannelReconfiguration-r4
                    TransportChannelReconfiguration-r4-IEs,
                nonCriticalExtensions SEQUENCE {} OPTIONAL
            },
            criticalExtensions      CHOICE {
                r5           SEQUENCE {
                    transportChannelReconfiguration-r5
                        TransportChannelReconfiguration-r5-IEs,
                nonCriticalExtensions SEQUENCE {} OPTIONAL
            },
            criticalExtensions      SEQUENCE {}
        }
    }
}

TransportChannelReconfiguration-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    integrityProtectionModeInfo   IntegrityProtectionModeInfo      OPTIONAL,
    cipheringModeInfo             CipheringModeInfo            OPTIONAL,
    activationTime                ActivationTime                  OPTIONAL,
    new-U-RNTI                   U-RNTI                      OPTIONAL,
    new-C-RNTI                   C-RNTI                      OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo           CN-InformationInfo          OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity                OPTIONAL,
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
}

```

```

-- Transport channel IEs
ul-CommonTransChInfo          UL-CommonTransChInfo           OPTIONAL,
ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList   OPTIONAL,
modeSpecificTransChInfo        CHOICE {
                                fdd {
                                    cpch-SetID      CPCH-SetID           OPTIONAL,
                                    addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
                                },
                                tdd {
                                    NULL
                                }
                            }
dl-CommonTransChInfo          DL-CommonTransChInfo           OPTIONAL,
dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList   OPTIONAL,
-- Physical channel IEs
frequencyInfo                  FrequencyInfo            OPTIONAL,
maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power    OPTIONAL,
ul-ChannelRequirement         UL-ChannelRequirement    OPTIONAL,
modeSpecificPhysChInfo        CHOICE {
                                fdd {
                                    dl-PDSCH-Information DL-PDSCH-Information    OPTIONAL
                                },
                                tdd {
                                    NULL
                                }
                            }
dl-CommonInformation          DL-CommonInformation     OPTIONAL,
dl-InformationPerRL-List      DL-InformationPerRL-List  OPTIONAL
}

TransportChannelReconfiguration-v3a0ext ::= SEQUENCE {
    new-DSCH-RNTI               DSCH-RNTI                OPTIONAL
}

TransportChannelReconfiguration-v4xyext-IEs ::= SEQUENCE {
    -- Physical channel IEs
    -- ssdt-UL extends SSDT-Information, which is included in
    -- DL-CommonInformation. FDD only.
    ssdt-UL                      SSDT-UL-r4              OPTIONAL,
    -- The order of the RLs in IE cell-id-PerRL-List is the same as
    -- in IE DL-InformationPerRL-List included in this message
    cell-id-PerRL-List            CellIdentity-PerRL-List OPTIONAL
}

TransportChannelReconfiguration-r4-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo IntegrityProtectionModeInfo OPTIONAL,
    cipheringModeInfo             CipheringModeInfo       OPTIONAL,
    activationTime                ActivationTime          OPTIONAL,
    new-U-RNTI                   U-RNTI                  OPTIONAL,
    new-C-RNTI                   C-RNTI                  OPTIONAL,
    new-DSCH-RNTI                DSCH-RNTI              OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator     OPTIONAL,
    utran-DRX-CycleLengthCoeff   UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo           CN-InformationInfo    OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity           OPTIONAL,
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo-r4  OPTIONAL,
    ul-AddReconfTransChInfoList    UL-AddReconfTransChInfoList-4 OPTIONAL,
    modeSpecificTransChInfo        CHOICE {
                                fdd {
                                    cpch-SetID      CPCH-SetID           OPTIONAL,
                                    addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
                                },
                                tdd {
                                    NULL
                                }
                            }
    dl-CommonTransChInfo          DL-CommonTransChInfo-r4  OPTIONAL,
    dl-AddReconfTransChInfoList    DL-AddReconfTransChInfoList-4 OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                  FrequencyInfo          OPTIONAL,
    maxAllowedUL-TX-Power         MaxAllowedUL-TX-Power    OPTIONAL,
    ul-ChannelRequirement         UL-ChannelRequirement-r4  OPTIONAL,
    modeSpecificPhysChInfo        CHOICE {
                                fdd {
                                    dl-PDSCH-Information DL-PDSCH-Information    OPTIONAL
                                },
                                tdd {
                                    NULL
                                }
                            }
}

```

```

        dl-CommonInformation          DL-CommonInformation-r4           OPTIONAL,
        dl-InformationPerRL-List     DL-InformationPerRL-List-r4      OPTIONAL
    }

TransportChannelReconfiguration-r5-IEs ::= SEQUENCE {
    -- User equipment IEs
    integrityProtectionModeInfo   IntegrityProtectionModeInfo   OPTIONAL,
    cipheringModeInfo             CipheringModeInfo          OPTIONAL,
    activationTime                ActivationTime              OPTIONAL,
    new-U-RNTI                   U-RNTI                      OPTIONAL,
    new-C-RNTI                   C-RNTI                      OPTIONAL,
    new-DSCH-RNTI                DSCH-RNTI                  OPTIONAL,
    new-H-RNTI                   H-RNTI                      OPTIONAL,
    rrc-StateIndicator            RRC-StateIndicator         OPTIONAL,
    utran-DRX-CycleLengthCoeff  UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- Core network IEs
    cn-InformationInfo           CN-InformationInfo        OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                 URA-Identity               OPTIONAL,
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo DL-CounterSynchronisationInfo-r5 OPTIONAL,
    -- Transport channel IEs
    ul-CommonTransChInfo          UL-CommonTransChInfo-r4    OPTIONAL,
    ul-AddReconfTransChInfoList   UL-AddReconfTransChInfoList OPTIONAL,
    modeSpecificTransChInfo       CHOICE {
        fdd                         SEQUENCE {
            cpch-SetID                CPCH-SetID                OPTIONAL,
            addReconfTransChDRAC-Info DRAC-StaticInformationList OPTIONAL
        },
        tdd                         NULL
    }
    dl-CommonTransChInfo          DL-CommonTransChInfo-r4    OPTIONAL,
    dl-AddReconfTransChInfoList   DL-AddReconfTransChInfoList OPTIONAL,
    -- Physical channel IEs
    frequencyInfo                FrequencyInfo              OPTIONAL,
    maxAllowedUL-TX-Power        MaxAllowedUL-TX-Power    OPTIONAL,
    ul-ChannelRequirement        UL-ChannelRequirement-r5  OPTIONAL,
    modeSpecificPhysChInfo       CHOICE {
        fdd                         SEQUENCE {
            dl-PDSCH-Information    DL-PDSCH-Information        OPTIONAL
        },
        tdd                         NULL
    },
    dl-HSPDSCH-Information        DL-HSPDSCH-Information      OPTIONAL,
    dl-CommonInformation          DL-CommonInformation-r4    OPTIONAL,
    dl-InformationPerRL-List     DL-InformationPerRL-List-r5  OPTIONAL
}

-- *****
-- 
-- TRANSPORT CHANNEL RECONFIGURATION COMPLETE
-- 
-- *****

TransportChannelReconfigurationComplete ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,   OPTIONAL,
    ul-IntegProtActivationInfo   IntegrityProtActivationInfo  OPTIONAL,
    -- TABULAR: UL-TimingAdvance is applicable for TDD mode only.
    ul-TimingAdvance              UL-TimingAdvance            OPTIONAL,
    -- Radio bearer IEs
    count-C-ActivationTime       ActivationTime             OPTIONAL,
    rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList    OPTIONAL,
    ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}                OPTIONAL
}

-- *****
-- 
-- TRANSPORT CHANNEL RECONFIGURATION FAILURE
-- 
-- *****

TransportChannelReconfigurationFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier     RRC-TransactionIdentifier,   OPTIONAL,
    failureCause                  FailureCauseWithProtErr,

```

```

-- Extension mechanism for non- release99 information
    nonCriticalExtensions           SEQUENCE {}      OPTIONAL
}

-- ****
--
-- TRANSPORT FORMAT COMBINATION CONTROL in AM or UM RLC mode
--
-- ****

TransportFormatCombinationControl ::= SEQUENCE {
    -- rrc-TransactionIdentifier is always included in this message
    rrc-TransactionIdentifier        RRC-TransactionIdentifier          OPTIONAL,
    modeSpecificInfo                 CHOICE {
        fdd                           NULL,
        tdd                           SEQUENCE {
            tfcs-ID                  TFCS-Identity     OPTIONAL
        }
    },
    dpch-TFCS-InUplink              TFC-Subset,
    activationTimeForTFCSSubset     ActivationTime                OPTIONAL,
    tfc-ControlDuration            TFC-ControlDuration         OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
--
-- TRANSPORT FORMAT COMBINATION CONTROL FAILURE
--
-- ****

TransportFormatCombinationControlFailure ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier        RRC-TransactionIdentifier,
    failureCause                    FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions          SEQUENCE {}      OPTIONAL
}

-- ****
--
-- UE CAPABILITY ENQUIRY
--
-- ****

UECapabilityEnquiry ::= CHOICE {
    r3                            SEQUENCE {
        ueCapabilityEnquiry-r3       UECapabilityEnquiry-r3-IEs,
        v4xyNonCriticalExtensions   SEQUENCE {
            ueCapabilityEnquiry-v4xyext UECapabilityEnquiry-v4xyext-IEs,
            nonCriticalExtensions     SEQUENCE {}          OPTIONAL
        }
    }      OPTIONAL
},
later-than-r3                   SEQUENCE {
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    criticalExtensions            SEQUENCE {}
}
}

UECapabilityEnquiry-r3-IEs ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    capabilityUpdateRequirement    CapabilityUpdateRequirement
}

UECapabilityEnquiry-v4xyext-IEs ::= SEQUENCE {
    capabilityUpdateRequirement-r4-ext CapabilityUpdateRequirement-r4-ext
}

-- ****
--
-- UE CAPABILITY INFORMATION
--
-- ****

UECapabilityInformation ::= SEQUENCE {
    -- User equipment IEs

```

```

rrc-TransactionIdentifier           RRC-TransactionIdentifier          OPTIONAL,
ue-RadioAccessCapability          UE-RadioAccessCapability          OPTIONAL,
-- Other IEs
ue-RATSpecificCapability         InterRAT-UE-RadioAccessCapabilityList
OPTIONAL,
v370NonCriticalExtensions        SEQUENCE {
    ueCapabilityInformation-v370ext UECapabilityInformation-v370ext,
v380NonCriticalExtensions        SEQUENCE {
    ueCapabilityInformation-v380ext UECapabilityInformation-v380ext-IES,
v3a0NonCriticalExtensions        SEQUENCE {
        ueCapabilityInformation-v3a0ext UECapabilityInformation-v3a0ext,
        -- Reserved for future non critical extension
v4xyNonCriticalExtensions        SEQUENCE {
        ueCapabilityInformation-v4xyext UECapabilityInformation-v4xyext,
v5xyNonCriticalExtensions        SEQUENCE {
        ueCapabilityInformation-v5xyext UECapabilityInformation-v5xyext,
        nonCriticalExtensions      SEQUENCE {} OPTIONAL
    }
}
OPTIONAL
}
OPTIONAL
}
OPTIONAL
}

UECapabilityInformation-v370ext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v370ext     UE-RadioAccessCapability-v370ext   OPTIONAL
}

UECapabilityInformation-v380ext-IES ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v380ext     UE-RadioAccessCapability-v380ext
OPTIONAL,
    dl-PhysChCapabilityFDD-v380ext      DL-PhysChCapabilityFDD-v380ext
}

UECapabilityInformation-v3a0ext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-v3a0ext     UE-RadioAccessCapability-v3a0ext   OPTIONAL
}

UECapabilityInformation-v4xyext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-r4-ext     UE-RadioAccessCapability-r4-ext   OPTIONAL,
    ue-RadioAccessCapability-v4xyext     UE-RadioAccessCapability-v4xyext
}

UECapabilityInformation-v5xyext ::= SEQUENCE {
    -- User equipment IEs
    ue-RadioAccessCapability-r5-ext     UE-RadioAccessCapability-r5-ext   OPTIONAL
}

-- *****
-- 
-- UE CAPABILITY INFORMATION CONFIRM
-- 
-- *****

UECapabilityInformationConfirm ::= CHOICE {
    r3
        SEQUENCE {
            ueCapabilityInformationConfirm-r3
                UECapabilityInformationConfirm-r3-IES,
            nonCriticalExtensions      SEQUENCE {} OPTIONAL
        },
    later-than-r3
        SEQUENCE {
            rrc-TransactionIdentifier   RRC-TransactionIdentifier,
            criticalExtensions        SEQUENCE {}
        }
}

UECapabilityInformationConfirm-r3-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier       RRC-TransactionIdentifier
}

-- *****
-- 
-- UPLINK DIRECT TRANSFER
-- 

```

```

-- ****
-- UplinkDirectTransfer ::= SEQUENCE {
  -- Core network IEs
    cn-DomainIdentity           CN-DomainIdentity,
    nas-Message                 NAS-Message,
  -- Measurement IEs
    measuredResultsOnRACH      MeasuredResultsOnRACH
                                OPTIONAL,
  -- Extension mechanism for non- release99 information
    nonCriticalExtensions      SEQUENCE {}     OPTIONAL
}

-- ****
-- UPLINK PHYSICAL CHANNEL CONTROL
-- ****

UplinkPhysicalChannelControl ::= CHOICE {
  r3          SEQUENCE {
    uplinkPhysicalChannelControl-r3 UplinkPhysicalChannelControl-r3-IEs,
    v4xyNonCriticalExtensions   SEQUENCE {
      uplinkPhysicalChannelControl-v4xyext UplinkPhysicalChannelControl-v4xyext-IEs,
      -- Extension mechanism for non- release4 information
      noncriticalExtensions        SEQUENCE {}     OPTIONAL
    } OPTIONAL
  },
  later-than-r3           SEQUENCE {
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
    criticalExtensions         CHOICE {
      r4          SEQUENCE {
        uplinkPhysicalChannelControl-r4 UplinkPhysicalChannelControl-r4-IEs,
        nonCriticalExtensions       SEQUENCE {} OPTIONAL
      },
      criticalExtensions        SEQUENCE {}
    }
  }
}

UplinkPhysicalChannelControl-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
    rrc-TransactionIdentifier   RRC-TransactionIdentifier,
  -- Physical channel IEs
    ccTrCH-PowerControlInfo    CCTrCH-PowerControlInfo
                                OPTIONAL,
    timingAdvance               UL-TimingAdvanceControl
                                OPTIONAL,
    alpha                      Alpha
                                OPTIONAL,
    specialBurstScheduling     SpecialBurstScheduling
                                OPTIONAL,
    prach-ConstantValue        ConstantValueTdd
                                OPTIONAL,
    pusch-ConstantValue        ConstantValueTdd
                                OPTIONAL
}

UplinkPhysicalChannelControl-v4xyext-IEs ::= SEQUENCE {
  -- In case of TDD, openLoopPowerControl-IPDL-TDD is included instead of IE
  -- up-IPDL-Parameters in up-OTDOA-AssistanceData
  openLoopPowerControl-IPDL-TDD OpenLoopPowerControl-IPDL-TDD-r4   OPTIONAL
}

UplinkPhysicalChannelControl-r4-IEs ::= SEQUENCE {
  -- Physical channel IEs
    ccTrCH-PowerControlInfo    CCTrCH-PowerControlInfo-r4     OPTIONAL,
    tddOption                  CHOICE {
      tdd384                   SEQUENCE {
        timingAdvance          UL-TimingAdvanceControl-r4   OPTIONAL,
        alpha                  Alpha
                                OPTIONAL,
        prach-ConstantValue    ConstantValueTdd
                                OPTIONAL,
        pusch-ConstantValue    ConstantValueTdd
                                OPTIONAL,
        openLoopPowerControl-IPDL-TDD OpenLoopPowerControl-IPDL-TDD-r4   OPTIONAL
      },
      tdd128                   SEQUENCE {
        ul-SynchronisationParameters UL-SynchronisationParameters-r4 OPTIONAL
      }
    }
}

-- ****
-- URA UPDATE

```

```

-- ****
URAUUpdate ::= SEQUENCE {
    -- User equipment IEs
    u-RNTI,                               U-RNTI,
    ura-UpdateCause,                      URA-UpdateCause,
    protocolErrorIndicator,               ProtocolErrorIndicatorWithMoreInfo,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions,                SEQUENCE {}      OPTIONAL
}

-- ****
-- URA UPDATE CONFIRM
-- ****

URAUUpdateConfirm ::= CHOICE {
    r3                                SEQUENCE {
        uraUpdateConfirm-r3            URAUpdateConfirm-r3-IES,
        nonCriticalExtensions         SEQUENCE {}      OPTIONAL
    },
    later-than-r3                      SEQUENCE {
        rrc-TransactionIdentifier     RRC-TransactionIdentifier,
        criticalExtensions           CHOICE {
            r5                                SEQUENCE {
                uraUpdateConfirm-r5          URAUpdateConfirm-r5-IES,
                nonCriticalExtensions       SEQUENCE {}      OPTIONAL
            },
            criticalExtensions           SEQUENCE {}
        }
    }
}

URAUUpdateConfirm-r3-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    integrityProtectionModeInfo       IntegrityProtectionModeInfo   OPTIONAL,
    cipheringModeInfo                 CipheringModeInfo          OPTIONAL,
    new-U-RNTI                        U-RNTI                         OPTIONAL,
    new-C-RNTI                        C-RNTI                         OPTIONAL,
    rrc-StateIndicator                 RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff       UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- CN information elements
    cn-InformationInfo                CN-InformationInfo          OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                      URA-Identity                  OPTIONAL,
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo    DL-CounterSynchronisationInfo OPTIONAL
}

URAUUpdateConfirm-r5-IES ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    integrityProtectionModeInfo       IntegrityProtectionModeInfo   OPTIONAL,
    cipheringModeInfo                 CipheringModeInfo          OPTIONAL,
    new-U-RNTI                        U-RNTI                         OPTIONAL,
    new-C-RNTI                        C-RNTI                         OPTIONAL,
    rrc-StateIndicator                 RRC-StateIndicator,
    utran-DRX-CycleLengthCoeff       UTRAN-DRX-CycleLengthCoefficient OPTIONAL,
    -- CN information elements
    cn-InformationInfo                CN-InformationInfo          OPTIONAL,
    -- UTRAN mobility IEs
    ura-Identity                      URA-Identity                  OPTIONAL,
    -- Radio bearer IEs
    dl-CounterSynchronisationInfo    DL-CounterSynchronisationInfo-r5 OPTIONAL
}

-- ****
-- URA UPDATE CONFIRM for CCCH
-- ****

URAUUpdateConfirm-CCCH ::= CHOICE {
    r3                                SEQUENCE {
        uraUpdateConfirm-CCCH-r3        URAUpdateConfirm-CCCH-r3-IES,

```

```

    nonCriticalExtensions           SEQUENCE {}      OPTIONAL
},
later-than-r3                      SEQUENCE {
  u-RNTI                           U-RNTI,
  rrc-TransactionIdentifier        RRC-TransactionIdentifier,
  criticalExtensions               SEQUENCE {}
}
}

URAUpdateConfirm-CCCH-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  u-RNTI                           U-RNTI,
  -- The rest of the message is identical to the one sent on DCCH.
  uraUpdateConfirm                 URAUpdateConfirm-r3-IEs
}

-- ****
-- 
-- UTRAN MOBILITY INFORMATION
-- 
-- ****

UTRANMobilityInformation ::= CHOICE {
  r3          SEQUENCE {
    utranMobilityInformation-r3      UTRANMobilityInformation-r3-IEs,
    v3a0NonCriticalExtensions       SEQUENCE {
      utranMobilityInformation-v3a0ext   UTRANMobilityInformation-v3a0ext-IEs,
      nonCriticalExtensions            SEQUENCE {} OPTIONAL
    }                                OPTIONAL
  },
  later-than-r3                     SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    criticalExtensions              CHOICE {
      r5          SEQUENCE {
        utranMobilityInformation-r5      UTRANMobilityInformation-r5-IEs,
        nonCriticalExtensions            SEQUENCE {} OPTIONAL
      },
      criticalExtensions              SEQUENCE {}
    }
  }
}

UTRANMobilityInformation-r3-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier       RRC-TransactionIdentifier,
  integrityProtectionModeInfo     IntegrityProtectionModeInfo
  cipheringModeInfo               CipheringModeInfo
  new-U-RNTI                      U-RNTI
  new-C-RNTI                      C-RNTI
  ue-ConnTimersAndConstants       UE-ConnTimersAndConstants
  -- CN information elements
  cn-InformationInfo             CN-InformationInfoFull
  -- UTRAN mobility IEs
  ura-Identity                     URA-Identity
  -- Radio bearer IEs
  dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo
  -- Extension mechanism for non-release99 information
  nonCriticalExtensions            SEQUENCE {} OPTIONAL
}

UTRANMobilityInformation-v3a0ext-IEs ::= SEQUENCE {
  ue-ConnTimersAndConstants-v3a0ext   UE-ConnTimersAndConstants-v3a0ext
}

UTRANMobilityInformation-r5-IEs ::= SEQUENCE {
  -- User equipment IEs
  rrc-TransactionIdentifier       RRC-TransactionIdentifier,
  integrityProtectionModeInfo     IntegrityProtectionModeInfo
  cipheringModeInfo               CipheringModeInfo
  new-U-RNTI                      U-RNTI
  new-C-RNTI                      C-RNTI
  ue-ConnTimersAndConstants       UE-ConnTimersAndConstants-r5
  -- CN information elements
  cn-InformationInfo             CN-InformationInfoFull
  -- UTRAN mobility IEs
  ura-Identity                     URA-Identity
  -- Radio bearer IEs
  dl-CounterSynchronisationInfo   DL-CounterSynchronisationInfo-r5
}

```

```

}

-- ****
-- 
-- UTRAN MOBILITY INFORMATION CONFIRM
-- 
-- ****

UTRANMobilityInformationConfirm ::= SEQUENCE {
    -- User equipment IEs
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    ul-IntegProtActivationInfo    IntegrityProtActivationInfo
                                OPTIONAL,
    -- Radio bearer IEs
    count-C-ActivationTime        ActivationTime
    rb-UL-CiphActivationTimeInfo RB-ActivationTimeInfoList
    ul-CounterSynchronisationInfo UL-CounterSynchronisationInfo
                                OPTIONAL,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions        SEQUENCE {}     OPTIONAL
}

-- ****
-- 
-- UTRAN MOBILITY INFORMATION FAILURE
-- 
-- ****

UTRANMobilityInformationFailure ::= SEQUENCE {
    -- UE information elements
    rrc-TransactionIdentifier      RRC-TransactionIdentifier,
    failureCause                  FailureCauseWithProtErr,
    -- Extension mechanism for non- release99 information
    nonCriticalExtensions         SEQUENCE {}     OPTIONAL
}

END

```

11.3 Information element definitions

```

InformationElements DEFINITIONS AUTOMATIC TAGS ::=

-- ****
-- CORE NETWORK INFORMATION ELEMENTS (10.3.1)
-- ****

BEGIN

IMPORTS

    hipDSCHidentities,
    hipUSCHidentities,
    hIRM,
    maxAC,
    maxAdditionalMeas,
    maxASC,
    maxASCmap,
    maxASCpersist,
    maxCCTrCH,
    maxCellMeas,
    maxCellMeas-1,
    maxCNdomains,
    maxCPCHsets,
    maxDPCH-DLchan,
    maxDPDCH-UL,
    maxDRACclasses,
    maxFACHPCH,
    maxFreq,
    maxFreqBandsFDD,
    maxFreqBandsTDD,
    maxFreqBandsGSM,
    maxInterSysMessages,
    maxLoCHperRLC,
    maxMeasEvent,
    maxMeasIntervals,
    maxMeasParEvent,
    maxNumCDMA2000Freqs,
    maxNumFDDFreqs,
    maxNumGSMFreqRanges,
    maxNumTDDFreqs,
    maxOtherRAT,
    maxOtherRAT-16,
    maxPage1,
    maxPCPCH-APsig,
    maxPCPCH-APsubCh,
    maxPCPCH-CDsig,
    maxPCPCH-CDsubCh,
    maxPCPCH-SF,
    maxPCPCHs,
    maxPDCPAlgoType,
    maxPDSCH,
    maxPDSCH-TFCIgroups,
    maxPRACH,
    maxPredefConfig,
    maxPUSCH,
    maxRABsetup,
    maxRAT,
    maxRB,
    maxRBallRABs,
    maxRBMuxOptions,
    maxRBperRAB,
    maxReportedGSMCells,
    maxSRBsetup,
    maxRL,
    maxRL-1,
    maxSCCPCH,
    maxSat,
    maxSIB,
    maxSIB-FACH,
    maxSystemCapability,
    maxTF,
    maxTF-CPCH,

```

```

maxTFC,
maxTFCI-2-Combs,
maxTGPS,
maxTrCH,
maxTrCHpreconf,
maxTS,
maxTS-1,
maxURA,
maxURNTI-Group
FROM Constant-definitions;

...
-- *****
-- USER EQUIPMENT INFORMATION ELEMENTS (10.3.3)
-- *****

AccessStratumReleaseIndicator ::= ENUMERATED {
    rel-4, spare15, spare14, spare13,
    spare12, spare11, spare10, spare9, spare8,
    spare7, spare6, spare5, spare4, spare3,
    spare2, spare1 }

-- TABULAR : for ActivationTime, value 'now' always appear as default, and is encoded
-- by absence of the field
ActivationTime ::= INTEGER (0..255)

BackoffControlParams ::= SEQUENCE {
    n-AP-RetransMax,
    n-AccessFails,
    nf-BO-NoAICH,
    ns-BO-Busy,
    nf-BO-AllBusy,
    nf-BO-Mismatch,
    t-CPCH
}

C-RNTI ::= BIT STRING (SIZE (16))

CapabilityUpdateRequirement ::= SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD BOOLEAN,
    -- ue-RadioCapabilityTDDUpdateRequirement-TDD is for 3.84Mcps TDD update requirement
    ue-RadioCapabilityTDDUpdateRequirement-TDD BOOLEAN,
    systemSpecificCapUpdateReqList SystemSpecificCapUpdateReqList OPTIONAL
}

CapabilityUpdateRequirement-r4-ext ::= SEQUENCE {
    ue-RadioCapabilityUpdateRequirement-TDD128 BOOLEAN
}

CapabilityUpdateRequirement-r4 ::= SEQUENCE {
    ue-RadioCapabilityFDDUpdateRequirement-FDD BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD384 BOOLEAN,
    ue-RadioCapabilityTDDUpdateRequirement-TDD128 BOOLEAN,
    systemSpecificCapUpdateReqList SystemSpecificCapUpdateReqList OPTIONAL
}

CellUpdateCause ::= ENUMERATED {
    cellReselection,
    periodicalCellUpdate,
    uplinkDataTransmission,
    utran-pagingResponse,
    re-enteredServiceArea,
    radiolinkFailure,
    rlc-unrecoverableError,
    spare1 }

ChipRateCapability ::= ENUMERATED {
    mcps3-84, mcps1-28 }

CipheringAlgorithm ::= ENUMERATED {
    uea0, uea1 }

CipheringModeCommand ::= CHOICE {
    startRestart,
    dummy
        NULL
}

```

```

}

CipheringModeInfo ::= SEQUENCE {
  -- TABULAR: The ciphering algorithm is included in the CipheringModeCommand.
  cipheringModeCommand      CipheringModeCommand,
  activationTimeForDPCH     ActivationTime           OPTIONAL,
  rb-DL-CiphActivationTimeInfo RB-ActivationTimeInfoList   OPTIONAL
}

CN-DRX-CycleLengthCoefficient ::= INTEGER (6..9)

CN-PagedUE-Identity ::= CHOICE {
  imsi-GSM-MAP      IMSI-GSM-MAP,
  tmsi-GSM-MAP      TMSI-GSM-MAP,
  p-TMSI-GSM-MAP    P-TMSI-GSM-MAP,
  imsi-DS-41        IMSI-DS-41,
  tmsi-DS-41        TMSI-DS-41,
  spare3            NULL,
  spare2            NULL,
  spare1            NULL
}

CompressedModeMeasCapability ::= SEQUENCE {
  fdd-Measurements    BOOLEAN,
  -- TABULAR: The IEs tdd-Measurements, gsm-Measurements and multiCarrierMeasurements
  -- are made optional since they are conditional based on another information element.
  -- Their absence corresponds to the case where the condition is not true.
  tdd-Measurements    BOOLEAN           OPTIONAL,
  gsm-Measurements    GSM-Measurements  OPTIONAL,
  multiCarrierMeasurements BOOLEAN         OPTIONAL
}

CompressedModeMeasCapability-LCR-r4 ::= SEQUENCE {
  tdd128-Measurements BOOLEAN           OPTIONAL
}

CompressedModeMeasCapabFDDList ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
  CompressedModeMeasCapabFDD

CompressedModeMeasCapabFDD ::= SEQUENCE {
  radioFrequencyBandFDD RadioFrequencyBandFDD  OPTIONAL,
  dl-MeasurementsFDD   BOOLEAN,
  ul-MeasurementsFDD   BOOLEAN
}

CompressedModeMeasCapabTDDList ::= SEQUENCE (SIZE (1..maxFreqBandsTDD)) OF
  CompressedModeMeasCapabTDD

CompressedModeMeasCapabTDD ::= SEQUENCE {
  radioFrequencyBandTDD RadioFrequencyBandTDD,
  dl-MeasurementsTDD   BOOLEAN,
  ul-MeasurementsTDD   BOOLEAN
}

CompressedModeMeasCapabGSMList ::= SEQUENCE (SIZE (1..maxFreqBandsGSM)) OF
  CompressedModeMeasCapabGSM

CompressedModeMeasCapabGSM ::= SEQUENCE {
  radioFrequencyBandGSM RadioFrequencyBandGSM,
  dl-MeasurementsGSM   BOOLEAN,
  ul-MeasurementsGSM   BOOLEAN
}

CompressedModeMeasCapabMC ::= SEQUENCE {
  dl-MeasurementsMC   BOOLEAN,
  ul-MeasurementsMC   BOOLEAN
}

CPCH-Parameters ::= SEQUENCE {
  initialPriorityDelayList InitialPriorityDelayList           OPTIONAL,
  backoffControlParams     BackoffControlParams,
  -- TABULAR: TPC step size nested inside PowerControlAlgorithm
  powerControlAlgorithm   PowerControlAlgorithm,
  dl-DPCCH-BER            DL-DPCCH-BER
}

DL-DPCCH-BER ::= INTEGER (0..63)

```

```

DL-PhysChCapabilityFDD ::=          SEQUENCE {
  maxNoDPCH-PDSCH-Codes           INTEGER (1..8),
  maxNoPhysChBitsReceived         MaxNoPhysChBitsReceived,
  supportForSF-512                BOOLEAN,
  supportOfPDSCH                 BOOLEAN,
  simultaneousSCCPCH-DPCH-Reception SimultaneousSCCPCH-DPCH-Reception
}

DL-PhysChCapabilityFDD-v380ext ::=      SEQUENCE {
  supportOfDedicatedPilotsForChEstimation   SupportOfDedicatedPilotsForChEstimation      OPTIONAL
}

SupportOfDedicatedPilotsForChEstimation ::=      ENUMERATED { true }

DL-PhysChCapabilityTDD ::=          SEQUENCE {
  maxTS-PerFrame                  MaxTS-PerFrame,
  maxPhysChPerFrame               MaxPhysChPerFrame,
  minimumSF                       MinimumSF-DL,
  supportOfPDSCH                 BOOLEAN,
  maxPhysChPerTS                 MaxPhysChPerTS
}

DL-PhysChCapabilityTDD-LCR-r4 ::=      SEQUENCE {
  maxTS-PerSubFrame               MaxTS-PerSubFrame-r4,
  maxPhysChPerFrame               MaxPhysChPerSubFrame-r4,
  minimumSF                       MinimumSF-DL,
  supportOfPDSCH                 BOOLEAN,
  maxPhysChPerTS                 MaxPhysChPerTS,
  supportOf8PSK                   BOOLEAN
}

DL-TransChCapability ::=          SEQUENCE {
  maxNoBitsReceived              MaxNoBits,
  maxConvCodeBitsReceived         MaxNoBits,
  turboDecodingSupport           TurboSupport,
  maxSimultaneousTransChs        MaxSimultaneousTransChsDL,
  maxSimultaneousCCTrCH-Count    MaxSimultaneousCCTrCH-Count,
  maxReceivedTransportBlocks     MaxTransportBlocksDL,
  maxNumberOfTFC                 MaxNumberOfTFC-DL,
  maxNumberOfTF                  MaxNumberOfTF
}

DRAC-SysInfo ::=          SEQUENCE {
  transmissionProbability         TransmissionProbability,
  maximumBitRate                 MaximumBitRate
}

DRAC-SysInfoList ::=          SEQUENCE (SIZE (1..maxDRACclasses)) OF
                                DRAC-SysInfo

DSCH-RNTI ::=          BIT STRING (SIZE (16))

ESN-DS-41 ::=          BIT STRING (SIZE (32))

EstablishmentCause ::=      ENUMERATED {
  originatingConversationalCall,
  originatingStreamingCall,
  originatingInteractiveCall,
  originatingBackgroundCall,
  originatingSubscribedTrafficCall,
  terminatingConversationalCall,
  terminatingStreamingCall,
  terminatingInteractiveCall,
  terminatingBackgroundCall,
  emergencyCall,
  interRAT-CellReselection,
  interRAT-CellChangeOrder,
  registration,
  detach,
  originatingHighPrioritySignalling,
  originatingLowPrioritySignalling,
  callRe-establishment,
  terminatingHighPrioritySignalling,
  terminatingLowPrioritySignalling,
  terminatingCauseUnknown,
  spare12,
  spare11,
  spare10,
}

```

```

                spare9,
                spare8,
                spare7,
                spare6,
                spare5,
                spare4,
                spare3,
                spare2,
                spare1 }

FailureCauseWithProtErr ::= CHOICE {
    configurationUnsupported      NULL,
    physicalChannelFailure       NULL,
    incompatibleSimultaneousReconfiguration
                                NULL,
    compressedModeRuntimeError   TGPSSI,
    protocolError                ProtocolErrorInformation,
    cellUpdateOccurred           NULL,
    invalidConfiguration          NULL,
    configurationIncomplete      NULL,
    unsupportedMeasurement        NULL,
    spare7                       NULL,
    spare6                       NULL,
    spare5                       NULL,
    spare4                       NULL,
    spare3                       NULL,
    spare2                       NULL,
    spare1                       NULL
}

FailureCauseWithProtErrTrId ::= SEQUENCE {
    rrc-TransactionIdentifier    RRC-TransactionIdentifier,
    failureCause                 FailureCauseWithProtErr
}

GroupReleaseInformation ::= SEQUENCE {
    uRNTI-Group                  U-RNTI-Group
}

GSM-Measurements ::= SEQUENCE {
    gsm900                      BOOLEAN,
    dcs1800                      BOOLEAN,
    gsm1900                      BOOLEAN
}

H-RNTI ::= BIT STRING (SIZE (16))

HSDSCH-capability-class ::= INTEGER (0..63)

IMSI-and-ESN-DS-41 ::= SEQUENCE {
    imsi-DS-41                   IMSI-DS-41,
    esn-DS-41                     ESN-DS-41
}

IMSI-DS-41 ::= OCTET STRING (SIZE (5..7))

InitialPriorityDelayList ::= SEQUENCE (SIZE (1..maxASC)) OF
                            NS-IP

InitialUE-Identity ::= CHOICE {
    imsi                         IMSI-GSM-MAP,
    tmsi-and-LAI                  TMSI-and-LAI-GSM-MAP,
    p-TMSI-and-RAI                P-TMSI-and-RAI-GSM-MAP,
    imei                          IMEI,
    esn-DS-41                     ESN-DS-41,
    imsi-DS-41                    IMSI-DS-41,
    imsi-and-ESN-DS-41            IMSI-and-ESN-DS-41,
    tmsi-DS-41                     TMSI-DS-41
}

IntegrityCheckInfo ::= SEQUENCE {
    messageAuthenticationCode     MessageAuthenticationCode,
    rrc-MessageSequenceNumber    RRC-MessageSequenceNumber
}

IntegrityProtActivationInfo ::= SEQUENCE {
    rrc-MessageSequenceNumberList RRC-MessageSequenceNumberList
}

```

```

}

IntegrityProtectionAlgorithm ::= ENUMERATED {
    uial
}

IntegrityProtectionModeCommand ::= CHOICE {
    startIntegrityProtection           SEQUENCE {
        integrityProtInitNumber       IntegrityProtInitNumber
    },
    modify                            SEQUENCE {
        dl-IntegrityProtActivationInfo   IntegrityProtActivationInfo
    }
}

IntegrityProtectionModeInfo ::= SEQUENCE {
    -- TABULAR: DL integrity protection activation info and Integrity
    -- protection initialisation number have been nested inside
    -- IntegrityProtectionModeCommand.
    integrityProtectionModeCommand    IntegrityProtectionModeCommand,
    integrityProtectionAlgorithm     IntegrityProtectionAlgorithm OPTIONAL
}

IntegrityProtInitNumber ::= BIT STRING (SIZE (32))

MAC-hs-Capability ::= SEQUENCE {
    totalBufferSize
}

MaxHcContextSpace ::= ENUMERATED {
    by512, by1024, by2048, by4096,
    by8192
}

MaxROHC-ContextSessions-r4 ::= ENUMERATED {
    s2, s4, s8, s12, s16, s24, s32, s48,
    s64, s128, s256, s512, s1024, s16384
}

MaximumAM-EntityNumberRLC-Cap ::= ENUMERATED {
    am3, am4, am5, am6,
    am8, am16, am30
}

-- Actual value MaximumBitRate = IE value * 16
MaximumBitRate ::= INTEGER (0..32)

MaximumRLC-WindowSize ::= ENUMERATED { mws2047, mws4095 }

MaxNoDPDCH-BitsTransmitted ::= ENUMERATED {
    b600, b1200, b2400, b4800,
    b9600, b19200, b28800, b38400,
    b48000, b57600
}

MaxNoBits ::= ENUMERATED {
    b640, b1280, b2560, b3840, b5120,
    b6400, b7680, b8960, b10240,
    b20480, b40960, b81920, b163840
}

MaxNoPhysChBitsReceived ::= ENUMERATED {
    b600, b1200, b2400, b3600,
    b4800, b7200, b9600, b14400,
    b19200, b28800, b38400, b48000,
    b57600, b67200, b76800
}

MaxNoSCCPCH-RL ::= ENUMERATED {
    r11
}

MaxNumberOfTF ::= ENUMERATED {
    tf32, tf64, tf128, tf256,
    tf512, tf1024
}

MaxNumberOfTFC-DL ::= ENUMERATED {
    tfc16, tfc32, tfc48, tfc64, tfc96,
    tfc128, tfc256, tfc512, tfc1024
}

MaxNumberOfTFC-UL ::= ENUMERATED {
    tfc4, tfc8, tfc16, tfc32, tfc48, tfc64,
    tfc96, tfc128, tfc256, tfc512, tfc1024
}

```

```

MaxPhysChPerFrame ::= INTEGER (1..224)
MaxPhysChPerSubFrame-r4 ::= INTEGER (1..96)
MaxPhysChPerTimeslot ::= ENUMERATED {
    ts1, ts2 }
MaxPhysChPerTS ::= INTEGER (1..16)
MaxSimultaneousCCTrCH-Count ::= INTEGER (1..8)
MaxSimultaneousTransChsDL ::= ENUMERATED {
    e4, e8, e16, e32 }
MaxSimultaneousTransChsUL ::= ENUMERATED {
    e2, e4, e8, e16, e32 }
MaxTransportBlocksDL ::= ENUMERATED {
    tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }
MaxTransportBlocksUL ::= ENUMERATED {
    tb2, tb4, tb8, tb16, tb32, tb48,
    tb64, tb96, tb128, tb256, tb512 }
MaxTS-PerFrame ::= INTEGER (1..14)
MaxTS-PerSubFrame-r4 ::= INTEGER (1..6)

-- TABULAR: MeasurementCapability contains dependencies to UE-MultiModeRAT-Capability,
-- the conditional fields have been left mandatory for now.

MeasurementCapability ::= SEQUENCE {
    downlinkCompressedMode           CompressedModeMeasCapability,
    uplinkCompressedMode             CompressedModeMeasCapability
}

MeasurementCapability-v370 ::= SEQUENCE{
    compressedModeMeasCapabFDDList   CompressedModeMeasCapabFDDList,
    compressedModeMeasCapabTDDList   OPTIONAL,
    compressedModeMeasCapabGSMList  OPTIONAL,
    compressedModeMeasCapabMC       OPTIONAL
}

MeasurementCapability-r4-ext ::= SEQUENCE {
    downlinkCompressedMode-LCR     CompressedModeMeasCapability-LCR-r4,
    uplinkCompressedMode-LCR       CompressedModeMeasCapability-LCR-r4
}

MessageAuthenticationCode ::= BIT STRING (SIZE (32))

MinimumSF-DL ::= ENUMERATED {
    sf1, sf16 }

MinimumSF-UL ::= ENUMERATED {
    sf1, sf2, sf4, sf8, sf16 }

MultiModeCapability ::= ENUMERATED {
    tdd, fdd, fdd-tdd }

MultiRAT-Capability ::= SEQUENCE {
    supportOfGSM           BOOLEAN,
    supportOfMulticarrier  BOOLEAN
}

N-300 ::= INTEGER (0..7)
N-301 ::= INTEGER (0..7)
N-302 ::= INTEGER (0..7)
N-304 ::= INTEGER (0..7)
N-308 ::= INTEGER (1..8)
N-310 ::= INTEGER (0..7)
N-312 ::= ENUMERATED {
    s1, s50, s100, s200, s400,
}

```

```

                                s600, s800, s1000 }

N-312ext ::= ENUMERATED {
                  s2, s4, s10, s20 }

N-312-r5 ::= ENUMERATED {
                  s1, s2, s4, s10, s20,
                  s50, s100, s200, s400,
                  s600, s800, s1000 }

N-313 ::= ENUMERATED {
                  s1, s2, s4, s10, s20,
                  s50, s100, s200 }

N-315 ::= ENUMERATED {
                  s1, s50, s100, s200, s400,
                  s600, s800, s1000 }

N-315ext ::= ENUMERATED {
                  s2, s4, s10, s20 }

N-315-r5 ::= ENUMERATED {
                  s1, s2, s4, s10, s20,
                  s50, s100, s200, s400,
                  s600, s800, s1000 }

N-AccessFails ::= INTEGER (1..64)

N-AP-RetransMax ::= INTEGER (1..64)

NetworkAssistedGPS-Supported ::= ENUMERATED {
                  networkBased,
                  ue-Based,
                  bothNetworkAndUE-Based,
                  noNetworkAssistedGPS }

NF-BO-AllBusy ::= INTEGER (0..31)

NF-BO-NoAICH ::= INTEGER (0..31)

NF-BO-Mismatch ::= INTEGER (0..127)

NS-BO-Busy ::= INTEGER (0..63)

NS-IP ::= INTEGER (0..28)

P-TMSI-and-RAI-GSM-MAP ::= SEQUENCE {
                  p-TMSI,
                  rai
                }

PagingCause ::= ENUMERATED {
                  terminatingConversationalCall,
                  terminatingStreamingCall,
                  terminatingInteractiveCall,
                  terminatingBackgroundCall,
                  terminatingHighPrioritySignalling,
                  terminatingLowPrioritySignalling,
                  terminatingCauseUnknown,
                  spare
                }

PagingRecord ::= CHOICE {
                  cn-Identity {
                    pagingCause,
                    cn-DomainIdentity,
                    cn-pagedUE-Identity
                  },
                  utran-Identity {
                    u-RNTI,
                    cn-OriginatedPage-connectedMode-UE {
                      pagingCause,
                      cn-DomainIdentity,
                      pagingRecordTypeID
                    }
                  }
                }

OPTIONAL
}

```

```

PagingRecord-r5 ::= CHOICE {
    utran-SingleUE-Identity           SEQUENCE {
        u-RNTI                           U-RNTI,
        cn-OriginatedPage-connectedMode-UE SEQUENCE {
            pagingCause                  PagingCause,
            cn-DomainIdentity             CN-DomainIdentity,
            pagingRecordTypeID            PagingRecordTypeID
        }
        rrc-ConnectionReleaseInformation OPTIONAL,
    }
    utran-GroupIdentity               SEQUENCE ( SIZE (1 .. maxURNTI-Group) ) OF
                                         GroupIdentityWithReleaseInformation;
}

GroupIdentityWithReleaseInformation ::= SEQUENCE {
    rrc-ConnectionReleaseInformation RRC-ConnectionReleaseInformation,
    groupReleaseInformation         GroupReleaseInformation
}

PagingRecordList ::= SEQUENCE (SIZE (1..maxPage1)) OF
                      PagingRecord

PagingRecordList-r5 ::= SEQUENCE (SIZE (1..maxPage1)) OF
                      PagingRecord-r5

PDCP-Capability ::= SEQUENCE {
    losslessSRNS-RelocationSupport   BOOLEAN,
    supportForRfc2507                CHOICE {
        notSupported                 NULL,
        supported                     MaxHcContextSpace
    }
}

PDCP-Capability-r4-ext ::= SEQUENCE {
    supportForRfc3095                CHOICE {
        notSupported                 NULL,
        supported                     SEQUENCE {
            maxROHC-ContextSessions   MaxROHC-ContextSessions-r4 DEFAULT s16,
            reverseCompressionDepth    INTEGER (0..65535)      DEFAULT 0
        }
    }
}

PDCP-Capability-r5-ext ::= SEQUENCE {
    supportForRfc3095ContextRelocation BOOLEAN
}

PhysicalChannelCapability ::= SEQUENCE {
    fddPhysChCapability              SEQUENCE {
        downlinkPhysChCapability     DL-PhysChCapabilityFDD,
        uplinkPhysChCapability       UL-PhysChCapabilityFDD
    }
    -- tddPhysChCapability describes the 3.84Mcps TDD physical channel capability
    tddPhysChCapability             SEQUENCE {
        downlinkPhysChCapability     DL-PhysChCapabilityTDD,
        uplinkPhysChCapability       UL-PhysChCapabilityTDD
    }
}

-- PhysicalChannelCapability-LCR-r4 describes the 1.28Mcps TDD physical channel capability
PhysicalChannelCapability-LCR-r4 ::= SEQUENCE {
    tdd128-PhysChCapability          SEQUENCE {
        downlinkPhysChCapability     DL-PhysChCapabilityTDD-LCR-r4,
        uplinkPhysChCapability       UL-PhysChCapabilityTDD-LCR-r4
    }
}

-- PhysicalChannelCapability-hspdsch-r5 describes the HS-PDSCH physical channel capability
PhysicalChannelCapability-hspdsch-r5 ::= SEQUENCE {
    modeSpecificInfo                 CHOICE {
        fdd                            SEQUENCE {
            hspdsch-supported          CHOICE {
                supported               HSDSCH-capability-class,
                notsupported            NULL
            }
        },
        tdd384                         SEQUENCE {
    }
}

```

```

        hspdsch-supported
        supported
        nosupported
    }
},
tdd128
    hspdsch-supported
    supported
    nosupported
}
}
}
}

PNBSCH-Allocation-r4 ::= SEQUENCE {
    numberOfRepetitionsPerSFNPeriod ENUMERATED {
        c2, c3, c4, c5, c6, c7, c8, c9, c10,
        c12, c14, c16, c18, c20, c24, c28, c32,
        c36, c40, c48, c56, c64, c72, c80
    }
}

ProtocolErrorCause ::= ENUMERATED {
    asnl-ViolationOrEncodingError,
    messageTypeNonexistent,
    messageNotCompatibleWithReceiverState,
    ie-ValueNotComprehended,
    informationElementMissing,
    messageExtensionNotComprehended,
    spare2, spare1
}

ProtocolErrorIndicator ::= ENUMERATED {
    noError, errorOccurred }

ProtocolErrorIndicatorWithMoreInfo ::= CHOICE {
    noError,
    errorOccurred,
    rrc-TransactionIdentifier,
    protocolErrorInformation
}

ProtocolErrorMoreInformation ::= SEQUENCE {
    diagnosticsType CHOICE {
        type1 CHOICE {
            asnl-ViolationOrEncodingError NULL,
            messageTypeNonexistent NULL,
            messageNotCompatibleWithReceiverState
                IdentificationOfReceivedMessage,
            ie-ValueNotComprehended IdentificationOfReceivedMessage,
            conditionalInformationElementError IdentificationOfReceivedMessage,
            messageExtensionNotComprehended IdentificationOfReceivedMessage,
            spare1 NULL,
            spare2 NULL
        },
        spare NULL
    }
}

RadioFrequencyBandFDD ::= ENUMERATED {
    fdd2100,
    fdd1900,
    spare6, spare5, spare4, spare3, spare2, spare1 }

RadioFrequencyBandTDDList ::= ENUMERATED {
    a, b, c, ab, ac, bc, abc, spare }

RadioFrequencyBandTDD ::= ENUMERATED {a, b, c, spare}

RadioFrequencyBandGSM ::= ENUMERATED {
    gsm450,
    gsm480,
    gsm850,
    gsm900P,
    gsm900E,
    gsm1800,
    gsm1900,
    spare9, spare8, spare7, spare6, spare5,
}

```

```

                                spare4, spare3, spare2, spare1}

Rb-timer-indicator ::=           SEQUENCE {
    t314-expired
    t315-expired
        BOOLEAN,
        BOOLEAN }

Re-EstablishmentTimer ::=         ENUMERATED {
}                                useT314, useT315

RedirectionInfo ::=              CHOICE {
    frequencyInfo
    interRATInfo
}                                FrequencyInfo,
                                    InterRATInfo

RejectionCause ::=               ENUMERATED {
}                                congestion,
                                    unspecified

ReleaseCause ::=                 ENUMERATED {
}                                normalEvent,
                                    unspecified,
                                    pre-emptiveRelease,
                                    congestion,
                                    re-establishmentReject,
                                    directedsignallingconnectionre-establishment,
                                    userInactivity,
                                    spare }

RF-Capability ::=                SEQUENCE {
    fddRF-Capability
    ue-PowerClass
    txRxFrequencySeparation
}                                SEQUENCE {
        UE-PowerClass,
        TxRxFrequencySeparation
        OPTIONAL,
        SEQUENCE {
            ue-PowerClass,
            radioFrequencyBandTDDList
            chipRateCapability
        }                                ChipRateCapability
        OPTIONAL
    }

RF-Capability-r4-ext ::=          SEQUENCE {
    tddRF-Capability
    ue-PowerClass
    radioFrequencyBandTDDList
    chipRateCapability
}                                SEQUENCE {
        UE-PowerClass,
        RadioFrequencyBandTDDList,
        ChipRateCapability
        OPTIONAL
    }

RLC-Capability ::=               SEQUENCE {
    totalRLC-AM-BufferSize
    maximumRLC-WindowSize
    maximumAM-EntityNumber
}                                MaximumAM-EntityNumberRLC-Cap

}

RRC-ConnectionReleaseInformation ::= CHOICE {
    noRelease
        NULL,
    release
        SEQUENCE {
            releaseCause
        }
    }

RRC-MessageSequenceNumber ::=      INTEGER (0..15)

RRC-MessageSequenceNumberList ::=   SEQUENCE (SIZE (4..5)) OF
}                                RRC-MessageSequenceNumber

RRC-StateIndicator ::=             ENUMERATED {
}                                cell-DCH, cell-FACH, cell-PCH, ura-PCH }

RRC-TransactionIdentifier ::=       INTEGER (0..3)

S-RNTI ::=                         BIT STRING (SIZE (20))

S-RNTI-2 ::=                        BIT STRING (SIZE (10))

```

```

SecurityCapability ::= SEQUENCE {
    cipheringAlgorithmCap      BIT STRING {
        spare15(0),
        spare14(1),
        spare13(2),
        spare12(3),
        spare11(4),
        spare10(5),
        spare9(6),
        spare8(7),
        spare7(8),
        spare6(9),
        spare5(10),
        spare4(11),
        spare3(12),
        spare2(13),
        uea1(14),
        uea0(15)
    }      (SIZE (16)),
    integrityProtectionAlgorithmCap      BIT STRING {
        spare15(0),
        spare14(1),
        spare13(2),
        spare12(3),
        spare11(4),
        spare10(5),
        spare9(6),
        spare8(7),
        spare7(8),
        spare6(9),
        spare5(10),
        spare4(11),
        spare3(12),
        spare2(13),
        uia1(14),
        spare0(15)
    }      (SIZE (16))
}

SimultaneousSCCPCH-DPCH-Reception ::= CHOICE {
    notSupported          NULL,
    supported              SEQUENCE {
        maxNoSCCPCH-RL           MaxNoSCCPCH-RL,
        -- simultaneousSCCPCH-DPCH-DPDCH-Reception is applicable only if
        -- the IE Support of PDSCH = TRUE
        simultaneousSCCPCH-DPCH-DPDCH-Reception   BOOLEAN
    }
}

SRNC-Identity ::= BIT STRING (SIZE (12))

START-Value ::= BIT STRING (SIZE (20))

STARTList ::= SEQUENCE (SIZE (1..maxCNdomains)) OF
             STARTSingle

STARTSingle ::= SEQUENCE {
    cn-DomainIdentity,
    start-Value
}

SystemSpecificCapUpdateReq ::= ENUMERATED {
    gsm
}

SystemSpecificCapUpdateReqList ::= SEQUENCE (SIZE (1..maxSystemCapability)) OF
                                SystemSpecificCapUpdateReq

T-300 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
    ms1800, ms2000, ms3000, ms4000,
    ms6000, ms8000
}

T-301 ::= ENUMERATED {
    ms100, ms200, ms400, ms600, ms800,
    ms1000, ms1200, ms1400, ms1600,
}

```

```

                         ms1800, ms2000, ms3000, ms4000,
                         ms6000, ms8000, spare }

T-302 ::= ENUMERATED {
                         ms100, ms200, ms400, ms600, ms800,
                         ms1000, ms1200, ms1400, ms1600,
                         ms1800, ms2000, ms3000, ms4000,
                         ms6000, ms8000, spare }

T-304 ::= ENUMERATED {
                         ms100, ms200, ms400,
                         ms1000, ms2000, spare3, spare2, spare1 }

T-305 ::= ENUMERATED {
                         noUpdate, m5, m10, m30,
                         m60, m120, m360, m720 }

T-307 ::= ENUMERATED {
                         s5, s10, s15, s20,
                         s30, s40, s50, spare }

T-308 ::= ENUMERATED {
                         ms40, ms80, ms160, ms320 }

T-309 ::= INTEGER (1..8)

T-310 ::= ENUMERATED {
                         ms40, ms80, ms120, ms160,
                         ms200, ms240, ms280, ms320 }

T-311 ::= ENUMERATED {
                         ms250, ms500, ms750, ms1000,
                         ms1250, ms1500, ms1750, ms2000 }

-- The value 0 for T-312 is not used in this version of the specification
T-312 ::= INTEGER (0..15)

T-313 ::= INTEGER (0..15)

T-314 ::= ENUMERATED {
                         s0, s2, s4, s6, s8,
                         s12, s16, s20 }

T-315 ::= ENUMERATED {
                         s0, s10, s30, s60, s180,
                         s600, s1200, s1800 }

T-316 ::= ENUMERATED {
                         s0, s10, s20, s30, s40,
                         s50, s-inf, spare }

T-317 ::= ENUMERATED {
                         s0, s10, s30, s60, s180,
                         s600, s1200, s1800 }

T-CPCH ::= ENUMERATED {
                         ct0, ct1 }

TMSI-and-LAI-GSM-MAP ::= SEQUENCE {
                         tmsi,
                         lai
                       }

TMSI-DS-41 ::= OCTET STRING (SIZE (2..17))

TotalRLC-AM-BufferSize ::= ENUMERATED {
                         kb2, kb10, kb50, kb100,
                         kb150, kb500, kb1000, spare }

TotalBufferSize ::= ENUMERATED {
                         kb50, kb100, kb150, kb200,
                         kb300, spare3, spare2, spare1 }

-- Actual value TransmissionProbability = IE value * 0.125
TransmissionProbability ::= INTEGER (1..8)

TransportChannelCapability ::= SEQUENCE {
                         dl-TransChCapability,

```

```

    ul-TransChCapability          UL-TransChCapability
}

TurboSupport ::= CHOICE {
    notSupported    NULL,
    supported       MaxNoBits
}

TxRxFrequencySeparation ::= ENUMERATED {
    mhz190, mhz174-8-205-2,
    mhz134-8-245-2
}

U-RNTI ::= SEQUENCE {
    srnc-Identity,
    s-RNTI
}

U-RNTI-Group ::= CHOICE {
-- TABULAR: not following the tabular strictly, but this will most likely save bits
    all             NULL,
    u-RNTI-BitMaskIndex-b1      BIT STRING (SIZE (31)),
    u-RNTI-BitMaskIndex-b2      BIT STRING (SIZE (30)),
    u-RNTI-BitMaskIndex-b3      BIT STRING (SIZE (29)),
    u-RNTI-BitMaskIndex-b4      BIT STRING (SIZE (28)),
    u-RNTI-BitMaskIndex-b5      BIT STRING (SIZE (27)),
    u-RNTI-BitMaskIndex-b6      BIT STRING (SIZE (26)),
    u-RNTI-BitMaskIndex-b7      BIT STRING (SIZE (25)),
    u-RNTI-BitMaskIndex-b8      BIT STRING (SIZE (24)),
    u-RNTI-BitMaskIndex-b9      BIT STRING (SIZE (23)),
    u-RNTI-BitMaskIndex-b10     BIT STRING (SIZE (22)),
    u-RNTI-BitMaskIndex-b11     BIT STRING (SIZE (21)),
    u-RNTI-BitMaskIndex-b12     BIT STRING (SIZE (20)),
    u-RNTI-BitMaskIndex-b13     BIT STRING (SIZE (19)),
    u-RNTI-BitMaskIndex-b14     BIT STRING (SIZE (18)),
    u-RNTI-BitMaskIndex-b15     BIT STRING (SIZE (17)),
    u-RNTI-BitMaskIndex-b16     BIT STRING (SIZE (16)),
    u-RNTI-BitMaskIndex-b17     BIT STRING (SIZE (15)),
    u-RNTI-BitMaskIndex-b18     BIT STRING (SIZE (14)),
    u-RNTI-BitMaskIndex-b19     BIT STRING (SIZE (13)),
    u-RNTI-BitMaskIndex-b20     BIT STRING (SIZE (12)),
    u-RNTI-BitMaskIndex-b21     BIT STRING (SIZE (11)),
    u-RNTI-BitMaskIndex-b22     BIT STRING (SIZE (10)),
    u-RNTI-BitMaskIndex-b23     BIT STRING (SIZE (9)),
    u-RNTI-BitMaskIndex-b24     BIT STRING (SIZE (8)),
    u-RNTI-BitMaskIndex-b25     BIT STRING (SIZE (7)),
    u-RNTI-BitMaskIndex-b26     BIT STRING (SIZE (6)),
    u-RNTI-BitMaskIndex-b27     BIT STRING (SIZE (5)),
    u-RNTI-BitMaskIndex-b28     BIT STRING (SIZE (4)),
    u-RNTI-BitMaskIndex-b29     BIT STRING (SIZE (3)),
    u-RNTI-BitMaskIndex-b30     BIT STRING (SIZE (2)),
    u-RNTI-BitMaskIndex-b31     BIT STRING (SIZE (1))
}

U-RNTI-Short ::= SEQUENCE {
    srnc-Identity,
    s-RNTI-2
}

UE-ConnTimersAndConstants ::= SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
-- t-301 and n-301 should not be used by the UE in this version of the specification
    t-301           T-301           DEFAULT ms2000,
    n-301           N-301           DEFAULT 2,
    t-302           T-302           DEFAULT ms4000,
    n-302           N-302           DEFAULT 3,
    t-304           T-304           DEFAULT ms2000,
    n-304           N-304           DEFAULT 2,
    t-305           T-305           DEFAULT m30,
    t-307           T-307           DEFAULT s30,
    t-308           T-308           DEFAULT ms160,
    t-309           T-309           DEFAULT 5,
    t-310           T-310           DEFAULT ms160,
    n-310           N-310           DEFAULT 4,
    t-311           T-311           DEFAULT ms2000,
    t-312           T-312           DEFAULT 1,
-- n-312 shall be ignored if n-312 in UE-ConnTimersAndConstants-v3a0ext is present, and the
-- value of that element shall be used instead.
    n-312           N-312           DEFAULT s1,
}

```

```

t-313          T-313          DEFAULT 3,
n-313          N-313          DEFAULT s20,
t-314          T-314          DEFAULT s12,
t-315          T-315          DEFAULT s180,
-- n-315 shall be ignored if n-315 in UE-ConnTimersAndConstants-v3a0ext is present, and the
-- value of that element shall be used instead.
n-315          N-315          DEFAULT s1,
t-316          T-316          DEFAULT s30,
t-317          T-317          DEFAULT s180
}

UE-ConnTimersAndConstants-v3a0ext ::=      SEQUENCE {
  n-312          N-312ext        OPTIONAL,
  n-315          N-315ext        OPTIONAL
}

UE-ConnTimersAndConstants-r5 ::=      SEQUENCE {
-- Optional is used also for parameters for which the default value is the last one read in SIB1
-- t-301 and n-301 should not be used by the UE in this version of the specification
  t-301          T-301          DEFAULT ms2000,
  n-301          N-301          DEFAULT 2,
  t-302          T-302          DEFAULT ms4000,
  n-302          N-302          DEFAULT 3,
  t-304          T-304          DEFAULT ms2000,
  n-304          N-304          DEFAULT 2,
  t-305          T-305          DEFAULT m30,
  t-307          T-307          DEFAULT s30,
  t-308          T-308          DEFAULT ms160,
  t-309          T-309          DEFAULT 5,
  t-310          T-310          DEFAULT ms160,
  n-310          N-310          DEFAULT 4,
  t-311          T-311          DEFAULT ms2000,
  t-312          T-312          DEFAULT 1,
  n-312          N-312-r5        DEFAULT s1,
  t-313          T-313          DEFAULT 3,
  n-313          N-313          DEFAULT s20,
  t-314          T-314          DEFAULT s12,
  t-315          T-315          DEFAULT s180,
  n-315          N-315-r5        DEFAULT s1,
  t-316          T-316          DEFAULT s30,
  t-317          T-317          DEFAULT s180
}

UE-IDLETimersAndConstants ::=      SEQUENCE {
  t-300          T-300,
  n-300          N-300,
  t-312          T-312,
-- n-312 shall be ignored if n-312 in UE-IDLETimersAndConstants-v3a0ext is present, and the
-- value of that element shall be used instead.
  n-312          N-312
}

UE-IDLETimersAndConstants-v3a0ext ::=      SEQUENCE {
  n-312          N-312ext        OPTIONAL
}

UE-MultiModeRAT-Capability ::=      SEQUENCE {
  multiRAT-CapabilityList
  multiModeCapability
}

UE-PowerClass ::=      INTEGER (1..4)

UE-PowerClass-v370 ::=      ENUMERATED {class1, class2, class3, class4,
                                         spare4, spare3, spare2, spare1 }

UE-RadioAccessCapability ::=      SEQUENCE {
  pdcp-Capability
  rlc-Capability
  transportChannelCapability
  rf-Capability
  physicalChannelCapability
  ue-MultiModeRAT-Capability
  securityCapability
  ue-positioning-Capability
  measurementCapability
}

```

```

UE-RadioAccessCapabilityInfo ::= SEQUENCE {
    ue-RadioAccessCapability           UE-RadioAccessCapability,
    ue-RadioAccessCapability-v370ext   UE-RadioAccessCapability-v370ext
}

UE-RadioAccessCapability-v370ext ::= SEQUENCE {
    ue-RadioAccessCapabBandFDDList    UE-RadioAccessCapabBandFDDList
}

UE-RadioAccessCapability-v380ext ::= SEQUENCE {
    ue-PositioningCapabilityExt-v380  UE-PositioningCapabilityExt-v380
}

UE-RadioAccessCapability-v3a0ext ::= SEQUENCE {
    ue-PositioningCapabilityExt-v3a0  UE-PositioningCapabilityExt-v3a0
}

UE-PositioningCapabilityExt-v380 ::= SEQUENCE {
    rx-tx-TimeDifferenceType2Capable BOOLEAN
}

UE-PositioningCapabilityExt-v3a0 ::= SEQUENCE {
    validity-CellPCH-UraPCH          ENUMERATED { true }
}

UE-RadioAccessCapabBandFDDList ::= SEQUENCE (SIZE (1..maxFreqBandsFDD)) OF
                                     UE-RadioAccessCapabBandFDD

UE-RadioAccessCapabBandFDD ::= SEQUENCE {
    radioFrequencyBandFDD             RadioFrequencyBandFDD,
    fddRF-Capability                 SEQUENCE {
        ue-PowerClass                UE-PowerClass-v370,
        txRxFrequencySeparation      TxRxFrequencySeparation
    }                                OPTIONAL,
    measurementCapability            MeasurementCapability-v370
}

UE-RadioAccessCapability-r4-ext ::= SEQUENCE {
    pdcp-Capability-r4-ext          PDCP-Capability-r4-ext,
    rf-Capability                   RF-Capability-r4-ext,
    physicalChannelCapability-LCR  PhysicalChannelCapability-LCR-r4,
    measurementCapability-r4-ext    MeasurementCapability-r4-ext OPTIONAL
}

UE-RadioAccessCapability-v4xyext ::= SEQUENCE {
    -- R99 UEs shall include IE "ue-TestLevelIndicator"
    accessStratumReleaseIndicator    AccessStratumReleaseIndicator
}

UE-RadioAccessCapability-r5-ext ::= SEQUENCE {
    pdcp-Capability-r5-ext          PDCP-Capability-r5-ext,
    mac-hs-Capability               MAC-hs-Capability,
    physicalChannelCapability       PhysicalChannelCapability-hspdsch-r5
}

UL-PhysChCapabilityFDD ::= SEQUENCE {
    maxNoDPDCH-BitsTransmitted     MaxNoDPDCH-BitsTransmitted,
    supportOfPCPCH                 BOOLEAN
}

UL-PhysChCapabilityTDD ::= SEQUENCE {
    maxTS-PerFrame                 MaxTS-PerFrame,
    maxPhysChPerTimeslot           MaxPhysChPerTimeslot,
    minimumSF                       MinimumSF-UL,
    supportOfPUSCH                 BOOLEAN
}

UL-PhysChCapabilityTDD-LCR-r4 ::= SEQUENCE {
    maxTS-PerSubFrame              MaxTS-PerSubFrame-r4,
    maxPhysChPerTimeslot           MaxPhysChPerTimeslot,
    minimumSF                       MinimumSF-UL,
    supportOfPUSCH                 BOOLEAN,
    supportOf8PSK                  BOOLEAN
}

UL-TransChCapability ::= SEQUENCE {
    maxNoBitsTransmitted           MaxNoBits,
    maxConvCodeBitsTransmitted     MaxNoBits,
}

```

```

turboEncodingSupport           TurboSupport,
maxSimultaneousTransChs      MaxSimultaneousTransChsUL,
modeSpecificInfo              CHOICE {
    fdd                         NULL,
    tdd                         SEQUENCE {
        maxSimultaneousCCTrCH-Count   MaxSimultaneousCCTrCH-Count
    }
},
maxTransmittedBlocks          MaxTransportBlocksUL,
maxNumberOfTFC                MaxNumberOfTFC-UL,
maxNumberOfTF                  MaxNumberOfTF
}

UE-Positioning-Capability ::= SEQUENCE {
    standaloneLocMethodsSupported BOOLEAN,
    ue-BasedOTDOA-Supported        BOOLEAN,
    networkAssistedGPS-Supported   NetworkAssistedGPS-Supported,
    supportForUE-GPS-TimingOfCellFrames BOOLEAN,
    supportForIPDL                 BOOLEAN
}

UE-SecurityInformation ::= SEQUENCE {
    start-CS                      START-Value
}

URA-UpdateCause ::= ENUMERATED {
    changeOfURA,
    periodicURAUpdate,
    dummy,
    spare1
}

UTRAN-DRX-CycleLengthCoefficient ::= INTEGER (3..9)

WaitTime ::= INTEGER (0..15)

```

11.4 Constant definitions

```

Constant-definitions DEFINITIONS AUTOMATIC TAGS ::=
BEGIN

hiPDSCHidentities      INTEGER ::= 64
hiPUSCHidentities      INTEGER ::= 64
hiRM                   INTEGER ::= 256
maxAC                  INTEGER ::= 16
maxAdditionalMeas       INTEGER ::= 4
maxASC                 INTEGER ::= 8
maxASCmap               INTEGER ::= 7
maxASCPersist           INTEGER ::= 6
maxCCTrCH               INTEGER ::= 8
maxCellMeas              INTEGER ::= 32
maxCellMeas-1            INTEGER ::= 31
maxCNdomains             INTEGER ::= 4
maxCPCHsets              INTEGER ::= 16
maxDPCH-DLchan           INTEGER ::= 8
maxDPDCH-UL              INTEGER ::= 6
maxDRACclasses           INTEGER ::= 8
maxFACHPCH               INTEGER ::= 8
maxFreq                 INTEGER ::= 8
maxFreqBandsFDD          INTEGER ::= 8
maxFreqBandsTDD          INTEGER ::= 4
maxFreqBandsGSM          INTEGER ::= 16
maxInterSysMessages       INTEGER ::= 4
maxLoCHperRLC             INTEGER ::= 2
maxMeasEvent              INTEGER ::= 8
maxMeasIntervals          INTEGER ::= 3
maxMeasParEvent           INTEGER ::= 2
maxNumCDMA2000Freqs        INTEGER ::= 8
maxNumGSMFreqRanges        INTEGER ::= 32
maxNumFDDFreqs             INTEGER ::= 8
maxNumTDDFreqs             INTEGER ::= 8
maxNoOfMeas                INTEGER ::= 16
maxOtherRAT                INTEGER ::= 15
maxOtherRAT-16              INTEGER ::= 16
maxPage1                  INTEGER ::= 8
maxPCPCH-APsig              INTEGER ::= 16
maxPCPCH-APsubCh           INTEGER ::= 12
maxPCPCH-CDsig              INTEGER ::= 16
maxPCPCH-CDsubCh           INTEGER ::= 12
maxPCPCH-SF                INTEGER ::= 7
maxPCPCHs                  INTEGER ::= 64
maxPDCAalgoType            INTEGER ::= 8
maxPDSCH                  INTEGER ::= 8
maxPDSCH-TFCIgroups         INTEGER ::= 256
maxPRACH                  INTEGER ::= 16
maxPredefConfig             INTEGER ::= 16
maxPUSCH                  INTEGER ::= 8
maxRABsetup                INTEGER ::= 16
maxRAT                     INTEGER ::= 16
maxRB                      INTEGER ::= 32
maxRBallRABs                INTEGER ::= 27
maxRBmuxOptions             INTEGER ::= 8
maxRBperRAB                 INTEGER ::= 8
maxReportedGSMCells         INTEGER ::= 8
maxRL                      INTEGER ::= 8
maxRL-1                     INTEGER ::= 7
maxSat                     INTEGER ::= 16
maxSCCPCH                  INTEGER ::= 16
maxSIB                     INTEGER ::= 32
maxSIB-FACH                 INTEGER ::= 8
maxSIBperMsg                 INTEGER ::= 16
maxSRBsetup                 INTEGER ::= 8
maxSystemCapability          INTEGER ::= 16
maxTF                      INTEGER ::= 32
maxTF-CPCH                  INTEGER ::= 16
maxTFC                     INTEGER ::= 1024
maxTFCI-2-Combs             INTEGER ::= 512
maxTGPS                    INTEGER ::= 6
maxTrCH                     INTEGER ::= 32
-- maxTrCHpreconf should be 16 but has been set to 32 for compatibility
maxTrCHpreconf               INTEGER ::= 32

```

```
maxTS           INTEGER ::= 14
maxTS-1         INTEGER ::= 13
maxURA          INTEGER ::= 8
| maxURNTI-Group INTEGER ::= 8
```

END