

**3GPP TSG CN Plenary Meeting #18**  
**4<sup>th</sup> – 6<sup>th</sup> December 2002 New Orleans, USA.**

**NP-020664**

**Source:** TSG CN WG4  
**Title:** Corrections on Signalling over IP in Core Network Release 4  
**Agenda item:** 7.12  
**Document for:** APPROVAL

---

<b>Spec</b>	<b>CR</b>	<b>Rev</b>	<b>Doc-2nd-Level</b>	<b>Phase</b>	<b>Subject</b>	<b>Cat</b>	<b>Ver_C</b>
29.202	006	2	N4-021318	Rel-4	M3UA for 3GPP networks	F	4.2.0
29.202	007	2	N4-021319	Rel-5	M3UA for 3GPP networks	A	5.1.0
29.202	008		N4-021396	Rel-4	IETF RFC reference for M3UA	F	4.2.0
29.202	009	1	N4-021397	Rel-5	IETF RFC reference for M3UA	A	5.1.0

## CHANGE REQUEST

⌘ **29.202 CR 006** ⌘ rev **2** ⌘ Current version: **4.2.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

<b>Title:</b>	⌘ M3UA for 3GPP networks		
<b>Source:</b>	⌘ CN4		
<b>Work item code:</b>	⌘ TEI4	<b>Date:</b>	⌘ 17/9/2002
<b>Category:</b>	⌘ <b>F</b>	<b>Release:</b>	⌘ Rel-4
	Use <u>one</u> of the following categories:		Use <u>one</u> of the following releases:
	<b>F</b> (correction)	2	(GSM Phase 2)
	<b>A</b> (corresponds to a correction in an earlier release)	R96	(Release 1996)
	<b>B</b> (addition of feature),	R97	(Release 1997)
	<b>C</b> (functional modification of feature)	R98	(Release 1998)
	<b>D</b> (editorial modification)	R99	(Release 1999)
	Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .	Rel-4	(Release 4)
		Rel-5	(Release 5)
		Rel-6	(Release 6)

<b>Reason for change:</b>	⌘ Interoperability between network domains and between implementations are essential for the application of M3UA in 3GPP networks. SS7 MTP3-User Adaptation Layer (M3UA) RFC 3332 includes a number of options. There exists uncertainty on how certain concepts shall be used in 3GPP networks. The addition of the Annex aims to clarify these uncertainties. This is a critical correction.
<b>Summary of change:</b>	⌘ An annex is added, where the choice of options in the M3UA specification is made. Certain concepts are clarified. The different sections in RFC 3332 are classified.
<b>Consequences if not approved:</b>	⌘ Interoperability between network domains and between vendors implementation will not be achieved.

<b>Clauses affected:</b>	⌘ 5.2 and an addition of an annex.										
<b>Other specs Affected:</b>	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> </table>	Y	N	⌘	X	⌘	X	⌘	X	Other core specifications	⌘
Y	N										
⌘	X										
⌘	X										
⌘	X										
		Test specifications									
		O&M Specifications									
<b>Other comments:</b>	⌘										

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

\*\*\*\* FIRST MODIFIED SECTION \*\*\*\*

## 5.2 Protocol architecture in the case of IP-based SS7 signalling transport network

The transport of an MTP3-user signalling messages shall be accomplished in accordance with the architecture defined by the "Framework Architecture for Signalling Transport" [16], by "Stream Control Transmission Protocol"[8] and by the IETF document available in Annex A

The protocol architecture applicable in the case of IP-based SS7 signalling transport network is shown in Figure 5.2/1




Figure 5.2/1: Protocol architecture in the case of IP-based SS7 signalling transport network

[The definition of the use of M3UA in 3GPP core network is provided in Annex B to this specification.](#)

\*\*\*\* LAST MODIFIED SECTION \*\*\*\*

---

## Annex B The use of M3UA in 3GPP networks(Normative)

### 1 Scope

[This annex defines the application of M3UA in 3GPP core networks. The purpose of the Annex is to ensure the interoperability of different implementations of M3UAs used by different operators and vendors. This is achieved by](#)

- [Clarifying certain concepts which are used in RFC 3332;](#)
- [Defining those features in RFC 3332 for which support is mandatory;](#)
- [Defining those features in the RFC 3332 for which support is optional;](#)
- [Defining those features in RFC 3332 which shall not be used;](#)

[The specification is intended for interfaces between network domains. However, it can also be used inside one network domain, and constitutes in that case minimum M3UA to be supported between IP nodes and between IP nodes and SGW nodes in 3GPP network.](#)

---

### 2 Introduction

[M3UA may be used in a number of interfaces in a 3GPP-core network. The annex is intended for the interface called A and C in figure 1. A is the Interface between two IP nodes that are equipped with SCTP, M3UA and a M3UA user. Examples of M3UA user are BICC, H.248, SCCP and ISUP. The interface can be used inside one network domain but also to interconnect network domains. Interface B can be used between network domains and inside network domains. Interface B is using - Q.701-Q.705 or Q.2210, and therefore is already standardised and not in the scope for](#)

this annex. Interface C is the interface between a node including SCTP, M3UA and a M3UA user and a node including SCTP, M3UA and M3UAsignalling gateway functions.. This interface is inside one network domain.

Interfaces A and C are similar. The main difference is that interface C shall also allow for interworking with the SS 7 network and therefore provides functions for the interworking.

The signalling gateways in this picture are pure MTP3/3B-M3UA signaling gateways. They do not include any M3UA users. Still there could be a node including an M3UA user (eg SCCP functions) and a M3UA signalling gateway functions. In that case the node will support all the interfaces A, B and C.

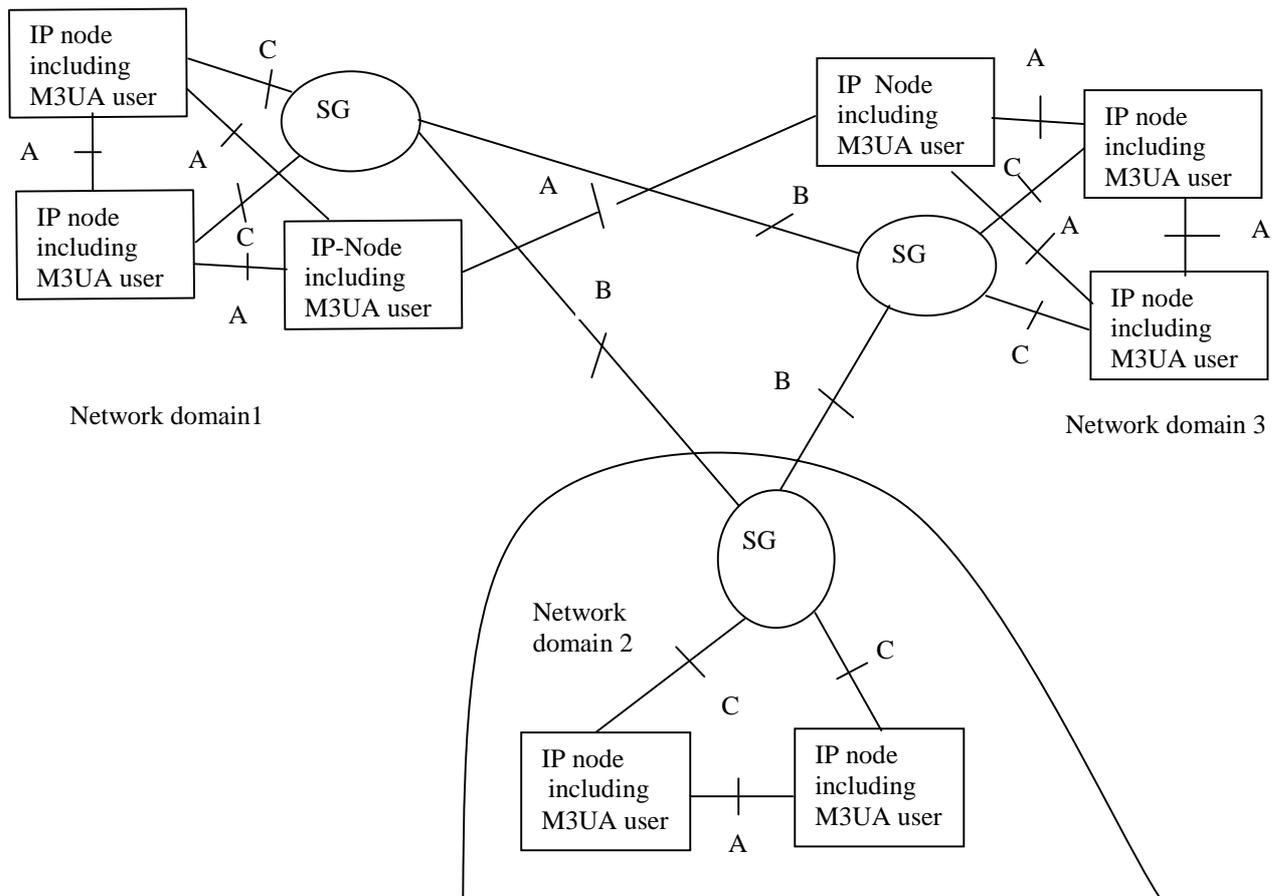


Figure 1 Use of M3UA in 3GPP core network

### 3 Protocol conformance to RFC 3332

A minimum implementation shall support sections marked mandatory in the table below. - It shall be possible to configure- all implementations to interoperate (no error messages returned) with the minimum set.

-The table below makes comment to the sections in -RFC 3332. In the comment column the following terms are used:

- - -

Mandatory: When support of text in a section is marked mandatory:

- On an information element, message or message class, it means that a receiver shall understand the information element, message or message class and carry out the requested action.
- For a procedure, it means that the procedure is mandatory to be carried out by the involved network elements.

- Optional: When support of the text in a section is marked optional the feature involved is only guaranteed to work between peer entities which are subject to a bilateral agreement between operators of those entities. If one end uses an optional message or information element and the other does not support it, then either a silent discard takes place of an

information element as a part of the message or the message is discarded and an error message is returned. This is described as part of the handling of the optionality in the table.

- Excluded: This means that the feature shall not be used in a 3GPP environment
- Descriptive text means that the section does not include any requirements for this specification.


The word “heading” means that the section consists only of subordinate sections.

The comments column ~~table~~ also defines the behaviour of a minimum implementation if it does not support ~~aa~~ message or an information element in a mandatory message.

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<u>Abstract</u>	<u>Descriptive text</u>
<u>1.Introduction</u>	<u>Descriptive text</u>
<u>1.1 Scope</u>	<u>Descriptive text</u>
<u>1.2 Terminology</u>	<u>Descriptive text.</u>
<u>1.3 M3UA overview</u>	<u>Descriptive text.</u>
<u>1.4 Functional area</u>	<u>Descriptive text.</u>
<u>1.5 Sample Configurations</u>	<u>Descriptive text</u>
<u>1.6 Definition of M3UA Boundaries</u>	<u>Descriptive text</u>
<u>2 Conventions</u>	<u>Descriptive text</u>
<u>3. M3UA Protocol Elements</u>	<u>Mandatory</u>
<u>3.1 Common message header</u>	<u>Mandatory</u>
<u>3.1.1 M3UA Protocol Version:</u>	<u>The version number field shall be set to 1</u>
<u>3.1.2 Message classes</u>	<u>The values are classified as follow</u> <u>0-4 Mandatory</u> <u>5-8 Excluded</u> <u>9 Optional (Routing Key Management (RKM) Messages)</u> <u>10 to 255 Excluded</u>
<u>3.1.2 (Management (MGMT) message)</u>	<u>The values are classified as follow</u> <u>0 Mandatory</u> <u>1 Optional (Notify). When received and not supported the</u> <u>message maybe silently discarded.</u> <u>2-255 Excluded</u>
<u>3.1.2 (Transfer messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1 Mandatory</u> <u>2 to 255 Excluded</u>
<u>3.1.2 (Signalling network management (SSNM) messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1-6 Mandatory</u> <u>7- 255 Excluded.</u>
<u>3.1.2 (ASP State Maintenance (ASPSM) Messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1-6 Mandatory</u> <u>7-255 Excluded</u>
<u>3.1.2 (ASP Traffic Maintenance (ASPTM) Messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1-4 Mandatory</u> <u>5 to 255 Excluded</u>
<u>3.1.2 (Routing key management (RKM) messages)</u>	<u>Optional</u> <u>If any of these messages is received and not supported an error message with the error code 0x04 (Unsupported message type) shall be sent</u>
<u>3.1.3 Reserved</u>	<u>Mandatory</u>
<u>3.1.4 Message length</u>	<u>Mandatory</u>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<p><u>3.2 Variable Length Parameter Format Common Parameters:</u></p>	<p><u>The values are classified as follows</u></p> <p><u>0x0000-- 0x0003, 0x0005, 0x0008-, 0x000a, 0x000e, 0x000f, 0x0010 0x0014—0x01ff Excluded</u></p> <p><u>0x0007, 0x0009, 0x000c and 0x0012 Mandatory</u></p> <p><u>0x0004 optional (INFO String) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x0006 optional (Routing Context-) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>-0x000b optional (Traffic Mode Type) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x0011 (ASP Identifier) if received and not supported the message is processed but the optional information element is silently discarded,-</u></p> <p><u>0x0012 Affected point code is mandatory. The support of value 0 in the mask field is mandatory. All other values is outside the scope of this annex.</u></p> <p><u>-0x0013 (Correlation ID) if received and not supported the message is processed but the optional information element is silently discarded,</u></p>
<p><u>3.2 Variable Length Parameter Format M3UA Specific Parameters</u></p>	<p><u>The values are classified as follows</u></p> <p><u>0x0201, 0x0202, 0x0203, 0x0211, 0x0202d and 0x0214 to 0xffff Excluded</u></p> <p><u>0x0204--0x0205, 0x0210 Mandatory</u></p> <p><u>0x0200) optional (Network Appearance) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x0206 Optinal (Concerned Destination). If received and not supported the message is processed but the optional information element is silently discarded.</u></p> <p><u>-0x0207 (Routing Key), 0x0208 (Registration Result), 0x0209 (Deregistration Result) 0x020a (Local Routing Key Identifier), 0x020b (Destination Point Code), 0x020c (Service Indicators) 0x020d (Subsystem Numbers), 0x020e (Originating Point Code List), 0x020f (Circuit Range), 0x0212 (Registration Status), 0x0213 (Deregistration Status) are parameters in optional message, and therefore no action is specified.</u></p>
<p><u>3.3 Transfer messages</u></p>	<p><u>These messages are mandatory at the interfaces A and C.</u></p>
<p><u>3.3.1 Payload message</u></p>	<p><u>The parameters Network Appearance, Routing Context, Correlation ID are optional</u>  <u>The parameter Protocol data is mandatory.</u></p>
<p><u>3.4 SS7 signalling network management messages</u></p>	<p><u>Heading</u></p>
<p><u>3.4.1 Destination Unavailable (DUNA)</u></p>	<p><u>The message is mandatory at the interface C.</u>  <u>The parameters Network Appearance, Routing Context, and INFO String are optional</u>  <u>The parameter Affected Point Code is mandatory</u></p>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<a href="#">3.4.2 Destination Available (DAVA)</a>	The message is mandatory at the interface C The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , and <a href="#">INFO String</a> are optional. The parameter <a href="#">Affected Point Code</a> is mandatory :-
<a href="#">3.4.3 Destination State Audit (DAUD)</a>	The message is mandatory at the interface C The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , and <a href="#">INFO String</a> are optional.- :- The parameter <a href="#">Affected Point Code</a> is mandatory
<a href="#">3.4.4 Signalling Congestion (SCON)</a>	The message is mandatory at the interface C The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , <a href="#">Congestion Indications</a> , and <a href="#">INFO String</a> are optional The parameter <a href="#">Affected point code</a> is -mandatory.
<a href="#">3.4.5 Destination User Part Unavailable (DUPU)</a>	The message is mandatory at the interfaces A and C. The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , and <a href="#">INFO String</a> are optional.  The parameters <a href="#">Affected point code</a> and <a href="#">User/Cause</a> are mandatory
<a href="#">3.4.6 Destination Restricted (DRST) message</a>	This message is <del>an</del> mandatory.- :-
<a href="#">3.5 ASP State Maintenance (ASPSM) Messages</a>	These messages are mandatory at the interfaces A and C.
<a href="#">3.5.1 ASP Up message</a>	The <a href="#">ASP Identifier</a> and <a href="#">Info String</a> parameters are optional
<a href="#">3.5.2 ASP Up Acknowledgement Message</a>	The <a href="#">Info String</a> parameter is optional.
<a href="#">3.5.3 ASP Down message</a>	The <a href="#">Info String</a> parameter is optional.
<a href="#">3.5.4 ASP Down Acknowledgement message</a>	The <a href="#">Info String</a> parameter is optional.
<a href="#">3.5.5 Heartbeat message</a>	The message is mandatory.
<a href="#">3.5.6 Heartbeat Acknowledgement message</a>	The message is mandatory
<a href="#">3.6 Routing Key Management messages</a>	These messages are optional at the interfaces A and C.
<a href="#">3.7 ASP Traffic Maintenance (ASPTM) Messages</a>	These messages are mandatory at the interfaces A and C.
<a href="#">3.7.1 ASP Active message</a>	The parameters <a href="#">Traffic Mode Type</a> , <a href="#">Routing Context</a> and <a href="#">INFO String</a> are optional.
<a href="#">3.7.2 ASP Active Acknowledgement message</a>	The <a href="#">Traffic Mode Type</a> , <a href="#">Routing Context</a> and <a href="#">INFO String</a> are optional.
<a href="#">3.7.3 ASP inactive message</a>	The parameters <a href="#">Routing Context</a> and <a href="#">INFO String</a> are optional.
<a href="#">3.7.4 ASP Inactive Acknowledgement</a>	The parameters <a href="#">Routing Context</a> <a href="#">INFO String</a> are optional.
<a href="#">3.8 Management (MGMT) Messages</a>	Heading
<a href="#">3.8.1 Error message</a>	The message is mandatory at the interfaces A and C

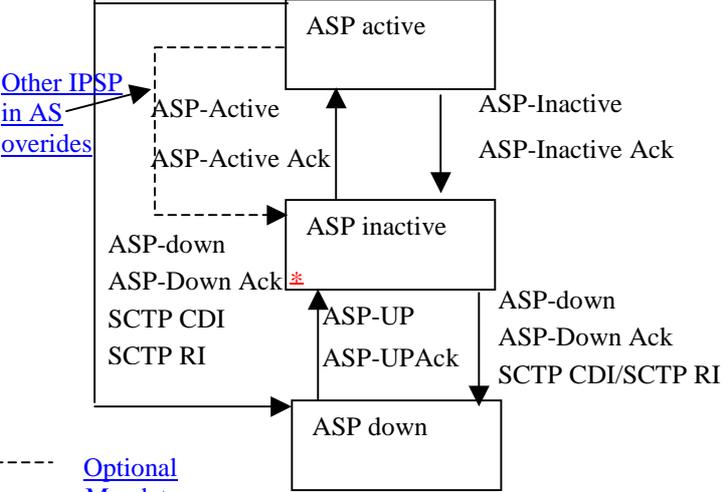
Section number in M3UA RFC	Comments
3.8.2 Notify message	The message is optional at the interfaces A and C
4 Procedure	The application of a particular procedure at a certain interface is detailed in the following sections
4.1 Procedures to Support the M3UA-User	Heading
4.1.1 Receipt of Primitives from the M3UA-User	The procedure is mandatory at the interfaces A and C.
4.1.2 Receipt of Primitives from the Layer Management	This section is outside the scope of this annex.
4.2 Procedures to Support the Management of SCTP Associations	The procedures are mandatory at the interfaces A and C
4.2.1 Receipt of M3UA Peer Management Messages	The two first paragraphs are outside the scope of this annex. Last paragraph is mandatory.
4.3 AS and ASP State Maintenance	The procedure is mandatory at the interfaces A and C.
4.3.1 ASP States	<p>Replace figure in section 4.3.1 in "RFC 3332" with the one below, which is based on figure 4 in draft-ietf-sigtran-m3ua-implementors-guide-01</p>  <pre> stateDiagram-v2     state ASP_active as ASP active     state ASP_inactive as ASP inactive     state ASP_down as ASP down      ASP_active --&gt; ASP_inactive : ASP-Inactive     ASP_inactive --&gt; ASP_active : ASP-Active     ASP_active --&gt; ASP_active : ASP-Active Ack     ASP_inactive --&gt; ASP_inactive : ASP-Inactive Ack     ASP_active --&gt; ASP_down : ASP-down     ASP_down --&gt; ASP_active : ASP-UP     ASP_down --&gt; ASP_inactive : ASP-UPAck     ASP_down --&gt; ASP_down : ASP-down, ASP-Down Ack, SCTP CDI/SCTP RI     ASP_inactive --&gt; ASP_down : ASP-down, ASP-Down Ack, SCTP CDI/SCTP RI      ASP_inactive -.-&gt; ASP_active : ASP-Active     ASP_active -.-&gt; ASP_inactive : ASP-Active Ack     ASP_inactive -.-&gt; ASP_down : ASP-down     ASP_down -.-&gt; ASP_inactive : ASP-Down Ack, SCTP CDI, SCTP RI     </pre> <p>Other IPSP in AS overrides</p> <p>Optional</p> <p>Mandatory</p>
4.3.2 AS States	Mandatory
4.3.3 M3UA Management Procedures for Primitives	This section is outside the scope of this annex.
4.3.4 ASPM Procedures for Peer-to-Peer Messages	Heading
4.3.4.1 ASP Up Procedure	<p>This procedure is mandatory at the interface C and is a subset of the procedure used at interface A. See also 4.3.4.1.2.</p> <p>Note: The registration procedure is optional.</p> <p>A received ASP Up must be acknowledged by an ASP Up Ack message, if no restriction applies e.g. maintenance.</p>
4.3.4.1.1 M3UA Version Control	This procedure is mandatory at the interfaces A and C.

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<p><u>4.3.4.1.2 IPSP Considerations (Asp Up)</u></p>	<p><u>This procedure is mandatory at the interface A.</u></p> <p><u>The present section 4.3.4.1.2 in RFC 3332 is replaced by:</u>  <u>"An IPSP may be considered in the ASP-INACTIVE state after an ASP Up or ASP Up Ack has been received from it. An IPSP can be considered in the ASP-DOWN state after an ASP Down or ASP Down Ack has been received from it".</u></p> <p><u>The IPSP may inform Layer Management of the change in state of the remote IPSP using M-ASP_UP or M-ASP_DN indication or confirmation primitives.</u></p> <p><u>If for any local reason (e.g., management lockout) an IPSP cannot respond to an ASP Up message with an ASP Up Ack message, it responds to an ASP Up message with an Error message with reason "Refused - Management Blocking" and leaves the remote IPSP in the ASP-DOWN state."</u></p> <p><u>The paragraphs above are in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</u></p> <p><u>All comments applicable for section 4.3.4.1 and 4.3.4.2 are also applicable for this section.</u></p>
<p><u>4.3.4.2 ASP-Down Procedure</u></p>	<p><u>This procedure is mandatory at the interface C and is a subset of the procedure used at interface A. See also 4.3.4.1.2.</u></p> <p><u>A received ASP Down message must be acknowledged by an ASP Down Ack message, if no restriction applies eg maintenance reason.</u></p>
<p><u>4.3.4.3 ASP Active Procedure</u></p>	<p><u>This procedure is mandatory at interface C and is a subset of the procedure used at interface A. See also 4.3.4.3.1.</u></p> <p><u>Configuration data define which AS an ASP is a member of. The ASP Active message does not contain a Routing Context parameter. Consequently, the ASP Active Ack message does not include any Routing Context(s) parameter.</u></p> <p><u>The traffic state an ASP has, is configured within the associated Application Server. If more than one physical entity (ASPs, SGPs or IPSPs) implements a logical entity (SG, AS) then loadshare with 1+k is the mandatory traffic mode.</u></p> <p><u>A received ASP Active must be acknowledged by an ASP Active Ack message, if no restriction applies e.g. maintenance reason.</u></p> <p><u>If a Routing Context parameter is included in the ASP Active message it is not needed to include the Routing Context parameter in the ASP Active Ack message.</u></p> <p><u>Note: This is a deviation to RFC 3332.</u></p>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<p><a href="#">4.3.4.3.1 IPSP Considerations (ASP Active)</a></p>	<p><a href="#">This procedure is mandatory at the interface A.</a></p> <p><a href="#">Section 4.3.4.3.1 in RFC 3332 is replaced by:</a></p> <p><a href="#">“Either of the IPSPs can initiate communication. When an IPSP receives an ASP Active, it should mark the peer as ASP-ACTIVE and return an ASP Active Ack message. An ASP receiving an ASP Active Ack message may mark the peer as ASP-Active, if it is not already in the ASP-ACTIVE state.”</a></p> <p><a href="#">The paragraph above is in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</a></p> <p><a href="#">All comments applicable for section 4.3.4.3 are also applicable for this section.</a></p>
<p><a href="#">4.3.4.4 ASP Inactive Procedures</a></p>	<p><a href="#">This procedure is mandatory at the interface C and is a subset of the procedure used at interface A. See also 4.3.4.4.1.</a></p> <p><a href="#">Configuration data defines which AS an ASP is a member of.</a></p> <p><a href="#">It is optional to send several ASP Active Ack messages in response to a single ASP Active message.</a></p> <p><a href="#">A received ASP Inactive must be acknowledged by an ASP Inactive Ack message, if no restriction applies e.g. maintenance.</a></p> <p><a href="#">The sending of Notify message is mandatory if the As state is changed.</a></p>
<p><a href="#">4.3.4.4.1 IPSP Considerations (ASP Inactive )</a></p>	<p><a href="#">This procedure is mandatory at the interface A.</a></p> <p><a href="#">Section 4.3.4.4.1 in RFC 3332 is replaced by:</a></p> <p><a href="#">“An IPSP may be considered in the ASP-INACTIVE state by a remote IPSP after an ASP Inactive or ASP Inactive Ack message has been received from it.”</a></p> <p><a href="#">The paragraph above is in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</a></p> <p><a href="#">All comments applicable for section 4.3.4.4 are also applicable for this section.</a></p>
<p><a href="#">4.3.4.5 Notify Procedures</a></p>	<p><a href="#">The procedure is mandatory at the interfaces A and C to reflect an AS state change.</a></p>
<p><a href="#">4.3.4.6 Heartbeat Procedures</a></p>	<p><a href="#">The procedure is optional.</a></p>
<p><a href="#">4.4 Routing Key management procedure</a></p>	<p><a href="#">The procedure is optional.</a></p>
<p><a href="#">4.5 Procedures to Support the Availability or Congestion Status of SS7 Destination</a></p>	<p><a href="#">Heading</a></p>
<p><a href="#">4.5.1 At an SGP</a></p>	<p><a href="#">Note: The use of Transfer restricted message is a national option and is about the scope of this specification.</a></p> <p><a href="#">If the SG knows that the ASP supports DRST, then SG shall Send a DRST message, if the SG does not know whether the ASP supports the DRST message the SGW shall send a DAVA message if the destination earlier was unavailable. If the destination was available then no action is required.</a></p>
<p><a href="#">4.5.2 At an ASP</a></p>	<p><a href="#">Heading</a></p>
<p><a href="#">4.5.2.1 Single SG Configurations</a></p>	<p><a href="#">It is mandatory for an ASP to interoperate with one Signaling Gateway.</a></p>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<a href="#">4.5.2.2 Multiple SG Configurations</a>	<a href="#">It shall be possible to configure an ASP to handle at least a configuration consisting of two Signalling Gateways.</a>
<a href="#">4.5.3 ASP Auditing</a>	<p><a href="#">Only the part related to international use in Q.704 is inside the scope of this annex.</a></p> <p><a href="#">Add the following paragraph to the corresponding section in RFC 3332</a></p> <p><a href="#">“Where the SGP does not maintain the congestion status of the SS7 destination (ITU international networks), the response to a DAUD message should always be only a DAVA, or DUNA message as appropriate.”</a></p> <p><a href="#">The paragraph above is an extract from “draft-ietf-sigtran-m3ua-implementors-guide-01”.</a></p>
<a href="#">4.6 MTP 3 restart</a>	<a href="#">The procedure is mandatory.</a>
<a href="#">5. Examples of M3UA Procedures</a>	<a href="#">Descriptive text</a>
<a href="#">5.1. Establishment of Association and Traffic between SGPs and ASPs</a>	<a href="#">Note The procedures defined in the sub-sections to 5.1 are a subset of the procedures defined in section 5.5.</a>
<a href="#">5.1.1 Single ASP in an Application Server (“1+0” sparing)</a>	<a href="#">Descriptive text</a>
<a href="#">5.1.1.1 Single ASP in an Application Server (“1+0” sparing), No Registration</a>	<a href="#">The use of RCn is optional.</a>
<a href="#">5.1.1.2 Single ASP in Application Server (“1+0” sparing), Dynamic Registration</a>	<a href="#">The use of dynamic registration is optional.</a>
<a href="#">5.1.1.3 Single ASP in Multiple Application Servers (each with “1+0” sparing), Dynamic Registration (Case 1 - Multiple Registration Requests)</a>	<a href="#">The use of dynamic registration is optional.</a>
<a href="#">5.1.1.4 Single ASP in Multiple Application Servers (each with “1+0” sparing), Dynamic Registration (Case 2 - Single Registration Request)</a>	<a href="#">The use of dynamic registration is optional.</a>
<a href="#">5.1.2 Two ASPs in Application Server (“1+1” sparing)</a>	<a href="#">This procedure is optional.</a>
<a href="#">5.1.3 Two ASPs in an Application Server (“1+1” sparing, loadsharing case).</a>	<a href="#">The traffic mode parameter is optional in ASP-Active message</a>
<a href="#">5.1.4 Three ASPs in an Application Server (“n+k” sparing, loadsharing case)</a>	<a href="#">The procedure is optional.</a>
<a href="#">5.2 ASP Traffic Failover Examples</a>	<a href="#">Heading</a>
<a href="#">5.2.1 (1+1 Sparing, Withdrawal of ASP, Backup Override)</a>	<a href="#">The use of the procedure “backup override” is optional.</a>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<a href="#">5.2.2 (1+1 Sparing, Backup Override)</a>	<a href="#">The use of the procedure “backup override” is optional.</a>
<a href="#">5.2.3 (n+k Sparing, Loadsharing case, Withdrawal of ASP)</a>	<a href="#">The procedure is optional</a>
<a href="#">5.3 Normal Withdrawal of an ASP from an Application Server and Teardown of an Association</a>	<a href="#">The registration procedure is optional. Routing Contexts (RC) is optional.</a>
<a href="#">5.3.X Normal Withdrawal of the ASP from an Application Server (1+1 sparing) loadsharing and Teardown of Association</a>	<div style="text-align: center;"> <pre> sequenceDiagram     participant SGP     participant ASP2 as ASP 2     participant ASP1 as ASP 1      SGP-&gt;&gt;ASP2: ASP Inactive     ASP2-&gt;&gt;SGP: ASP Inactive Ack     SGP-&gt;&gt;ASP1: ASP Inactive     ASP1-&gt;&gt;SGP: ASP Inactive Ack     SGP-&gt;&gt;ASP1: Notify     ASP1-&gt;&gt;ASP2: Notify     ASP2-&gt;&gt;SGP: ASP Down     SGP-&gt;&gt;ASP2: ASP Down Ack     SGP-&gt;&gt;ASP1: ASP Down     ASP1-&gt;&gt;SGP: ASP Down Ack                     </pre> </div> <p><a href="#">The figure is added for clarification.</a></p>
<a href="#">5.4 M3UA/MTP3-User Boundary Examples</a>	<a href="#">Heading</a>
<a href="#">5.4.1 At an ASP</a>	<a href="#">Heading</a>
<a href="#">5.4.1.1 Support for MTP-TRANSFER Primitives at the ASP</a>	<a href="#">Heading</a>
<a href="#">5.4.1.1.1 Support for MTP-TRANSFER Request Primitive</a>	<a href="#">The procedure is mandatory at the interface A and C. This description is also applicable for an IPSP, so replace the abbreviation ASP with ASP/IPSP and SGP with SGP/IPSP</a>
<a href="#">5.4.1.1.2 Support for the MTP-TRANSFER Indication Primitive</a>	<a href="#">The support is mandatory at the interface A and C. This description is also applicable for an IPSP, so replace the abbreviation ASP with ASP/IPSP and SGP with SGP/IPSP.</a>
<a href="#">5.4.1.1.3 Support for ASP Querying of SS7 Destination States</a>	<a href="#">This procedure is mandatory at the interface C. The quering of congestion states is an optional national procedure and outside the scope of this annex.</a>
<a href="#">5.4.2 At an SGP</a>	<a href="#">Heading</a>
<a href="#">5.4.2.1 Support for MTP-TRANSFER Request Primitive at the SGP</a>	<a href="#">The procedure is mandatory at the interface C. Network Appearance is optional.</a>
<a href="#">5.4.2.2 Support for MTP-TRANSFER Indication Primitive at the SGP</a>	<a href="#">The procedure is mandatory at the interface C</a>
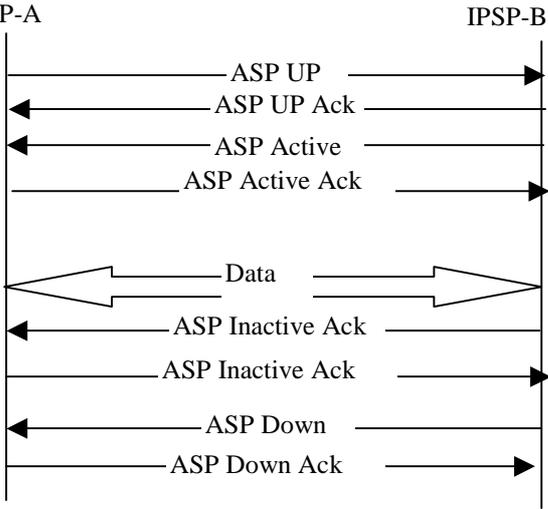
<u>Section number in M3UA RFC</u>	<u>Comments</u>
<a href="#">5.4.2.3 Support for MTP-PAUSE, MTP-RESUME, MTP-STATUS Indication Primitives</a>	<a href="#">Heading</a>
<a href="#">5.4.2.3.1 Destination Unavailable</a>	<a href="#">The procedure is mandatory at the interface C</a>
<a href="#">5.4.2.3.2 Destination Available</a>	<a href="#">The procedure is mandatory at the interface C</a>
<a href="#">5.4.2.3.3 SS7 Network Congestion</a>	<a href="#">The procedure is mandatory at the interface C</a>
<a href="#">5.4.2.3.4 Destination User Part Unavailable</a>	<a href="#">The procedure is mandatory at the interface C and optional at the interface A.</a>
<a href="#">5.5 Examples for IPSP communication.</a>	<p> <a href="#">Replace the section in RFC 3332 with the paragraph below</a>  <a href="#">This scenario shows a basic example for IPSP communication for the three phases of the connection (establishment, data exchange, disconnection). It is assumed that the SCTP association is already set up.</a> </p>  <pre> sequenceDiagram     participant IPSP_A as IPSP-A     participant IPSP_B as IPSP-B     IPSP_A-&gt;&gt;IPSP_B: ASP UP     IPSP_B--&gt;&gt;IPSP_A: ASP UP Ack     IPSP_A-&gt;&gt;IPSP_B: ASP Active     IPSP_B--&gt;&gt;IPSP_A: ASP Active Ack     IPSP_A&lt;&gt;&gt;IPSP_B: Data     IPSP_B--&gt;&gt;IPSP_A: ASP Inactive Ack     IPSP_A-&gt;&gt;IPSP_B: ASP Inactive Ack     IPSP_A-&gt;&gt;IPSP_B: ASP Down     IPSP_B--&gt;&gt;IPSP_A: ASP Down Ack     </pre> <p> <a href="#">The paragraph above is in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</a> </p>

## CHANGE REQUEST

⌘ **29202 CR 007** ⌘ rev **2** ⌘ Current version: **5.1.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

<b>Title:</b>	⌘ M3UA for 3GPP networks		
<b>Source:</b>	⌘ CN4		
<b>Work item code:</b>	⌘ TEI4	<b>Date:</b>	⌘ 17/9/2002
<b>Category:</b>	⌘ <b>A</b>	<b>Release:</b>	⌘ Rel-5
	Use <u>one</u> of the following categories:		Use <u>one</u> of the following releases:
	<b>F</b> (correction)	2	(GSM Phase 2)
	<b>A</b> (corresponds to a correction in an earlier release)	R96	(Release 1996)
	<b>B</b> (addition of feature),	R97	(Release 1997)
	<b>C</b> (functional modification of feature)	R98	(Release 1998)
	<b>D</b> (editorial modification)	R99	(Release 1999)
	Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .	Rel-4	(Release 4)
		Rel-5	(Release 5)
		Rel-6	(Release 6)

<b>Reason for change:</b>	⌘ Interoperability between network domains and between implementations are essential for the application of M3UA in 3GPP networks. SS7 MTP3-User Adaptation Layer (M3UA) RFC 3332 includes a number of options. There exists uncertainty on how certain concepts shall be used in 3GPP networks. The addition of the Annex aims to clarify these uncertainties. This is a critical correction.
<b>Summary of change:</b>	⌘ An annex is added, where the choice of options in the M3UA specification is made. Certain concepts are clarified. The different sections in RFC 3332 are classified.
<b>Consequences if not approved:</b>	⌘ Interoperability between network domains and between vendors implementation will not be achieved.

<b>Clauses affected:</b>	⌘ 5.2 and an addition of an annex.						
<b>Other specs Affected:</b>	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;">⌘</td> <td style="text-align: center;">X</td> </tr> </table>	Y	N	⌘	X	Other core specifications	⌘
Y	N						
⌘	X						
	⌘	Test specifications					
	⌘	O&M Specifications					
<b>Other comments:</b>	⌘						

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

\*\*\*\* FIRST MODIFIED SECTION \*\*\*\*

## 5.2 Protocol architecture in the case of IP-based SS7 signalling transport network

The transport of an MTP3-user signalling messages shall be accomplished in accordance with the architecture defined by the "Framework Architecture for Signalling Transport" [16], by "Stream Control Transmission Protocol"[8] and by the IETF document available in Annex A

The protocol architecture applicable in the case of IP-based SS7 signalling transport network is shown in Figure 5.2/1




Figure 5.2/1: Protocol architecture in the case of IP-based SS7 signalling transport network

[The definition of the use of M3UA in 3GPP core network is provided in Annex B to this specification.](#)

\*\*\*\* LAST MODIFIED SECTION \*\*\*\*

---

## Annex B The use of M3UA in 3GPP networks(Normative)

### 1 Scope

[This annex defines the application of M3UA in 3GPP core networks. The purpose of the Annex is to ensure the interoperability of different implementations of M3UAs used by different operators and vendors. This is achieved by](#)

- [Clarifying certain concepts which are used in RFC 3332;](#)
- [Defining those features in RFC 3332 for which support is mandatory;](#)
- [Defining those features in the RFC 3332 for which support is optional;](#)
- [Defining those features in RFC 3332 which shall not be used;](#)

[The specification is intended for interfaces between network domains. However, it can also be used inside one network domain, and constitutes in that case minimum M3UA to be supported between IP nodes and between IP nodes and SGW nodes in 3GPP network.](#)

---

### 2 Introduction

[M3UA may be used in a number of interfaces in a 3GPP-core network. The annex is intended for the interface called A and C in figure 1. A is the Interface between two IP nodes that are equipped with SCTP, M3UA and a M3UA user. Examples of M3UA user are BICC, H.248, SCCP and ISUP. The interface can be used inside one network domain but also to interconnect network domains. Interface B can be used between network domains and inside network domains. Interface B is using - Q.701-Q.705 or Q.2210, and therefore is already standardised and not in the scope for](#)

this annex. Interface C is the interface between a node including SCTP, M3UA and a M3UA user and a node including SCTP, M3UA and M3UAsignalling gateway functions.. This interface is inside one network domain.

Interfaces A and C are similar. The main difference is that interface C shall also allow for interworking with the SS 7 network and therefore provides functions for the interworking.

The signalling gateways in this picture are pure MTP3/3B-M3UA signaling gateways. They do not include any M3UA users. Still there could be a node including an M3UA user (eg SCCP functions) and a M3UA signalling gateway functions. In that case the node will support all the interfaces A, B and C.

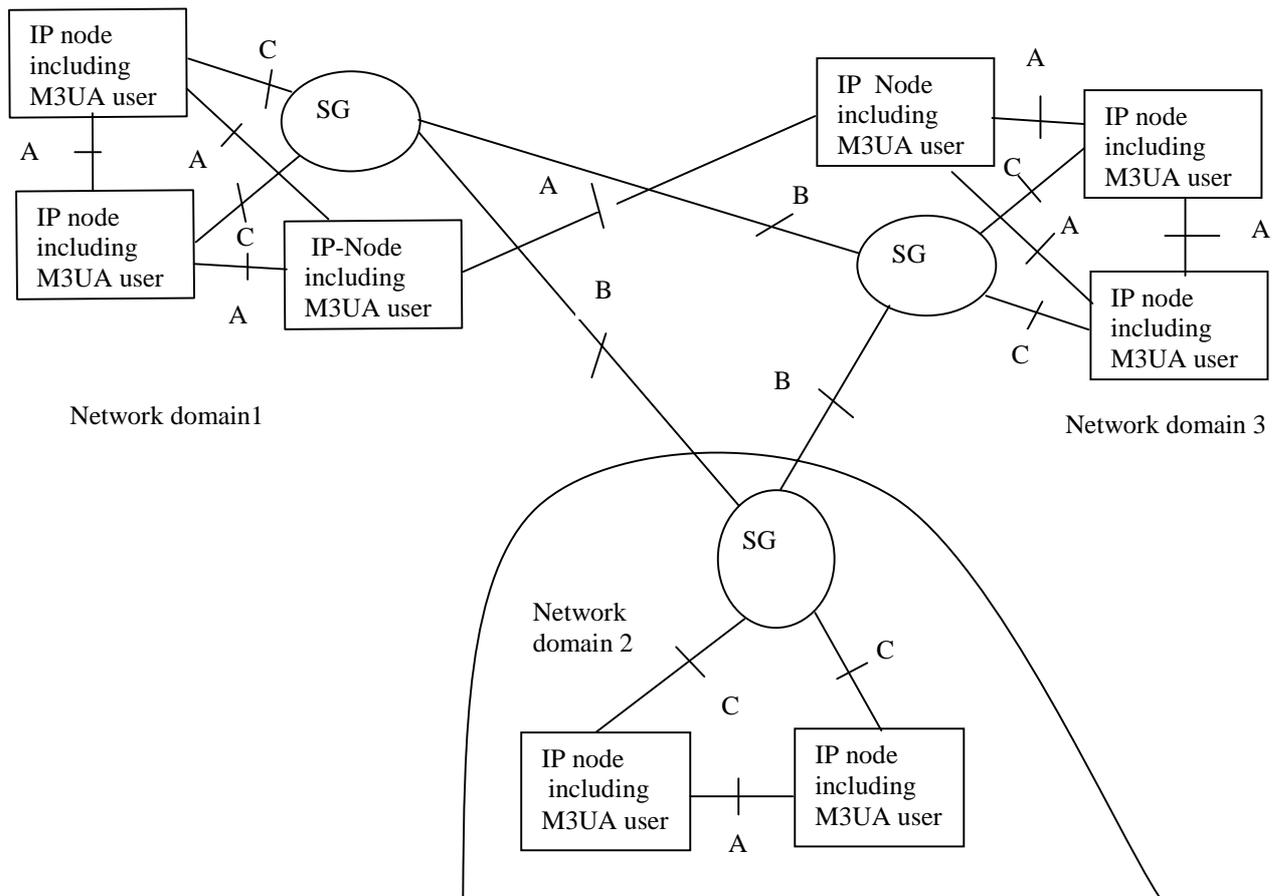


Figure 1 Use of M3UA in 3GPP core network

### 3 Protocol conformance to RFC 3332

A minimum implementation shall support sections marked mandatory in the table below. - It shall be possible to configure- all implementations to interoperate (no error messages returned) with the minimum set.

-The table below makes comment to the sections in -RFC 3332. In the comment column the following terms are used:

- - -

Mandatory: When support of text in a section is marked mandatory:

- On an information element, message or message class, it means that a receiver shall understand the information element, message or message class and carry out the requested action.
- For a procedure, it means that the procedure is mandatory to be carried out by the involved network elements.

- Optional: When support of the text in a section is marked optional the feature involved is only guaranteed to work between peer entities which are subject to a bilateral agreement between operators of those entities. If one end uses an optional message or information element and the other does not support it, then either a silent discard takes place of an

information element as a part of the message or the message is discarded and an error message is returned. This is described as part of the handling of the optionality in the table.

- Excluded: This means that the feature shall not be used in a 3GPP environment

- Descriptive text means that the section does not include any requirements for this specification.


The word “heading” means that the section consists only of subordinate sections.

The comments column -also defines the behaviour of a minimum implementation if it does not support a message or an information element in a mandatory message.

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<u>Abstract</u>	<u>Descriptive text</u>
<u>1.Introduction</u>	<u>Descriptive text</u>
<u>1.1 Scope</u>	<u>Descriptive text</u>
<u>1.2 Terminology</u>	<u>Descriptive text.</u>
<u>1.3 M3UA overview</u>	<u>Descriptive text.</u>
<u>1.4 Functional area</u>	<u>Descriptive text.</u>
<u>1.5 Sample Configurations</u>	<u>Descriptive text</u>
<u>1.6 Definition of M3UA Boundaries</u>	<u>Descriptive text</u>
<u>2 Conventions</u>	<u>Descriptive text</u>
<u>3. M3UA Protocol Elements</u>	<u>Mandatory</u>
<u>3.1 Common message header</u>	<u>Mandatory</u>
<u>3.1.1 M3UA Protocol Version:</u>	<u>The version number field shall be set to 1</u>
<u>3.1.2 Message classes</u>	<u>The values are classified as follow</u> <u>0-4 Mandatory</u> <u>5-8 Excluded</u> <u>9 Optional (Routing Key Management (RKM) Messages)</u> <u>10 to 255 Excluded</u>
<u>3.1.2 (Management (MGMT) message)</u>	<u>The values are classified as follow</u> <u>0 Mandatory</u> <u>1 Optional (Notify). When received and not supported the</u> <u>message maybe silently discarded.</u> <u>2-255 Excluded</u>
<u>3.1.2 (Transfer messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1 Mandatory</u> <u>2 to 255 Excluded</u>
<u>3.1.2 (Signalling network management (SSNM) messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1-6 Mandatory</u> <u>7- 255 Excluded.</u>
<u>3.1.2 (ASP State Maintenance (ASPSM) Messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1-6 Mandatory</u> <u>7-255 Excluded</u>
<u>3.1.2 (ASP Traffic Maintenance (ASPTM) Messages)</u>	<u>The values are classified as follow</u> <u>0 Excluded</u> <u>1-4 Mandatory</u> <u>5 to 255 Excluded</u>
<u>3.1.2 (Routing key management (RKM) messages)</u>	<u>Optional</u> <u>If any of these messages is received and not supported an error message with the error code 0x04 (Unsupported message type) shall be sent</u>
<u>3.1.3 Reserved</u>	<u>Mandatory</u>
<u>3.1.4 Message length</u>	<u>Mandatory</u>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<p><u>3.2 Variable Length Parameter Format Common Parameters:</u></p>	<p><u>The values are classified as follows</u></p> <p><u>0x0000-- 0x0003, 0x0005, 0x0008, 0x000a, 0x000e, 0x000f, 0x0010 0x0014—0x01ff Excluded</u></p> <p><u>0x0007, 0x0009, 0x000c and 0x0012 Mandatory</u></p> <p><u>0x0004 optional (INFO String) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x0006 optional (Routing Context) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x000b optional (Traffic Mode Type) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x0011 (ASP Identifier) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x0012 Affected point code is mandatory. The support of value 0 in the mask field is mandatory. All other values is outside the scope of this annex.</u></p> <p><u>0x0013 (Correlation ID) if received and not supported the message is processed but the optional information element is silently discarded,</u></p>
<p><u>3.2 Variable Length Parameter Format M3UA Specific Parameters</u></p>	<p><u>The values are classified as follows</u></p> <p><u>0x0201, 0x0202, 0x0203, 0x0211, 0x0202d and 0x0214 to 0xffff Excluded</u></p> <p><u>0x0204--0x0205, 0x0210 Mandatory</u></p> <p><u>0x0200 optional (Network Appearance) if received and not supported the message is processed but the optional information element is silently discarded,</u></p> <p><u>0x0206 Optinal (Concerned Destination). If received and not supported the message is processed but the optional information element is silently discarded.</u></p> <p><u>0x0207 (Routing Key), 0x0208 (Registration Result), 0x0209 (Deregistration Result) 0x020a (Local Routing Key Identifier), 0x020b (Destination Point Code), 0x020c (Service Indicators) 0x020d (Subsystem Numbers), 0x020e (Originating Point Code List), 0x020f (Circuit Range), 0x0212 (Registration Status), 0x0213 (Deregistration Status) are parameters in optional message, and therefore no action is specified.</u></p>
<p><u>3.3 Transfer messages</u></p>	<p><u>These messages are mandatory at the interfaces A and C.</u></p>
<p><u>3.3.1 Payload message</u></p>	<p><u>The parameters Network Appearance, Routing Context, Correlation ID are optional</u>  <u>The parameter Protocol data is mandatory.</u></p>
<p><u>3.4 SS7 signalling network management messages</u></p>	<p><u>Heading</u></p>
<p><u>3.4.1 Destination Unavailable (DUNA)</u></p>	<p><u>The message is mandatory at the interface C.</u>  <u>The parameters Network Appearance, Routing Context, and INFO String are optional</u>  <u>The parameter Affected Point Code is mandatory</u></p>


<u>Section number in M3UA RFC</u>	<u>Comments</u>
<a href="#">3.4.2 Destination Available (DAVA)</a>	The message is mandatory at the interface C The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , and <a href="#">INFO String</a> are optional. The parameter <a href="#">Affected Point Code</a> is mandatory :-
<a href="#">3.4.3 Destination State Audit (DAUD)</a>	The message is mandatory at the interface C The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , and <a href="#">INFO String</a> are optional.- :- The parameter <a href="#">Affected Point Code</a> is mandatory
<a href="#">3.4.4 Signalling Congestion (SCON)</a>	The message is mandatory at the interface C The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , <a href="#">Congestion Indications</a> , and <a href="#">INFO String</a> are optional The parameter <a href="#">Affected point code</a> is -mandatory.
<a href="#">3.4.5 Destination User Part Unavailable (DUPU)</a>	The message is mandatory at the interfaces A and C. The parameters <a href="#">Network Appearance</a> , <a href="#">Routing Context</a> , and <a href="#">INFO String</a> are optional.  The parameters <a href="#">Affected point code</a> and <a href="#">User/Cause</a> are mandatory
<a href="#">3.4.6 Destination Restricted (DRST) message</a>	This message is <del>an</del> mandatory.- :-
<a href="#">3.5 ASP State Maintenance (ASPSM) Messages</a>	These messages are mandatory at the interfaces A and C.
<a href="#">3.5.1 ASP Up message</a>	The <a href="#">ASP Identifier</a> and <a href="#">Info String</a> parameters are optional
<a href="#">3.5.2 ASP Up Acknowledgement Message</a>	The <a href="#">Info String</a> parameter is optional.
<a href="#">3.5.3 ASP Down message</a>	The <a href="#">Info String</a> parameter is optional.
<a href="#">3.5.4 ASP Down Acknowledgement message</a>	The <a href="#">Info String</a> parameter is optional.
<a href="#">3.5.5 Heartbeat message</a>	The message is mandatory.
<a href="#">3.5.6 Heartbeat Acknowledgement message</a>	The message is mandatory
<a href="#">3.6 Routing Key Management messages</a>	These messages are optional at the interfaces A and C.
<a href="#">3.7 ASP Traffic Maintenance (ASPTM) Messages</a>	These messages are mandatory at the interfaces A and C.
<a href="#">3.7.1 ASP Active message</a>	The parameters <a href="#">Traffic Mode Type</a> , <a href="#">Routing Context</a> and <a href="#">INFO String</a> are optional.
<a href="#">3.7.2 ASP Active Acknowledgement message</a>	The <a href="#">Traffic Mode Type</a> , <a href="#">Routing Context</a> and <a href="#">INFO String</a> are optional.
<a href="#">3.7.3 ASP inactive message</a>	The parameters <a href="#">Routing Context</a> and <a href="#">INFO String</a> are optional.
<a href="#">3.7.4 ASP Inactive Acknowledgement</a>	The parameters <a href="#">Routing Context</a> <a href="#">INFO String</a> are optional.
<a href="#">3.8 Management (MGMT) Messages</a>	Heading
<a href="#">3.8.1 Error message</a>	The message is mandatory at the interfaces A and C

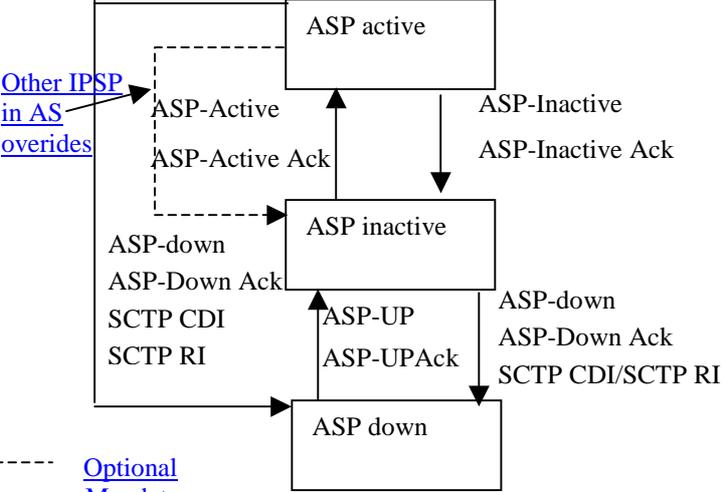
Section number in M3UA RFC	Comments
3.8.2 Notify message	The message is optional at the interfaces A and C
4 Procedure	The application of a particular procedure at a certain interface is detailed in the following sections
4.1 Procedures to Support the M3UA-User	Heading
4.1.1 Receipt of Primitives from the M3UA-User	The procedure is mandatory at the interfaces A and C.
4.1.2 Receipt of Primitives from the Layer Management	This section is outside the scope of this annex.
4.2 Procedures to Support the Management of SCTP Associations	The procedures are mandatory at the interfaces A and C
4.2.1 Receipt of M3UA Peer Management Messages	The two first paragraphs are outside the scope of this annex. Last paragraph is mandatory.
4.3 AS and ASP State Maintenance	The procedure is mandatory at the interfaces A and C.
4.3.1 ASP States	<p>Replace figure in section 4.3.1 in "RFC 3332" with the one below, which is based on figure 4 in draft-ietf-sigtran-m3ua-implementors-guide-01</p>  <pre> stateDiagram-v2     state ASP_active as ASP active     state ASP_inactive as ASP inactive     state ASP_down as ASP down      ASP_active --&gt; ASP_inactive : ASP-Inactive     ASP_inactive --&gt; ASP_active : ASP-Active     ASP_active --&gt; ASP_down : ASP-down     ASP_down --&gt; ASP_active : ASP-UP     ASP_down --&gt; ASP_inactive : ASP-down     ASP_inactive --&gt; ASP_down : ASP-Down      ASP_active --&gt; ASP_active : ASP-Active Ack     ASP_inactive --&gt; ASP_active : ASP-Active Ack     ASP_down --&gt; ASP_active : ASP-UP Ack     ASP_down --&gt; ASP_inactive : ASP-Down Ack     ASP_inactive --&gt; ASP_down : ASP-Down Ack     ASP_down --&gt; ASP_down : SCTP CDI/SCTP RI      ASP_active -.-&gt; ASP_inactive : ASP-Active (Optional)     ASP_inactive -.-&gt; ASP_active : ASP-Inactive (Optional)     ASP_down -.-&gt; ASP_active : ASP-UP (Optional)     ASP_down -.-&gt; ASP_down : SCTP CDI/SCTP RI (Optional)     </pre> <p>Other IPSP in AS overrides</p> <p>Optional Mandatory</p>
4.3.2 AS States	Mandatory
4.3.3 M3UA Management Procedures for Primitives	This section is outside the scope of this annex.
4.3.4 ASPM Procedures for Peer-to-Peer Messages	Heading
4.3.4.1 ASP Up Procedure	<p>This procedure is mandatory at the interface C and is a subset of the procedure used at interface A. See also 4.3.4.1.2.</p> <p>Note: The registration procedure is optional.</p> <p>A received ASP Up must be acknowledged by an ASP Up Ack message, if no restriction applies e.g. maintenance.</p>
4.3.4.1.1 M3UA Version Control	This procedure is mandatory at the interfaces A and C.

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<p><u>4.3.4.1.2 IPSP Considerations (Asp Up)</u></p>	<p><u>This procedure is mandatory at the interface A.</u></p> <p><u>The present section 4.3.4.1.2 in RFC 3332 is replaced by:</u>  <u>"An IPSP may be considered in the ASP-INACTIVE state after an ASP Up or ASP Up Ack has been received from it. An IPSP can be considered in the ASP-DOWN state after an ASP Down or ASP Down Ack has been received from it".</u></p> <p><u>The IPSP may inform Layer Management of the change in state of the remote IPSP using M-ASP_UP or M-ASP_DN indication or confirmation primitives.</u></p> <p><u>If for any local reason (e.g., management lockout) an IPSP cannot respond to an ASP Up message with an ASP Up Ack message, it responds to an ASP Up message with an Error message with reason "Refused - Management Blocking" and leaves the remote IPSP in the ASP-DOWN state."</u></p> <p><u>The paragraphs above are in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</u></p> <p><u>All comments applicable for section 4.3.4.1 and 4.3.4.2 are also applicable for this section.</u></p>
<p><u>4.3.4.2 ASP-Down Procedure</u></p>	<p><u>This procedure is mandatory at the interface C and is a subset of the procedure used at interface A. See also 4.3.4.1.2.</u></p> <p><u>A received ASP Down message must be acknowledged by an ASP Down Ack message, if no restriction applies eg maintenance reason.</u></p>
<p><u>4.3.4.3 ASP Active Procedure</u></p>	<p><u>This procedure is mandatory at interface C and is a subset of the procedure used at interface A. See also 4.3.4.3.1.</u></p> <p><u>Configuration data define which AS an ASP is a member of. The ASP Active message does not contain a Routing Context parameter. Consequently, the ASP Active Ack message does not include any Routing Context(s) parameter.</u></p> <p><u>The traffic state an ASP has, is configured within the associated Application Server. If more than one physical entity (ASPs, SGPs or IPSPs) implements a logical entity (SG, AS) then loadshare with 1+k is the mandatory traffic mode.</u></p> <p><u>A received ASP Active must be acknowledged by an ASP Active Ack message, if no restriction applies e.g. maintenance reason.</u></p> <p><u>If a Routing Context parameter is included in the ASP Active message it is not needed to include the Routing Context parameter in the ASP Active Ack message.</u></p> <p><u>Note: This is a deviation to RFC 3332.</u></p>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<p><a href="#">4.3.4.3.1 IPSP Considerations (ASP Active)</a></p>	<p><a href="#">This procedure is mandatory at the interface A.</a></p> <p><a href="#">Section 4.3.4.3.1 in RFC 3332 is replaced by:</a></p> <p><a href="#">“Either of the IPSPs can initiate communication. When an IPSP receives an ASP Active, it should mark the peer as ASP-ACTIVE and return an ASP Active Ack message. An ASP receiving an ASP Active Ack message may mark the peer as ASP-Active, if it is not already in the ASP-ACTIVE state.”</a></p> <p><a href="#">The paragraph above is in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</a></p> <p><a href="#">All comments applicable for section 4.3.4.3 are also applicable for this section.</a></p>
<p><a href="#">4.3.4.4 ASP Inactive Procedures</a></p>	<p><a href="#">This procedure is mandatory at the interface C and is a subset of the procedure used at interface A. See also 4.3.4.4.1.</a></p> <p><a href="#">Configuration data defines which AS an ASP is a member of.</a></p> <p><a href="#">It is optional to send several ASP Active Ack messages in response to a single ASP Active message.</a></p> <p><a href="#">A received ASP Inactive must be acknowledged by an ASP Inactive Ack message, if no restriction applies e.g. maintenance.</a></p> <p><a href="#">The sending of Notify message is mandatory if the As state is changed.</a></p>
<p><a href="#">4.3.4.4.1 IPSP Considerations (ASP Inactive )</a></p>	<p><a href="#">This procedure is mandatory at the interface A.</a></p> <p><a href="#">Section 4.3.4.4.1 in RFC 3332 is replaced by:</a></p> <p><a href="#">“An IPSP may be considered in the ASP-INACTIVE state by a remote IPSP after an ASP Inactive or ASP Inactive Ack message has been received from it.”</a></p> <p><a href="#">The paragraph above is in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</a></p> <p><a href="#">All comments applicable for section 4.3.4.4 are also applicable for this section.</a></p>
<p><a href="#">4.3.4.5 Notify Procedures</a></p>	<p><a href="#">The procedure is mandatory at the interfaces A and C to reflect an AS state change.</a></p>
<p><a href="#">4.3.4.6 Heartbeat Procedures</a></p>	<p><a href="#">The procedure is optional.</a></p>
<p><a href="#">4.4 Routing Key management procedure</a></p>	<p><a href="#">The procedure is optional.</a></p>
<p><a href="#">4.5 Procedures to Support the Availability or Congestion Status of SS7 Destination</a></p>	<p><a href="#">Heading</a></p>
<p><a href="#">4.5.1 At an SGP</a></p>	<p><a href="#">Note: The use of Transfer restricted message is a national option and is about the scope of this specification.</a></p> <p><a href="#">If the SG knows that the ASP supports DRST, then SG shall Send a DRST message, if the SG does not know whether the ASP supports the DRST message the SGW shall send a DAVA message if the destination earlier was unavailable. If the destination was available then no action is required.</a></p>
<p><a href="#">4.5.2 At an ASP</a></p>	<p><a href="#">Heading</a></p>
<p><a href="#">4.5.2.1 Single SG Configurations</a></p>	<p><a href="#">It is mandatory for an ASP to interoperate with one Signaling Gateway.</a></p>

<u>Section number in M3UA RFC</u>	<u>Comments</u>
<a href="#">4.5.2.2 Multiple SG Configurations</a>	<a href="#">It shall be possible to configure an ASP to handle at least a configuration consisting of two Signalling Gateways.</a>
<a href="#">4.5.3 ASP Auditing</a>	<p><a href="#">Only the part related to international use in Q.704 is inside the scope of this annex.</a></p> <p><a href="#">Add the following paragraph to the corresponding section in RFC 3332</a></p> <p><a href="#">“Where the SGP does not maintain the congestion status of the SS7 destination (ITU international networks), the response to a DAUD message should always be only a DAVA, or DUNA message as appropriate.”</a></p> <p><a href="#">The paragraph above is an extract from “draft-ietf-sigtran-m3ua-implementors-guide-01”.</a></p>
<a href="#">4.6 MTP 3 restart</a>	<a href="#">The procedure is mandatory.</a>
<a href="#">5. Examples of M3UA Procedures</a>	<a href="#">Descriptive text</a>
<a href="#">5.1. Establishment of Association and Traffic between SGPs and ASPs</a>	<a href="#">Note The procedures defined in the sub-sections to 5.1 are a subset of the procedures defined in section 5.5.</a>
<a href="#">5.1.1 Single ASP in an Application Server (“1+0” sparing)</a>	<a href="#">Descriptive text</a>
<a href="#">5.1.1.1 Single ASP in an Application Server (“1+0” sparing), No Registration</a>	<a href="#">The use of RCn is optional.</a>
<a href="#">5.1.1.2 Single ASP in Application Server (“1+0” sparing), Dynamic Registration</a>	<a href="#">The use of dynamic registration is optional.</a>
<a href="#">5.1.1.3 Single ASP in Multiple Application Servers (each with “1+0” sparing), Dynamic Registration (Case 1 - Multiple Registration Requests)</a>	<a href="#">The use of dynamic registration is optional.</a>
<a href="#">5.1.1.4 Single ASP in Multiple Application Servers (each with “1+0” sparing), Dynamic Registration (Case 2 - Single Registration Request)</a>	<a href="#">The use of dynamic registration is optional.</a>
<a href="#">5.1.2 Two ASPs in Application Server (“1+1” sparing)</a>	<a href="#">This procedure is optional.</a>
<a href="#">5.1.3 Two ASPs in an Application Server (“1+1” sparing, loadsharing case).</a>	<a href="#">The traffic mode parameter is optional in ASP-Active message</a>
<a href="#">5.1.4 Three ASPs in an Application Server (“n+k” sparing, loadsharing case)</a>	<a href="#">The procedure is optional.</a>
<a href="#">5.2 ASP Traffic Failover Examples</a>	<a href="#">Heading</a>
<a href="#">5.2.1 (1+1 Sparing, Withdrawal of ASP, Backup Override)</a>	<a href="#">The use of the procedure “backup override” is optional.</a>

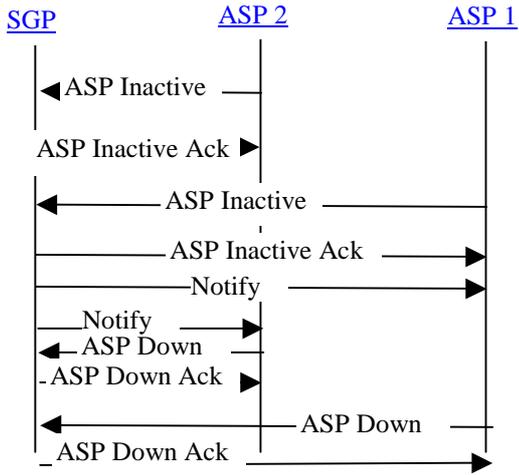Section number in M3UA RFC	Comments
5.2.2 (1+1 Sparing, Backup Override)	<a href="#">The use of the procedure “backup override” is optional.</a>
5.2.3 (n+k Sparing, Loadsharing case, Withdrawal of ASP)	<a href="#">The procedure is optional</a>
5.3 Normal Withdrawal of an ASP from an Application Server and Teardown of an Association	<a href="#">The registration procedure is optional. Routing Contexts (RC) is optional.</a>
5.3.X Normal Withdrawal of the ASP from an Application Server (1+1 sparing) loadsharing and Teardown of Association	 <pre> sequenceDiagram     participant SGP     participant ASP2 as ASP 2     participant ASP1 as ASP 1      SGP-&gt;&gt;ASP2: ASP Inactive     ASP2-&gt;&gt;SGP: ASP Inactive Ack     SGP-&gt;&gt;ASP1: ASP Inactive     ASP1-&gt;&gt;SGP: ASP Inactive Ack     SGP-&gt;&gt;ASP1: Notify     ASP1-&gt;&gt;ASP2: Notify     ASP2-&gt;&gt;SGP: ASP Down     SGP-&gt;&gt;ASP2: ASP Down Ack     SGP-&gt;&gt;ASP1: ASP Down     ASP1-&gt;&gt;SGP: ASP Down Ack     </pre> <p><a href="#">The figure is added for clarification.</a></p>
5.4 M3UA/MTP3-User Boundary Examples	<a href="#">Heading</a>
5.4.1 At an ASP	<a href="#">Heading</a>
5.4.1.1 Support for MTP-TRANSFER Primitives at the ASP	<a href="#">Heading</a>
5.4.1.1.1 Support for MTP-TRANSFER Request Primitive	<a href="#">The procedure is mandatory at the interface A and C. This description is also applicable for an IPSP, so replace the abbreviation ASP with ASP/IPSP and SGP with SGP/IPSP</a>
5.4.1.1.2 Support for the MTP-TRANSFER Indication Primitive	<a href="#">The support is mandatory at the interface A and C. This description is also applicable for an IPSP, so replace the abbreviation ASP with ASP/IPSP and SGP with SGP/IPSP.</a>
5.4.1.1.3 Support for ASP Querying of SS7 Destination States	<a href="#">This procedure is mandatory at the interface C. The quering of congestion states is an optional national procedure and outside the scope of this annex.</a>
5.4.2 At an SGP	<a href="#">Heading</a>
5.4.2.1 Support for MTP-TRANSFER Request Primitive at the SGP	<a href="#">The procedure is mandatory at the interface C. Network Appearance is optional.</a>
5.4.2.2 Support for MTP-TRANSFER Indication Primitive at the SGP	<a href="#">The procedure is mandatory at the interface C</a>
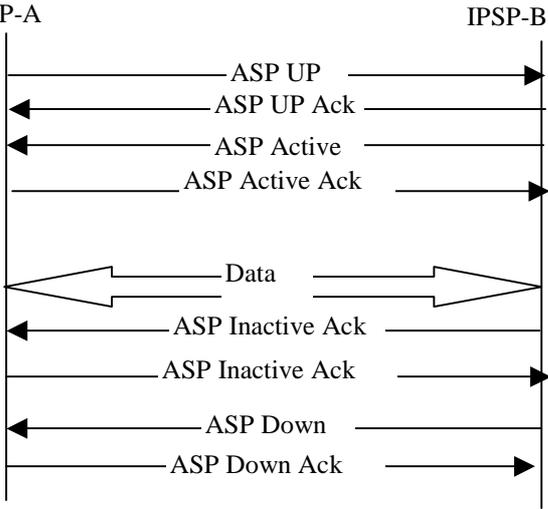
<u>Section number in M3UA RFC</u>	<u>Comments</u>
<a href="#">5.4.2.3 Support for MTP-PAUSE, MTP-RESUME, MTP-STATUS Indication Primitives</a>	<a href="#">Heading</a>
<a href="#">5.4.2.3.1 Destination Unavailable</a>	<a href="#">The procedure is mandatory at the interface C</a>
<a href="#">5.4.2.3.2 Destination Available</a>	<a href="#">The procedure is mandatory at the interface C</a>
<a href="#">5.4.2.3.3 SS7 Network Congestion</a>	<a href="#">The procedure is mandatory at the interface C</a>
<a href="#">5.4.2.3.4 Destination User Part Unavailable</a>	<a href="#">The procedure is mandatory at the interface C and optional at the interface A.</a>
<a href="#">5.5 Examples for IPSP communication.</a>	<p> <a href="#">Replace the section in RFC 3332 with the paragraph below</a>  <a href="#">This scenario shows a basic example for IPSP communication for the three phases of the connection (establishment, data exchange, disconnection). It is assumed that the SCTP association is already set up.</a> </p>  <pre> sequenceDiagram     participant IPSP_A as IPSP-A     participant IPSP_B as IPSP-B     IPSP_A-&gt;&gt;IPSP_B: ASP UP     IPSP_B--&gt;&gt;IPSP_A: ASP UP Ack     IPSP_A-&gt;&gt;IPSP_B: ASP Active     IPSP_B--&gt;&gt;IPSP_A: ASP Active Ack     IPSP_A&lt;&gt;&gt;IPSP_B: Data     IPSP_B--&gt;&gt;IPSP_A: ASP Inactive Ack     IPSP_A-&gt;&gt;IPSP_B: ASP Inactive Ack     IPSP_A-&gt;&gt;IPSP_B: ASP Down     IPSP_B--&gt;&gt;IPSP_A: ASP Down Ack     </pre> <p> <a href="#">The paragraph above is in accordance with changes included in Draft-ietf-sigtran-m3ua-implementors-guide-01</a> </p>

## CHANGE REQUEST

⌘ **29.202 CR 008** ⌘ rev **-** ⌘ Current version: **4.2.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

<b>Title:</b>	⌘ IETF RFC reference for M3UA		
<b>Source:</b>	⌘ CN4		
<b>Work item code:</b>	⌘ SS7IP	<b>Date:</b>	⌘ 29/07/2002
<b>Category:</b>	⌘ <b>F</b>	<b>Release:</b>	⌘ Rel-4
	Use <u>one</u> of the following categories: <b>F</b> (correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (addition of feature), <b>C</b> (functional modification of feature) <b>D</b> (editorial modification) Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .		Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6)

<b>Reason for change:</b>	⌘ SS7 MTP3-User Adaptation Layer (M3UA) "has reached the " proposed standard" status and has been allocated a RFC number "RFC 3332". To be able to interwork with standard RFC implementation and use standard developed products 3GPP must align with the progress in IETF.
	<b>This is an Essential correction</b>
<b>Summary of change:</b>	⌘ The changes consist of - an addition of a reference to RFC 3332 in the reference section. - Deletion of Annex A
<b>Consequences if not approved:</b>	⌘ If the reference is not introduced it is still Annex A that defines the M3UA protocol for 3GPP. However standard product will be based on RFC 3332. Therefore interoperability problem will occur between the two ends.

<b>Clauses affected:</b>	⌘ Section 2.1 and annex A.										
<b>Other specs Affected:</b>	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px;">Y</td> <td style="width: 20px;">N</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">X</td> </tr> </table> Other core specifications ⌘ Test specifications ⌘ O&M Specifications ⌘	Y	N	X	X	X	X	X	X		
Y	N										
X	X										
X	X										
X	X										
<b>Other comments:</b>	⌘										

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.
- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

\*\*\*\* FIRST MODIFIED SECTION \*\*\*\*

## 2.1 Normative references

- [1] 3GPP TR 21.905: "3G Vocabulary"
- [2] ITU-T Recommendation Q.701: "Functional description of the message transfer part (MTP) of signalling system No. 7"
- [3] ITU-T Recommendation Q.702: "Signalling data link"
- [4] ITU-T Recommendation Q.703: "Signalling link"
- [5] ITU-T Recommendation Q.704: "Signalling network functions and messages"
- [6] ITU-T Recommendation Q.705: "Signalling network structure"
- [7] ITU-T Recommendation Q.706: "Message transfer part signalling performance"
- [8] RFC 2960: "Stream Control Transmission Protocol"
- [9] ITU-T Recommendation G.804: "ATM cell mapping into Plesiochronous Digital Hierarchy (PDH)"
- [10] ITU-T Recommendation I.112: "Vocabulary of terms for ISDNs"
- [11] ITU-T Recommendation I.361: "B-ISDN ATM layer specification"
- [12] ITU-T Recommendation I.363.5: "B-ISDN ATM Adaptation Layer specification: Type 5 AAL"
- [13] ITU-T Recommendation Q.2110: "B-ISDN ATM adaptation layer - Service specific connection oriented protocol (SSCOP)"
- [14] ITU-T Recommendation Q.2140: "B-ISDN ATM adaptation layer - Service specific coordination function for signalling at the network node interface (SSCF at NNI)"
- [15] ITU-T Recommendation Q.2210: "Message transfer part level 3 functions and messages using the services of ITU-T Recommendation Q.2140"
- [17] RFC 3309: "SCTP Checksum Change"
- [18] [RFC 3332: Signaling System 7 \(SS7\) Message Transfer Part 3 \(MTP3\) - User Adaptation Layer \(M3UA\)](#)

\*\*\*\* LAST MODIFIED SECTION \*\*\*\*

---

## ~~Annex A (normative): Internet Draft: SS7 MTP3-User Adaption Layer (M3UA)~~

~~The document included in this Annex is the latest available Internet Draft at the time of writing. When the IETF issues the RFC to this Internet Draft then a change request will be provided to replace the text in Annex A with a reference in section 2~~

~~Network Working Group~~ ~~Greg Sidebottom (Editor)~~  
~~INTERNET DRAFT~~ ~~Guy Mousseau~~  
~~Nortel Networks~~  
~~Lyndon Ong~~  
~~Ciena~~  
~~Ian Rytina~~  
~~Eriasson~~  
~~Hanns Juergen Schwarzbauer~~  
~~Siemens~~  
~~Klaus Gradischnig~~  
~~Neustar~~  
~~Ken Morneault~~  
~~Cisco~~  
~~Mallesh Kalla~~  
~~Telecordia~~  
~~Normand Claude~~  
~~Performance Technologies~~

~~Expires in six months~~ ~~Jul 2001~~

~~SS7 MTP3 User Adaptation Layer (M3UA)~~  
~~<draft-ietf-sigtran-m3ua-07.txt>~~

#### ~~Status of This Memo~~

~~This document is an Internet Draft and is in full conformance with all provisions of Section 10 of RFC 2026. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet Drafts.~~

~~Internet Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet Drafts as reference material or to cite them other than as 'work in progress.'~~

~~The list of current Internet Drafts can be accessed at~~  
~~<http://www.ietf.org/lid-abstracts.html>~~

~~The list of Internet Draft Shadow Directories can be accessed at~~  
~~<http://www.ietf.org/shadow.html>.~~

~~To learn the current status of any Internet Draft, please check the 'lid-abstracts.txt' listing contained in the Internet Drafts Shadow Directories on [ftp.isi.edu](ftp://ftp.isi.edu) (US West Coast), [ftp.munnari.oz.au](ftp://ftp.munnari.oz.au) (Pacific Rim), [ftp.nic.nordu.net](ftp://ftp.nic.nordu.net) (Europe), [ftp.isi.edu](ftp://ftp.isi.edu) (US East Coast), or [ftp.isi.edu](ftp://ftp.isi.edu) (US West Coast).~~

#### ~~Abstract~~

~~This Internet Draft defines a protocol for supporting the transport of any SS7 MTP3 User signalling (e.g., ISUP and SCCP messages) over IP using the services of the Stream Control Transmission Protocol. Also, provision is made for protocol elements that enable a seamless~~

~~Sidebottom et al [Page 1]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~operation of the MTP3 User peers in the SS7 and IP domains. This protocol would be used between a Signalling Gateway (SG) and a Media Gateway Controller (MGC) or IP-resident Database. It is assumed that the SG receives SS7 signalling over a standard SS7 interface using the SS7 Message Transfer Part (MTP) to provide transport.~~

~~Sidebottom et al [Page 2]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~TABLE OF CONTENTS~~

~~1. Introduction.....4~~

~~1.1 Scope.....4~~

~~1.2 Terminology.....4~~

~~1.3 M3UA Overview.....6~~

~~1.4 Functional Areas.....12~~

~~1.5 Sample Configurations.....21~~

~~1.6 Definition of M3UA Boundaries.....24~~

~~2. Conventions.....28~~

~~3. M3UA Protocol Elements.....28~~

~~3.1 Common Message Header.....28~~

~~3.2 Variable Length Parameter.....31~~

~~3.3 Transfer Messages.....32~~

~~3.4 SS7 Signalling Network management (SSNM) Messages.....35~~

~~3.5 ASP State Maintenance (ASPM) Messages.....43~~

~~3.6 Routing Key Management (RKM) Messages.....46~~

~~3.7 ASP Traffic Maintenance (ASPTM) Messages.....55~~

~~3.8 Management(MGMT) Messages.....60~~

~~4. Procedures.....64~~

~~4.1 Procedures to Support the M3UA User and Layer Management Layers.....64~~

~~4.2 Procedures to Support the Management of SCTP Associations with M3UA Peers.....67~~

~~4.3 Procedures to support the Unavailability or Congestion Status of SS7 Destinations.....81~~

~~4.4 MTP3 Restart.....83~~

~~5. Examples of M3UA Procedures.....84~~

~~5.1 Establishment of Association and Traffic Between SGs and ASPs.....84~~

~~5.2 ASP traffic Fail over Examples.....89~~

~~5.3 Normal Withdrawal of an ASP from an Application Server and Tear-down of an Association.....90~~

~~5.4 M3UA/MTP3 User Boundary Examples.....91~~

~~6. Security.....95~~

~~6.1 Introduction.....95~~

~~6.2 Threats.....95~~

~~6.3 Protecting Confidentiality.....95~~

~~7. IANA Considerations.....96~~

~~7.1 SCTP Payload Protocol Identifier.....96~~

~~7.2 M3UA Protocol Extensions.....96~~

~~8. Acknowledgements.....97~~

~~9. References.....97~~

~~10. Bibliography.....99~~

~~11. Author's Addresses.....99~~

~~Sidebottom et al [Page 3]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~1. Introduction~~

~~1.1 Scope~~

~~There is a need for Switched Circuit Network (SCN) signalling protocol~~

~~delivery from an SS7 Signalling Gateway (SG) to a Media Gateway Controller (MGC) or IP-resident Database as described in the Framework Architecture for Signalling Transport [1]. The delivery mechanism SHOULD meet the following criteria:~~

- ~~\* Support for the transfer of all SS7 MTP3 User Part messages (e.g., ISUP, SCCP, TUP, etc.)~~
- ~~\* Support for the seamless operation of MTP3 User protocol peers~~
- ~~\* Support for the management of SCTP transport associations and traffic between an SG and one or more MGCs or IP-resident Databases~~
- ~~\* Support for MGC or IP-resident Database process fail-over and load-sharing~~
- ~~\* Support for the asynchronous reporting of status changes to management~~

~~In simplistic transport terms, the SG will terminate SS7 MTP2 and MTP3 protocol layers and deliver ISUP, SCCP and/or any other MTP3 User protocol messages, as well as certain MTP network management events, over SCTP transport associations to MTP3 User peers in MGCs or IP-resident Databases.~~

## ~~1.2 Terminology~~

~~Application Server (AS) — A logical entity serving a specific Routing Key. An example of an Application Server is a virtual switch element handling all call processing for a unique range of PSTN trunks, identified by an SS7 SIO/DPC/OPC/CIC\_range. Another example is a virtual database element, handling all HLR transactions for a particular SS7 DPC/OPC/SCCP\_SSN combination. The AS contains a set of one or more unique Application Server Processes, of which one or more is normally actively processing traffic. An AS is contained within a single Network Appearance. Note that there is a 1:1 relationship between an AS and a Routing Key.~~

~~Application Server Process (ASP) — A process instance of an Application Server. An Application Server Process serves as an active or back-up process of an Application Server (e.g., part of a distributed virtual switch or database). Examples of ASPs are processes (or process instances) of MGCs, IP-SCPs or IP-HLRs. An ASP contains an SCTP endpoint and may be configured to process signalling traffic within more than one Application Server.~~

~~Sidebottom et al~~ [Page 4]

~~Internet Draft~~ SS7 MTP3 User Adaptation Layer ~~Jul 2001~~

~~Association — An association refers to an SCTP association. The association provides the transport for the delivery of MTP3 User protocol data units and M3UA adaptation layer peer messages.~~

~~IP Server Process (IPSP) — A process instance of an IP-based application. An IPSP is essentially the same as an ASP, except that it uses M3UA in a point-to-point fashion. Conceptually, an IPSP does not use the services of a Signalling Gateway.~~

~~Signalling Gateway Process (SGP) — A process instance of a Signalling Gateway. It serves as an active, back-up or load-sharing process of a~~

~~Signalling Gateway.~~

~~Signalling Gateway~~ An SG is a signaling agent that receives/sends SCN native signaling at the edge of the IP network [1]. An SG appears to the SS7 network as an SS7 Signalling Point. An SG contains a set of one or more unique Signalling Gateway Processes, of which one or more is normally actively processing traffic. Where an SG contains more than one SGP, the SG is a logical entity and the contained SGPs must be coordinated into a single management view to the SS7 network and to the supported Application Servers.

~~Signalling Process~~ A process instance that uses M3UA to communicate with other signalling process. An ASP, an SGP and an IPSP are all signalling processes.

~~Routing Key:~~ A Routing Key describes a set of SS7 parameters and parameter values that uniquely define the range of signalling traffic to be handled by a particular Application Server. Parameters within the Routing Key cannot extend across more than a single SS7 Destination Point Code.

~~Routing Context~~ A value that uniquely identifies a Routing Key. Routing Context values are either configured using a configuration management interface, or by using the routing key management procedures defined in this document.

~~Fail over~~ The capability to re route signalling traffic as required to an alternate Application Server Process, or group of ASPs, within an Application Server in the event of failure or unavailability of a currently used Application Server Process. Fail over also applies upon the return to service of a previously unavailable Application Server Process.

~~Signalling Point Management Cluster (SPMC)~~ The complete set of Application Servers represented to the SS7 network under one specific SS7 Point Code of one specific Network Appearance. SPMCs are used to sum the availability/congestion/User\_Part status of an SS7 destination point code that is distributed in the IP domain, for the purpose of supporting MTP3 management procedures at an SG. In some

~~Sidebottom et al~~ [Page 5]

~~Internet Draft~~ SS7 MTP3 User Adaptation Layer Jul 2001

~~cases, the SG itself may also be a member of the SPMC. In this case, the SG availability/congestion/User\_Part status must also be taken into account when considering any supporting MTP3 management actions.~~

~~MTP~~ The Message Transfer Part of the SS7 protocol.

~~MTP3~~ MTP Level 3, the signalling network layer of SS7

~~MTP3 User~~ Any protocol normally using the services of the SS7 MTP3 (e.g., ISUP, SCCP, TUP, etc.).

~~Network Appearance~~ The Network Appearance uniquely identifies an SS7 entity (Point Code) into an SS7 network, as presented by the SG. It is used for the purposes of logically separating the signalling traffic between the SG and the Application Server Processes over a common SCTP association. This partitioning is necessary where an SG is logically partitioned to appear as end node elements in multiple separate SS7 networks, in which case there is a separate network appearance for each

~~point code in the SS7 networks. It is also necessary when an SG is configured as an STP hosting multiple point codes, or when configured as multiple end nodes within the same network, in which case each point code is a separate network appearance between the SG and the Application Server Processes over a common SCTP Association. An example is where an SG is logically partitioned to appear as an element in four separate national SS7 networks. A Network Appearance implicitly defines the SS7 Point Code(s), Network Indicator and MTP3 protocol type/variant/version used within a specific SS7 network partition.~~

~~Network Byte Order: Most significant byte first, a.k.a Big Endian.~~

~~Layer Management— Layer Management is a nodal function that handles the inputs and outputs between the M3UA layer and a local management entity.~~

~~Host— The computing platform that the ASP process is running on.~~

~~Stream— A stream refers to an SCTP stream; a uni-directional logical channel established from one SCTP endpoint to another associated SCTP endpoint, within which all user messages are delivered in sequence except for those submitted to the un-ordered delivery service.~~

### ~~1.3 M3UA Overview~~

#### ~~1.3.1 Protocol Architecture~~

~~The framework architecture that has been defined for SCN signalling transport over IP [1] uses multiple components, including a common signalling transport protocol and an adaptation module to support the~~

~~Sidebottom et al [Page 6]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~services expected by a particular SCN signalling protocol from its underlying protocol layer.~~

~~Within the framework architecture, this document defines an MTP3 User adaptation module suitable for supporting the transfer of messages of any protocol layer that is identified to the MTP Level 3 layer, in SS7 terms, as a user part. The list of these protocol layers include, but is not limited to, ISDN User Part (ISUP) [2,3,4], Signalling Connection Control Part (SCCP) [5,6,7] and Telephone User Part (TUP) [8]. TCAP [9,10,11] or RANAP [12] messages are transferred transparently by the M3UA protocol as SCCP payload, as they are SCCP User protocols.~~

~~It is recommended that M3UA use the services of the Stream Control Transmission Protocol (SCTP) [13] as the underlying reliable common signalling transport protocol. This is to take advantage of various SCTP features such as:~~

- ~~— Explicit packet-oriented delivery (not stream-oriented),~~
- ~~— Sequenced delivery of user messages within multiple streams,~~
- ~~— with an option for order-of-arrival delivery of individual user messages,~~
- ~~— Optional multiplexing of user messages into SCTP datagrams,~~
- ~~— Network level fault tolerance through support of multi homing~~

~~at either or both ends of an association,  
Resistance to flooding and masquerade attacks, and  
Data segmentation to conform to discovered path MTU size.~~

~~Under certain scenarios, such as back-to-back connections without redundancy requirements, the SCTP functions above MAY NOT be a requirement and TCP can be used as the underlying common transport protocol.~~

### ~~1.3.2 Services Provided by the M3UA Layer~~

~~The M3UA Layer at an ASP or IPSP provides the equivalent set of primitives at its upper layer to the MTP3 Users as provided by the MTP Level 3 to its local MTP3 Users at an SS7 SEP. In this way, the ISUP and/or SCCP layer at an ASP or IPSP is unaware that the expected MTP3 services are offered remotely from an MTP3 Layer at an SGP, and not by a local MTP3 layer. The MTP3 layer at an SGP may also be unaware that its local users are actually remote user parts over M3UA. In effect, the M3UA extends access to the MTP3 layer services to a remote IP-based application. The M3UA layer does not itself provide the MTP3 services. However, in the case where an ASP is connected to more than one SGP, the M3UA layer at an ASP must maintain the status of configured SS7 destinations and route messages according to the availability and congestion status of the routes to these destinations via each SGP.~~

~~Sidebottom et al [Page 7]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The M3UA layer may also be used for point-to-point signalling between two IP Server Processes (IPSPs). In this case, the M3UA layer provides the same set of primitives and services at its upper layer as the MTP3. However, in this case the expected MTP3 services are not offered remotely from an SGP. The MTP3 services are provided but the procedures to support these services are a subset of the MTP3 procedures due to the simplified point-to-point nature of the IPSP to IPSP relationship.~~

#### ~~1.3.2.1 Support for the Transport of MTP3 User Messages~~

~~The M3UA layer provides the transport of MTP TRANSFER primitives across an established SCTP association between an SGP and an ASP or between IPSPs.~~

~~The MTP TRANSFER primitive information is encoded as in MTP3 User messages. In this way, the SCCP and ISUP messages received from the SS7 network by the SGP are not re-encoded into a different format for transport between the M3UA peers. The MTP3 Service Information Octet (SIO) and Routing Label (OPC, DPC, and SLS) are included, encoded as expected by the MTP3 and MTP3 User protocol layer.~~

~~At an ASP, in the case where a destination is reachable via multiple SGPs, the M3UA layer must also choose via which SGP the message is to be routed or support load balancing across the SGPs, ensuring that no missequencing occurs.~~

~~The M3UA layer does not impose a 272 octet signalling information field (SIF) length limit as specified by the SS7 MTP Level 2 protocol [14]~~

~~[15] [16]. Larger information blocks can be accommodated directly by M3UA/SCTP, without the need for an upper layer segmentation/re-assembly procedure as specified in recent SCCP or ISUP versions. However, in the context of an SG, the maximum 272 octet block size must be followed when inter-working to a SS7 network that does not support the transfer of larger information blocks to the final destination. This avoids potential ISUP or SCCP fragmentation requirements at the SGs. However, if the SS7 network is provisioned to support the Broadband MTP [20] to the final SS7 destination, the information block size limit may be increased past 272 octets.~~

#### ~~1.3.2.2 Native Management Functions~~

~~The M3UA layer provides management of the underlying SCTP transport protocol to ensure that SGP-ASP and IPSP-IPSP transport is available to the degree called for by the MTP3-User signalling applications.~~

~~The M3UA layer provides the capability to indicate errors associated with received M3UA messages and to notify, as appropriate, local management and/or the peer M3UA.~~

~~Sidebottom et al [Page 8]~~

~~Internet Draft SS7 MTP3-User Adaptation Layer Jul 2001~~

#### ~~1.3.2.3 Inter-working with MTP3 Network Management Functions~~

~~At the SGP, the M3UA layer must also provide inter-working with MTP3 management functions to support seamless operation of the user SCN signalling applications in the SS7 and IP domains. This includes:~~

- ~~— Providing an indication to MTP3-Users at an ASP that a remote destination in the SS7 network is not reachable.~~
- ~~— Providing an indication to MTP3-Users at an ASP that a remote destination in the SS7 network is now reachable.~~
- ~~— Providing an indication to MTP3-Users at an ASP that messages to a remote destination in the SS7 network are experiencing SS7 congestion.~~
- ~~— Providing an indication to the M3UA layer at an ASP that the routes to a remote destination in the SS7 network are restricted.~~
- ~~— Providing an indication to MTP3-Users at an ASP that a remote MTP3-User peer is unavailable.~~

~~The M3UA layer at an ASP may initiate an audit of the availability, the restricted or the congested state of remote SS7 destinations. This information is requested from the M3UA layer at the SGP.~~

~~The M3UA layer at an ASP may also indicate to the SG that the M3UA layer itself or the ASP or the ASP's Host is congested.~~

#### ~~1.3.2.4 Support for the Management of SCTP Associations between the SGP and ASPs.~~

~~The M3UA layer at the SGP maintains the availability state of all configured remote ASPs, in order to manage the SCTP Associations and the traffic between the M3UA peers. As well, the active/inactive and~~

~~congestion state of remote ASPs is maintained.~~

~~The M3UA layer MAY be instructed by local management to establish an SCTP association to a peer M3UA node. This can be achieved using the M\_SCTP\_ESTABLISH primitives to request, indicate and confirm the establishment of an SCTP association with a peer M3UA node. In order to avoid redundant SCTP associations between two M3UA peers, one side (client) SHOULD be designated to establish the SCTP association, or M3UA configuration knowledge maintained to detect redundant associations (e.g., via knowledge of the expected local and remote SCTP endpoint addresses).~~

~~Local management MAY request from the M3UA layer the status of the underlying SCTP associations using the M\_SCTP\_STATUS request and~~

~~Sidebottom et al [Page 9]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~confirm primitives. Also, the M3UA MAY autonomously inform local management of the reason for the release of an SCTP association, determined either locally within the M3UA layer or by a primitive from the SCTP.~~

~~Also the M3UA layer MAY inform the local management of the change in status of an ASP or AS. This may be achieved using the M\_ASP\_request or M\_AS\_STATUS request primitives.~~

#### ~~1.3.2.5 Support for the Management of Connections to Multiple SGPs~~

~~As shown in Figure 1 an ASP may be connected to multiple SGPs. In such a case a particular SS7 destination may be reachable via more than one SGP, i.e., via more than one route. As MTP3 users only maintain status on a destination and not on a route basis, the M3UA layer must maintain the status (availability, restriction, and/or congestion of route to destination) of the individual routes, derive the overall availability or congestion status of the destination from the status of the individual routes, and inform the MTP3 users of this derived status whenever it changes.~~

#### ~~1.3.3 Signalling Network Architecture~~

~~A Signalling Gateway is used to support the transport of MTP3 User signalling traffic received from the SS7 network to multiple distributed ASPs (e.g., MGCs and IP Databases). Clearly, the M3UA protocol is not designed to meet the performance and reliability requirements for such transport by itself. However, the conjunction of distributed architecture and redundant networks does allow for a sufficiently reliable transport of signalling traffic over IP. The M3UA protocol is flexible enough to allow its operation and management in a variety of physical configurations, enabling Network Operators to meet their performance and reliability requirements.~~

~~To meet the stringent SS7 signalling reliability and performance requirements for carrier grade networks, Network Operators SHOULD ensure that no single point of failure is present in the end-to-end network architecture between an SS7 node and an IP based application. This can typically be achieved through the use of redundant SGPs or SGs, redundant hosts, and the provision of redundant QoS bounded IP network paths for Sctp Associations between Sctp End Points. Obviously, the reliability of the SG, the MGC and other IP based functional~~

~~elements also needs to be taken into account. The distribution of ASPs and SGPs within the available Hosts SHOULD also be considered. As an example, for a particular Application Server, the related ASPs SHOULD be distributed over at least two Hosts.~~

~~One example of a physical network architecture relevant to SS7 carrier-grade operation in the IP network domain is shown in Figure 1 below:~~

~~Sidebottom et al [Page 10]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~



~~Figure 1 Physical Model~~

~~In this model, each host has many application processes. In the case of the MGC, an ASP may provide service to one or more Application Servers, and is identified as an Sctp end point. A pair of signalling gateway processes may represent, as an example, a single Signalling Gateway, serving a signalling point management cluster.~~

~~This example model can also be applied to IPSP-IPSP signalling. In this case, each IPSP would have its services distributed across 2 hosts or more, and may have multiple server processes on each host.~~

~~In the example above, each signalling process (SGP, ASP or IPSP) is the end point to more than one Sctp association, leading to many other signalling processes. To support this, a signalling process must be able to support distribution of M3UA messages to many simultaneous active associations. This message distribution function is based on the status of provisioned routing keys, the availability of signalling points in the SS7 network, and the redundancy model (active standby,~~

~~load sharing, n+k) of the remote signalling processes.~~

~~Sidebottom et al [Page 11]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~For carrier grade networks, the failure or isolation of a particular signalling process SHOULD NOT cause stable calls or transactions to be lost. This implies that signalling processes need, in some cases, to share the call/transaction state or be able to pass the call state information between each other. In the case of ASPs performing call processing, coordination may also be required with the related Media Gateway to transfer the MGC control for a particular trunk termination. However, this sharing or communication of call/transaction state information is outside the scope of this document.~~

~~This model serves as an example. M3UA imposes no restrictions as to the exact layout of the network elements, the message distribution algorithms and the distribution of the signalling processes. Instead, it provides a framework and a set of messages that allow for a flexible and scalable signalling network architecture, aiming to provide reliability and performance.~~

#### ~~1.4 Functional Areas~~

##### ~~1.4.1 Signalling Point Code Representation~~

~~For example, within an SS7 network, a Signalling Gateway might be charged with representing a set of nodes in the IP domain into the SS7 network for routing purposes. The SG itself, as a signalling point in the SS7 network, might also be addressable with an SS7 Point Code for MTP3 Management purposes. The SG Point Code might also be used for addressing any local MTP3 Users at the SG such as an SG resident SCCP function.~~

~~An SG may be logically partitioned to operate in multiple SS7 network appearances. In such a case, the SG must be addressable with a Point Code in each network appearance, and represents a set of nodes in the IP domain into each SS7 network. Alias Point Codes [15] may also be used within an SG network appearance.~~

~~Where an SG contains more than one SCP, the MTP3 routeset, SPMC and remote AS/ASP states of each SCP SHOULD be coordinated across all the SGPs. Re-routing of traffic between the SGPs SHOULD also be supported~~

~~The M3UA places no restrictions on the SS7 Point Code representation of an AS. Application Servers can be represented under the same Point Code of the SG, their own individual Point Codes or grouped with other Application Servers for Point Code preservation purposes. A single Point Code may be used to represent the SG and all the Application Servers together, if desired.~~


~~If an ASP or group of ASPs is available to the SS7 network via more than one SG, each with its own Point Code, the ASP(s) should be represented by a Point Code that is separate from any SG Point Code. This allows these SGs to be viewed from the SS7 network as "STPs", each~~

~~Sidebottom et al [Page 12]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~having an ongoing "route" to the same ASP(s). Under failure conditions where the ASP(s) become(s) unavailable from one of the SGs, this approach enables MTP3 route management messaging between the SG and SS7 network, allowing simple SS7 re-routing through an alternate SG without changing the Destination Point Code Address of SS7 traffic to the ASP(s).~~

~~Where an AS can be reached via more than one SCP it is equally important that the corresponding Routing Keys in the involved SCPs are identical. (Note: It is possible for the SCP Routing Key configuration data to be temporarily out of synch during configuration updates).~~

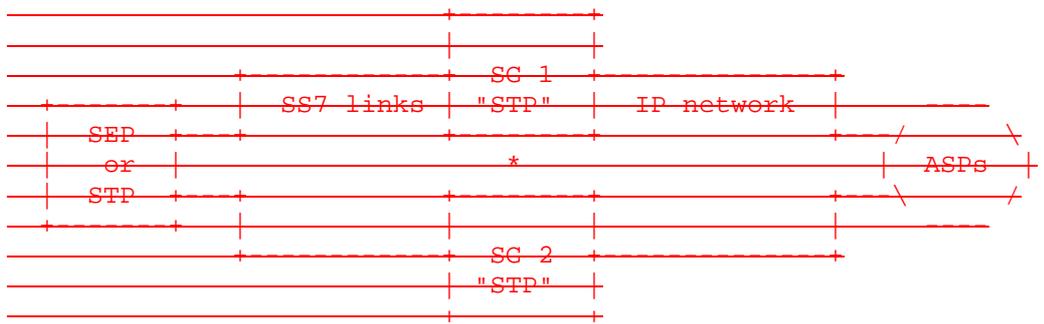

~~\* Note: SC to SC communication is recommended for carrier grade networks, using an MTP3 linkset or an equivalent, to allow re-routing between the SGs in the event of route failures. Where SGPs are used, inter-SCP communication is recommended. Inter-SCP protocol is outside of the scope of this document.~~

~~The following example shows a signalling gateway partitioned into two network appearances.~~

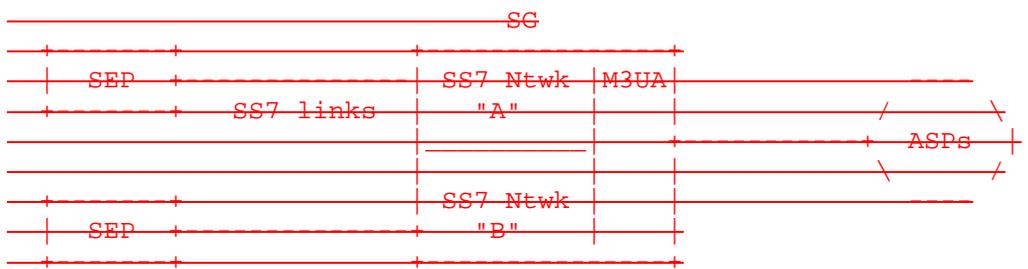

~~1.4.2 Routing Contexts and Routing Keys~~

~~1.4.2.1 Overview~~

~~The distribution of SS7 messages between the SCP and the Application Servers is determined by the Routing Keys and their associated Routing Contexts. A Routing Key is essentially a set of SS7 parameters used to~~

~~Sidebottom et al [Page 13]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~filter SS7 messages, whereas the Routing Context parameter is a 4-byte value (integer) that is associated to that Routing Key in a 1:1 relationship. The Routing Context therefore can be viewed as an index~~

~~into a sending node's Message Distribution Table containing the Routing Key entries.~~

~~Possible SS7 address/routing information that comprise a Routing Key entry includes, for example, the OPC, DPC, SIO found in the MTP3 routing label, or MTP3 User specific fields such as the ISUP CIC, SSCP subsystem number, or TCAP transaction ID. Some example Routing Keys are: the DPC alone, the DPC/OPC combination, the DPC/OPC/CIC combination, or the DPC/SSN combination. The particular information used to define an M3UA Routing Key is application and network dependent, and none of the above examples are mandated.~~

~~An Application Server Process may be configured to process signalling traffic related to more than one Application Server, over a single SCTP Association. In ASP Active and ASP Inactive management messages, the signalling traffic to be started or stopped is discriminated by the Routing Context parameter. At an ASP, the Routing Context parameter uniquely identifies the range of signalling traffic associated with each Application Server that the ASP is configured to receive.~~

#### ~~1.4.2.2 Routing Key Limitations~~

~~Routing Keys SHOULD be unique in the sense that each received SS7 signalling message SHOULD have a single routing result to an Application Server. It is not necessary for the parameter range values within a particular Routing Key to be contiguous. For example, an AS could be configured to support call processing for multiple ranges of PSTN trunks that are not represented by contiguous CIC values.~~

#### ~~1.4.2.3 Managing Routing Contexts and Routing Keys~~

~~There are two ways to provision a Routing Key at an SGP. A Routing Key may be configured statically using an implementation dependent management interface, or dynamically using the M3UA Routing Key registration procedure. A Routing Key may also be configured using the M3UA dynamic registration/deregistration procedures defined in this document. An M3UA element must implement at least one method of Routing Key provisioning.~~

~~When using a management interface to configure Routing Keys, the message distribution function within the SGP is not limited to the set of parameters defined in this document. Other implementation dependent distribution algorithms may be used.~~

~~Sidebottom et al [Page 14]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~1.4.2.4 Message Distribution at the SGP~~

~~In order to direct messages received from the SS7 MTP3 network to the appropriate IP destination, the SGP must perform a message distribution function using information from the received MTP3 User message.~~

~~To support this message distribution, the SGP must maintain the~~

~~equivalent of a network address translation table, mapping incoming SS7 message information to an Application Server for a particular application and range of traffic. This is accomplished by comparing elements of the incoming SS7 message to currently defined Routing Keys in the SGP. These Routing Keys in turn make reference to an Application Server that is enabled by one or more ASPs. These ASPs provide dynamic status information on their availability, traffic handling capability and congestion to the SGP using various management messages defined in the M3UA protocol.~~

~~The list of ASPs in an AS is assumed to be dynamic, taking into account the availability, traffic handling capability and congestion status of the individual ASPs in the list, as well as configuration changes and possible fail-over mechanisms.~~

~~Normally, one or more ASPs are active in the AS (i.e., currently processing traffic) but in certain failure and transition cases it is possible that there may be no active ASP available. Both load-sharing and backup scenarios are supported.~~

~~When there is no matching Routing Key entry for an incoming SS7 message, a default treatment SHOULD be specified. Possible solutions are to provide a default Application Server at the SGP that directs all unallocated traffic to a (set of) default ASP(s), or to drop the message and provide a notification to layer management. The treatment of unallocated traffic is implementation dependent.~~

#### ~~1.4.2.5 Message Distribution at the ASP~~

~~In order to direct messages to the SS7 network, the ASP must also perform a message distribution function in order to choose the proper SGP for a given message. This is accomplished by observing the Destination Point Code (and possibly other elements of the outgoing message such as the SLS value). Where more than one route (or SGP) is possible for routing to the SS7 network, the ASP SHOULD maintain a dynamic table of available SGP routes for the SS7 destinations, taking into account the SS7 destination availability/restricted/congestion status received from the SGP(s), the availability status of the individual SGPs and configuration changes and fail-over mechanisms. There is, however, no M3UA messaging to manage the status of an SGP (e.g., SGP Up/Down/Active/Inactive messaging). Whenever an SCTP~~

~~Sidebottom et al [Page 15]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~association to an SGP exists, the SGP is assumed to be ready for the purposes of responding to M3UA ASPSM messages.~~

~~Every SGP of one SC ASP regarding one AS provides identical SS7 connectivity to this ASP.~~

#### ~~1.4.3 SS7 and M3UA Interworking~~

~~In the case of SS7 and M3UA inter-working, the M3UA adaptation layer is designed to provide an extension of the MTP3 defined user primitives.~~

##### ~~1.4.3.1 Signalling Gateway SS7 Layers~~

~~The SG is responsible for terminating MTP Level 3 of the SS7 protocol, and offering an IP based extension to its users.~~

~~>From an SS7 perspective, it is expected that the Signalling Gateway transmits and receives SS7 Message Signalling Units (MSUs) to and from the PSTN over a standard SS7 network interface, using the SS7 Message Transfer Part (MTP) [14,15,16] to provide reliable transport of the messages.~~

~~As a standard SS7 network interface, the use of MTP Level 2 signalling links is not the only possibility. ATM based High Speed Links can also be used with the services of the Signalling ATM Adaptation Layer (SAAL) [17,18].~~

~~Note: It is also possible for IP based interfaces to be present, using the services of the MTP2 User Adaptation Layer (M2UA) [23] or M2PA []. These may be terminated at a Signalling Transfer Point (STP) or Signalling End Point (SEP). Using the services of MTP3, the SG may be capable of communicating with remote SS7 SEPs in a quasi associated fashion, where STPs may be present in the SS7 path between the SEP and the SG.~~

#### ~~1.4.3.2 SS7 and M3UA Inter Working at the SG~~

~~The SGP provides a functional inter working of transport functions between the SS7 network and the IP network by also supporting the M3UA adaptation layer. It allows the transfer of MTP3 User signalling messages to and from an IP based Application Server Process where the peer MTP3 User protocol layer exists.~~

~~The Signalling Gateway must maintain knowledge of relevant SS7 node and Signalling Point Management Cluster (SPMC) status in their respective domains in order to perform a seamless inter working of the IP based signalling and the SS7 domains. For example, SG knowledge of the availability and/or congestion status of the SPMC and SS7 nodes must be maintained and disseminated in the respective networks, in order to ensure that end-to-end operation is transparent to the communicating SCN protocol peers at the SS7 node and ASP. Where more than one SGP~~

~~Sidebottom et al [Page 16]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~constitutes an SG, the knowledge of the SGPs must be coordinated into an overall SG view.~~

~~For SS7 user part management, it is required that the MTP3 User protocols at ASPs receive indications of SS7 signalling point availability, SS7 network congestion, and remote User Part unavailability as would be expected in an SS7 SEP node. To accomplish this, the MTP\_PAUSE, MTP\_RESUME and MTP\_STATUS indication primitives received at the MTP3 upper layer interface at the SG need to be propagated to the remote MTP3 User lower layer interface at the ASP. (These indication primitives are also made available to any existing local MTP3 Users at the SG, if present.)~~

~~MTP3 management messages (such as TFps or TFAs received from the SS7 network) MUST NOT be encapsulated as Data message Payload Data and sent either from SG to ASP or from ASP to SG. The SG MUST terminate these messages and generate M3UA messages as appropriate.~~

#### ~~1.4.3.3 Application Server~~

~~A cluster of application servers is responsible for providing the~~

~~overall support for one or more SS7 upper layers. From an SS7 standpoint, a Signalling Point Management Cluster (SPMC) provides complete support for the upper layer service for a given point code. As an example, an SPMC providing MGC capabilities must provide complete support for ISUP (and any other MTP3 user located at the point code of the SPMC) for a given point code, according to the local SS7 network specifications.~~

~~This measure is necessary to allow the SG to accurately represent the signalling point on the local SS7 network.~~

~~In the case where an ASP is connected to more than one SCP, the M3UA layer must maintain the status of configured SS7 destinations and route messages according to availability/congestion/restricted status of the routes to these SS7 destinations.~~

#### ~~1.4.3.4 IPSP Considerations~~

~~Since IPSPs use M3UA in a point-to-point fashion, there is no concept of routing of messages beyond the remote end. Therefore, SS7 and M3UA inter working is not necessary for this model.~~

#### ~~1.4.4 Redundancy Models~~

~~The network address translation and mapping function of the M3UA layer supports signalling process fail over functions in order to support a high availability of call and transaction processing capability.~~

~~Sidebottom et al [Page 17]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~1.4.4.1 Application Server Redundancy~~

~~All MTP3 User messages (e.g., ISUP, SCCP) incoming to an SG from the SS7 network are assigned to a unique Application Server, based on the information in the message and the provisioned Routing Keys.~~

~~The Application Server is, in practical terms, a list of all ASPs configured to process a range of MTP3 User traffic defined by one Routing Key. One or more ASPs in the list are normally active (i.e., handling traffic) while any others may be unavailable or inactive, to be possibly used in the event of failure or unavailability of the active ASP(s).~~

~~The fail-over model supports an "n+k" redundancy model, where "n" ASPs is the minimum number of redundant ASPs required to handle traffic and "k" ASPs are available to take over for a failed or unavailable ASP. A "1+1" active/back-up redundancy is a subset of this model. A simplex "1+0" model is also supported as a subset, with no ASP redundancy.~~

~~At the SCP, an Application Server list contains active and inactive ASPs to support ASP load sharing and fail over procedures. The list of ASPs within a logical Application Server is kept updated in the SCP to reflect the active Application Server Process(es).~~

~~To avoid a single point of failure, it is recommended that a minimum of two ASPs be in the list, resident in separate hosts and therefore available over different SCTP Associations. For example, in the~~

~~network shown in Figure 1, all messages to DPC=x could be sent to ASP1 in Host3 or ASP1 in Host4. The AS list at SGP1 in Host 1 might look like the following:~~

```
----- Routing Key {DPC=x} ----- "Application Server #1"
----- ASP1/Host3 ----- State = Active
----- ASP1/Host3 ----- State = Inactive
```

~~In this "1+1" redundancy case, ASP1 in Host3 would be sent any incoming message with DPC=x. ASP1 in Host4 would normally be brought to the "active" state upon failure of, or loss of connectivity to, ASP1/Host1.~~

~~The AS List at SGP1 in Host1 might also be set up in load share mode:~~

```
----- Routing Key {DPC=x} ----- "Application Server #1"
----- ASP1/Host3 ----- State = Active
----- ASP1/Host4 ----- State = Active
```

~~In this case, both the ASPs would be sent a portion of the traffic. For example the two ASPs could together form a database, where incoming queries may be sent to any active ASP.~~

~~Care must be exercised by a Network Operator in the selection of the routing information to be used as the Routing Key for a particular AS.~~

~~Sidebottom et al ----- [Page 18]~~

~~Internet Draft ----- SS7 MTP3 User Adaptation Layer ----- Jul 2001~~

~~For example, where Application Servers are defined using ranges of ISUP CIC values, the Operator is implicitly splitting up control of the related circuit groups. Some CIC value range assignments may interfere with ISUP circuit group management procedures.~~

~~In the process of fail-over, it is recommended that in the case of ASPs supporting call processing, stable calls do not fail. It is possible that calls in "transition" MAY fail, although measures of communication between the ASPs involved can be used to mitigate this. For example, the two ASPs MAY share call state via shared memory, or MAY use an ASP to ASP protocol to pass call state information. Any ASP to ASP protocol to support this function is outside the scope of this document.~~

#### ~~1.4.4.2 Signalling Gateway Redundancy~~

~~Signalling Gateways MAY also be distributed over multiple hosts. Much like the AS model, SGs may comprise one or more SG Processes (SGPs), distributed over one or more hosts, using an active/back-up or a load-sharing model. Also, every SGP within an SG communicating with an ASP provides identical SS7 connectivity to this ASP. Should an SGP lose all or partial SS7 connectivity and other SGPs exist, the SGP SHOULD terminate the SCTP associations to the concerned ASPs.~~

~~It is therefore possible for an ASP to route signalling messages destined to the SS7 network using more than one SGP. In this model, a Signalling Gateway is deployed as a cluster of hosts acting as a single SG. A primary/back-up redundancy model is possible, where the unavailability of the SCTP association to a primary SGP could be used to reroute affected traffic to an alternate SGP. A load sharing model is possible, where the signalling messages are load shared between multiple SGPs. The distribution of the MTP3 user messages over the SGPs should be done in such a way to minimize message mis sequencing,~~

~~as required by the SS7 User Parts.~~

~~It may also be possible for an ASP to use more than one SG to access a specific SS7 end point, in a model that resembles an SS7 STP mated pair. Typically, SS7 STPs are deployed in mated pairs, with traffic load shared between them. Other models are also possible, subject to the limitations of the local SS7 network provisioning guidelines.~~

~~>From the perspective of the M3UA layer at an ASP, a particular SG is capable of transferring traffic to an SS7 destination if an SCTP association with at least one SGP of the SG is established, the SGP has returned an acknowledgement to the ASP to indicate that the ASP is actively handling traffic for that destination, and the SGP has not indicated that the destination is inaccessible. When an ASP is configured to use multiple SGPs for transferring traffic to the SS7 network, the ASP must maintain knowledge of the current capability of the SGPs to handle traffic to destinations of interest. This information is crucial to the overall reliability of the service, for~~

~~Sidebottom et al [Page 19]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~both active/back-up and load-sharing model, in the event of failures, recovery and maintenance activities. The ASP M3UA may also use this information for congestion avoidance purposes. The distribution of the MTP3 user messages over the SGPs should be done in such a way to minimize message mis-sequencing, as required by the SS7 User Parts.~~

#### ~~1.4.5 Flow Control~~

~~Local Management at an ASP may wish to stop traffic across an SCTP association in order to temporarily remove the association from service or to perform testing and maintenance activity. The function could optionally be used to control the start of traffic on to a newly available SCTP association.~~

#### ~~1.4.6 Congestion Management~~

~~The M3UA layer is informed of local and IP network congestion by means of an implementation-dependent function (e.g., an implementation-dependent indication from the SCTP of IP network congestion).~~

~~At an ASP or IPSP, the M3UA layer indicates congestion to local MTP3-Users by means of an MTP-STATUS primitive, as per current MTP3 procedures, to invoke appropriate upper layer responses.~~

~~When an SG determines that the transport of SS7 messages to a Signalling Point Management Cluster (SPMC) is encountering congestion, the SG MAY trigger SS7 MTP3 Transfer Controlled management messages to originating SS7 nodes, per the congestion procedures of the relevant MTP3 standard. The triggering of SS7 MTP3 Management messages from an SG is an implementation-dependent function.~~

~~The M3UA layer at an ASP or IPSP should indicate local congestion to an M3UA peer with an SCON message. When an SG receives a congestion message (SCON) from an ASP, and the SG determines that an SPMC is now encountering congestion, it MAY trigger SS7 MTP3 Transfer Controlled management messages to concerned SS7 destinations according to congestion procedures of the relevant MTP3 standard.~~

#### ~~1.4.7 SCTP Stream Mapping.~~

~~The M3UA layer at both the SCP and ASP also supports the assignment of signalling traffic into streams within an SCTP association. Traffic that requires sequencing must be assigned to the same stream. To accomplish this, MTP3 User traffic may be assigned to individual streams based on, for example, the SLS value in the MTP3 Routing Label or the ISUP CIC assignment, subject of course to the maximum number of streams supported by the underlying SCTP association.~~

~~The use of SCTP streams within M3UA is recommended in order to minimize transmission and buffering delays, therefore improving the overall performance and reliability of the signalling elements. The distribution of the MTP3 user messages over the various streams should~~

~~Sidebottom et al [Page 20]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~be done in such a way to minimize message mis-sequencing, as required by the SS7 User Parts.~~

~~1.4.8 Client/Server Model~~

~~It is recommended that the SCP and ASP be able to support both client and server operation. The peer endpoints using M3UA SHOULD be configured so that one always takes on the role of client and the other the role of server for initiating SCTP associations. The default orientation would be for the SCP to take on the role of server while the ASP is the client. In this case, ASPs SHOULD initiate the SCTP association to the SCP~~


~~In the case of IPSP to IPSP communication, the peer endpoints using M3UA SHOULD be configured so that one always takes on the role of client and the other the role of server for initiating SCTP associations.~~

~~The SCTP Registered User Port Number Assignment for M3UA is 2905.~~

~~1.5 Sample Configurations~~

~~1.5.1 Example 1: ISUP Message Transport~~

~~\*\*\*\*\* SS7 \*\*\*\*\* IP \*\*\*\*\*  
\* SEP \* \* SCP \* \* ASP \*  
\*\*\*\*\* \*\*\*\*\* \*\*\*\*\*~~

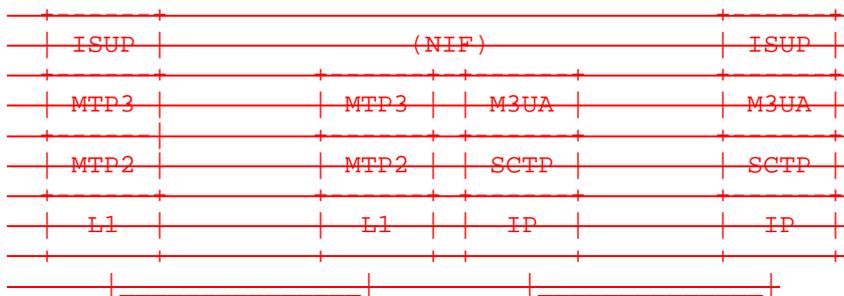

~~SEP SS7 Signalling End Point  
SCTP Stream Control Transmission Protocol  
NIF Nodal Inter-working Function~~

~~In this example, the SCP provides an implementation dependent nodal inter working function (NIF) that allows the MGC to exchange SS7~~


~~signalling messages with the SS7 based SEP. The NIF within the SCP serves as the interface within the SCP between the MTP3 and M3UA. This nodal inter working function has no visible peer protocol with either the MGC or SEP. It also provides network status information to one or both sides of the network.~~

~~Sidebottom et al [Page 21]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~For internal SCP modeling purposes, at the NIF level, SS7 signalling messages that are destined to the MGC are received as MTP TRANSFER indication primitives from the MTP Level 3 upper layer interface, translated to MTP TRANSFER request primitives, and sent to the local M3UA resident message distribution function for ongoing routing to the final IP destination. Messages received from the local M3UA network address translation and mapping function as MTP TRANSFER indication primitives are sent to the MTP Level 3 upper layer interface as MTP TRANSFER request primitives for on going MTP Level 3 routing to an SS7 SEP. For the purposes of providing SS7 network status information the NIF also delivers MTP PAUSE, MTP RESUME and MTP STATUS indication primitives received from the MTP Level 3 upper layer interface to the local M3UA resident management function. In addition, as an implementation and network option, restricted destinations are communicated from MTP network management to the local M3UA resident management function.~~

~~1.5.2 Example 2: SCCP Transport between IPSPs~~

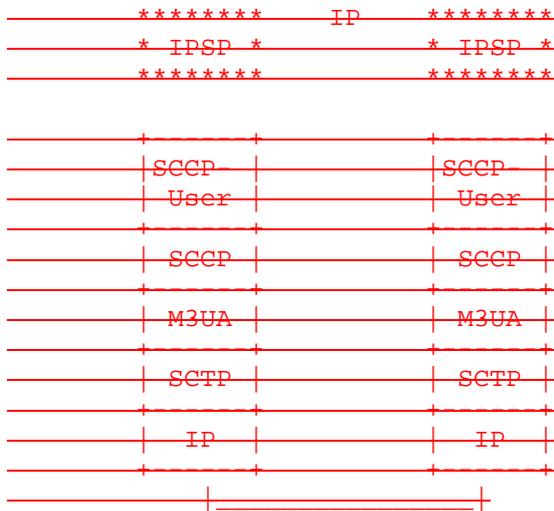

~~This example shows an architecture where no Signalling Gateway is used. In this example, SCCP messages are exchanged directly between two IP-resident IPSPs with resident SCCP User protocol instances, such as RANAP or TCAP. SS7 network inter working is not required, therefore there is no MTP3 network management status information for the SCCP and SCCP User protocols to consider. Any MTP PAUSE, MTP RESUME or MTP STATUS indications from the M3UA layer to the SCCP layer should consider the status of the SCTP Association and underlying IP network and any congestion information received from the remote site.~~

~~Sidebottom et al [Page 22]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~1.5.3 Example 3: SGP Resident SCCP Layer, with Remote ASP~~

```

***** SS7 ***** IP *****
* SEP * * * * *
* or * * SGP * * ASP *
* STP * * * * *
*****

```

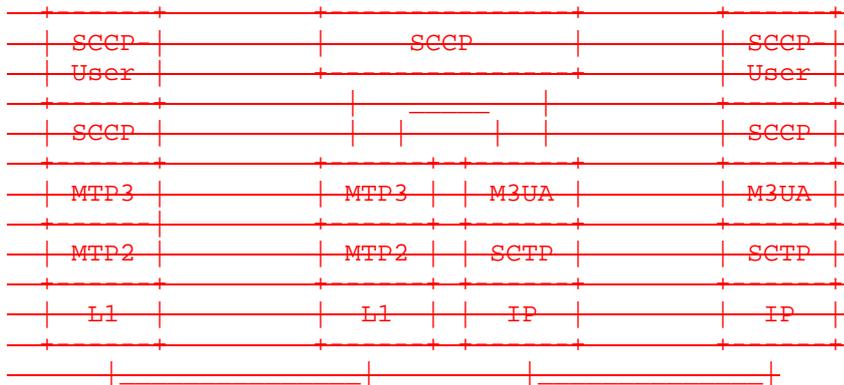

~~STP SS7 Signalling Transfer Point~~

~~In this example, the SGP contains an instance of the SS7 SCCP protocol layer that may, for example, perform the SCCP Global Title Translation (GTT) function for messages logically addressed to the SG SCCP. If the result of a GTT for an SCCP message yields an SS7 DPC or DPC/SSN address of an SCCP peer located in the IP domain, the resulting MTP-TRANSFER request primitive is sent to the local M3UA resident network address translation and mapping function for ongoing routing to the final IP destination.~~

~~Similarly, the SCCP instance in an SGP can perform the SCCP GTT service for messages logically addressed to it from SCCP peers in the IP domain. In this case, MTP-TRANSFER indication primitives are sent from the local M3UA resident network address translation and mapping function to the SCCP for GTT. If the result of the GTT yields the address of an SCCP peer in the SS7 network then the resulting MTP-TRANSFER request primitive is given to the MTP3 for delivery to an SS7-resident node.~~

~~It is possible that the above SCCP GTT at the SGP could yield the address of an SCCP peer in the IP domain and the resulting MTP-TRANSFER request primitive would be sent back to the M3UA layer for delivery to an IP destination.~~

~~For internal SGP modeling purposes, this may be accomplished with the use of an implementation dependent nodal inter working function within the SGP that effectively sits below the SCCP and routes MTP-TRANSFER~~

~~Sidebottom et al [Page 23]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~request/indication messages to/from both the MTP3 and the M3UA layer, based on the SS7 DPC or DPC/SSN address information. This nodal interworking function has no visible peer protocol with either the ASP or SEP.~~

~~Note that the services and interface provided by the M3UA layer are the same as in Example 1 and the functions taking place in the SCCP entity are transparent to the M3UA layer. The SCCP protocol functions are not reproduced in the M3UA protocol.~~

## ~~1.6 Definition of M3UA Boundaries~~

### ~~1.6.1 Definition of the Boundary between M3UA and an MTP3 User.~~

~~>From ITU Q.701 [14]:~~

~~— MTP\_TRANSFER request  
— MTP\_TRANSFER indication  
— MTP\_PAUSE indication  
— MTP\_RESUME indication  
— MTP\_STATUS indication~~

### ~~1.6.2 Definition of the Boundary between M3UA and SCTP~~

~~An example of the upper layer primitives provided by the SCTP are provided in Reference [13] Section 10.~~

### ~~1.6.3 Definition of the Boundary between M3UA and Layer Management~~

~~— M\_SCTP\_ESTABLISH request  
— Direction: LM → M3UA  
— Purpose: LM requests ASP to establish an SCTP association with its peer.~~

~~— M\_SCTP\_ESTABLISH confirm  
— Direction: M3UA → LM  
— Purpose: ASP confirms to LM that it has established an SCTP association with its peer.~~

~~— M\_SCTP\_ESTABLISH indication  
— Direction: M3UA → LM  
— Purpose: M3UA informs LM that a remote ASP has established an SCTP association.~~

~~— M\_SCTP\_RELEASE request  
— Direction: LM → M3UA  
— Purpose: LM requests ASP to release an SCTP association with its peer.~~

~~Sidebottom et al [Page 24]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~— M\_SCTP\_RELEASE confirm  
— Direction: M3UA → LM  
— Purpose: ASP confirms to LM that it has released SCTP association with its peer.~~

~~M\_SCTP\_RELEASE indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA informs LM that a remote ASP has released an SCTP Association or the SCTP association has failed.~~

~~M\_SCTP\_STATUS request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests M3UA to report the status of an SCTP association.~~

~~M\_SCTP\_STATUS confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA responds with the status of an SCTP association.~~

~~M\_SCTP\_STATUS indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports the status of an SCTP association.~~

~~M\_ASP\_STATUS request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests M3UA to report the status of a local or remote ASP.~~

~~M\_ASP\_STATUS confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports status of local or remote ASP.~~

~~M\_AS\_STATUS request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests M3UA to report the status of an AS.~~

~~M\_AS\_STATUS confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports the status of an AS.~~

~~M\_NOTIFY indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports that it has received a Notify message from its peer.~~

~~M\_ERROR indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports that it has received an Error message from its peer or that a local operation has been unsuccessful.~~

Sidebottom et al [Page 25]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

~~M\_ASP\_UP request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests ASP to start its operation and send an ASP Up message to its peer.~~

~~M\_ASP\_UP confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: ASP reports that is has received an ASP UP Ack message from its peer.~~

~~M\_ASP\_UP indication~~  
~~Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Up message from its peer.~~

~~— M-ASP\_DOWN request~~

~~— Direction: LM → M3UA~~

~~— Purpose: LM requests ASP to stop its operation and send an ASP Down message to its peer.~~

~~— M-ASP\_DOWN confirm~~

~~— Direction: M3UA → LM~~

~~— Purpose: ASP reports that it has received an ASP Down Ack message from its peer.~~

~~— M-ASP\_DOWN indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Down message from its peer, or the SCTP association has been lost/reset.~~

~~— M-ASP\_ACTIVE request~~

~~— Direction: LM → M3UA~~

~~— Purpose: LM requests ASP to send an ASP Active message to its peer.~~

~~— M-ASP\_ACTIVE confirm~~

~~— Direction: M3UA → LM~~

~~— Purpose: ASP reports that it has received an ASP Active Ack message from its peer.~~

~~— M-ASP\_ACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Active message from its peer.~~

~~— M-ASP\_INACTIVE request~~

~~— Direction: LM → M3UA~~

~~— Purpose: LM requests ASP to send an ASP Inactive message to its peer.~~

~~Sidebottom et al [Page 26]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~— M-ASP\_INACTIVE confirm~~

~~— Direction: LM → M3UA~~

~~— Purpose: ASP reports that it has received an ASP Inactive Ack message from its peer.~~

~~— M-ASP\_INACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Inactive message from its peer.~~

~~— M-AS\_ACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports that an AS has moved to the AS\_ACTIVE state.~~

~~— M-AS\_INACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports that an AS has moved to the AS\_INACTIVE state.~~

~~M\_AS\_DOWN indication  
 Direction: M3UA → LM  
 Purpose: M3UA reports that an AS has moved to the AS-DOWN state.~~

~~If dynamic registration of RK is supported by the M3UA layer, the layer MAY support the following additional primitives:~~

~~M\_RK\_REG request  
 Direction: LM → M3UA  
 Purpose: LM requests ASP to register RK(s) with its peer by sending  
 REG\_REQ message~~

~~M\_RK\_REG confirm  
 Direction: M3UA → LM  
 Purpose: ASP reports that it has received REG\_RSP message with  
 registration status as successful from its peer.~~

~~M\_RK\_REG indication  
 Direction: M3UA → LM  
 Purpose: M3UA informs LM that it has successfully processed an  
 incoming REG\_REQ message.~~

~~M\_RK\_DEREG request  
 Direction: LM → M3UA  
 Purpose: LM requests ASP to de-register RK(s) with its peer by  
 sending DEREG\_REQ message.~~

~~M\_RK\_DEREG confirm  
 Direction: M3UA → LM  
 Purpose: ASP reports that it has received DEREG\_REQ message with de-  
 registration status as successful from its peer.~~

~~Sidebottom et al [Page 27]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~M\_RK\_DEREG indication  
 Direction: M3UA → LM  
 Purpose: M3UA informs LM that it has successfully processed an  
 incoming DEREG\_REQ from its peer.~~

## ~~2.0 Conventions~~

~~The keywords MUST, MUST NOT, REQUIRED, SHALL, SHALL NOT, SHOULD, SHOULD NOT, RECOMMENDED, NOT RECOMMENDED, MAY, and OPTIONAL, when they appear in this document, are to be interpreted as described in [RFC2119].~~


## ~~3. M3UA Protocol Elements~~

~~The general M3UA message format includes a Common Message Header followed by zero or more parameters as defined by the Message Type. For forward compatibility, all Message Types may have attached parameters even if none are specified in this version.~~

### ~~3.1 Common Message Header~~

~~The protocol messages for MTP3 User Adaptation require a message header~~

~~which contains the adaptation layer version, the message type, and message length.~~

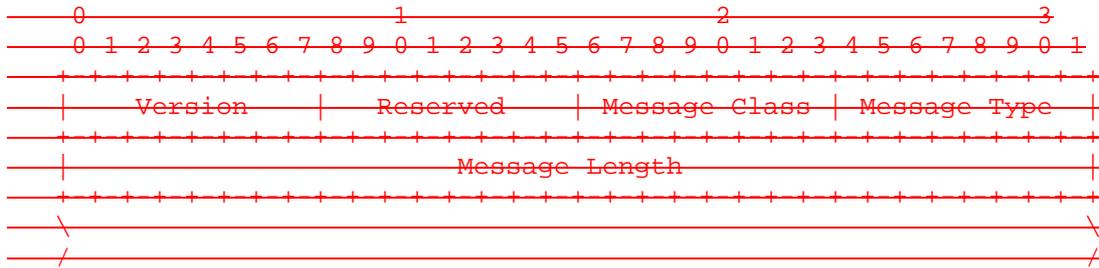

~~All fields in an M3UA message MUST be transmitted in the network byte order, unless otherwise stated.~~

~~3.1.1 M3UA Protocol Version: 8 bits (unsigned integer)~~

~~The version field contains the version of the M3UA adaptation layer.~~

~~The supported versions are the following:~~

- ~~1 Release 1.0~~

~~3.1.2 Message Classes and Types~~

~~The following list contains the valid Message Classes:~~

~~Message Class: 8 bits (unsigned integer)~~

~~The following list contains the valid Message Type Classes:~~

- ~~0 Management (MGMT) Message~~
- ~~1 Transfer Messages~~
- ~~2 SS7 Signalling Network Management (SSNM) Messages~~
- ~~3 ASP State Maintenance (ASPSM) Messages~~
- ~~4 ASP Traffic Maintenance (ASPTM) Messages~~
- ~~5 Reserved for Other Sigtran Adaptation Layers~~
- ~~6 Reserved for Other Sigtran Adaptation Layers~~
- ~~7 Reserved for Other Sigtran Adaptation Layers~~
- ~~8 Reserved for Other Sigtran Adaptation Layers~~
- ~~9 Routing Key Management (RKM) Messages~~
- ~~10 to 127 Reserved by the IETF~~
- ~~128 to 255 Reserved for IETF Defined Message Class extensions~~

~~Message Type: 8 bits (unsigned integer)~~

~~The following list contains the message types for the defined messages.~~

~~Management (MGMT) Messages (See Section 3.6)~~

- ~~0 Error (ERR)~~

~~1 Notify (NTFY)~~  
~~2 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined MGMT extensions~~

~~Transfer Messages (See Section 3.3)~~

~~0 Reserved~~  
~~1 Payload Data (DATA)~~  
~~2 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined Transfer extensions~~

~~SS7 Signalling Network Management (SSNM) Messages (See Section 3.4)~~

~~0 Reserved~~  
~~1 Destination Unavailable (DUNA)~~  
~~2 Destination Available (DAVA)~~  
~~3 Destination State Audit (DAUD)~~  
~~4 SS7 Network Congestion (SCON)~~  
~~5 Destination User Part Unavailable (DUPU)~~  
~~6 Destination Restricted (DRST)~~  
~~7 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined SSNM extensions~~

~~Sidebottom et al [Page 29]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~ASP State Maintenance (ASPSM) Messages (See Section 3.5)~~

~~0 Reserved~~  
~~1 ASP Up (ASPUP)~~  
~~2 ASP Down (ASPDN)~~  
~~3 Heartbeat (BEAT)~~  
~~4 ASP Up Acknowledgement (ASPUP ACK)~~  
~~5 ASP Down Acknowledgement (ASPDN ACK)~~  
~~6 Heartbeat Acknowledgement (BEAT ACK)~~  
~~7 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined ASPSM extensions~~

~~ASP Traffic Maintenance (ASPTM) Messages (See Section 3.5)~~

~~0 Reserved~~  
~~1 ASP Active (ASPAC)~~  
~~2 ASP Inactive (ASPIA)~~  
~~3 ASP Active Acknowledgement (ASPAC ACK)~~  
~~4 ASP Inactive Acknowledgement (ASPIA ACK)~~  
~~5 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined ASPTM extensions~~

~~Routing Key Management (RKM) Messages (See Section 3.7)~~

~~0 Reserved~~  
~~1 Registration Request (REG REQ)~~  
~~2 Registration Response (REG RSP)~~  
~~3 Deregistration Request (DEREG REQ)~~  
~~4 Deregistration Response (DEREG RSP)~~  
~~5 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined RKM extensions~~

~~3.1.3 Reserved: 8 bits~~

~~The Reserved field SHOULD be set to all '0's and ignored by the~~



<del>0x0c</del>	<del>Error Code</del>
<del>0x0d</del>	<del>Status</del>
<del>0x85</del>	<del>Congestion Indications</del>
<del>0x86</del>	<del>Concerned Destination</del>
<del>0x87</del>	<del>Routing Key</del>
<del>0x88</del>	<del>Registration Result</del>
<del>0x89</del>	<del>De-registration Result</del>
<del>0x8a</del>	<del>Local Routing Key Identifier</del>
<del>0x8b</del>	<del>Destination Point Code</del>
<del>0x8c</del>	<del>Service Indicators</del>

~~Sidebottom et al~~ ~~[Page 31]~~

~~Internet Draft~~ ~~SS7 MTP3 User Adaptation Layer~~ ~~Jul 2001~~

<del>0x8d</del>	<del>Subsystem Numbers</del>
<del>0x8e</del>	<del>Originating Point Code List</del>
<del>0x8f</del>	<del>Circuit Range</del>
<del>0x90</del>	<del>Registration Results</del>
<del>0x91</del>	<del>De-Registration Results</del>
<del>0x92 to ffff</del>	<del>...Reserved by the IETF</del>

~~The value of 65535 is reserved for IETF defined extensions. Values other than those defined in specific parameter description are reserved for use by the IETF.~~

~~Parameter Length: 16 bits (unsigned integer)~~

~~The Parameter Length field contains the size of the parameter in bytes, including the Parameter Tag, Parameter Length, and Parameter Value fields. The Parameter Length does not include any padding bytes.~~

~~Parameter Value: variable-length.~~

~~The Parameter Value field contains the actual information to be transferred in the parameter.~~

~~The total length of a parameter (including Tag, Parameter Length and Value fields) MUST be a multiple of 4 bytes. If the length of the parameter is not a multiple of 4 bytes, the sender pads the Parameter at the end (i.e., after the Parameter Value field) with all zero bytes. The length of the padding is NOT included in the parameter length field. A sender SHOULD NOT pad with more than 3 bytes. The receiver MUST ignore the padding bytes.~~

### ~~3.3 Transfer Messages~~

~~The following section describes the Transfer messages and parameter contents.~~

#### ~~3.3.1 Payload Data Message (DATA)~~


~~The DATA message contains the SS7 MTP3 User protocol data, which is an MTP TRANSFER primitive, including the complete MTP3 Routing Label. The DATA message contains the following variable length parameters:~~

<del>Network Appearance</del>	<del>Optional</del>
<del>Protocol Data 1 or 2</del>	<del>Mandatory</del>

~~Sidebottom et al [Page 32]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The following format MUST be used for the Data Message:~~

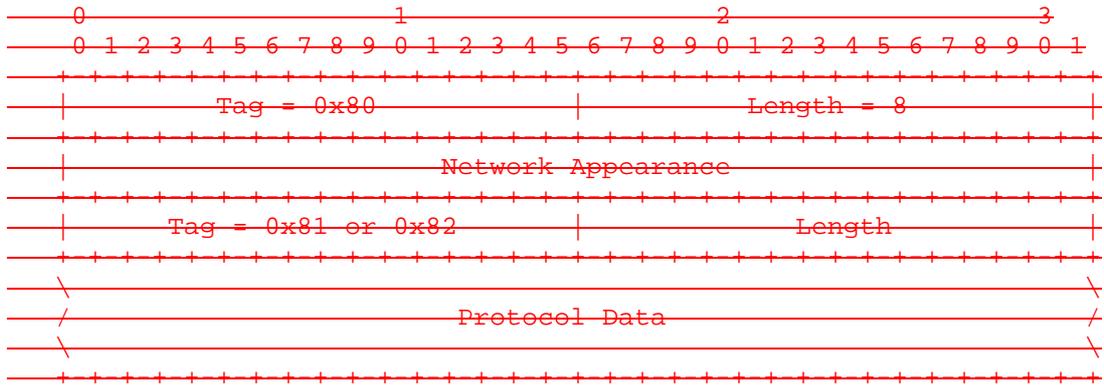

~~Network Appearance: 32 bits (unsigned integer)~~

~~The optional Network Appearance parameter identifies the SS7 network context for the message, for the purposes of logically separating the signalling traffic between the SCP and the ASP over a common SCTP association. An example is where an SG is logically partitioned to appear as an element in four different national SS7 networks.~~

~~In a DATA message, the Network Appearance implicitly defines the SS7 Point Code format used, the SS7 Network Indicator value, and the MTP3 and possibly the MTP3 User protocol type/variant/version used within the SS7 network partition. Where an SG operates in the context of a single SS7 network, or individual SCTP associations are dedicated to each SS7 network context, the Network Appearance parameter is not required. In other cases the parameter MUST be included.~~

~~The Network Appearance parameter value is of local significance only, coordinated between the SCP and ASP. Therefore, in the case where an ASP is connected to more than one SCP, the same SS7 network context may be identified by different Network Appearance values depending over which SCP a message is being transmitted/received.~~

~~Where the optional Network Appearance parameter is present, it must be the first parameter in the message as it defines the format of the Protocol Data field~~

~~One of two possible Protocol Data parameters are included in a DATA message: Protocol Data 1 or Protocol Data 2.~~

~~Sidebottom et al [Page 33]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Protocol Data 1 or 2: variable length~~

~~The Protocol Data 1 parameter contains the original SS7 MTP3 message, including the Service Information Octet and Routing Label.~~

~~The Protocol Data 1 parameter contains the following fields:~~

~~Service Information Octet. Includes:~~

~~Service Indicator,  
Network Indicator,  
and Spare/Priority codes.~~

~~Routing Label. Includes:~~

~~Destination Point Code,  
Originating Point Code,  
And Signalling Link Selection Code (SLS).~~

~~User Protocol Data. Includes:~~

~~MTP3 User protocol elements (e.g., ISUP, SCCP, or TUP parameters).~~

~~The Protocol Data 2 parameter contains all the information in Protocol Data 1 as described above, plus the MTP2 Length Indicator octet. The MTP2 Length Indicator (LI) octet appears before the SIO and Routing Label information. The MTP2 Length Indicator octet is required for some national MTP variants that use the spare bits in the LI to carry additional information of interest to the MTP3 and MTP3 User (e.g., the Japan TTC standard use of LI spare bits to indicate message priority)~~


~~The Payload Data format is as defined in the relevant MTP standards for the SS7 protocol being transported. The format is either implicitly known or identified by the Network Appearance parameter. Note: In the SS7 Recommendations, the format of the messages and fields within the messages are based on bit transmission order. In these recommendations the Least Significant Bit (LSB) of each field is positioned to the right. The received SS7 fields are populated octet by octet as received into the 4 octet word as shown in the two examples below.~~

~~For the ANSI protocol example, the Protocol Data 1 field format is shown below:~~

~~Sidebottom et al [Page 34]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~0 1 2 3~~

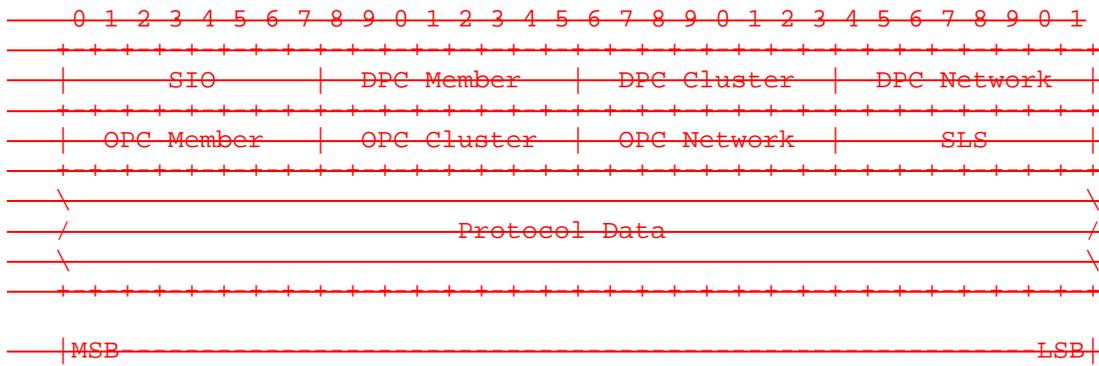

~~Within each octet the Least Significant Bit (LSB) per the SS7 Recommendations is to the right (e.g., bit 7 of SIO is the LSB).~~

~~For the ITU international protocol example (with the 3/8/3 Point Code format), the Protocol Data 1 field is shown below.~~

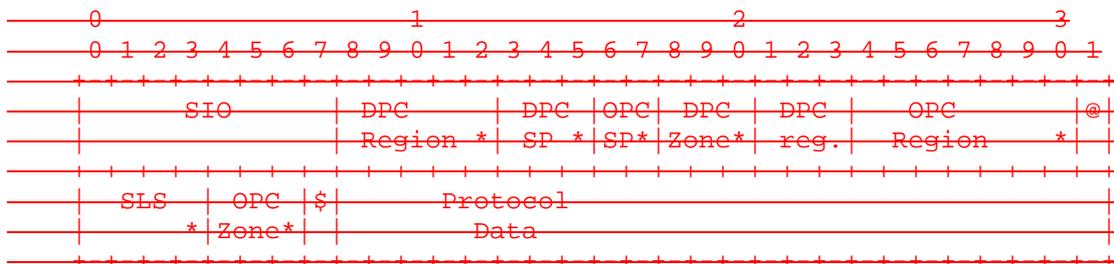

~~\* marks LSB of each field; @ = OPC SP MSB; \$ = OPC region MSB~~

### ~~3.4 SS7 Signalling Network Management (SSNM) Messages~~

#### ~~3.4.1 Destination Unavailable (DUNA)~~

~~The DUNA message is sent from all SGP in an SG to all concerned ASPs to indicate that the SG has determined that one or more SS7 destinations are unreachable. It is also sent by an SGP in response to a message from the ASP to an unreachable SS7 destination. As an implementation option the SG may suppress the sending of subsequent "response" DUNA messages regarding a certain unreachable SS7 destination for a certain period in order to give the remote side time to react. The MTP3 User at the ASP is expected to stop traffic to the affected destination through the SGP initiating the DUNA message as per the defined MTP3 User procedures.~~


~~Sidebottom et al [Page 35]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The DUNA message contains the following parameters:~~

- ~~Network Appearance Optional~~
- ~~Affected Destinations Mandatory~~
- ~~INFO String Optional~~

~~The format for DUNA Message parameters is as follows:~~

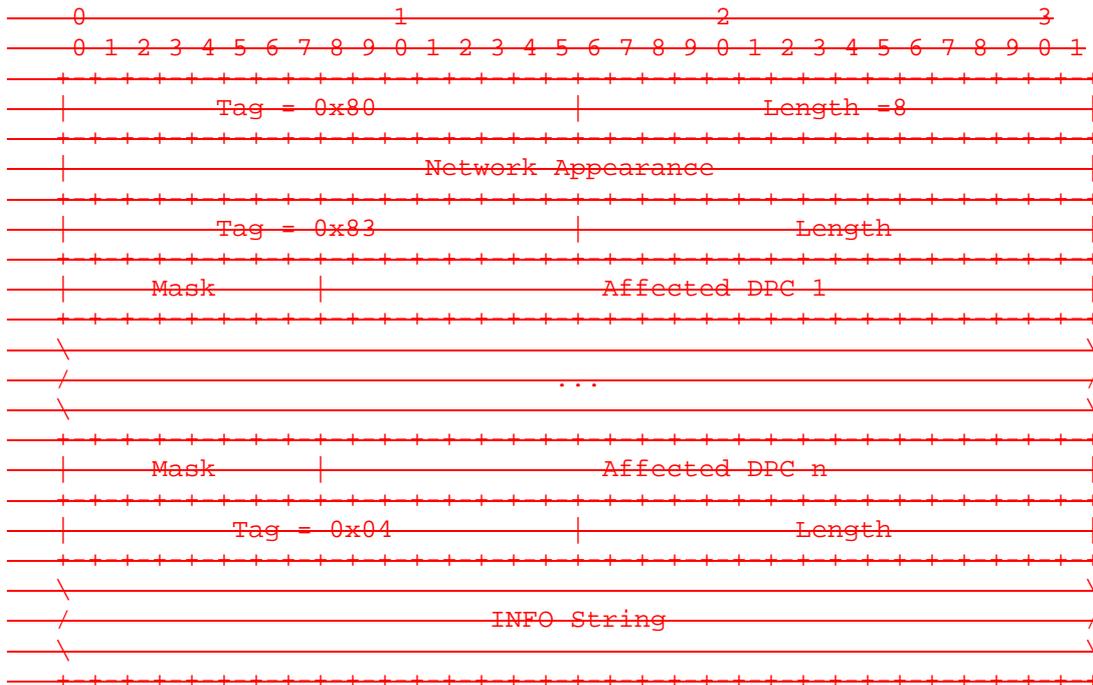

~~Network Appearance: 32 bit unsigned integer~~

~~See Section 3.3.1~~


~~Affected Destinations: n x 32 bits~~

~~The Affected Destinations parameter contains up to sixteen Affected Destination Point Code fields, each a three octet parameter to allow for 14, 16 and 24 bit binary formatted SS7 Point Codes. Affected Point Codes that are less than 24 bits, are padded on the left to the 24 bit boundary. The encoding is shown below for ANSI and ITU Point Code examples.~~

~~Sidebottom et al [Page 36]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~ANSI 24 bit Point Code:~~

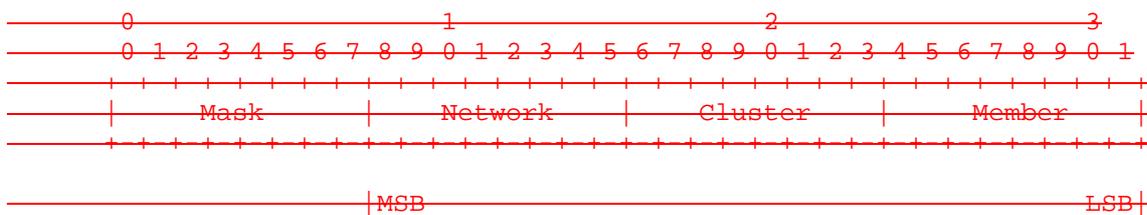

~~ITU 14 bit Point Code:~~



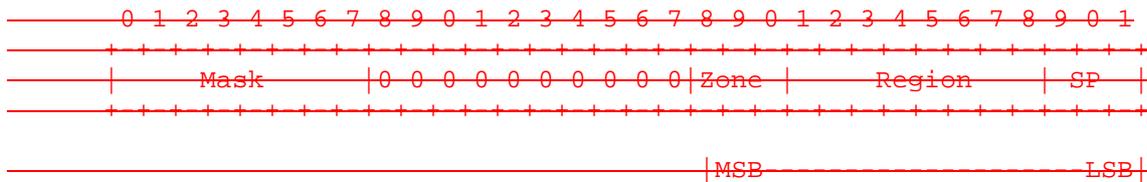

~~It is optional to send an Affected Destinations parameter with more than one Affected DPC but it is mandatory to receive and process it. All the Affected DPCs included must be within the same Network Appearance. Including multiple Affected DPCs may be useful when reception of an MTP3 management message or a linkset event simultaneously affects the availability status of a list of destinations at an SG.~~

~~Mask: 8 bits (unsigned integer)~~

~~The Mask field associated with each Affected DPC in the Affected Destinations parameter, used to identify a contiguous range of Affected Destination Point Codes, independent of the point code format. Identifying a contiguous range of Affected DPCs may be useful when reception of an MTP3 management message or a linkset event simultaneously affects the availability status of a series of destinations at an SG. For example, if all DPCs in an ANSI cluster are determined to be unavailable due to local linkset unavailability, the DUNA could identify potentially 256 Affected DPCs in a single Affected DPC field.~~

~~The Mask parameter represents a bit mask that can be applied to the related Affected DPC field. The bit mask identifies how many bits of the Affected DPC field are significant and which are effectively "wildcarded". For example, a mask of "8" indicates that the least significant eight bits of the DPC is "wildcarded". For an ANSI 24-bit Affected DPC, this is equivalent to signalling that all DPCs in an ANSI Cluster are unavailable. A mask of "3" indicates that the least significant three bits of the DPC is "wildcarded". For a 14-bit ITU Affected DPC, this is equivalent to signaling that an ITU~~

~~Sidebottom et al [Page 37]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Region is unavailable. A mask value equal to the number of bits in the DPC indicates that the entire network appearance is affected & this is used to indicate network isolation to the ASP.~~

~~INFO String: variable length~~

~~The optional INFO String parameter can carry any 8 bit ASCII character string along with the message. Length of the INFO String parameter is from 0 to 255 characters. No procedures are presently identified for its use but the INFO String MAY be used by Operators to identify in text form the location reflected by the Affected DPC for debugging purposes.~~

~~3.4.2 Destination Available (DAVA)~~

~~The DAVA message is sent from the SGP to all concerned ASPs to indicate that the SG has determined that one or more SS7 destinations are now reachable (and not restricted), or in response to a DAUD message if appropriate. The ASP MTP3 User protocol is informed and may now resume traffic to the affected destination. The ASP M3UA layer routes the~~

~~MTP3\_user traffic through the SCP(s) initiating the DAVA message.~~

~~The DAVA message contains the following parameters:~~

- ~~— Network Appearance — Optional~~
- ~~— Affected Destinations — Mandatory~~
- ~~— INFO String — Optional~~

~~The format and description of the Network Appearance, Affected Destinations and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

~~3.4.3 Destination State Audit (DAUD)~~

~~The DAUD message MAY be sent from the ASP to the SCP to audit the availability/congestion state of SS7 routes to one or more affected destinations.~~

~~The DAUD message contains the following parameters:~~

- ~~— Network Appearance — Optional~~
- ~~— Affected Destinations — Mandatory~~
- ~~— INFO String — Optional~~

~~The format and description of DAUD Message parameters is the same as for the DUNA message (See Section 3.4.1).~~

~~3.4.4 SS7 Network Congestion (SCON)~~

~~The SCON message can be sent from the SCP to all concerned ASPs to indicate congestion in the SS7 network to one or more destinations, or~~

~~Sidebottom et al [Page 38]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~to an ASP in response to a DATA or DAUD message as appropriate. For some MTP protocol variants (e.g., ANSI MTP) the SCON message may be sent when the SS7 congestion level changes. The SCON message MAY also be sent from the M3UA layer of an ASP to an M3UA peer indicating that the M3UA layer or the ASP is congested.~~

~~The SCON message contains the following parameters:~~

- ~~— Network Appearance — Optional~~
- ~~— Affected Destinations — Mandatory~~
- ~~— Concerned Destination — Optional~~
- ~~— Congestion Indications — Optional~~
- ~~— INFO String — Optional~~

~~The format for SCON Message parameters is as follows:~~

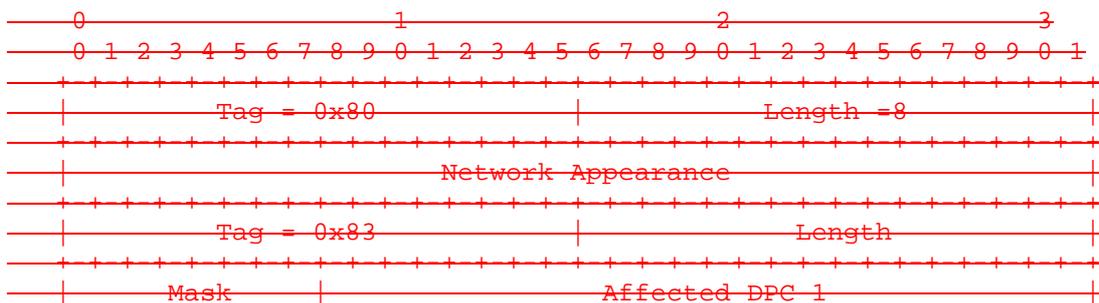

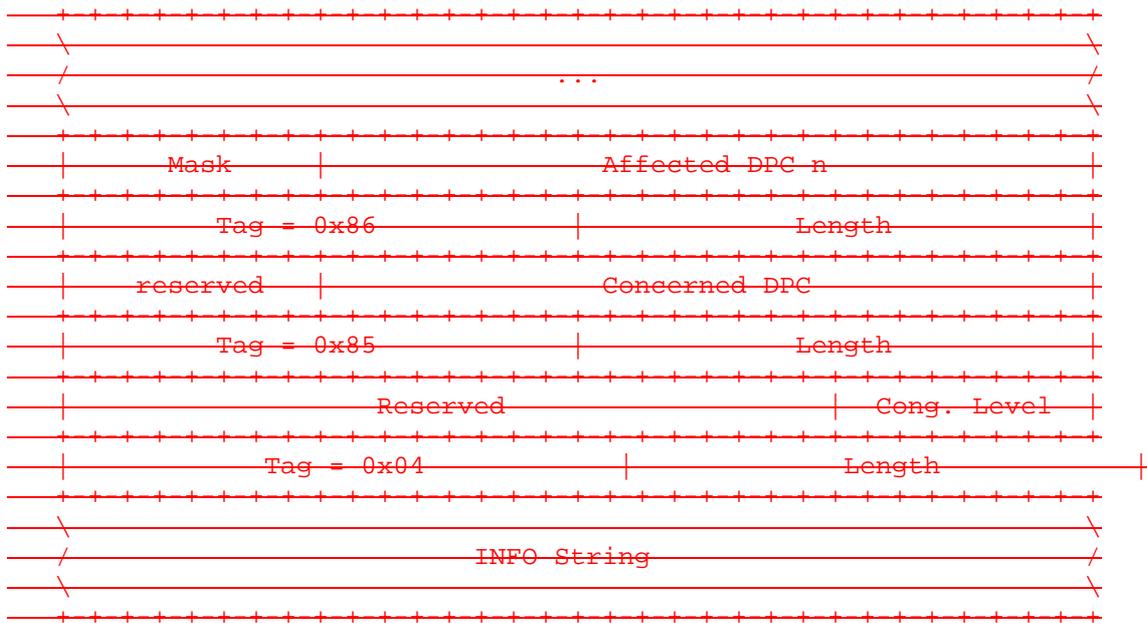

~~The format and description of the Network Appearance, Affected Destinations, and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

~~Sidebottom et al [Page 39]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The Affected Destinations parameter can be used to indicate congestion of multiple destinations or ranges of destinations. However, an SCON message MUST not be delayed in order to "collect" individual congested destinations into a single SCON message as any delay might affect the timing of congestion indications to the M3UA Users. One use for including a range of Congested DPCs is when the SG supports an ANSI cluster route set to the SS7 network that becomes congested due to outgoing link set congestion.~~

~~Concerned Destination: 32 bits~~

~~The optional Concerned Destination parameter is only used if the SCON message is sent from an ASP to the SGP. It contains the point code of the originator of the message that triggered the SCON message. The Concerned Destination parameter contains one Concerned Destination Point Code field, a three octet parameter to allow for 14, 16 and 24 bit binary formatted SS7 Point Codes. A Concerned Point Code that is less than 24 bits is padded on the left to the 24 bit boundary. Any resulting Transfer Controlled (TFC) message from the SG is sent to the Concerned Point Code using the single Affected DPC contained in the SCON message to populate the (affected) Destination field of the TFC message~~

~~Congested Indications: 32 bits~~

~~The optional Congestion Indications parameter contains a Congestion Level field. This optional parameter is used to communicate congestion levels in national MTP networks with multiple congestion thresholds, such as in ANSI MTP3. For MTP congestion methods without multiple congestion levels (e.g., the ITU international method) the parameter is not included.~~

~~Congestion Level field: 8 bits (unsigned integer)~~

~~The Congestion Level field, associated with all of the Affected DPC(s) in the Affected Destinations parameter, contains one of the following values:~~

- ~~0 No Congestion or Undefined~~
- ~~1 Congestion Level 1~~
- ~~2 Congestion Level 2~~
- ~~3 Congestion Level 3~~

~~The congestion levels are defined in the congestion method in the appropriate national MTP recommendations [14,15].~~

~~3.4.5 Destination User Part Unavailable (DUPU)~~

~~The DUPU message is used by an SGP to inform an ASP that a remote peer MTP3 User Part (e.g., ISUP or SCCP) at an SS7 node is unavailable.~~


~~Sidebottom et al [Page 40]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The DUPU message contains the following parameters:~~

- ~~Network Appearance Optional~~
- ~~Affected Destinations Mandatory~~
- ~~User/Cause Mandatory~~
- ~~INFO String Optional~~

~~The format for DUPU message parameters is as follows:~~

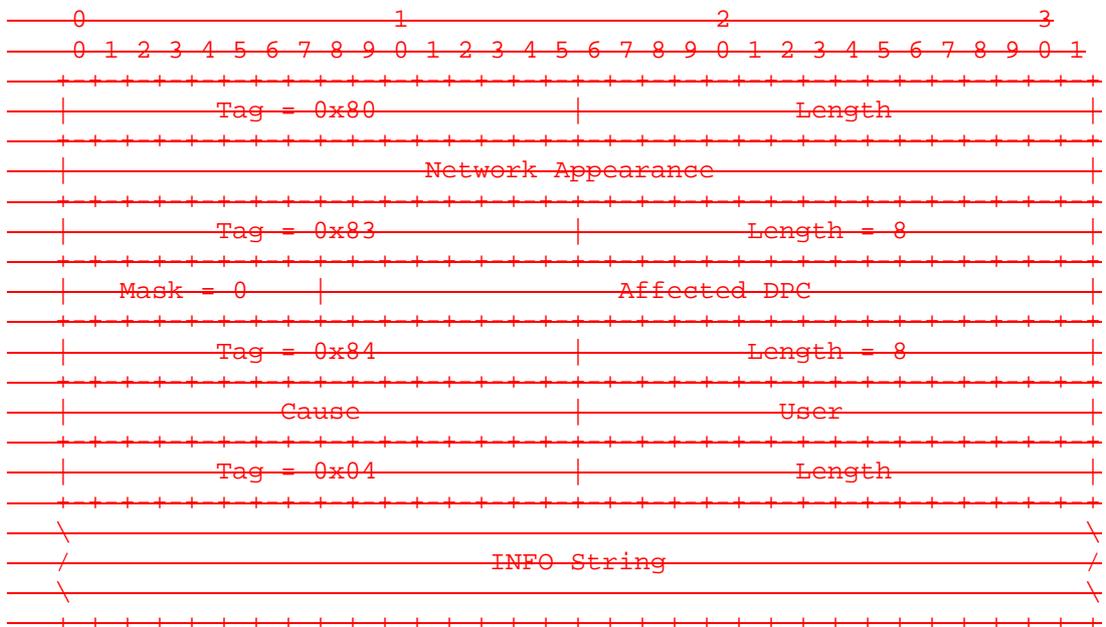

~~User/Cause: 32 bits~~

~~The Unavailability Cause and MTP3 User Identity fields, associated with the Affected DPC in the Affected Destinations parameter, are encoded as follows:~~

~~Unavailability Cause field: 16 bits (unsigned integer)~~

~~The Unavailability Cause parameter provides the reason for the unavailability of the MTP3 User. The valid values for the Unavailability Cause parameter are shown in the following table. The values agree with those provided in the SS7 MTP3 User Part Unavailable message. Depending on the MTP3 protocol used in the Network Appearance, additional values may be used—the specification of the relevant MTP3 protocol variant/version recommendation is definitive.~~

<del>0</del>	<del>Unknown</del>
<del>1</del>	<del>Unequipped Remote User</del>
<del>2</del>	<del>Inaccessible Remote User</del>

~~Sidebottom et al [Page 41]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~MTP3 User Identity field: 16 bits (unsigned integer)~~

~~The MTP3 User Identity describes the specific MTP3 User that is unavailable (e.g., ISUP, SCCP, ...). Some of the valid values for the MTP3 User Identity are shown below. The values align with those provided in the SS7 MTP3 User Part Unavailable message and Service Indicator. Depending on the MTP3 protocol variant/version used in the network appearance, additional values may be used. The relevant MTP3 protocol variant/version recommendation is definitive.~~

<del>0 to 2</del>	<del>Reserved</del>
<del>3</del>	<del>SCCP</del>
<del>4</del>	<del>TUP</del>
<del>5</del>	<del>ISUP</del>
<del>6 to 8</del>	<del>Reserved</del>
<del>9</del>	<del>Broadband ISUP</del>
<del>10</del>	<del>Satellite ISUP</del>
<del>11</del>	<del>Reserved</del>
<del>12</del>	<del>AAL type 2 Signalling</del>
<del>13</del>	<del>Bearer Independent Call Control (BICC)</del>
<del>14</del>	<del>Gateway Control Protocol</del>
<del>15</del>	<del>Reserved</del>

~~The format and description of the Affected Destinations parameter is the same as for the DUNA message (See Section 3.4.1.) except that the Mask field is not used and only a single Affected DPC is included. Ranges and lists of Affected DPCs cannot be signalled in a DUPU message, but this is consistent with UPU operation in the SS7 network. The Affected Destinations parameter in an MTP3 User Part Unavailable message (UPU) received by an SGP from the SS7 network contains only one destination.~~

~~The format and description of the Network Appearance and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

### ~~3.4.6 Destination Restricted (DRST)~~

~~The DRST message is optionally sent from the SGP to all concerned ASPs to indicate that the SG has determined that one or more SS7 destinations are now restricted from the point of view of the SGP, or in response to a DAUD message if appropriate. The M3UA layer at the ASP is expected to send traffic to the affected destination via an~~

~~alternate SCP of equal priority, but only if such an alternate route exists and is available. If the affected destination is currently considered unavailable by the ASP, The MTP3 User should be informed that traffic to the affected destination can be resumed. In this case, the M3UA layer should route the traffic through the SCP initiating the DRST message.~~

~~Sidebottom et al [Page 42]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~This message is optional for the SCP to send and it is optional for the ASP to act on any information received in the message. It is for use in the "STP" case described in Section 1.4.1.~~

~~The DRST message contains the following parameters:~~

- ~~Network Appearance Optional~~
- ~~Affected Destinations Mandatory~~
- ~~INFO String Optional~~

~~The format and description of the Network Appearance, Affected Destinations and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

### ~~3.5 ASP State Maintenance (ASPSM) Messages~~


#### ~~3.5.1 ASP Up~~

~~The ASP Up message is used to indicate to a remote M3UA peer that the adaptation layer is ready to receive any SSNM or ASPSM/ASPTM messages for all Routing Keys that the ASP is configured to serve.~~

~~The ASP Up message contains the following parameters:~~

- ~~INFO String Optional~~

~~The format for ASP Up message parameters is as follows:~~

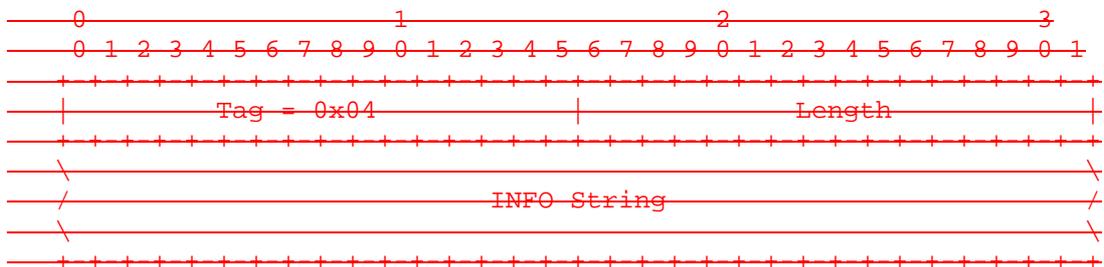

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

#### ~~3.5.2 ASP Up Acknowledgement (ASP Up Ack)~~

~~The ASP UP Ack message is used to acknowledge an ASP Up message received from a remote M3UA peer.~~


~~Sidebottom et al [Page 43]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The ASP Up Ack message contains the following parameters:~~

~~INFO String (optional)~~

~~The format for ASP Up Ack message parameters is as follows:~~

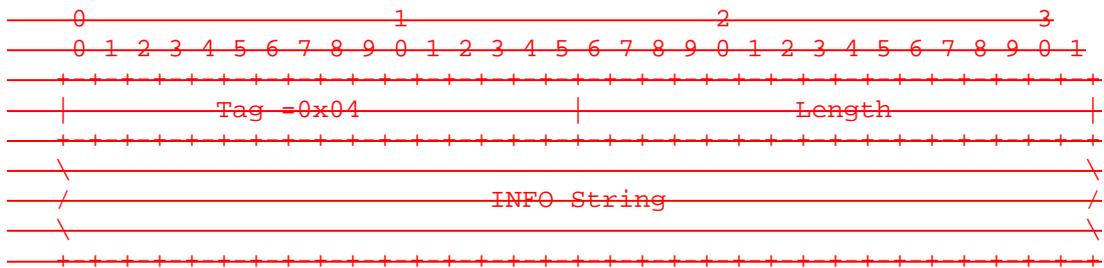

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1). The INFO String in an ASP Up Ack message is independent from the INFO String in the ASP Up message (i.e., it does not have to echo back the INFO String received).~~


~~3.5.3 ASP Down~~

~~The ASP Down message is used to indicate to a remote M3UA peer that the adaptation layer is NOT ready to receive DATA, SSNM or ASPTM messages.~~

~~The ASP Down message contains the following parameters:~~

~~Reason Mandatory  
INFO String Optional~~

~~The format for the ASP Down message parameters is as follows:~~

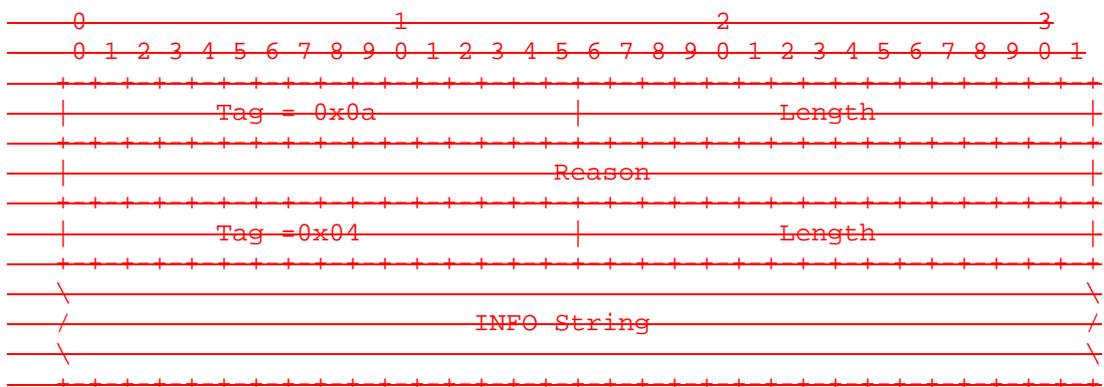

~~Sidebottom et al [Page 44]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

~~Reason: 32 bit (unsigned integer)~~

~~The Reason parameter indicates the reason that the remote M3UA adaptation layer is unavailable. The valid values for Reason are shown in the following table.~~

<del>0</del>	<del>Unspecified</del>
<del>1</del>	<del>User Unavailable</del>
<del>2</del>	<del>Management Blocking</del>


### ~~3.5.4 ASP Down Acknowledgement (ASP Down Ack)~~

~~The ASP Down Ack message is used to acknowledge an ASP Down message received from a remote M3UA peer.~~

~~The ASP Down Ack message contains the following parameters:~~

<del>Reason</del>	<del>Mandatory</del>
<del>INFO String</del>	<del>Optional</del>

~~The format for the ASP Down Ack message parameters is as follows:~~

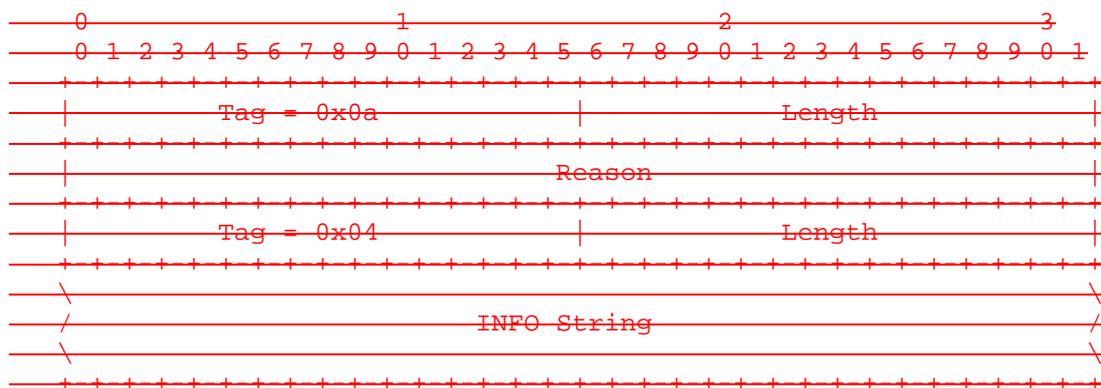

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

~~The INFO String in an ASP Down Ack message is independent from the INFO String in the ASP Down message (i.e., it does not have to echo back the INFO String received).~~

~~The format of the Reason parameter is the same as for the ASP Down message. (See Section 3.5.3).~~

### ~~3.5.5 Heartbeat (BEAT)~~


~~The BEAT message is optionally used to ensure that the M3UA peers are still available to each other. It is recommended for use when the~~

~~M3UA runs over a transport layer other than the SCTP, which has its own heartbeat.~~

~~The BEAT message contains the following parameters:~~

~~—— Heatbeat Data —— Optional~~

~~The format for the BEAT message is as follows:~~

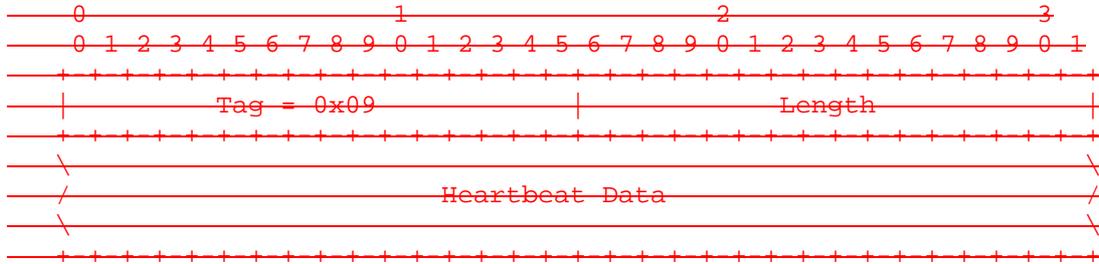

~~The Heartbeat Data parameter contents are defined by the sending node. The Heartbeat Data could include, for example, a Heartbeat Sequence Number and/or Timestamp. The receiver of a BEAT message does not process this field as it is only of significance to the sender. The receiver MUST respond with a BEAT Ack message.~~

~~3.5.6 Heartbeat Acknowledgement (BEAT Ack)~~

~~The BEAT Ack message is sent in response to a received BEAT message. It includes all the parameters of the received BEAT message, without any change.~~

~~3.6 Routing Key Management (RKM) Messages~~


~~3.6.1 Registration Request (REG REQ)~~


~~The REG REQ message is sent by an ASP to indicate to a remote M3UA peer that it wishes to register one or more given Routing Keys with the remote peer. Typically, an ASP would send this message to an SGP, and expects to receive a REG RSP message in return with an associated Routing Context value.~~

~~The REG REQ message contains the following parameters:~~

~~—— Routing Key —— Mandatory~~

~~The format for the REG REQ message is as follows:~~

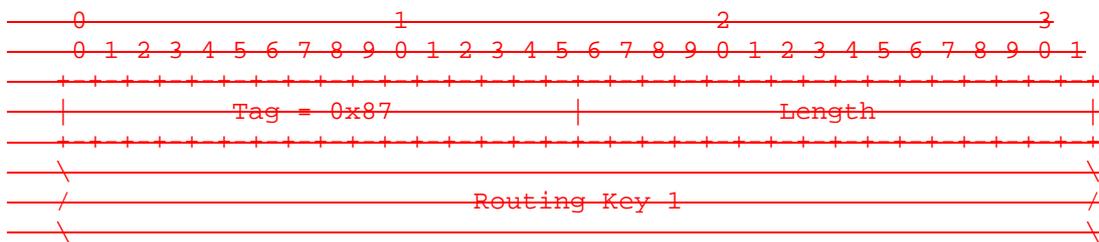

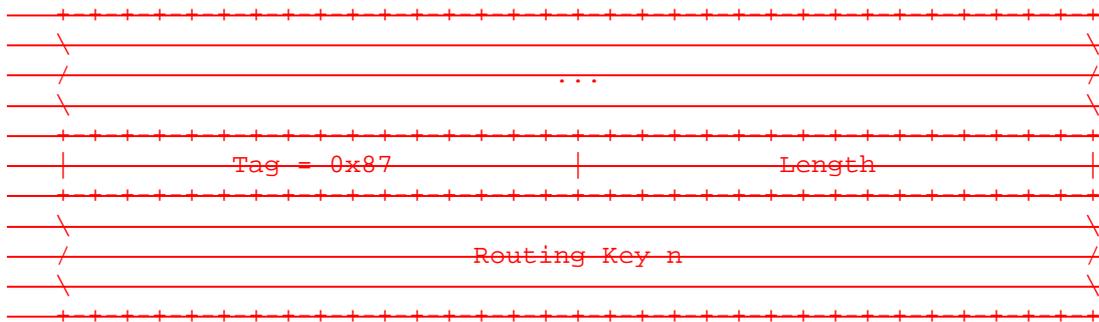

~~Routing Key: variable length~~


~~The Routing Key parameter is mandatory. The sender of this message expects that the receiver of this message will create a Routing Key entry and assign a unique Routing Context value to it, if the Routing Key entry does not already exist.~~

~~The Routing Key parameter may be present multiple times in the same message. This is used to allow the registration of multiple Routing Keys in a single message.~~

~~Sidebottom et al [Page 47]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format of the Routing Key parameter is as follows.~~

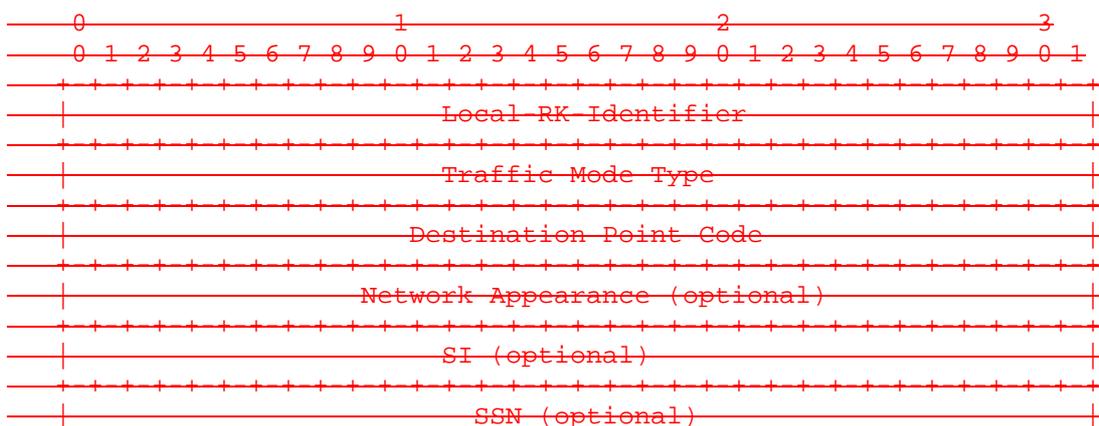




~~Local RK Identifier: 32-bit integer~~

~~The mandatory Local RK Identifier field is used to uniquely identify the registration request. The Identifier value is assigned by the ASP, and is used to correlate the response in an REG RSP message with the original registration request. The Identifier value must remain unique until the REG RSP message is received.~~

~~The format of the Local RK Identifier field is as follows:~~

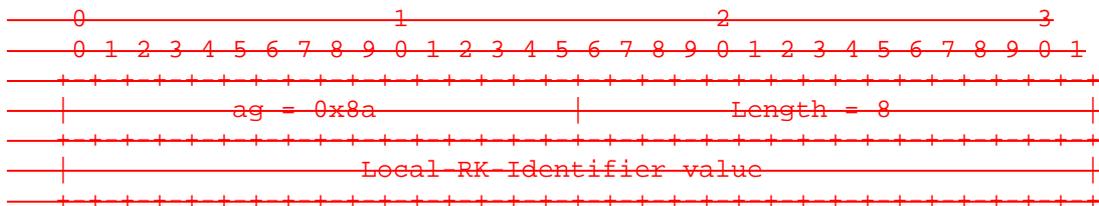

~~Traffic Mode Type: 32-bit (unsigned integer)~~

~~The Traffic Mode Type parameter is mandatory and identifies the traffic mode of operation of the ASP(s) within an Application Server. The valid values for Traffic Mode Type are shown in the following table:~~

- ~~1 Over-ride~~
- ~~2 Load-share~~


~~Sidebottom et al [Page 48]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If the receiver of the REG REQ creates a new Routing Key entry, then the Traffic Mode Type sets the traffic mode for the new Application Server. If the receiver of the REG REQ determines that a matching Routing Key already exists, the Traffic Mode Type MUST match the existing traffic mode for the AS.~~


~~Destination Point Code:~~

~~The Destination Point Code parameter is mandatory, and identifies the Destination Point Code of incoming SS7 traffic for which the ASP is registering. The format is the same as described for the Affected Destination parameter in the DUNA message (See Section 3.4.1). Its format is:~~

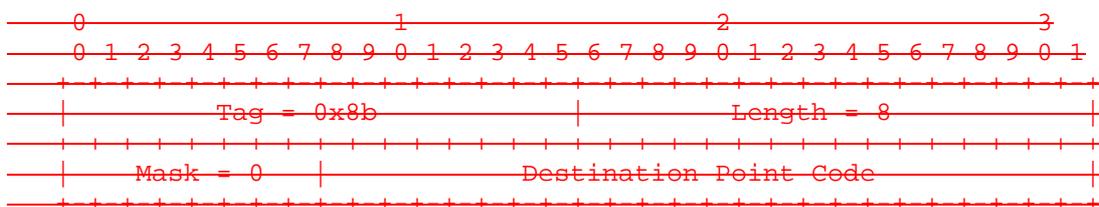

~~Network Appearance:~~

~~The optional Network Appearance parameter field identifies the SS7 network context for the Routing Key, and has the same format as in the DATA message (See Section 3.3.1). The absence of the Network Appearance parameter in the Routing Key indicates the use of any Network Appearance value, its format is:~~

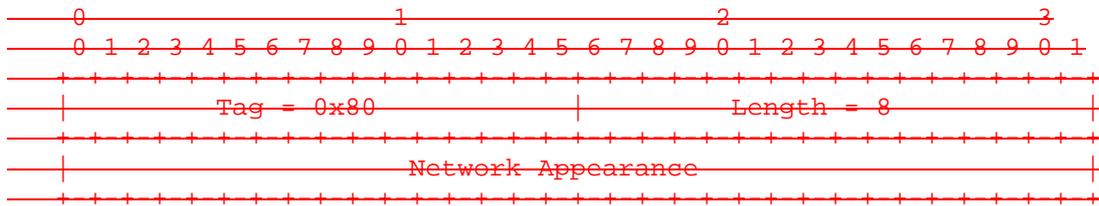


~~Service Indicators (SI): n X 8-bit integers~~

~~The optional SI field contains one or more Service Indicators from the values as described in the MTP3 User Identity field of the DUPU message. The absence of the SI parameter in the Routing Key indicates the use of any SI value, excluding of course MTP management. Where an SI parameter does not contain a multiple of four SIs, the parameter is padded out to 32 byte alignment. An SI value of zero is not valid in M3UA. The SI format is:~~


~~Sidebottom et al [Page 49]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

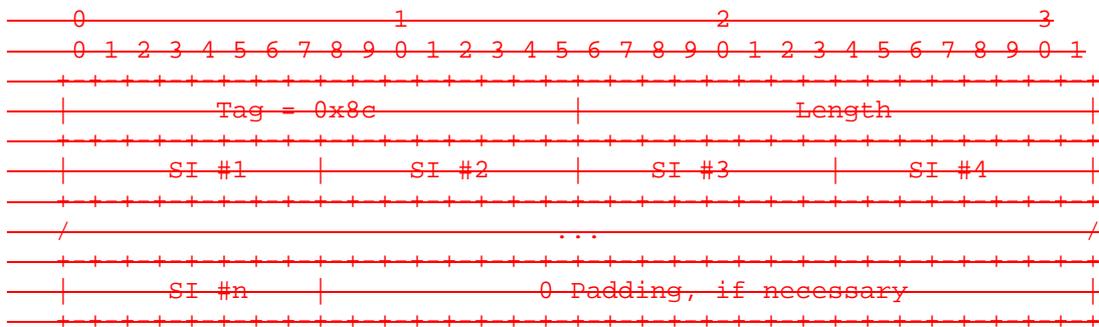

~~Subsystem Numbers (SSN): n X 8-bit integers~~


~~The optional SSN field contains one or more SCCP subsystem numbers, and is used in conjunction with an SI values of 3 (i.e., SCCP) only. The absence of the SSN parameter in the Routing Key indicates the use of any SSN value, in the case of SCCP traffic. Where an SSN parameter does not contain a multiple of four SSNs, the parameter is padded out to 32 byte alignment. The subsystem number values associated are defined by the local network operator, and typically follow ITU-T Recommendation Q.713 [5]. An SSN value of zero is not valid in M3UA. The format of this field is as follows:~~

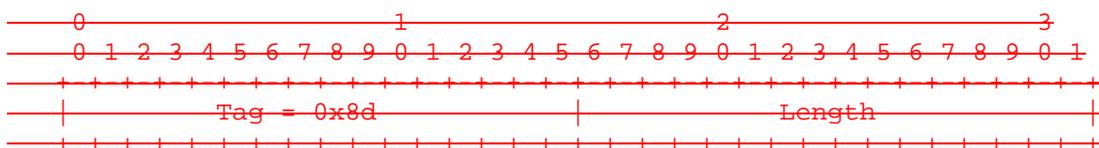



~~OPC List:~~


~~The Originating Point Code List parameter contains one or more SS7 OPC entries, and its format is the same as the Destination Point Code parameter. The absence of the OPC List parameter in the Routing Key indicates the use of any OPC value,~~

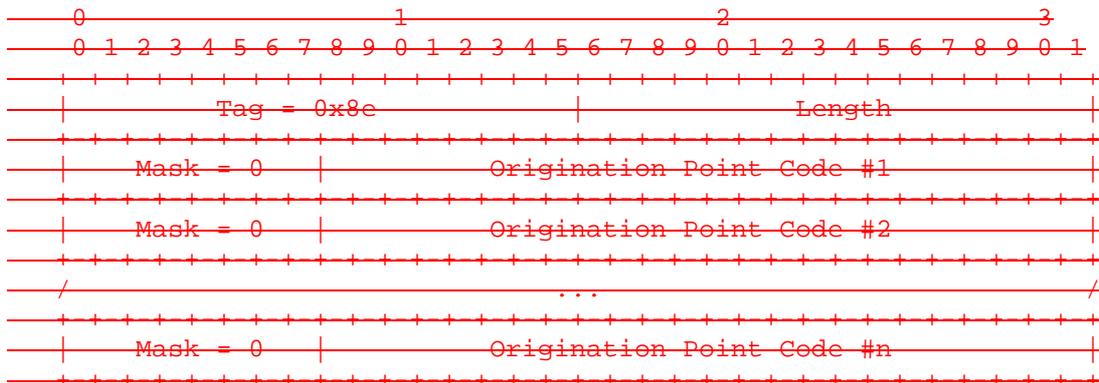


~~Circuit Range:~~

~~An ISUP controlled circuit is uniquely identified by the SS7 OPC, DPC and CIC value. For the purposes of identifying Circuit Ranges in an M3UA Routing Key, the optional Circuit Range parameter includes one or more circuit ranges, each identified by an OPC and Upper/Lower CIC value. The DPC is implicit as it is mandatory and already included in the DPC parameter of the Routing Key. The absence of the Circuit Range parameter in the Routing Key indicates the use of any Circuit Range values, in the case of ISUP/TUP traffic. The Origination Point Code is encoded the same as the Destination Point Code parameter, while the CIC values are 16 bit integers.~~

~~The Circuit Range format is as follows:~~

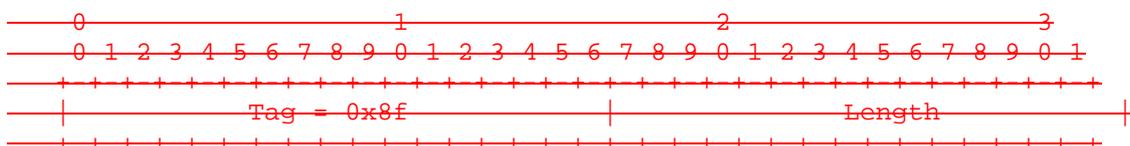

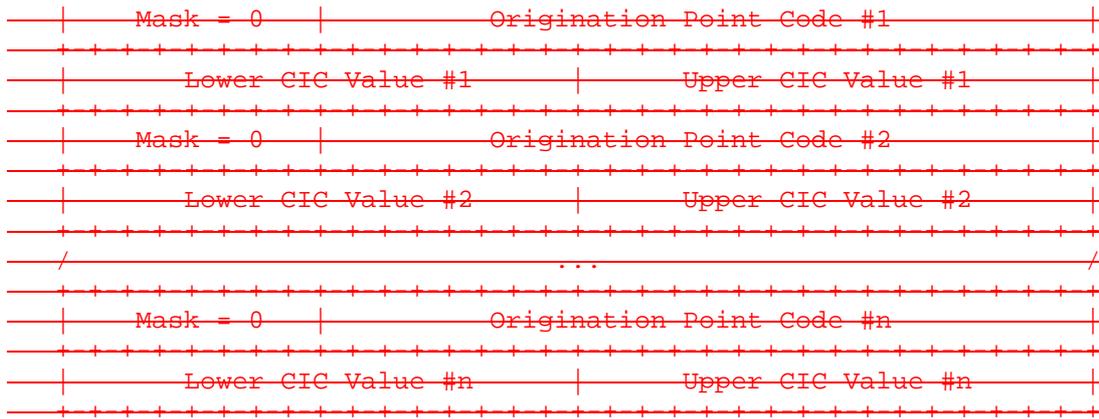

~~Sidebottom et al [Page 51]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~3.6.2 Registration Response (REG RSP)~~

~~The REG RSP message is used as a response to the REG REQ message from a remote M3UA peer. It contains indications of success/failure for registration requests and returns a unique Routing Context value for successful registration requests, to be used in subsequent M3UA Traffic Management protocol.~~

~~The REG RSP message contains the following parameters:~~


~~Registration Results Mandatory~~

~~The format for the REG RSP message is as follows:~~

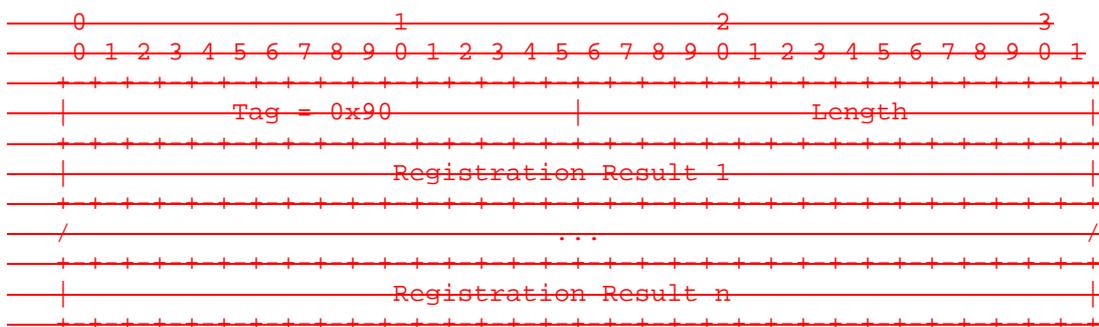

~~Registration Results:~~

~~The Registration Results parameter contains one or more results, each containing the registration status for a single Routing Key in an REG REQ message. The number of results in a single REG RSP message MAY match the number of Routing Key parameters found in the corresponding REG REQ message. The format of each result is as follows:~~

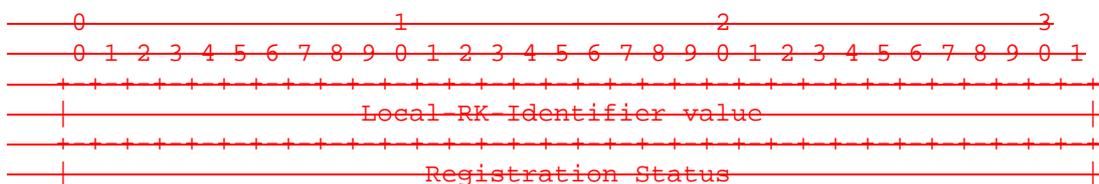



~~Sidebottom et al [Page 53]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Routing Context: n X 32-bit integers~~

~~The Routing Context parameter contains (a list of) integers indexing the Application Server traffic that the sending ASP is currently registered to receive from the SGP but now wishes to deregister.~~


~~3.6.4 De-Registration Response (DEREG RSP)~~

~~The DEREG RSP message is used as a response to the DEREG REQ message from a remote M3UA peer.~~

~~The DEREG RSP message contains the following parameters:~~


~~De-registration Results Mandatory~~

~~The format for the DEREG RSP message is as follows:~~

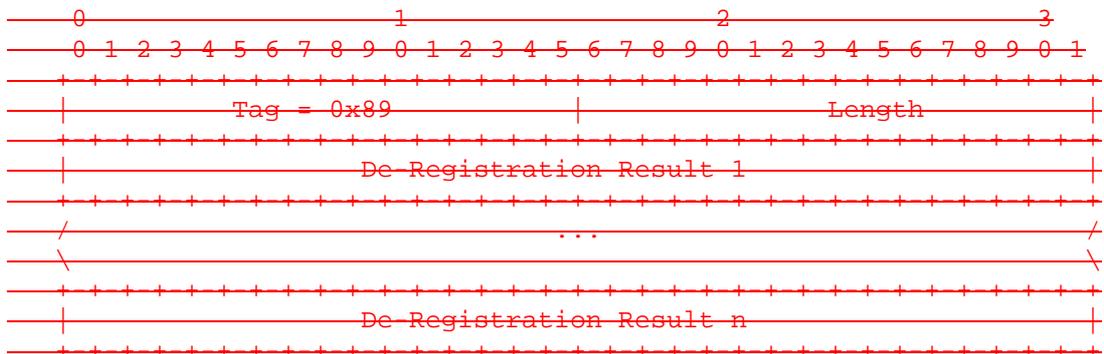

~~De-Registration Results:~~

~~The De-Registration Results parameter contains one or more results, each containing the de-registration status for a single Routing Context in a DEREG REQ message. The number of results in a single DEREG RSP message MAY match the number of Routing Contexts found in the corresponding DEREG REQ message. The format of each result is as follows:~~

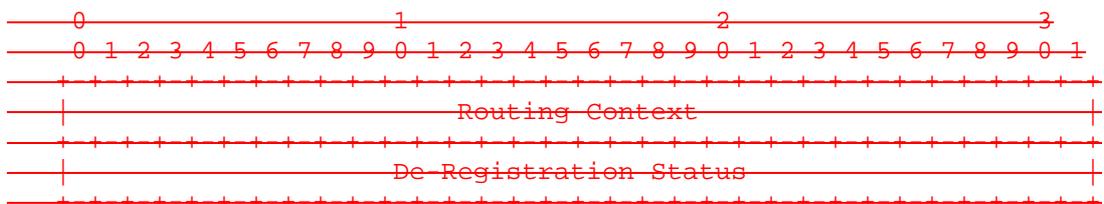

~~Sidebottom et al [Page 54]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Routing Context: 32 bit integer~~

~~The Routing Context field contains the Routing Context value of the matching Routing Key to deregister, as found in the DEREG REQ message.~~

~~De-Registration Status: 32 bit integer~~

~~The De-Registration Result Status field indicates the success or the reason for failure of the de-registration.~~

~~Its values may be:~~

<del>0</del>	<del>Successfully De-registered</del>
<del>1</del>	<del>Error - Unknown</del>
<del>2</del>	<del>Error - Invalid Routing Context</del>
<del>3</del>	<del>Error - Permission Denied</del>
<del>4</del>	<del>Error - Not Registered</del>
<del>5</del>	<del>Error - ASP Currently Active for Routing Context</del>

### ~~3.7 ASP Traffic Maintenance (ASPTM) Messages~~

#### ~~3.7.1 ASP Active~~

~~The ASP Active message is sent by an ASP to indicate to a remote M3UA peer that it is ready to process signalling traffic for a particular Application Server. The ASP Active message affects only the ASP state for the Routing Keys identified by the Routing Contexts, if present.~~


~~The ASP Active message contains the following parameters:~~

<del>Traffic Mode Type</del>	<del>Mandatory</del>
<del>Routing Context</del>	<del>Optional</del>
<del>INFO String</del>	<del>Optional</del>

~~Sidebottom et al [Page 55]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format for the ASP Active message is as follows:~~

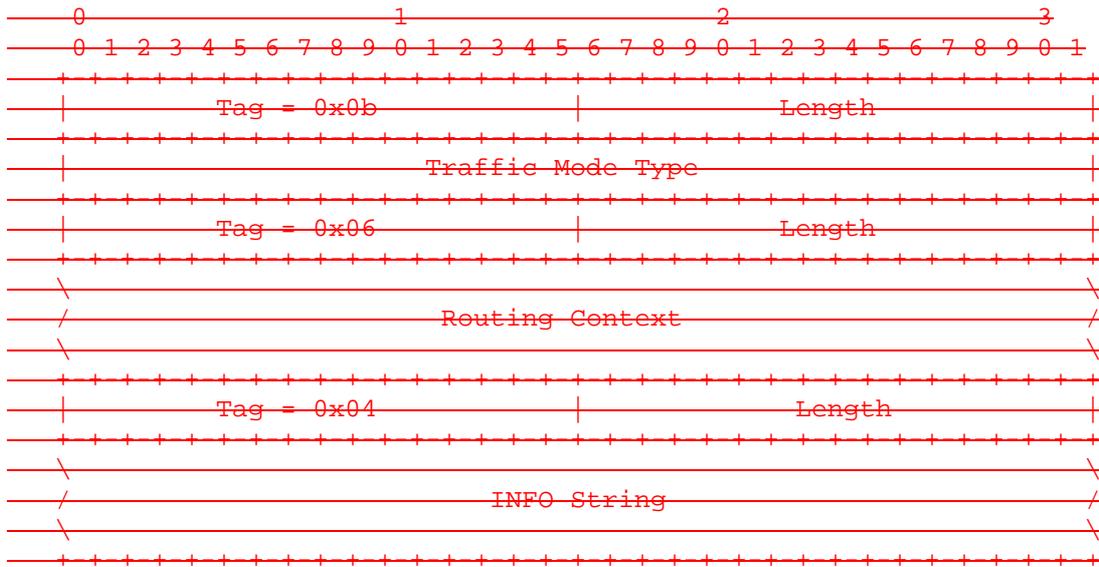

~~Traffic Mode Type: 32-bit (unsigned integer)~~

~~The Traffic Mode Type parameter identifies the traffic mode of operation of the ASP within an AS. The valid values for Traffic Mode Type are shown in the following table:~~

<del>1</del>	<del>Over-ride</del>
<del>2</del>	<del>Load share</del>
<del>3</del>	<del>Over-ride (Standby)</del>
<del>4</del>	<del>Load share (Standby)</del>

~~Within a particular Routing Context, Over-ride and Load share, either active or standby, MUST NOT be mixed. The Over-ride value indicates that the ASP is operating in Over-ride mode, and the ASP takes over all traffic in an Application Server (i.e., primary/back-up operation), over-riding any currently active ASPs in the AS. In Load share mode, the ASP will share in the traffic distribution with any other currently active ASPs. The Standby versions of the Over-ride and Load share Types indicate that the ASP is declaring itself ready to accept traffic but leaves it up to the sender as to when the traffic is started. Over-ride (Standby) indicates that the traffic sender continues to use the currently active ASP until it can no longer send/receive traffic (i.e., the currently active ASP transitions to state ASP-DOWN or ASP-ACTIVE). At this point the sender MUST move the standby ASP to the ASP-ACTIVE state and commence traffic. Load share (Standby) is similar the sender continues to load share to the current ASPs until it is determined~~

~~Sidebottom et al [Page 56]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~that there is insufficient resources in the Load share group. When there are insufficient ASPs, the sender MUST move the ASP to state ASP-ACTIVE.~~

~~Routing Context: n X 32-bit integers~~

~~The optional Routing Context parameter contains (a list of) integers indexing the Application Server traffic that the sending ASP is~~

~~— configured/registered to receive.~~

~~— There is one to one relationship between an index entry and an SGP Routing Key or AS Name. Because an AS can only appear in one Network Appearance, the Network Appearance parameter is not required in the ASP Active message.~~

~~— An Application Server Process may be configured to process traffic for more than one logical Application Server. From the perspective of an ASP, a Routing Context defines a range of signalling traffic that the ASP is currently configured to receive from the SGP. For example, an ASP could be configured to support call processing for multiple ranges of PSTN trunks and therefore receive related signalling traffic, identified by separate SS7 DPC/OPC/CIC ranges.~~

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

~~3.7.2 ASP Active Acknowledgement (ASP Active Ack)~~

~~The ASP Active Ack message is used to acknowledge an ASP Active message received from a remote M3UA peer. In the case where an ASP Active (Over-ride (standby)) or ASP Active (Load share (standby)) message is received, a second ASP Active Ack message is sent when the ASP is moved from the ASP STANDBY to the ASP ACTIVE state.~~


~~The ASP Active Ack message contains the following parameters:~~


- ~~— Traffic Mode Type — Mandatory~~
- ~~— Routing Context — Optional~~
- ~~— INFO String — Optional~~

~~Sidebottom et al ————— [Page 57]~~

~~Internet Draft — SS7 MTP3 User Adaptation Layer — Jul 2001~~

~~The format for the ASP Active Ack message is as follows:~~

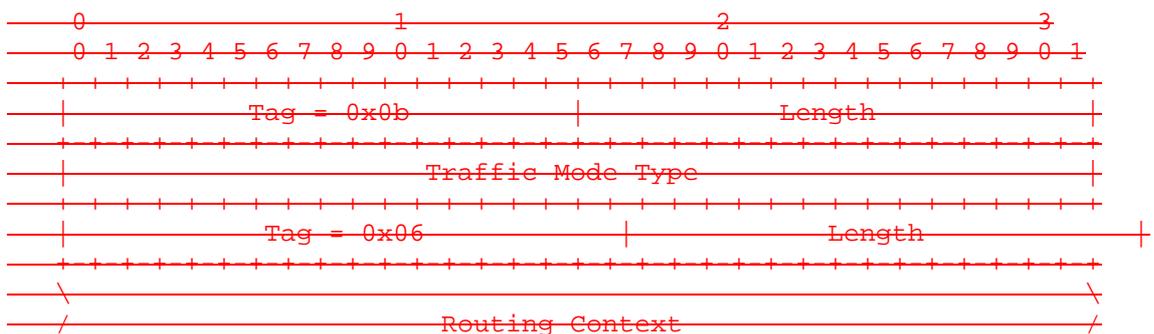

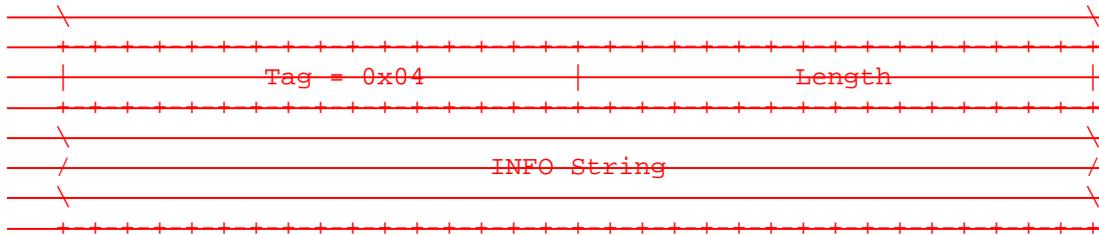

The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).

The INFO String in an ASP Active Ack message is independent from the INFO String in the ASP Active message (i.e., it does not have to echo back the INFO String received).

The format of the Traffic Mode Type and Routing Context parameters is the same as for the ASP Active message. (See Section 3.5.5).

### 3.7.3 ASP Inactive

The ASP Inactive message is sent by an ASP to indicate to a remote M3UA peer that it is no longer an active ASP to be used from within a list of ASPs. The ASP Inactive message affects only the ASP state in the Routing Keys identified by the Routing Contexts, if present.


The ASP Inactive message contains the following parameters:

- Routing Context Optional
- INFO String Optional

Sidebottom et al [Page 58]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

The format for the ASP Inactive message parameters is as follows:

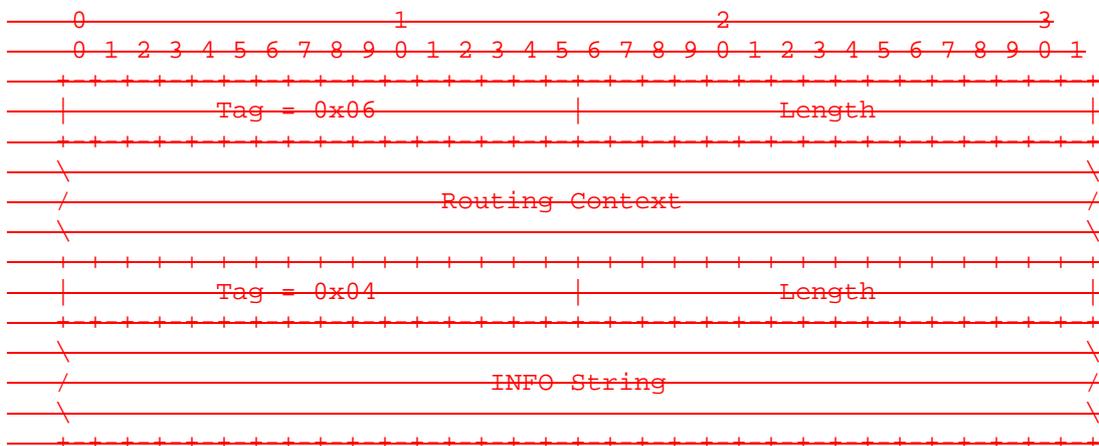

The format and description of the optional Routing Context and INFO

~~String parameters is the same as for the ASP Active message (See Section 3.5.5.)~~


~~3.7.4 ASP Inactive Acknowledgement (ASP Inactive Ack)~~

~~The ASP Inactive Ack message is used to acknowledge an ASP Inactive message received from a remote M3UA peer.~~

~~The ASP Inactive Ack message contains the following parameters:~~

- ~~Routing Context Optional~~
- ~~INFO String Optional~~

~~The format for the ASP Inactive Ack message is as follows:~~

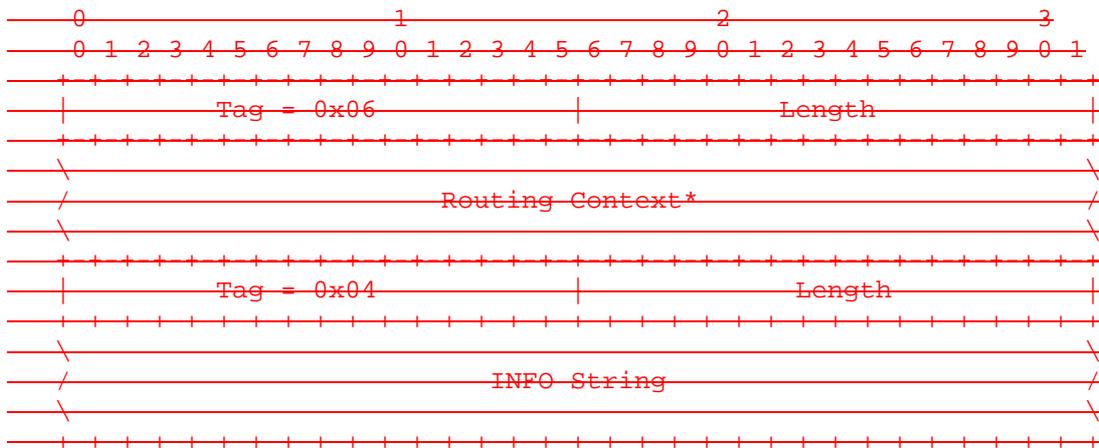

~~Sidebottom et al [Page 59]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1.)~~

~~The INFO String in an ASP Inactive Ack message is independent from the INFO String in the ASP Inactive message (i.e., it does not have to echo back the INFO String received).~~

~~The format of the Routing Context parameter is the same as for the ASP Inactive message. (See Section 3.5.7).~~

~~3.8 Management (MGMT) Messages~~


~~3.8.1 Error~~

~~The Error message is used to notify a peer of an error event associated with an incoming message. For example, the message type might be unexpected given the current state, or a parameter value might be invalid.~~

~~The Error message contains the following parameters:~~

- ~~Error Code Mandatory~~
- ~~Diagnostic Information Optional~~

The format for the Error message is as follows:

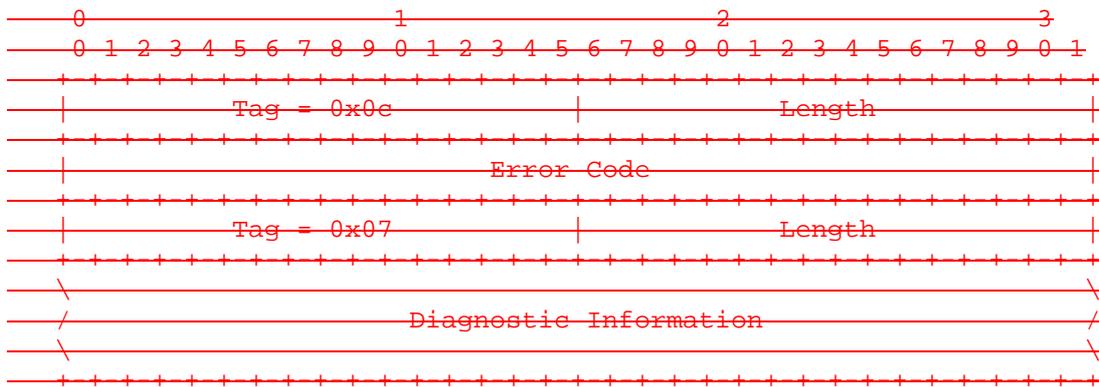

Error Code: 32 bits (unsigned integer)

The Error Code parameter indicates the reason for the Error Message. The Error parameter value can be one of the following values:

- 1 Invalid Version
- 2 Invalid Network Appearance
- 3 Unsupported Message Class

Sidebottom et al [Page 60]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

- 4 Unsupported Message Type
- 5 Unsupported/Invalid Traffic Handling Mode
- 6 Unexpected Message
- 7 Protocol Error
- 8 Invalid Routing Context
- 9 Invalid Stream Identifier
- 10 Invalid Parameter Value
- 11 Refused Management Blocking
- 12 Unknown Routing Context

The "Invalid Version" error is sent if a message was received with an invalid or unsupported version. The Error message contains the supported version in the Common header. The Error message could optionally provide the supported version in the Diagnostic Information area.

The "Invalid Network Appearance" error is sent by a SGP if an ASP sends a message with an invalid (unconfigured) Network Appearance value.

The "Unsupported Message Class" error is sent if a message with an unexpected or unsupported Message Class is received.

The "Unsupported Message Type" error is sent if a message with an unexpected or unsupported Message Type is received.

The "Unsupported/Invalid Traffic Handling Mode" error is sent by a SGP if an ASP sends an ASP Active message with an unsupported Traffic Mode Type or a Traffic Mode Type that is inconsistent with the presently configured mode for the Application Server. An example would be a case in which the SGP did not support load sharing.

~~The "Unexpected Message" error MAY be sent if a defined and recognized message is received that is not expected in the current state (in some cases the ASP may optionally silently discard the message and not send an Error message). For example, silent discard is used by an ASP if it received a DATA message from an SCP while it was in the ASP INACTIVE state.~~

~~The "Protocol Error" error is sent for any protocol anomaly (i.e., reception of a parameter that is syntactically correct but unexpected in the current situation).~~

~~The "Invalid Routing Context" error is sent if a message is received from a peer with an invalid (unconfigured) Routing Context value.~~

~~The "Invalid Stream Identifier" error is sent if a message is received on an unexpected SCTP stream (e.g., a Management message was received on a stream other than "0").~~

~~Sidebottom et al [Page 61]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The "Invalid Parameter Value" error is sent if a message is received with an invalid parameter value (e.g., a DUPU message was received with a Mask value other than "0").~~

~~The "Refused Management Blocking" error is sent when an ASP Up or ASP Active message is received and the request is refused for management reasons (e.g., management lock-out).~~

~~The "Unknown Routing Context" Error is sent if a message is received from a peer without a Routing Context parameter and it is not known by configuration data which Application Servers are referenced.~~

~~Diagnostic Information: variable length~~

~~When included, the optional Diagnostic information can be any information germane to the error condition, to assist in identification of the error condition. In the case of an Invalid Network Appearance, Traffic Handling Mode, Routing Context or Parameter Value, the Diagnostic information parameter MUST be added and include the offending parameter. In the other cases, the Diagnostic information MAY be the first 40 bytes of the offending message.~~

~~Error messages MUST NOT be generated in response to other Error messages.~~

### ~~3.8.2 Notify~~


~~The Notify message used to provide an autonomous indication of M3UA events to an M3UA peer.~~

~~The Notify message contains the following parameters:~~

<del>Status</del>	<del>Mandatory</del>
<del>Routing Context</del>	<del>Optional</del>
<del>INFO String</del>	<del>Optional</del>

~~Sidebottom et al [Page 62]  
Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format for the Notify message is as follows:~~

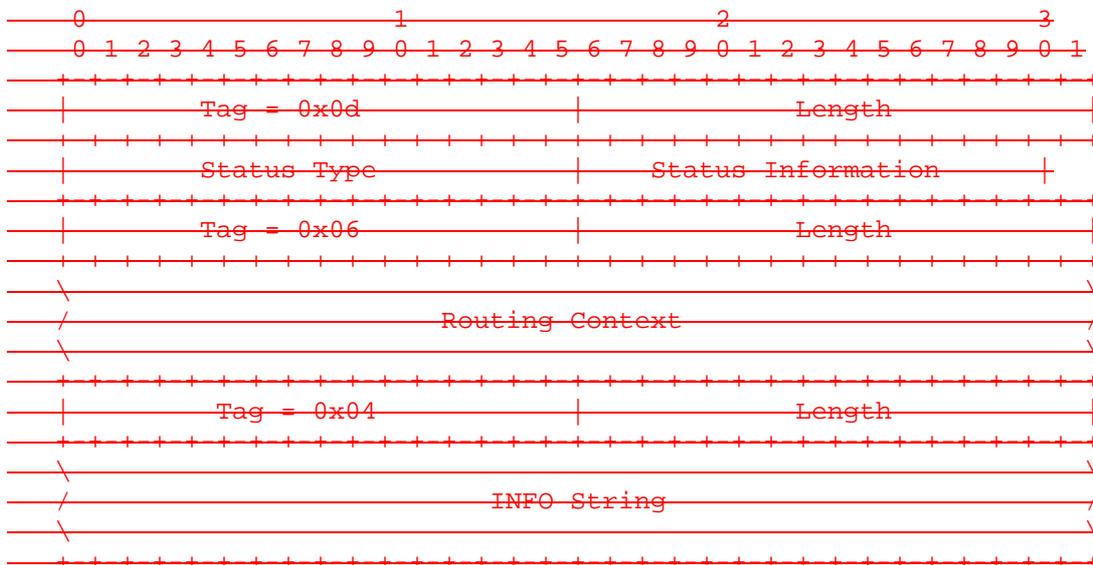

~~Status Type: 16 bits (unsigned integer)~~

~~The Status Type parameter identifies the type of the Notify message. The following are the valid Status Type values:~~

- ~~1 Application Server State Change (AS State\_Change)~~
- ~~2 Other~~

~~Status Information: 16 bits (unsigned integer)~~

~~The Status Information parameter contains more detailed information for the notification, based on the value of the Status Type.~~

~~If the Status Type is AS State\_Change the following Status Information values are used:~~

- ~~1 reserved~~
- ~~2 Application Server Inactive (AS INACTIVE)~~
- ~~3 Application Server Active (AS ACTIVE)~~
- ~~4 Application Server Pending (AS PENDING)~~

~~These notifications are sent from an SCP to an ASP upon a change in status of a particular Application Server. The value reflects the new state of the Application Server.~~

~~Sidebottom et al [Page 63]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If the Status Type is Other, then the following Status Information values are defined:~~

- ~~1 Insufficient ASP Resources Active in AS~~
- ~~2 Alternate ASP Active~~

~~These notifications are not based on the SCP reporting the state change of an ASP or AS. In the Insufficient ASP Resources case, the SCP is indicating to an ASP\_INACTIVE ASP in the AS that another ASP is required in order to handle the load of the AS (Load sharing mode). For the Alternate ASP Active case, an ASP is informed when an alternate ASP transitions to the ASP\_ACTIVE state in Over ride mode.~~

~~The format and description of the optional Routing Context and Info String parameters is the same as for the ASP Active message (See Section 3.5.5.)~~

#### ~~4. Procedures~~

~~The M3UA layer needs to respond to various local primitives it receives from other layers as well as the messages that it receives from the peer M3UA layer. This section describes the M3UA procedures in response to these events.~~

##### ~~4.1 Procedures to Support the M3UA User and Layer Management Layers~~

###### ~~4.1.1 Receipt of Primitives from the M3UA User~~

~~On receiving an MTP\_TRANSFER request primitive from an upper layer at an ASP/IPSP, or the nodal inter-working function at an SCP, the M3UA layer sends a corresponding DATA message (see Section 3) to its M3UA peer. The M3UA peer receiving the DATA message sends an MTP\_TRANSFER indication primitive to the upper layer.~~

~~The M3UA message distribution function (see Section 1.4.2.1) determines the Application Server (AS) based on comparing the information in the MTP\_TRANSFER request primitive with a provisioned Routing Key.~~

~~>From the list of ASPs within the AS table, an ASP in the ASP\_ACTIVE state is selected and a DATA message is constructed and issued on the corresponding SCTP association. If more than one ASP is in the ASP\_ACTIVE state (i.e., traffic is to be load shared across more than one ASP), one of the ASPs in the ASP\_ACTIVE state is selected from the list. The selection algorithm is implementation dependent but could, for example, be round robin or based on, for example, the SLS or ISUP CIC. The appropriate selection algorithm must be chosen carefully as it is dependent on application assumptions and understanding of the~~

~~degree of state coordination between the ASP\_ACTIVE ASPs in the AS.~~

~~Sidebottom et al [Page 64]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~In addition, the message needs to be sent on the appropriate SCTP stream, again taking care to meet the message sequencing needs of the signalling application.~~

~~When there is no Routing Key match, or only a partial match, for an incoming SS7 message, a default treatment MUST be specified. Possible solutions are to provide a default Application Server at the SGP that directs all unallocated traffic to a (set of) default ASP(s), or to drop the message and provide a notification to Layer Management in an M\_ERROR indication primitive. The treatment of unallocated traffic is implementation dependent.~~

#### ~~4.1.2 Receipt of Primitives from the Layer Management~~

~~On receiving primitives from the local Layer Management, the M3UA layer will take the requested action and provide an appropriate response primitive to Layer Management.~~

~~An M\_SCTP\_ESTABLISH request primitive from Layer Management at an ASP or IPSP will initiate the establishment of an SCTP association. The M3UA layer will attempt to establish an SCTP association with the remote M3UA peer by sending an SCTP\_ASSOCIATE primitive to the local SCTP layer.~~

~~When an SCTP association has been successfully established, the SCTP will send an SCTP\_COMMUNICATION\_UP notification primitive to the local M3UA layer. At the SGP or IPSP that initiated the request, the M3UA layer will send an M\_SCTP\_ESTABLISH confirm primitive to Layer Management when the association set up is complete. At the peer M3UA layer, an M\_SCTP\_ESTABLISH indication primitive is sent to Layer Management upon successful completion of an incoming SCTP association set up.~~

~~An M\_SCTP\_RELEASE request primitive from Layer Management initiates the tear-down of an SCTP association. The M3UA layer accomplishes a graceful shutdown of the SCTP association by sending an SCTP\_SHUTDOWN primitive to the SCTP layer.~~

~~When the graceful shutdown of the SCTP association has been accomplished, the SCTP layer returns an SCTP\_SHUTDOWN\_COMPLETE notification primitive to the local M3UA layer. At the M3UA Layer that initiated the request, the M3UA layer will send an M\_SCTP\_RELEASE confirm primitive to Layer Management when the association teardown is complete. At the peer M3UA Layer, an M\_SCTP\_RELEASE indication primitive is sent to Layer Management upon successful tear-down of an SCTP association.~~

~~An M\_SCTP\_STATUS request primitive supports a Layer Management query of the local status of a particular SCTP association. The M3UA layer simply maps the M\_SCTP\_STATUS request primitive to an SCTP\_STATUS~~

~~Sidebottom et al [Page 65]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~primitive to the SCTP layer. When the SCTP responds, the M3UA layer maps the association status information to an M-SCTP\_STATUS confirm primitive. No peer protocol is invoked.~~

~~Similar LM to M3UA to SCTP and/or SCTP to M3UA to LM primitive mappings can be described for the various other SCTP Upper Layer primitives in RFC2960 [13] such as INITIALIZE, SET PRIMARY, CHANGE HEARTBEAT, REQUEST HEARTBEAT, GET SRTP REPORT, SET FAILURE THRESHOLD, SET PROTOCOL PARAMETERS, DESTROY SCTP INSTANCE, SEND FAILURE, AND NETWORK STATUS CHANGE. Alternatively, these SCTP Upper Layer primitives (and Status as well) can be considered for modeling purposes as a Layer Management interaction directly with the SCTP Layer.~~

~~M-NOTIFY indication and M-ERROR indication primitives indicate to Layer Management the notification or error information contained in a received M3UA Notify or Error message respectively. These indications can also be generated based on local M3UA events.~~

~~An M-ASP\_STATUS request primitive supports a Layer Management query of the status of a particular local or remote ASP. The M3UA layer responds with the status in an M-ASP\_STATUS confirm primitive. No M3UA peer protocol is invoked.~~

~~An M-AS\_STATUS request supports a Layer Management query of the status of a particular AS. The M3UA responds with an M-AS\_STATUS confirm primitive. No M3UA peer protocol is invoked.~~

~~M-ASP\_UP request, M-ASP\_DOWN request, M-ASP\_ACTIVE request and M-ASP\_INACTIVE request primitives allow Layer Management at an ASP to initiate state changes. Upon successful completion, a corresponding confirm primitive is provided by the M3UA layer to Layer Management. If an invocation is unsuccessful, an Error indication primitive is provided in the primitive.~~

~~These requests result in outgoing ASP Up, ASP Down, ASP Active and ASP Inactive messages to the remote M3UA peer at an SCP or IPSP.~~

#### ~~4.1.3 Receipt of M3UA Peer Management Messages~~

~~Upon successful state changes resulting from reception of ASP Up, ASP Down, ASP Active and ASP Inactive messages from a peer M3UA, the M3UA layer SHOULD invoke corresponding M-ASP\_UP, M-ASP\_DOWN, M-ASP\_ACTIVE and M-ASP\_INACTIVE, M-AS\_ACTIVE, M-AS\_INACTIVE, and M-AS\_DOWN indication primitives to the local Layer Management.~~

~~M-NOTIFY indication and M-ERROR indication primitives indicate to Layer Management the notification or error information contained in a received M3UA Notify or Error message. These indications can also be generated based on local M3UA events.~~

~~Sidebottom et al [Page 66]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~4.2 Procedures to Support the Management of SCTP Associations with M3UA Peers~~

~~These procedures support the M3UA management of SCTP Associations between SGPs and ASPs or between IPSPs.~~

4.2.1 AS and ASP State Maintenance

The M3UA layer on the SCP maintains the state of each remote ASP, in each Application Server that the ASP is configured to receive traffic, as input to the M3UA message distribution function. Similarly, where IPSPs use M3UA in a point to point fashion, the M3UA layer in an IPSP maintains the state of remote IPSPs. For the purposes of the following procedures, only the SCP/ASP case is described but the SCP side of the procedures also apply to an IPSP sending traffic to an AS consisting of a set of remote IPSPs.

4.2.1.1 ASP States

The state of each remote ASP, in each AS that it is configured to operate, is maintained in the M3UA layer in the SCP. The state of a particular ASP in a particular AS changes due to events. The events include:

- \* Reception of messages from the peer M3UA layer at the ASP;
- \* Reception of some messages from the peer M3UA layer at other ASPs in the AS (e.g., ASP Active message indicating "Over ride");
- \* Reception of indications from the SCTP layer; or
- \* Local Management intervention.

The ASP state transition diagram is shown in Figure 4. The possible states of an ASP are:

ASP-DOWN: The remote M3UA peer at the ASP is unavailable and/or the related SCTP association is down. Initially all ASPs will be in this state. An ASP in this state SHOULD NOT be sent any M3UA messages.

ASP-INACTIVE: The remote M3UA peer at the ASP is available (and the related SCTP association is up) but application traffic is stopped. In this state the ASP MAY be sent any non-DATA M3UA messages.


ASP-ACTIVE: The remote M3UA peer at the ASP is available and application traffic is active (for a particular Routing Context or set of Routing Contexts).


ASP-STANDBY: The remote M3UA peer at the ASP is available and ready to receive application traffic at any time (for a particular Routing Context or set of Routing Contexts). In this state the ASP MAY be sent any non-Data M3UA messages.

Sidebottom et al [Page 67]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

Figure 4: ASP State Transition Diagram

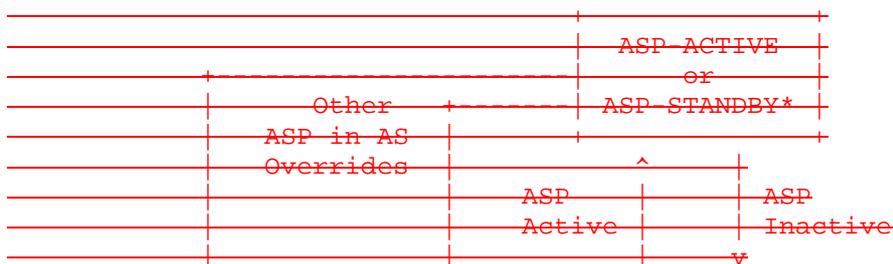

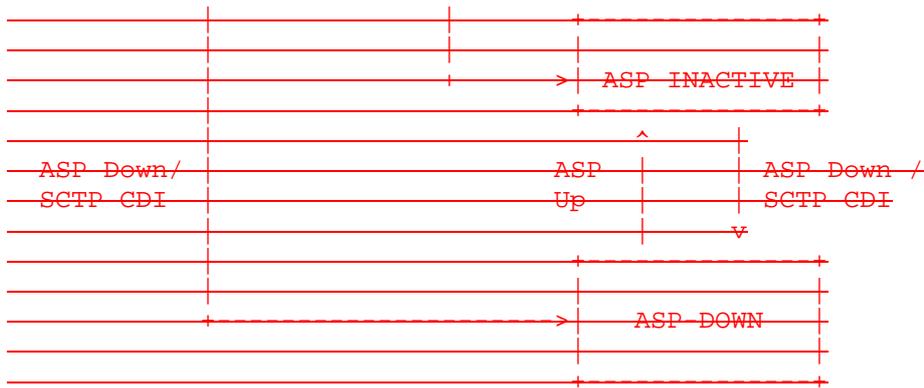

~~\*Note: ASP ACTIVE and ASP STANDBY differ only in whether the ASP is currently receiving Data traffic within the AS.~~

~~SCTP CDI: The SCTP CDI denotes the local SCTP layer's Communication Down Indication to the Upper Layer Protocol (M3UA) on an SCP. The local SCTP layer will send this indication when it detects the loss of connectivity to the ASP's peer SCTP layer. SCTP CDI is understood as either a SHUTDOWN\_COMPLETE notification or COMMUNICATION\_LOST notification from the SCTP layer.~~

~~4.2.1.2 AS States~~

~~The state of the AS is maintained in the M3UA layer on the SCP. The state of an AS changes due to events. These events include:~~

- ~~\* ASP state transitions~~
- ~~\* Recovery timer triggers~~

~~The possible states of an AS are:~~

~~AS DOWN: The Application Server is unavailable. This state implies that all related ASPs are in the ASP DOWN state for this AS. Initially the AS will be in this state. An Application Server MUST be in the AS DOWN state before it can be removed from a configuration.~~

~~Sidebottom et al [Page 68]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~AS INACTIVE: The Application Server is available but no application traffic is active (i.e., one or more related ASPs are in the ASP INACTIVE state, but none in the ASP ACTIVE or ASP STANDBY states). The recovery timer T(r) is not running or has expired.~~

~~AS ACTIVE: The Application Server is available and application traffic is active. This state implies that at least one ASP is in the ASP ACTIVE state.~~

~~AS PENDING: An active ASP has transitioned to ASP INACTIVE or ASP DOWN and it was the last remaining active ASP in the AS (and no ASPs in the ASP STANDBY state are available. A recovery timer T(r) SHOULD be started and all incoming signalling messages SHOULD be queued by the SCP. If an ASP becomes ASP ACTIVE before T(r) expires, the AS is moved to the AS ACTIVE state and all the queued messages will be sent to the ASP.~~

If T(r) expires before an ASP becomes ASP ACTIVE, the SGP stops queuing messages and discards all previously queued messages. The AS will move to the AS INACTIVE state if at least one ASP is in ASP INACTIVE state, otherwise it will move to AS DOWN state.


Figure 5 shows an example AS state machine for the case where the AS/ASP data is pre-configured. For other cases where the AS/ASP configuration data is created dynamically, there would be differences in the state machine, especially at creation of the AS.


For example, where the AS/ASP configuration data is not created until Registration of the first ASP, the AS INACTIVE state is entered directly upon the first successful REG REQ from an ASP. Another example is where the AS/ASP configuration data is not created until the first ASP successfully enters the ASP ACTIVE state. In this case the AS ACTIVE state is entered directly.

Sidebottom et al [Page 69]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

Figure 5: AS State Transition Diagram

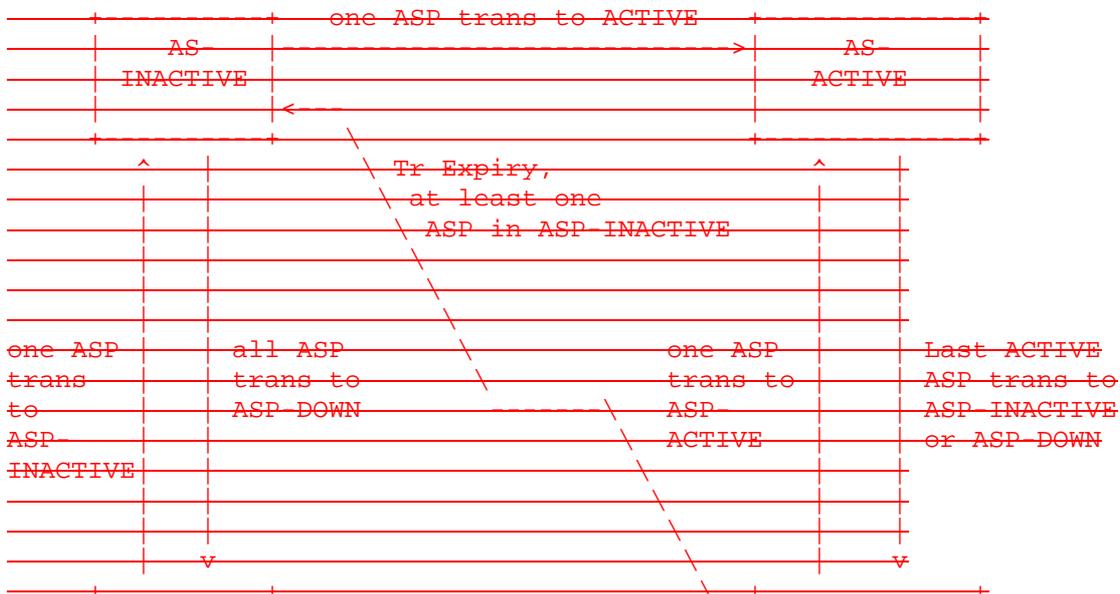

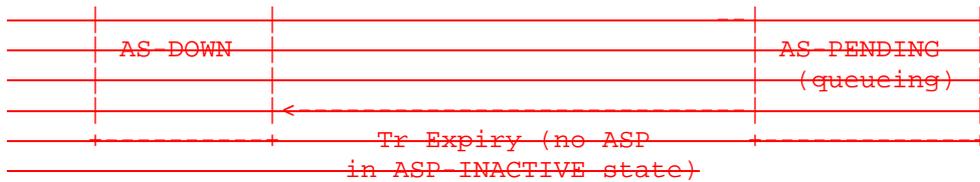

Tr = Recovery Timer

4.2.2 M3UA Management Procedures for Primitives

Before the establishment of an SCTP association the ASP state at both the SGP and ASP is assumed to be in the state ASP\_DOWN.

Once the SCTP association is established (see Section 4.1.2) and assuming that the local M3UA User is ready, the local M3UA ASP Maintenance (ASPM) function will initiate the relevant procedures, using the ASP Up/ASP Down/ASP Active/ASP Inactive messages to convey the ASP state to the SGP (see Section 4.3.3).

If the M3UA layer subsequently receives an SCTP\_COMMUNICATION\_DOWN or SCTP\_RESTART indication primitive from the underlying SCTP layer, it will inform the Layer Management by invoking the M\_SCTP\_STATUS indication primitive. The state of the ASP will be moved to ASP\_DOWN. At an ASP, the MTP3 User will be informed of the unavailability of any affected SS7 destinations through the use of MTP\_PAUSE indication primitives. In the case

Sidebottom et al [Page 70]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

of SS7 network isolation, the local MTP3 Users MAY be informed by implementation dependent means, as there is currently no primitive defined for conveying this information.

In the case of SCTP\_COMMUNICATION\_DOWN, the SCTP client MAY try to re-establish the SCTP Association. This MAY be done by the M3UA layer automatically, or Layer Management MAY re-establish using the M\_SCTP\_ESTABLISH request primitive.

In the case of an SCTP\_RESTART indication at an ASP, the ASP is now considered by its M3UA peer to be in the ASP\_DOWN state. The ASP, if it is to recover, must begin any recovery with the ASP Up procedure.

4.2.3 M3UA Management Procedures for Peer to Peer Messages

All M3UA Management and ASP State and Traffic Maintenance messages are sent on a sequenced stream to ensure ordering. SCTP stream '0' is used.

4.2.3.1 ASP Up Procedures

After an ASP has successfully established an SCTP association to an SGP, the SGP waits for the ASP to send an ASP Up message, indicating that the ASP M3UA peer is available. The ASP is always the initiator of the ASP Up message. This action MAY be initiated at the ASP by an M-ASP\_UP request primitive from Layer Management or MAY be initiated automatically by an M3UA management function.

~~When an ASP Up message is received at an SGP and internally the remote ASP is in the ASP-DOWN state and not considered locked out for local management reasons, the SGP marks the remote ASP in the state ASP-INACTIVE and informs Layer Management with an M-ASP-Up indication primitive. If the SGP is aware, via current configuration data, which Application Servers the ASP is configured to operate in, the SGP updates the ASP state to ASP-INACTIVE in each AS that it is a member. Alternatively, the SGP may move the ASP into a pool of Inactive ASPs available for future configuration within Application Server(s), determined in a subsequent Registration Request or ASP Active procedure. The SGP responds with an ASP Up Ack message in acknowledgement. The SGP sends an ASP Up Ack message in response to a received ASP Up message even if the ASP is already marked as ASP-INACTIVE at the SGP.~~

~~If for any local reason (e.g., management lock-out) the SGP cannot respond with an ASP Up Ack message, the SGP responds to an ASP Up message with an Error message with Reason "Refused - Management Blocking".~~

~~At the ASP, the ASP Up Ack message received is not acknowledged. Layer Management is informed with an M-ASP-UP confirm primitive. When an ASP~~

~~Sidebottom et al [Page 71]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~enters the ASP-Inactive state from the ASP-Down state towards an SCP the M3UA MUST mark all SS7 destinations configured to be reachable via this SGP as available.~~

~~When the ASP sends an ASP Up message it starts timer T(ack). If the ASP does not receive a response to an ASP Up message within T(ack), the ASP MAY restart T(ack) and resend ASP Up messages until it receives an ASP Up Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Up messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in an M-ASP-UP confirm primitive carrying a negative indication.~~

~~The ASP must wait for the ASP Up Ack message before sending any other M3UA messages (e.g., ASP Active or REG REQ). If the SGP receives any other M3UA messages before an ASP Up message is received, the SGP SHOULD discard them.~~

~~If an ASP Up message is received and internally the remote ASP is in the ASP-ACTIVE or ASP-STANDBY state, an ASP Up Ack message is returned, as well as an Error message ("Unexpected Message), and the remote ASP state is changed to ASP-INACTIVE in all relevant Application Servers.~~

~~If an ASP Up message is received and internally the remote ASP is already in the ASP-INACTIVE state, an ASP Up Ack message is returned and no further action is taken.~~

#### ~~4.2.3.1.1 M3UA Version Control~~

~~If an ASP Up message with an unsupported version is received, the receiving end responds with an Error message, indicating the version the receiving node supports and notifies Layer Management.~~

~~This is useful when protocol version upgrades are being performed in a network. A node upgraded to a newer version should support the older~~

~~versions used on other nodes it is communicating with. Because ASPs initiate the ASP Up procedure it is assumed that the Error message would normally come from the SGP.~~

#### ~~4.2.3.1.2 IPSP Considerations~~

~~In the case of peer-to-peer IPSPs, either of the IPSPs (IPSP\_A) may start operations by sending an ASP Up message to the remote peer (IPSP\_B). When the ASP Up message is received at IPSP\_B and internally the remote IPSP\_A is in the ASP-DOWN state and not considered locked-out for local management reasons, IPSP\_B marks the remote IPSP\_A in the state ASP-INACTIVE and informs Layer Management with an M-ASP-Up indication primitive. IPSP\_B returns an ASP Up Ack message to IPSP\_A. IPSP\_A moves IPSP\_B to the ASP-INACTIVE state upon reception of an ASP Up Ack message, if it is not already in the ASP-INACTIVE state, and informs Layer Management with an M-ASP-UP confirmation primitive.~~

~~Sidebottom et al [Page 72]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If for any local reason (e.g., management lock-out) the IPSP\_B cannot respond with an ASP Up Ack message, it responds to an ASP Up message with an Error message with Reason "Refused - Management Blocking" and leaves IPSP\_A in the ASP-DOWN state.~~

#### ~~4.2.3.2 ASP-Down Procedures~~

~~The ASP will send an ASP Down message to an SGP when the ASP wishes to be removed from service in all Application Servers that it is a member and no longer receive any DATA, SSNM or ASPTM messages. This action MAY be initiated at the ASP by an M-ASP-DOWN request primitive from Layer Management or MAY be initiated automatically by an M3UA management function.~~

~~Whether the ASP is permanently removed from any AS is a function of configuration management. In the case where the ASP previously used the Registration procedures (see Section 3.5.5) to register within Application Servers but has not deregistered from all of them prior to sending the ASP Down message, the SGP SHOULD consider the ASP as Deregistered in all Application Servers that it is still a member.~~

~~The SGP marks the ASP as ASP-DOWN, informs Layer Management with an M-ASP-Down indication primitive, and returns an ASP Down Ack message to the ASP. has locked out the ASP for management reasons.~~

~~The SGP sends an ASP Down Ack message in response to a received ASP-Down message from the ASP even if the ASP is already marked as ASP-DOWN at the SGP. The SGP sends an ASP Down Ack message even if the reason in the received ASP Down message is considered invalid.~~

~~At the ASP, the ASP Down Ack message received is not acknowledged. Layer Management is informed with an M-ASP-DOWN confirm primitive. If the ASP receives an ASP Down Ack without having sent an ASP Down message, the ASP should now consider itself as in the ASP-DOWN state. If the ASP was previously in the ASP-ACTIVE or ASP-INACTIVE state, the ASP should then initiate procedures to return itself to its previous state.~~

~~When the ASP sends an ASP Down message it starts timer T(ack). If the ASP does not receive a response to an ASP Down message within T(ack), the ASP MAY restart T(ack) and resend ASP Down messages until it receives an ASP Down Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Down messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in an M-ASP\_DOWN confirm primitive carrying a negative indication.~~

~~Sidebottom et al [Page 73]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~4.2.3.4 ASP Active Procedures~~

~~Anytime after the ASP has received an ASP Up Ack message from the SCP or IPSP, the ASP sends an ASP Active message to the SCP indicating that the ASP is ready to start processing traffic. This action MAY be initiated at the ASP by an M-ASP\_ACTIVE request primitive from Layer Management or MAY be initiated automatically by an M3UA management function. In the case where an ASP wishes to process the traffic for more than one Application Server across a common SCTP association, the ASP Active message(s) SHOULD contain a list of one or more Routing Contexts to indicate for which Application Servers the ASP Active message applies. It is not necessary for the ASP to include all Routing Contexts of interest in a single ASP Active message, thus requesting to become active in all Routing Contexts at the same time. Multiple ASP Active messages MAY be used to activate within the Application Servers independently, or in sets. In the case where an ASP Active message does not contain a Routing Context parameter, the receiver must know, via configuration data, which Application Server(s) the ASP is a member.~~

~~For the Application Servers that the ASP can be successfully activated, the SCP or IPSP responds with one or more ASP Active Ack messages, including the associated Routing Context and Traffic Mode Type values. The Routing Context parameter MUST be included in the Asp Active Ack message if the received ASP Active message contained any Routing Contexts. Depending on the ASP Active Message Traffic Mode Type request, the SCP moves the ASP to the correct ASP traffic state within the associated Application Server(s). Layer Management is informed with an M-ASP\_Active indication. If the SCP or IPSP receives any Data messages before an ASP Active message is received, the SCP or IPSP MAY discard them. By sending an ASP Active Ack message, the SCP or IPSP is now ready to receive and send traffic for the related Routing Context(s). The ASP SHOULD NOT send Data messages for the related Routing Context(s) before receiving an ASP Active Ack message, or it will risk message loss.~~

~~Multiple ASP Active Ack messages MAY be used in response to an ASP Active message containing multiple Routing Contexts, allowing the SCP or IPSP to independently acknowledge the ASP Active message for different (sets of) Routing Contexts. The SCP or IPSP sends an Error message ("Invalid Routing Context") for each Routing Context value that the ASP cannot be successfully activated.~~

~~In the case where an "out-of-the-blue" ASP Active message is received (i.e., the ASP has not registered with the SC or the SC has no static configuration data for the ASP), the message may be silently discarded.~~

~~The SCP MUST send an ASP Active Ack message in response to a received ASP Active message from the ASP, if the ASP is already marked in the ASP\_ACTIVE state at the SCP.~~

~~Sidebottom et al [Page 74]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~At the ASP, the ASP Active Ack message received is not acknowledged. Layer Management is informed with an M ASP\_ACTIVE confirm primitive. It is possible for the ASP to receive Data message(s) before the ASP Active Ack message as the ASP Active Ack and Data messages from an SG or IPSP may be sent on different SCTP streams. Message loss is possible as the ASP does not consider itself in the ASP\_ACTIVE state until reception of the ASP Active Ack message.~~

~~When the ASP sends an ASP Active message it starts timer T(ack). If the ASP does not receive a response to an ASP Active message within T(ack), the ASP MAY restart T(ack) and resend ASP Active messages until it receives an ASP Active Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Active messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in an M ASP\_ACTIVE confirm primitive carrying a negative indication.~~

~~There are four modes of Application Server traffic handling in the SCP M3UA layer Over-ride, Over-ride (Standby), Load share and Load share (Standby). The Traffic Mode Type parameter in the ASP Active message indicates the traffic handling mode used in a particular Application Server. If the SCP determines that the mode indicated in an ASP Active message is unsupported or incompatible with the mode currently configured for the AS, the SCP responds with an Error message ("Unsupported / Invalid Traffic Handling Mode"). If the Traffic Handling mode of the Application Server is not already known via configuration data, then the Traffic Handling mode indicated in the first ASP Active message causing the transition of the Application Server state to AS\_ACTIVE MAY be used to set the mode.~~

~~In the case of an Over-ride mode AS, reception of an ASP Active message at an SCP causes the (re)direction of all traffic for the AS to the ASP that sent the ASP Active message. Any previously active ASP in the AS is now considered to be in state ASP\_INACTIVE and SHOULD no longer receive traffic from the SCP within the AS. The SCP or IPSP then MUST send a Notify message ("Alternate ASP Active") to the previously active ASP in the AS, and SHOULD stop traffic to/from that ASP. The ASP receiving this Notify MUST consider itself now in the ASP\_INACTIVE state, if it is not already aware of this via inter-ASP communication with the Over-riding ASP.~~

~~In the case of Over-ride (Standby) mode the traffic is not started to the ASP until the currently active ASP transitions to the ASP\_INACTIVE or ASP\_DOWN state. At this point the ASP that sent the ASP Active message ("Over-ride (Standby)") is moved to the ASP\_ACTIVE state and the traffic is redirected. A second ASP Active Ack message with a new Traffic Mode Type ("Over-ride", previously "Over-ride(Standby)") is sent to the ASP. A Notify message ("Alternate ASP Active") is not sent in this case.~~

~~Sidebottom et al [Page 75]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If there is no currently active ASP, an ASP Active Ack message ("Override") is returned right away and the traffic is directed to the ASP.~~

~~In the case of a Load share mode AS, reception of an ASP Active message at an SCP or IPSP causes the direction of traffic to the ASP sending the ASP Active message, in addition to all the other ASPs that are currently active in the AS. The algorithm at the SCP for load sharing traffic within an AS to all the active ASPs is implementation dependent. The algorithm could, for example, be round robin or based on information in the Data message (e.g., the SLS, SCCP SSN, ISUP CIC value).~~

~~An SCP or IPSP, upon reception of an ASP Active message for the first ASP in a Loadshare AS, MAY choose not to direct traffic to a newly active ASP until it determines that there are sufficient resources to handle the expected load (e.g., until there are "n" ASPs in state ASP\_ACTIVE in the AS).~~

~~In the case of a Load share (Standby) mode AS, the traffic is not started to the ASP until the SCP or IPSP determines that there are insufficient resources available in the AS. This is likely when one of the active load sharing ASPs transitions to either the ASP\_INACTIVE or ASP\_DOWN state. At this point the ASP that sent the ASP Active message ("Load share (Standby)") is moved to the ASP\_ACTIVE state and traffic is started. A second ASP Active Ack message with a new Traffic Mode Type ("Load share" previously "Loadshare(Standby)") is sent to the ASP. A Notify message ("Insufficient ASP resources active in AS ") is not sent in this case.~~

~~If there is no currently active ASP, an ASP Active Ack message ("Loadshare") is returned right away and the traffic is directed to the ASP.~~

~~All ASPs within a load sharing mode AS must be able to process any Data message received for the AS, in order to accommodate any potential fail-over or rebalancing of the offered load.~~

#### ~~4.2.3.5 ASP Inactive Procedures~~

~~When an ASP wishes to withdraw from receiving traffic within an AS, the ASP sends an ASP Inactive message to the SCP or IPSP. This action MAY be initiated at the ASP by an M ASP\_INACTIVE request primitive from Layer Management or MAY be initiated automatically by an M3UA management function. In the case where an ASP is processing the traffic for more than one Application Server across a common SCTP association, the ASP Inactive message contains one or more Routing Contexts to indicate for which Application Servers the ASP Inactive message applies. In the case where an ASP Inactive message does not contain a Routing Context parameter, the receiver must know, via~~

~~Sidebottom et al [Page 76]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~configuration data, which Application Servers the ASP is a member and move the ASP to the ASP\_INACTIVE state in each all Application Servers.~~

~~In the case of an Over-ride mode AS, where another ASP has already taken over the traffic within the AS with an ASP Active ("Over-ride") message, the ASP that sends the ASP Inactive message is already considered by the SCP to be in state ASP\_INACTIVE. An ASP Inactive Ack message is sent to the ASP, after ensuring that all traffic is stopped to the ASP.~~

~~In the case of a Load-share mode AS, the SCP moves the ASP to the ASP\_INACTIVE state and the AS traffic is re-allocated across the remaining ASPs in the state ASP\_ACTIVE, as per the load sharing algorithm currently used within the AS. A Notify message("Insufficient ASP resources active in AS") MAY be sent to all inactive ASPs, if required. However, if a Loadshare ("Standby") ASP is available, it may be now immediately included in the loadshare group and a Notify message is not sent. An ASP Inactive Ack message is sent to the ASP after all traffic is halted and Layer Management is informed with an M-ASP\_INACTIVE indication primitive.~~

~~Multiple ASP Inactive Ack messages MAY be used in response to an ASP Inactive message containing multiple Routing Contexts, allowing the SCP or IPSP to independently acknowledge for different (sets of) Routing Contexts. The SCP or IPSP sends an Error message ("Invalid Routing Context") message for each invalid or un-configured Routing Context value in a received ASP Inactive message message.~~

~~The SCP MUST send an ASP Inactive Ack message in response to a received ASP Inactive message from the ASP and the ASP is already marked as ASP\_INACTIVE at the SCP.~~

~~At the ASP, the ASP Inactive Ack message received is not acknowledged. Layer Management is informed with an M-ASP\_INACTIVE confirm primitive. When the ASP sends an ASP Inactive message it starts timer T(ack). If the ASP does not receive a response to an ASP Inactive message within T(ack), the ASP MAY restart T(ack) and resend ASP Inactive messages until it receives an ASP Inactive Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Inactive messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in a M-ASP\_Inactive confirm primitive carrying a negative indication.~~

~~If no other ASPs in the Application Server are in the state ASP\_ACTIVE or ASP\_STANDBY, the SCP MUST send a Notify message ("AS Pending") to all of the ASPs in the AS which are in the state ASP\_INACTIVE. The SCP SHOULD start buffering the incoming messages for T(r)seconds, after which messages MAY be discarded. T(r) is configurable by the network operator. If the SCP receives an ASP Active message from an ASP in the AS before expiry of T(r), the buffered traffic is directed to that ASP and the timer is cancelled. If T(r) expires, the AS is moved to the AS\_INACTIVE state.~~

~~Sidebottom et al [Page 77]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~4.2.3.6 Notify Procedures~~

~~A Notify message reflecting a change in the AS state SHOULD be sent to all ASPs in the AS, except those in the ASP\_DOWN state, with appropriate Status Information. The Notify message MUST be sent after any ASP State or Traffic Management acknowledgement messages (e.g., ASP Up Ack, ASP Down Ack, ASP Active Ack, or ASP Inactive Ack). At the~~

~~ASP, Layer Management is informed with an M-NOTIFY indication primitive.~~

~~In the case where a Notify message ("AS Pending") message is sent by an SGP that now has no ASPs active to service the traffic, or where a Notify message ("Insufficient ASP resources active in AS") is sent in the Loadshare mode, the Notify message does not explicitly compel the ASP(s) receiving the message to become active. The ASPs remain in control of what (and when) traffic action is taken.~~

~~In the case where a Notify message does not contain a Routing Context parameter, the receiver must know, via configuration data, of which Application Servers the ASP is a member and take the appropriate action for the ASP in each AS.~~

#### ~~4.2.3.7 Heartbeat Procedures~~

~~The optional Heartbeat procedures MAY be used when operating over transport layers that do not have their own heartbeat mechanism for detecting loss of the transport association (i.e., other than SCTP).~~

~~After receiving an ASP Up Ack message from an M3UA peer in response to an ASP Up message, an ASP may optionally send Heartbeat messages periodically, subject to a provisionable timer T(beat). Upon receiving a Heartbeat message, the M3UA peer MUST respond with a Heartbeat ACK message.~~

~~At the ASP, if no Heartbeat Ack message (or any other M3UA message) is received from the M3UA peer within 2\*T(beat), the remote M3UA peer is considered unavailable. Transmission of Heartbeat messages is stopped and the ASP SHOULD attempt to re-establish communication with the SGP M3UA peer.~~

~~The Heartbeat message may optionally contain an opaque Heartbeat Data parameter that MUST be echoed back unchanged in the related Heartbeat Ack message. The ASP, upon examining the contents of the returned Heartbeat Ack message, MAY choose to consider the remote M3UA peer as unavailable. The contents/format of the Heartbeat Data parameter is implementation dependent and only of local interest to the original sender. The contents may be used, for example, to support a Heartbeat sequence algorithm (to detect missing Heartbeats), and/or a timestamp mechanism (to evaluate delays).~~

~~Sidebottom et al [Page 78]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Note: Heartbeat related events are not shown in Figure 4 "ASP state transition diagram".~~

#### ~~4.2.4 Routing Key Management Procedures~~

##### ~~4.2.4.1 Registration~~

~~An ASP MAY dynamically register with an SGP as an ASP within an Application Server using the REG-REQ message. A Routing Key parameter in the REG-REQ message specifies the parameters associated with the Routing Key.~~

~~The SGP examines the contents of the received Routing Key parameter and~~

~~compares it with the currently provisioned Routing Keys. If the received Routing Key matches an existing SGP Routing Key entry, and the ASP is not currently included in the list of ASPs for the related Application Server, the SGP MAY authorize the ASP to be added to the AS. Or, if the Routing Key does not currently exist and the received Routing Key data is valid and unique, an SGP supporting dynamic configuration MAY authorize the creation of a new Routing Key and related Application Server and add the ASP to the new AS. In either case, the SGP returns a Registration Response message to the ASP, containing the same Local RK Identifier as provided in the initial request, and a Registration Result "Successfully Registered". A unique Routing Context value assigned to the SGP Routing Key is included. The method of Routing Context value assignment at the SG/SCP is implementation dependent but must be guaranteed to be unique across all SGPs in an SG.~~

~~If the SGP determines that the received Routing Key data is invalid, or contains invalid parameter values, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Invalid Routing Key", "Error Invalid DPC", "Error Invalid Network Appearance" as appropriate.~~

~~If the SGP determines that a unique Routing Key cannot be created, the SGP returns a Registration Response message to the ASP, with a Registration Status of "Error Cannot Support Unique Routing". An incoming signalling message received at an SGP should not match against more than one Routing Key.~~

~~If the SGP does not authorize the registration request, the SGP returns a REG\_RSP message to the ASP containing the Registration Result "Error Permission Denied".~~

~~If an SGP determines that a received Routing Key does not currently exist and the SGP does not support dynamic configuration, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Routing Key not Currently Provisioned".~~

~~Sidebottom et al [Page 79]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If an SGP determines that a received Routing Key does not currently exist and the SGP supports dynamic configuration but does not have the capacity to add new Routing Key and Application Server entries, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Insufficient Resources".~~

~~If an SGP determines that one or more of the Routing Key parameters are not supported for the purpose of creating new Routing Key entries, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Unsupported RK parameter field". This result MAY be used if, for example, the SGP does not support RK Circuit Range Lists in a Routing Key because the SGP does not support ISUP traffic, or does not provide CIC range granularity.~~

~~A Registration Response "Error Unsupported Traffic Handling Mode" is returned if the Routing Key in the REG\_REQ contains a Traffic Handling Mode that is inconsistent with the presently configured mode for the matching Application Server.~~

~~An ASP MAY register multiple Routing Keys at once by including a number~~

~~of Routing Key parameters in a single REG REQ message. The SCP MAY respond to each registration request in a single REG RSP message, indicating the success or failure result for each Routing Key in a separate Registration Result parameter. Alternatively the SCP MAY respond with multiple REG RSP messages, each with one or more Registration Result parameters. The ASP uses the Local RK Identifier parameter to correlate the requests with the responses.~~

~~Upon successful registration of an ASP in an AS, the SCP can now send related SS7 Signalling Network Management messaging, if this did not previously start upon the ASP transitioning to state ASP\_INACTIVE~~

#### ~~4.2.4.2 Deregistration~~

~~An ASP MAY dynamically deregister with an SCP as an ASP within an Application Server using the Dereg REQ message. A Routing Context parameter in the Dereg REQ message specifies which Routing Keys to deregister. An ASP SHOULD move to the ASP\_INACTIVE state for an Application Server before attempting to deregister the Routing Key (i.e., deregister after receiving an ASP Inactive Ack). Also, an ASP SHOULD deregister from all Application Servers that it is a member before attempting to move to the ASP Down state.~~

~~The SCP examines the contents of the received Routing Context parameter and validates that the ASP is currently registered in the Application Server(s) related to the included Routing Context(s). If validated, the ASP is deregistered as an ASP in the related Application Server.~~

~~Sidebottom et al [Page 80]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The deregistration procedure does not necessarily imply the deletion of Routing Key and Application Server configuration data at the SCP. Other ASPs may continue to be associated with the Application Server, in which case the Routing Key data MUST NOT be deleted. If a Deregistration results in no more ASPs in an Application Server, an SCP MAY delete the Routing Key data.~~

~~The SCP acknowledges the deregistration request by returning a Dereg RSP message to the requesting ASP. The result of the deregistration is found in the Deregistration Result parameter, indicating success or failure with cause.~~

~~An ASP MAY deregister multiple Routing Contexts at once by including a number of Routing Contexts in a single Dereg REQ message. The SCP MAY respond to each deregistration request in a single Dereg RSP message, indicating the success or failure result for each Routing Context in a separate Deregistration Result parameter.~~

### ~~4.3 Procedures to Support the Availability or Congestion Status of SS7 Destination~~

#### ~~4.3.1 At an SCP~~

~~On receiving an MTP\_PAUSE, MTP\_RESUME or MTP\_STATUS indication primitive from the nodal inter working function at an SCP, the SCP M3UA~~

~~layer will send a corresponding SS7 Signalling Network Management (SSNM) DUNA, DAVA, SCON, or DUPU message (see Section 3.4) to the M3UA peers at concerned ASPs. The M3UA layer must fill in various fields of the SSNM messages consistently with the information received in the primitives.~~

~~The SGP M3UA layer determines the set of concerned ASPs to be informed based on the SS7 network partition for which the primitive indication is relevant. In this way, all ASPs configured to send/receive traffic within a particular network appearance are informed. If the SGP operates within a single SS7 network appearance, then all ASPs are informed.~~

~~The SG M3UA MAY filter further based on the Affected Point Code in the MTP PAUSE, MTP RESUME or MTP STATUS indication primitives. In this way ASPs can be informed only of affected destinations to which they actually communicate. The SGP M3UA layer MAY also suppress DUPU messages to ASPs that do not implement an MTP3 User protocol peer for the affected MTP3 User.~~

~~DUNA, DAVA, SCON, and DRST messages MUST be sent sequentially and processed at the receiver in the order sent. SCTP stream "0" is used to provide the sequencing. . The only exception to this is if the international congestion method (see Q.704) is used. If so, the Unordered bit in the SCTP DATA chunk MAY be used for the SCON message.~~

~~Sidebottom et al [Page 81]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Sequencing is not required for the DUPU or DAUD messages, which MAY be sent un-sequenced. Again, SCTP stream 0 is used, with optional use of the Unordered bit in the SCTP DATA chunk.~~

#### ~~4.3.2 At an ASP~~

##### ~~4.3.2.1 Single SGP Configurations~~

~~At an ASP, upon receiving an SS7 Signalling Network Management (SSNM) message from the remote M3UA Peer, the M3UA layer invokes the appropriate primitive indications to the resident M3UA Users. Local management is informed.~~

~~In the case where a local event has caused the unavailability or congestion status of SS7 destinations, the M3UA layer at the ASP MUST pass up appropriate indications in the primitives to the M3UA User, as though equivalent SSNM messages were received. For example, the loss of an SCTP association to an SGP may cause the unavailability of a set of SS7 destinations. MTP PAUSE indication primitives to the M3UA User are appropriate. To accomplish this, the M3UA layer at an ASP maintains the status of routes via the SG(P), much like an MTP3 layer maintains route set status.~~

##### ~~4.3.2.2 Multiple SGP Configurations~~

~~At an ASP, upon receiving a Signalling Network Management message from the remote M3UA Peer, the M3UA layer updates the status of the affected route(s) via the originating SGP and determines, whether or not the overall availability or congestion status of the effected destination(s) has changed. If so, the M3UA layer invokes the appropriate primitive indications to the resident M3UA Users. Local~~

~~management is informed.~~

~~An M3UA layer at the ASP MAY choose to maintain knowledge of which SGPs are included in Signalling Gateways for the purpose of interpreting SSNM messaging from one SGP so as to apply to all the SGPs in the SG.~~

#### ~~4.3.3 ASP Auditing~~

~~An ASP may optionally initiate an audit procedure in order to enquire of an SGP the availability and, if the national congestion method with multiple congestion levels and message priorities is used, congestion status of an SS7 destination or set of destinations. A Destination Audit (DAUD) message is sent from the ASP to the SGP requesting the current availability and congestion status of one or more SS7 Destination Point Codes.~~

~~The DAUD message MAY be sent un-sequenced. The DAUD MAY be sent by the ASP in the following cases:~~

~~Sidebottom et al [Page 82]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Periodic. A Timer originally set upon reception of a DUNA, SCON or DRST message has expired without a subsequent DAVA, DUNA, SCON or DRST message updating the availability/congestion status of the affected Destination Point Codes. The Timer is reset upon issuing a DAUD. In this case the DAUD is sent to the SGP that originally sent the SSNM message.~~

~~Isolation. The ASP is newly ASP INACTIVE or ASP ACTIVE or has been isolated from an SGP for an extended period. The ASP MAY request the availability/congestion status of one or more SS7 destinations to which it expects to communicate.~~

~~In the first of the cases above, the auditing procedure must not be invoked for the case of a received SCON message containing a congestion level value of "no congestion" or "undefined" (i.e., congestion Level = "0"). This is because the value indicates either congestion abatement or that the ITU MTP3 international congestion method is being used. In the international congestion method, the MTP3 layer at the SGP does not maintain the congestion status of any destinations and therefore the SGP cannot provide any congestion information in response to the DAUD. For the same reason, in the second of the cases above a DAUD message cannot reveal any congested destination(s).~~

~~The SGP MUST respond to a DAUD message with the MTP3 availability/congested status of the routeset associated with each Destination Point Code(s) in the DAUD message. The status of each SS7 destination requested is indicated in a DUNA message (if unavailable), a DAVA message (if available), or a DRST (if restricted and the SGP supports this feature). If the SS7 destination is available and congested, the SGP responds with an SCON message in addition to the DAVA message. If the SS7 destination is restricted and congested, the SGP responds with an SCON message in addition to the DRST. If the SGP has no information on the availability/congestion status of the SS7 destination, the SGP responds with a DUNA message, as it has no routing~~

~~information to allow it to route traffic to this destination~~

~~Any DUNA or DAVA message in response to a DAUD message MAY contain a list of up to sixteen Affected Point Codes.~~

#### ~~4.4 MTP3 Restart~~

~~In the case where the MTP3 in the SC undergoes an MTP restart, event communication SHOULD be handled as follows:~~

~~When the SC discovers SS7 network isolation, the SCPs send an indication to all concerned available ASPs (i.e., ASPs in the ASP ACTIVE, ASP STANDBY or ASP INACTIVE state) using a DUNA message. For the purpose of MTP restart, all Signalling Point Management Clusters with point codes~~

~~Sidebottom et al [Page 83]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~different from that of the SC with at least one ASP in the ASP ACTIVE state or that has sent an ASP ACTIVE message to the SC during the first part of the restart procedure should be considered as available. If the M3UA layer at the SGP receives any ASP ACTIVE messages during the restart procedure, it delays the ASP ACTIVE ACK messages until the end of the restart procedure. During the second part of the restart procedure the SGP M3UA layers at the SGPs inform all concerned ASPs in the ASP ACTIVE, ASP STANDBY or ASP INACTIVE states of any unavailable SS7 destinations using the DUNA message. At the end of the restart procedure the SGP M3UA layers send an ASP ACTIVE ACK message to all ASPs in the ASP ACTIVE state.~~

~~When the M3UA layer at an ASP receives a DUNA message indicating SS7 network isolation at an SC, it will stop any affected traffic via this route. When the M3UA subsequently receives any DUNA messages from an SGP it will mark the affected SS7 destinations as unavailable via that SC. When the M3UA receives an ASP ACTIVE ACK message it can resume traffic to available SS7 destinations via this SGP, provided the ASP is in the ASP ACTIVE state towards this SGP. The ASP MAY choose to audit the availability of any unavailable destinations~~

#### ~~5. Examples of M3UA Procedures~~


##### ~~5.1 Establishment of Association and Traffic between SCPs and ASPs~~

###### ~~5.1.1 Single ASP in an Application Server ("1+0" sparing),~~

###### ~~5.1.1.1 Single ASP in an Application Server ("1+0" sparing), No Registration~~

~~This scenario shows the example M3UA message flows for the establishment of traffic between an SGP and an ASP, where only one ASP is configured within an AS (no backup). It is assumed that the SCTP association is already set up. The sending of any DUNA/SCON messages by the SGP is not shown but is similar to the case described in Section 5.1.2.~~



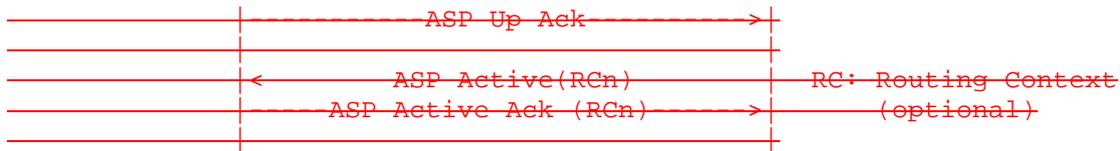


~~Note: If the ASP Active message contains an optional Routing Context parameter, The ASP Active message only applies for the specified RC value(s). For an unknown RC value, the SGP responds with an Error message.~~

~~Sidebottom et al [Page 84]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~5.1.1.2 Single ASP in Application Server ("1+0" sparing), Dynamic Registration~~


~~This scenario is the same as for 5.1.1.1 but with the optional exchange of registration information. In this case the Registration is accepted by the SGP.~~

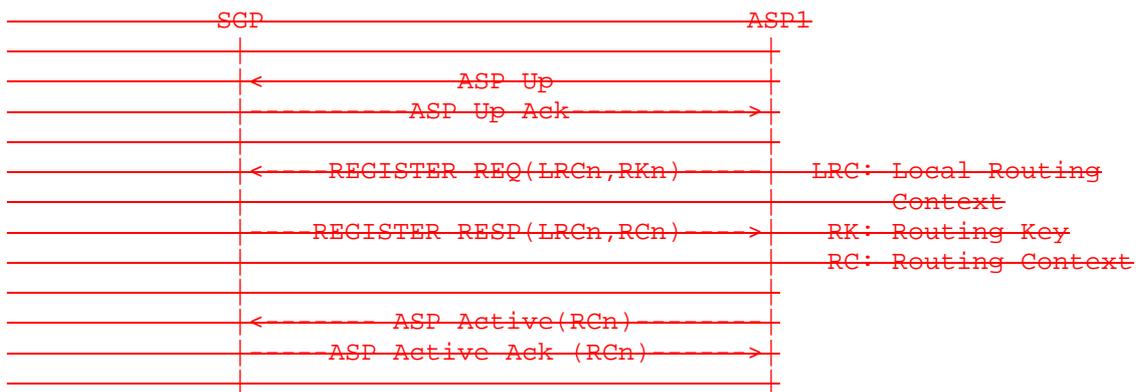

~~Note: In the case of an unsuccessful registration attempt (e.g., Invalid RKn), the Register Response message will contain an unsuccessful indication and the ASP will not subsequently send an ASP Active message.~~

~~5.1.1.3 Single ASP in Multiple Application Servers (each with "1+0" sparing), Dynamic Registration (Case 1 - Multiple Registration Requests)~~

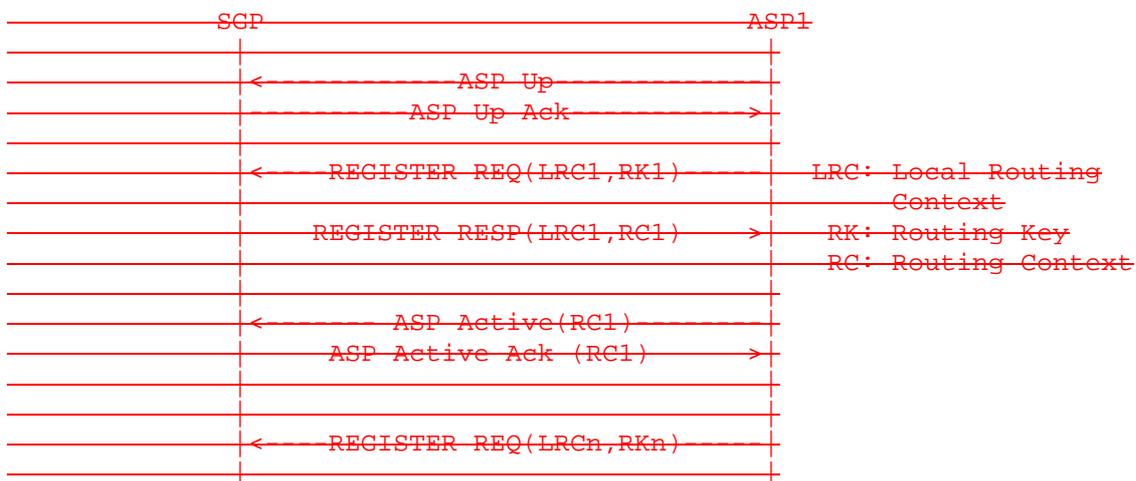

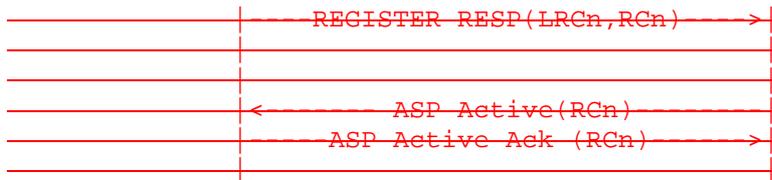


~~Sidebottom et al [Page 85]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Note: In the case of an unsuccessful registration attempt (e.g., Invalid RKn), the Register Response message will contain an unsuccessful indication and the ASP will not subsequently send an ASP Active message. Each LRC/RK pair registration is considered independently.~~

~~It is not necessary to follow a Registration Request/Response message pair with an ASP Active message before sending the next Registration Request. The ASP Active message can be sent at any time after the related successful registration.~~

~~5.1.1.4 Single ASP in Multiple Application Servers (each with "1+0" sparing), Dynamic Registration (Case 2 - Single Registration Request)~~

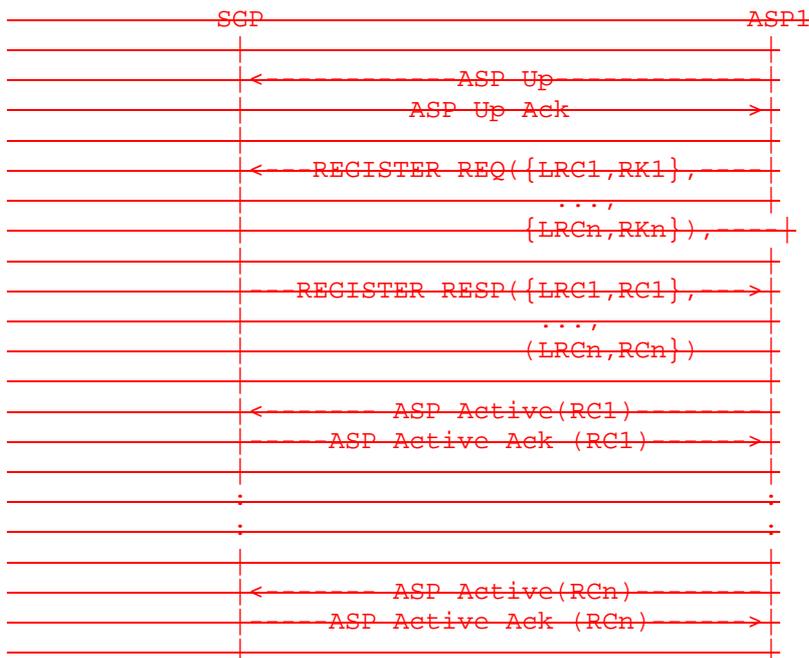


~~Note: In the case of an unsuccessful registration attempt (e.g., Invalid RKn), the Register Response message will contain an unsuccessful indication and the ASP will not subsequently send an ASP Active message. Each LRC/RK pair registration is considered independently.~~

~~The ASP Active message can be sent at any time after the related successful registration, and may have more than one RC.~~

~~5.1.2 Two ASPs in Application Server ("1+1" sparing)~~


~~This scenario shows the example M3UA message flows for the establishment of traffic between an SGP and two ASPs in the same Application Server, where ASP1 is configured to be in the ASP ACTIVE state and ASP2 is to be a "back up" in the event of communication failure or the withdrawal from service of ASP1. ASP2 may act as a hot, warm, or cold back up depending on the extent to which ASP1 and ASP2 share call/transaction state or can communicate call state under failure/withdrawal events. The example message flow is the same whether the ASP Active messages indicate "Over ride" or "Load share" mode, although typically this example would use an Over ride mode. The SGP MAY start sending any relevant DUNA, DRST and SCON messages to ASPs as soon as they enter the ASP INACTIVE state. In the case of MTP Restart, the ASP Active Ack message is only sent after all relevant DUNA/DRST/SCON messages have been transmitted to the concerned ASP.~~

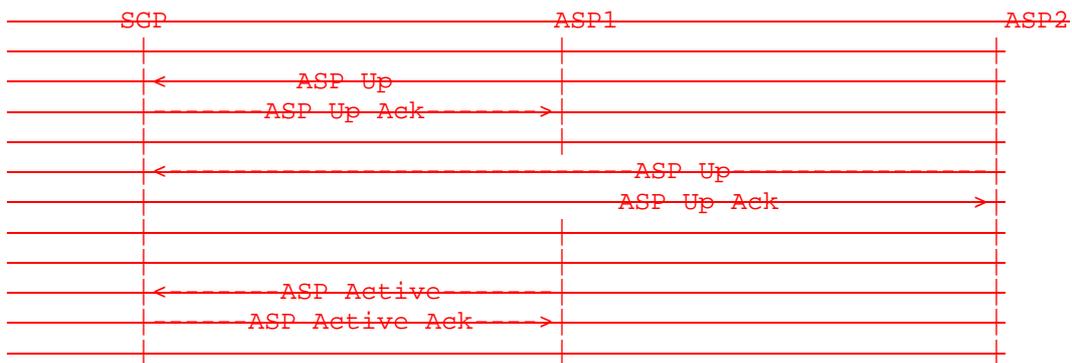

~~Note: It is also possible for ASP2 to send an ASP Active ("Over ride Standby") message after ASP1 goes ASP ACTIVE. A similar sparing arrangement is created, except that the SGP may re direct traffic to ASP2 more quickly in certain fail over cases.~~


~~5.1.3 Two ASPs in an Application Server ("1+1" sparing, load sharing case)~~

~~This scenario shows a similar case to Section 5.1.2 but where the two ASPs are brought to the state ASP ACTIVE and subsequently load share the traffic. In this case, one ASP is sufficient to handle the total traffic load. The sending of DUNA, DRST and SCON messages by the SGP is not shown but is similar to the case described in Section 5.1.2.~~

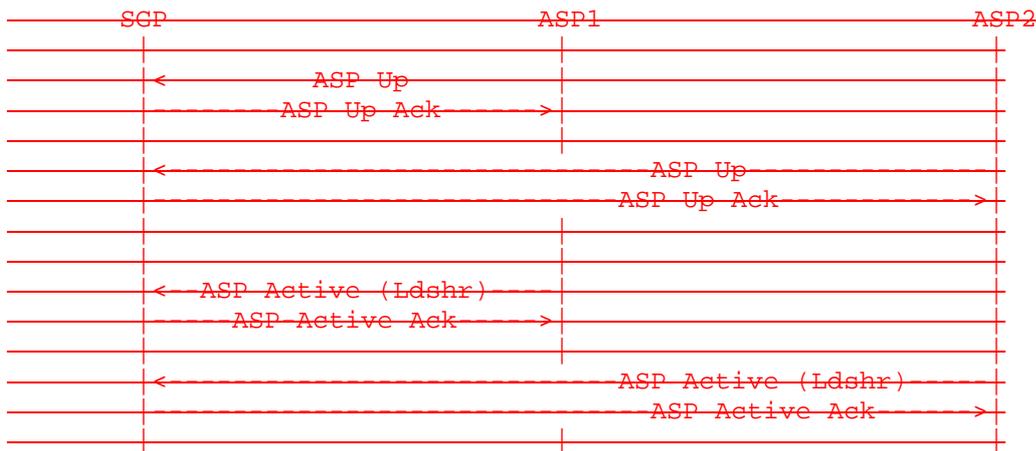

5.1.4 Three ASPs in an Application Server ("n+k" sparing, load sharing case)

This scenario shows the example M3UA message flows for the establishment of traffic between an SCP and three ASPs in the same Application Server, where two of the ASPs are brought to the state ASP ACTIVE and subsequently share the load. In this case, a minimum of two ASPs are required to handle the total traffic load (2+1 sparing). The sending of DUNA, DRST and SCON messages by the SCP is not shown but is similar to the case described in Section 5.1.2.

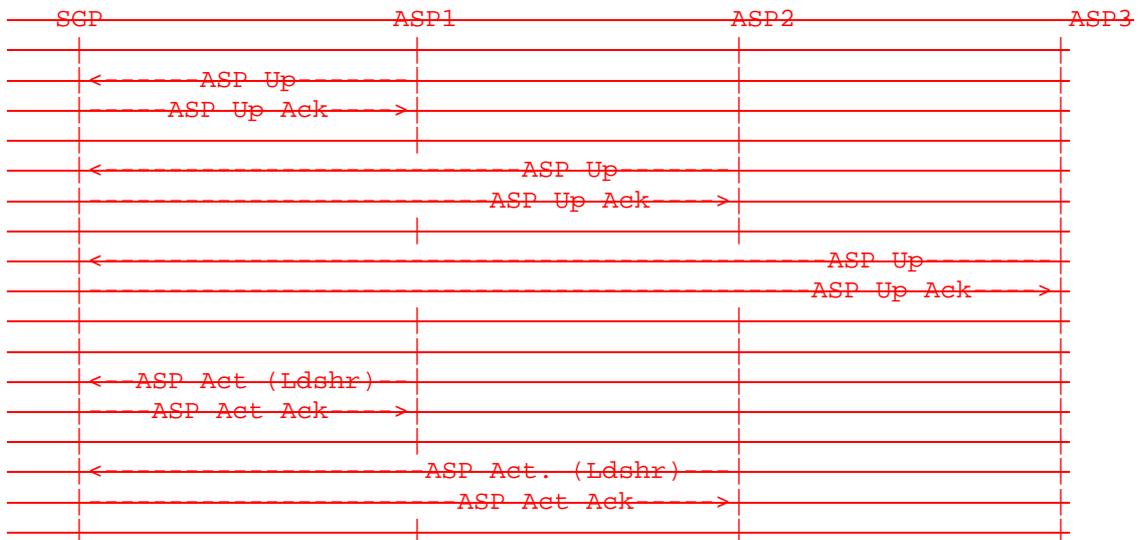

Sidebottom et al [Page 88]


Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

Note: It is also possible for ASP3 to send an ASP Active message ("Loadshare Standby") after ASP1 and ASP2 go to the ASP ACTIVE state. A similar sparing arrangement is created, except that the SCP may redirect traffic to ASP3 more quickly in certain fail over cases.

5.2 ASP Traffic Fail over Examples

~~5.2.1 (1+1 Sparing, Withdrawal of ASP, Back up Over ride)~~


~~Following on from the example in Section 5.1.2, and ASP1 withdraws from service:~~

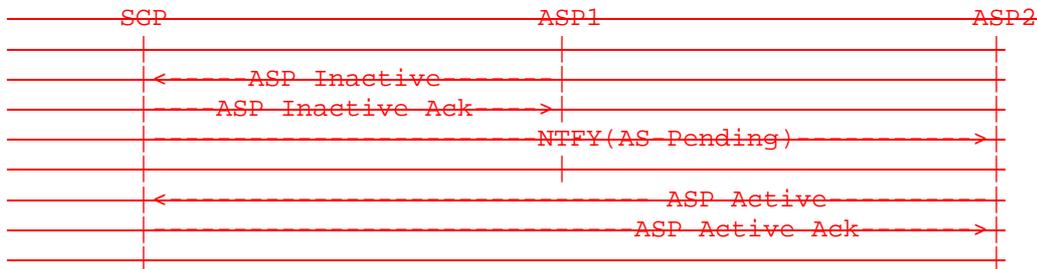

~~Note: If the SGP M3UA layer detects the loss of the M3UA peer (M3UA heartbeat loss or detection of SCTP failure), the initial ASP Inactive message exchange (i.e., SGP to ASP1) would not occur.~~


~~5.2.2 (1+1 Sparing, Back up Over ride)~~

~~Following on from the example in Section 5.1.2, and ASP2 wishes to over ride ASP1 and take over the traffic:~~

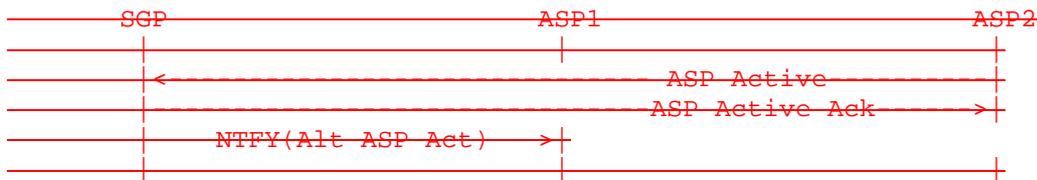

~~5.2.3 (n+k Sparing, Load sharing case, Withdrawal of ASP)~~

~~Following on from the example in Section 5.1.4, and ASP1 withdraws from service:~~

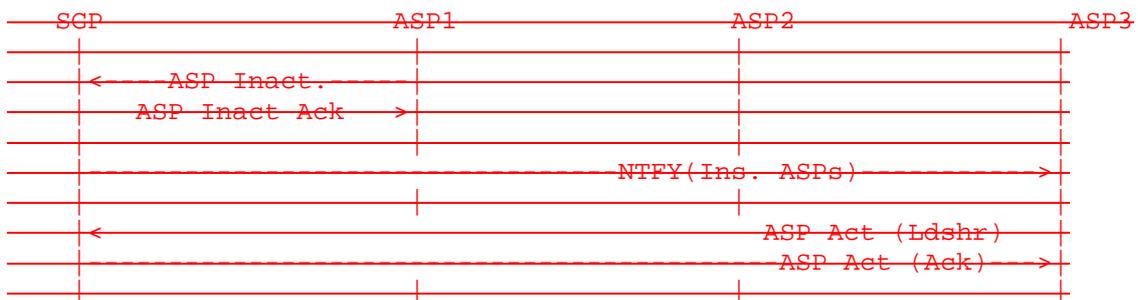


~~For the Notify message to be sent, the SG maintains knowledge of the minimum ASP resources required (e.g., if the SG knows that "n+k" = "2+1" for a load share AS and "n" currently equals "1").~~

~~Note: If the SGP detects loss of the ASP1 M3UA peer (M3UA heartbeat loss or detection of SCTP failure), the initial ASP Inactive message exchange (i.e., SGP-ASP1) would not occur.~~

### ~~5.3 Normal Withdrawal of an ASP from an Application Server and Tear-down of an Association~~

~~An ASP which is now confirmed in the state ASP INACTIVE (i.e., the ASP has received an ASP Inactive Ack message) may now proceed to the ASP-DOWN state, if it is to be removed from service. Following on from Section 5.2.1 or 5.2.3, where ASP1 has moved to the "Inactive" state:~~

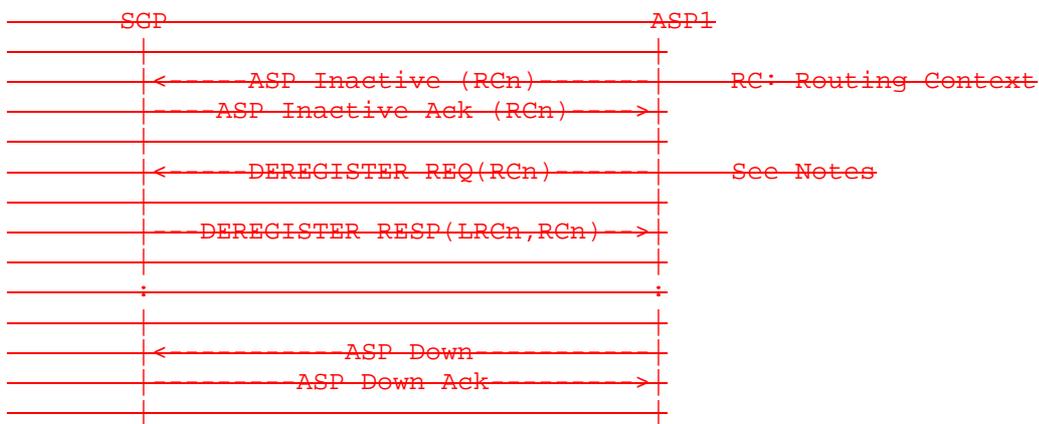

~~Note: The Deregistration procedure MUST be used if the ASP previously used the Registration procedures for configuration within the Application Server. ASP Inactive and Deregister messages exchanges may contain multiple Routing Contexts.~~

~~The ASP SHOULD be ASP INACTIVE and de-registered in all its Routing Contexts before attempting to move to the ASP-DOWN state.~~

### ~~5.4 M3UA/MTP3 User Boundary Examples~~

#### ~~5.4.1 At an ASP~~

~~This section describes the primitive mapping between the MTP3 User and the M3UA layer at an ASP.~~


##### ~~5.4.1.1 Support for MTP TRANSFER Primitives at the ASP~~

###### ~~5.4.1.1.1 Support for MTP TRANSFER Request Primitive~~

~~When the MTP3 User on the ASP has data to send into the SS7 network, it uses the MTP TRANSFER request primitive. The M3UA layer at the ASP will do the following when it receives an MTP TRANSFER request~~

~~primitive from the M3UA user:~~

- ~~— Determine the correct SGP;~~
- ~~— Determine the correct association to the chosen SGP;~~
- ~~— Determine the correct stream in the association (e.g., based on SLS);~~
- ~~— Determine whether to complete the optional fields of the DATA message;~~
- ~~— Map the MTP TRANSFER request primitive into the Protocol Data field of a DATA message;~~
- ~~— Send the DATA message to the remote M3UA peer at the SGP, over the SCTP association.~~



~~5.4.1.1.2 Support for the MTP TRANSFER Indication Primitive~~


~~When the M3UA layer on the ASP receives a DATA message from the remote M3UA peer at the SGP, it will do the following:~~

- ~~— Evaluate the optional fields of the DATA message, if present;~~

~~Sidebottom et al [Page 91]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

- ~~— Map the Protocol Data field of a DATA message into the MTP TRANSFER indication primitive;~~
- ~~— Pass the MTP TRANSFER indication primitive to the user part. In case of multiple user parts, the optional fields of the Data message are used to determine the concerned user part.~~



~~5.4.1.1.3 Support for ASP Querying of SS7 Destination States~~

~~There are situations such as temporary loss of connectivity to the SGP that may cause the M3UA layer at the ASP to audit SS7 destination availability/congestion states. Note: there is no primitive for the MTP3 User to request this audit from the M3UA layer as this is initiated by an internal M3UA management function.~~





5.4.2 At an SCP

This section describes the primitive mapping between the MTP3 User and the M3UA layer at an SCP.

5.4.2.1 Support for MTP TRANSFER Request Primitive at the SCP

When the M3UA layer at the SCP has received DATA messages from its peer destined to the SS7 network it will do the following:

- Evaluate the optional fields of the DATA message, if present, to determine the Network Appearance;
- Map the Protocol data field of the DATA message into an MTP TRANSFER request primitive;
- Pass the MTP TRANSFER request primitive to the MTP3 of the concerned Network Appearance.

Sidebottom et al [Page 92]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001



5.4.2.2 Support for MTP TRANSFER Indication Primitive at the SCP

When the MTP3 layer at the SCP has data to pass its user parts, it will use the MTP TRANSFER indication primitive. The M3UA layer at the SCP will do the following when it receives an MTP TRANSFER indication primitive:

- Determine the correct ASP;
- Determine the correct association to the chosen ASP;
- Determine the correct stream in the association (e.g., based on SLS);
- Determine whether to complete the optional fields of the DATA message;
- Map the MTP TRANSFER indication primitive into the Protocol Data field of a DATA message;
- Send the DATA message to the remote M3UA peer in the ASP, over the SCTP association





~~5.4.2.3 Support for MTP\_PAUSE, MTP\_RESUME, MTP\_STATUS Indication Primitives~~

~~The MTP\_PAUSE, MTP\_RESUME and MTP\_STATUS indication primitives from the MTP3 upper layer interface at the SCP need to be made available to the remote MTP3 User Part lower layer interface at the concerned ASP(s).~~

~~5.4.2.3.1 Destination Unavailable~~

~~The MTP3 layer at the SCP will generate an MTP\_PAUSE indication primitive when it determines locally that an SS7 destination is unreachable. The M3UA layer will map this primitive to a DUNA message. The SCP M3UA layer determines the set of concerned ASPs to be informed based on internal SS7 network information associated with the MTP\_PAUSE indication primitive indication.~~

~~Sidebottom et al [Page 93]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~




~~5.4.2.3.2 Destination Available~~

~~The MTP3 at the SCP will generate an MTP\_RESUME indication primitive when it determines locally that an SS7 destination that was previously unreachable is now reachable. The M3UA layer will map this primitive to a DAVA message. The SCP M3UA determines the set of concerned ASPs to be informed based on internal SS7 network information associated with the MTP\_RESUME indication primitive.~~



~~5.4.2.3.3 SS7 Network Congestion~~

~~The MTP3 layer at the SCP will generate an MTP\_STATUS indication primitive when it determines locally that the route to an SS7 destination is congested. The M3UA layer will map this primitive to a SCON message. It will determine which ASP(s) to send the SCON message to, based on the intended Application Server.~~

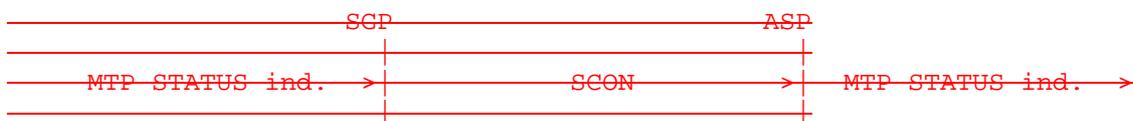

~~5.4.2.3.4 Destination User Part Unavailable~~

~~The MTP3 layer at the SCP will generate an MTP\_STATUS indication primitive when it receives an UPU message from the SS7 network. The M3UA layer will map this primitive to a DUPU message. It will determine which ASP(s) to send the DUPU based on the intended Application Server.~~



~~Sidebottom et al [Page 94]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

## ~~6. Security~~

### ~~6.1 Introduction~~

~~M3UA is designed to carry signalling messages for telephony services. As such, M3UA must involve the security needs of several parties: the end users of the services; the network providers and the applications involved. Additional requirements may come from local regulation. While having some overlapping security needs, any security solution should fulfil all of the different parties' needs.~~

### ~~6.2 Threats~~

~~There is no quick fix, one size fits all solution for security. As a transport protocol, M3UA has the following security objectives:~~

- ~~\* Availability of reliable and timely user data transport.~~
- ~~\* Integrity of user data transport.~~
- ~~\* Confidentiality of user data.~~

~~M3UA is recommended to be transported on SCTP. SCTP [13] provides certain transport related security features, such as some protection against:~~

- ~~\* Blind Denial of Service Attacks~~
- ~~\* Flooding~~
- ~~\* Masquerade~~
- ~~\* Improper Monopolization of Services~~

~~When M3UA is running in professionally managed corporate or service provider network, it is reasonable to expect that this network includes an appropriate security policy framework. The "Site Security Handbook" [21] should be consulted for guidance.~~

~~When the network in which M3UA runs in involves more than one party, it may not be reasonable to expect that all parties have implemented security in a sufficient manner. In such a case, it is recommended that IPSEC is used to ensure confidentiality of user payload. Consult [22] for more information on configuring IPSEC services.~~

### ~~6.3 Protecting Confidentiality~~

~~Particularly for mobile users, the requirement for confidentiality may include the masking of IP addresses and ports. In this case application level encryption is not sufficient; IPSEC ESP [23] SHOULD be used instead. Regardless of which level performs the encryption, the IPSEC ISAKMP [24] service SHOULD be used for key management.~~

~~Sidebottom et al [Page 95]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

## ~~7. IANA Considerations~~

### ~~7.1 SCTP Payload Protocol Identifier~~

~~IANA has assigned an M3UA value for the Payload Protocol Identifier in the SCTP DATA chunk. The following SCTP Payload Protocol Identifier is registered:~~

~~----- M3UA ----- "3"~~

~~The SCTP Payload Protocol Identifier value "3" SHOULD be included in each SCTP DATA chunk, to indicate that the SCTP is carrying the M3UA protocol. The value "0" (unspecified) is also allowed but any other values MUST not be used. This Payload Protocol Identifier is not directly used by SCTP but MAY be used by certain network entities to identify the type of information being carried in a DATA chunk.~~

~~The User Adaptation peer MAY use the Payload Protocol Identifier as a way of determining additional information about the data being presented to it by SCTP.~~

### ~~7.2 M3UA Port Number~~

~~IANA has registered SCTP (and UDP/TCP) Port Number 2905 for M3UA.~~

### ~~7.3 M3UA Protocol Extensions~~

~~This protocol may also be extended through IANA in three ways:~~  
~~----- through definition of additional message classes,~~  
~~----- through definition of additional message types, and~~  
~~----- through definition of additional message parameters~~

~~The definition and use of new message classes, types and parameters is an integral part of SIGTRAN adaptation layers. Thus these extensions are assigned by IANA through an IETF Consensus action as defined in Guidelines for Writing an IANA Considerations Section in RFCs (25)~~

~~The proposed extension must in no way adversely affect the general working of the protocol.~~

#### ~~7.3.1 IETF Defined Message Classes~~

~~The documentation for a new message class MUST include the following information:~~

- ~~(a) A long and short name for the new message class;~~
- ~~(b) A detailed description of the purpose of the message class.~~

#### ~~7.3.2 IETF Defined Message Types~~

~~The documentation for a new message type MUST include the following information:~~

~~Sidebottom et al [Page 96]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

- ~~(a) A long and short name for the new message type;~~
- ~~(b) A detailed description of the structure of the message;~~
- ~~(c) A detailed definition and description of intended use for each field within the message;~~
- ~~(d) A detailed procedural description of the use of the new message type within the operation of the protocol;~~
- ~~(e) A detailed description of error conditions when receiving this message type.~~

~~When an implementation receives a message type which it does not support, it MUST respond with an Error (ERR) message ("Unsupported Message Type").~~

### ~~7.3.3 IETF Defined Parameter Extension~~

~~Documentation of the message parameter MUST contain the following information:~~

- ~~(a) Name of the parameter type;~~
- ~~(b) Detailed description of the structure of the parameter field. This structure MUST conform to the general type length value format described in Section 3.2;~~
- ~~(c) Detailed definition of each component of the parameter value;~~
- ~~(d) Detailed description of the intended use of this parameter type, and an indication of whether and under what circumstances multiple instances of this parameter type may be found within the same message.~~

## ~~8. Acknowledgements~~

~~The authors would like to thank Antonio Roque Alvarez, Joyce Archibald, Tolga Asveren, Brian Bidulock, Dan Brendes, Nikhil Jain, Joe Keller, Kurt Kite, Ming Lin, Steve Lorusso, John Loughney, Naoto Makinae, Howard May, Barry Nagelberg, Neil Olson, Heinz Prantner, Shyamal Prasad, Mukesh Punhani, Selvam Rengasami, Ray Singh, Michael Tuexen, Nitin Tomar, Gery Verwimp, Kazuo Watanabe, Ben Wilson and many others for their valuable comments and suggestions.~~

## ~~9. References~~

- ~~[1] RFC 2719, "Framework Architecture for Signaling Transport", L. Ong et al, October 1999~~
- ~~[2] ITU-T Recommendations Q.761 to Q.767, "Signalling System No.7 (SS7) ISDN User Part (ISUP)"~~
- ~~[3] ANSI T1.113 - "Signaling System Number 7 ISDN User Part"~~

~~Sidebottom et al [Page 97]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~[4] ETSI ETS 300 356 1 "Integrated Services Digital Network (ISDN);  
Signalling System No.7; ISDN User Part (ISUP) version 2 for the  
international interface; Part 1: Basic services"~~

~~[5] ITU-T Recommendations Q.711 to Q.715, "Signalling System No. 7  
(SS7) Signalling Connection Control Part (SCCP)"~~

~~[6] ANSI T1.112 "Signaling System Number 7 Signaling Connection  
Control Part"~~

~~[7] ETSI ETS 300 009 1, "Integrated Services Digital Network (ISDN);  
Signalling System No.7; Signalling Connection Control Part (SCCP)  
(connectionless and connection-oriented class 2) to support  
international interconnection; Part 1: Protocol specification"~~

~~[8] ITU-T Recommendation Q.720, "Telephone User Part"~~

~~[9] ITU-T Recommendations Q.771 to Q.775 "Signalling System No. 7 (SS7)  
Transaction Capabilities (TCAP)"~~

~~[10] ANSI T1.114 "Signaling System Number 7 Transaction Capabilities  
Application Part"~~

~~[11] ETSI ETS 300 287 1, "Integrated Services Digital Network (ISDN);  
Signalling System No.7; Transaction Capabilities (TC) version 2;  
Part 1: Protocol specification"~~

~~[12] 3G TS 25.410 V4.0.0 (2001-04) "Technical Specification 3rd  
Generation partnership Project; Technical Specification Group  
Radio Access Network; UTRAN Iu Interface: General Aspects and  
Principles"~~

~~[13] RFC 2960, "Stream Control Transport Protocol", R. Stewart et al,  
October 2000.~~

~~[14] ITU-T Recommendations Q.701 to Q.705, "Signalling System No. 7  
(SS7) Message Transfer Part (MTP)"~~

~~[15] ANSI T1.111 "Signaling System Number 7 Message Transfer Part"~~

~~[16] ETSI ETS 300 008 1, "Integrated Services Digital Network (ISDN);  
Signalling System No.7; Message Transfer Part (MTP) to support  
international interconnection; Part 1: Protocol specification"~~

~~[17] ITU-T Recommendation Q.2140 "B-ISDN ATM Adaptation Layer Service  
Specific Coordination Function for signalling at the Network Node  
Interface (SSCF at NNI)"~~

~~[18] ITU-T Recommendation Q.2110 "B-ISDN ATM Adaptation Layer Service  
Specific Connection Oriented Protocol (SSCOP)"~~

~~Sidebottom et al [Page 98]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~[19] RFC 2119, "Key words for use in RFCs to Indicate Requirement  
Levels", S. Bradner, March 1997.~~

~~[20] ITU-T Recommendation Q.2210 "Message Transfer Part Level 3 functions and messages using the services of ITU Recommendation Q.2140"~~

~~[21] RFC 2196, "Site Security Handbook", B. Fraser Ed., September 1997~~

~~[22] RFC 2401, "Security Architecture for the Internet Protocol", S. Kent, R. Atkinson, November 1998.~~

~~[23] RFC 2406, "IP Encapsulating Security Payload (ESP)", S. Kent and R. Atkinson, November 1998.~~

~~[24] RFC 2408, "Internet Security Association and Key Management Protocol", D. Maughan, M. Schertler, M. Schneider and J. Turner, November 1998.~~

~~[25] RFC 2434, "Guidelines for Writing an IANA Considerations Section in RFCs", T. Narten and H. Alvestrand, October 1998~~

#### ~~10. Bibliography~~

~~[26] <draft-ietf-sigtran-m2ua-07.txt>, "MTP2 User Adaptation Layer", K. Morneault et al, February 2001 (Work in Progress)~~

#### ~~11. Author's Addresses~~

~~Greg Sidebottom  
Kanata, Ontario, Canada  
gregside@home.com~~

~~Guy Mousseau  
Nortel Networks  
3685 Richmond Rd  
Nepean, Ontario, Canada K2H 5B7~~

~~Lyndon Ong  
Ciena  
10480 Ridgeview Court  
Cupertino, CA 95014  
lyong@ciena.com~~

~~Ian Rytina  
Eriesson Australia  
37/360 Elizabeth Street  
Melbourne, Victoria 3000, Australia  
ian.rytina@eriesson.com.au~~

~~Sidebottom et al~~ [Page 99]

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Hanns Juergen Schwarzbauer  
SIEMENS AG  
Hofmannstr. 51  
81359 Munich, Germany  
HannsJuergen.Schwarzbauer@icn.siemens.de~~

~~Klaus D. Gradischnig  
NeuStar, Inc  
1120 Vermont Ave. N.W. Suite 400  
Washington D.C 20005  
klaus.gradischnig@neustar.com~~

~~Ken Morneault  
Cisco Systems Inc.  
13615 Dulles Technology Drive  
Herndon, VA, USA 20171  
EMail: kmorneau@cisco.com~~

~~Malleswar Kalla  
Telcordia Technologies  
MCC 1J211R  
445 South Street  
Morristown, NJ, USA 07960  
Email: kalla@research.telcordia.com~~

~~Normand Claude  
Performance Technologies  
150 Metcalf Sreet, Suite 1300  
Ottawa, Ontario, Canada K2P 1P1  
EMail: nglau@microlegend.com~~

~~This draft expires December 2001.~~

## CHANGE REQUEST

⌘ **29202 CR 009** ⌘ rev **1** ⌘ Current version: **5.1.0** ⌘

For **HELP** on using this form, see bottom of this page or look at the pop-up text over the ⌘ symbols.

**Proposed change affects:** UICC apps  ME  Radio Access Network  Core Network

<b>Title:</b>	⌘ IETF RFC reference for M3UA		
<b>Source:</b>	⌘ CN4		
<b>Work item code:</b>	⌘ SS7IP	<b>Date:</b>	⌘ 29/07/2002
<b>Category:</b>	⌘ <b>A</b>	<b>Release:</b>	⌘ Rel-5
	Use <u>one</u> of the following categories: <b>F</b> (correction) <b>A</b> (corresponds to a correction in an earlier release) <b>B</b> (addition of feature), <b>C</b> (functional modification of feature) <b>D</b> (editorial modification) Detailed explanations of the above categories can be found in 3GPP <a href="#">TR 21.900</a> .		Use <u>one</u> of the following releases: 2 (GSM Phase 2) R96 (Release 1996) R97 (Release 1997) R98 (Release 1998) R99 (Release 1999) Rel-4 (Release 4) Rel-5 (Release 5) Rel-6 (Release 6)

<b>Reason for change:</b>	⌘ SS7 MTP3-User Adaptation Layer (M3UA) has reached the "proposed standard" status and has been allocated a RFC number "RFC 3332". To be able to interwork with standard RFC implementation and use standard developed products 3GPP must align with the progress in IETF.
<b>Summary of change:</b>	⌘ The changes consist of - an addition of a reference to RFC 3332 in the reference section. - Deletion of Annex A
<b>Consequences if not approved:</b>	⌘ If the reference is not introduced it is still Annex A that defines the M3UA protocol for 3GPP. However standard product will be based on RFC 3332. Therefore interoperability problem will occur between the two ends.

<b>Clauses affected:</b>	⌘ Section 2.1 and annex A.						
<b>Other specs Affected:</b>	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td style="text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> Other core specifications	Y	N	<input type="checkbox"/>	<input checked="" type="checkbox"/>	⌘	
Y	N						
<input type="checkbox"/>	<input checked="" type="checkbox"/>						
	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td style="text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> Test specifications	Y	N	<input type="checkbox"/>	<input checked="" type="checkbox"/>	⌘	
Y	N						
<input type="checkbox"/>	<input checked="" type="checkbox"/>						
	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="width: 20px; text-align: center;">Y</td> <td style="width: 20px; text-align: center;">N</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td style="text-align: center;"><input checked="" type="checkbox"/></td> </tr> </table> O&M Specifications	Y	N	<input type="checkbox"/>	<input checked="" type="checkbox"/>	⌘	
Y	N						
<input type="checkbox"/>	<input checked="" type="checkbox"/>						
<b>Other comments:</b>	⌘						

**How to create CRs using this form:**

Comprehensive information and tips about how to create CRs can be found at <http://www.3gpp.org/specs/CR.htm>. Below is a brief summary:

- 1) Fill out the above form. The symbols above marked ⌘ contain pop-up help information about the field that they are closest to.

- 2) Obtain the latest version for the release of the specification to which the change is proposed. Use the MS Word "revision marks" feature (also known as "track changes") when making the changes. All 3GPP specifications can be downloaded from the 3GPP server under <ftp://ftp.3gpp.org/specs/> For the latest version, look for the directory name with the latest date e.g. 2001-03 contains the specifications resulting from the March 2001 TSG meetings.
- 3) With "track changes" disabled, paste the entire CR form (use CTRL-A to select it) into the specification just in front of the clause containing the first piece of changed text. Delete those parts of the specification which are not relevant to the change request.

\*\*\*\* FIRST MODIFIED SECTION \*\*\*\*

## 2.1 Normative references

- [1] 3GPP TR 21.905: "3G Vocabulary"
- [2] ITU-T Recommendation Q.701: "Functional description of the message transfer part (MTP) of signalling system No. 7"
- [3] ITU-T Recommendation Q.702: "Signalling data link"
- [4] ITU-T Recommendation Q.703: "Signalling link"
- [5] ITU-T Recommendation Q.704: "Signalling network functions and messages"
- [6] ITU-T Recommendation Q.705: "Signalling network structure"
- [7] ITU-T Recommendation Q.706: "Message transfer part signalling performance"
- [8] RFC 2960: "Stream Control Transmission Protocol"
- [9] ITU-T Recommendation G.804: "ATM cell mapping into Plesiochronous Digital Hierarchy (PDH)"
- [10] ITU-T Recommendation I.112: "Vocabulary of terms for ISDNs"
- [11] ITU-T Recommendation I.361: "B-ISDN ATM layer specification"
- [12] ITU-T Recommendation I.363.5: "B-ISDN ATM Adaptation Layer specification: Type 5 AAL"
- [13] ITU-T Recommendation Q.2110: "B-ISDN ATM adaptation layer - Service specific connection oriented protocol (SSCOP)"
- [14] ITU-T Recommendation Q.2140: "B-ISDN ATM adaptation layer - Service specific coordination function for signalling at the network node interface (SSCF at NNI)"
- [15] ITU-T Recommendation Q.2210: "Message transfer part level 3 functions and messages using the services of ITU-T Recommendation Q.2140"
- [17] RFC 3309: "SCTP Checksum Change"
- [18] [RFC 3332: Signaling System 7 \(SS7\) Message Transfer Part 3 \(MTP3\) - User Adaptation Layer \(M3UA\)](#)

\*\*\*\* LAST MODIFIED SECTION \*\*\*\*

---

### ~~Annex A (normative): Internet Draft: SS7 MTP3-User Adaption Layer (M3UA)~~

~~The document included in this Annex is the latest available Internet Draft at the time of writing. When the IETF issues the RFC to this Internet Draft then a change request will be provided to replace the text in Annex A with a reference in section 2~~

~~Network Working Group~~ ~~Greg Sidebottom (Editor)~~  
~~INTERNET DRAFT~~ ~~Guy Mousseau~~  
~~Nortel Networks~~  
~~Lyndon Ong~~  
~~Ciena~~  
~~Ian Rytina~~  
~~Eriasson~~  
~~Hanns Juergen Schwarzbauer~~  
~~Siemens~~  
~~Klaus Gradischnig~~  
~~Neustar~~  
~~Ken Morneault~~  
~~Cisco~~  
~~Mallesh Kalla~~  
~~Telecordia~~  
~~Normand Claude~~  
~~Performance Technologies~~

~~Expires in six months~~ ~~Jul 2001~~

~~SS7 MTP3 User Adaptation Layer (M3UA)~~  
~~<draft-ietf-sigtran-m3ua-07.txt>~~

#### ~~Status of This Memo~~

~~This document is an Internet Draft and is in full conformance with all provisions of Section 10 of RFC 2026. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet Drafts.~~

~~Internet Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet Drafts as reference material or to cite them other than as 'work in progress.'~~

~~The list of current Internet Drafts can be accessed at~~  
~~<http://www.ietf.org/lid-abstracts.html>~~

~~The list of Internet Draft Shadow Directories can be accessed at~~  
~~<http://www.ietf.org/shadow.html>.~~

~~To learn the current status of any Internet Draft, please check the 'lid-abstracts.txt' listing contained in the Internet Drafts Shadow Directories on [ftp.isi.edu](ftp://ftp.isi.edu) (US West Coast), [ftp.munnari.oz.au](ftp://ftp.munnari.oz.au) (Pacific Rim), [ftp.nic.nordu.net](ftp://ftp.nic.nordu.net) (Europe), [ftp.isi.edu](ftp://ftp.isi.edu) (US East Coast), or [ftp.isi.edu](ftp://ftp.isi.edu) (US West Coast).~~

#### ~~Abstract~~

~~This Internet Draft defines a protocol for supporting the transport of any SS7 MTP3 User signalling (e.g., ISUP and SCCP messages) over IP using the services of the Stream Control Transmission Protocol. Also, provision is made for protocol elements that enable a seamless~~

~~Sidebottom et al [Page 1]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~operation of the MTP3 User peers in the SS7 and IP domains. This protocol would be used between a Signalling Gateway (SG) and a Media Gateway Controller (MGC) or IP-resident Database. It is assumed that the SG receives SS7 signalling over a standard SS7 interface using the SS7 Message Transfer Part (MTP) to provide transport.~~

~~Sidebottom et al [Page 2]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~TABLE OF CONTENTS~~

~~1. Introduction.....4~~

~~1.1 Scope.....4~~

~~1.2 Terminology.....4~~

~~1.3 M3UA Overview.....6~~

~~1.4 Functional Areas.....12~~

~~1.5 Sample Configurations.....21~~

~~1.6 Definition of M3UA Boundaries.....24~~

~~2. Conventions.....28~~

~~3. M3UA Protocol Elements.....28~~

~~3.1 Common Message Header.....28~~

~~3.2 Variable Length Parameter.....31~~

~~3.3 Transfer Messages.....32~~

~~3.4 SS7 Signalling Network management (SSNM) Messages.....35~~

~~3.5 ASP State Maintenance (ASPM) Messages.....43~~

~~3.6 Routing Key Management (RKM) Messages.....46~~

~~3.7 ASP Traffic Maintenance (ASPTM) Messages.....55~~

~~3.8 Management(MGMT) Messages.....60~~

~~4. Procedures.....64~~

~~4.1 Procedures to Support the M3UA User and Layer Management Layers.....64~~

~~4.2 Procedures to Support the Management of SCTP Associations with M3UA Peers.....67~~

~~4.3 Procedures to support the Unavailability or Congestion Status of SS7 Destinations.....81~~

~~4.4 MTP3 Restart.....83~~

~~5. Examples of M3UA Procedures.....84~~

~~5.1 Establishment of Association and Traffic Between SGs and ASPs.....84~~

~~5.2 ASP traffic Fail over Examples.....89~~

~~5.3 Normal Withdrawal of an ASP from an Application Server and Tear-down of an Association.....90~~

~~5.4 M3UA/MTP3 User Boundary Examples.....91~~

~~6. Security.....95~~

~~6.1 Introduction.....95~~

~~6.2 Threats.....95~~

~~6.3 Protecting Confidentiality.....95~~

~~7. IANA Considerations.....96~~

~~7.1 SCTP Payload Protocol Identifier.....96~~

~~7.2 M3UA Protocol Extensions.....96~~

~~8. Acknowledgements.....97~~

~~9. References.....97~~

~~10. Bibliography.....99~~

~~11. Author's Addresses.....99~~

~~Sidebottom et al [Page 3]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~1. Introduction~~

~~1.1 Scope~~

~~There is a need for Switched Circuit Network (SCN) signalling protocol~~

~~delivery from an SS7 Signalling Gateway (SG) to a Media Gateway Controller (MGC) or IP-resident Database as described in the Framework Architecture for Signalling Transport [1]. The delivery mechanism SHOULD meet the following criteria:~~

- ~~\* Support for the transfer of all SS7 MTP3 User Part messages (e.g., ISUP, SCCP, TUP, etc.)~~
- ~~\* Support for the seamless operation of MTP3 User protocol peers~~
- ~~\* Support for the management of SCTP transport associations and traffic between an SG and one or more MGCs or IP-resident Databases~~
- ~~\* Support for MGC or IP-resident Database process fail-over and load-sharing~~
- ~~\* Support for the asynchronous reporting of status changes to management~~

~~In simplistic transport terms, the SG will terminate SS7 MTP2 and MTP3 protocol layers and deliver ISUP, SCCP and/or any other MTP3 User protocol messages, as well as certain MTP network management events, over SCTP transport associations to MTP3 User peers in MGCs or IP-resident Databases.~~

## ~~1.2 Terminology~~

~~Application Server (AS) — A logical entity serving a specific Routing Key. An example of an Application Server is a virtual switch element handling all call processing for a unique range of PSTN trunks, identified by an SS7 SIO/DPC/OPC/CIC\_range. Another example is a virtual database element, handling all HLR transactions for a particular SS7 DPC/OPC/SCCP\_SSN combination. The AS contains a set of one or more unique Application Server Processes, of which one or more is normally actively processing traffic. An AS is contained within a single Network Appearance. Note that there is a 1:1 relationship between an AS and a Routing Key.~~

~~Application Server Process (ASP) — A process instance of an Application Server. An Application Server Process serves as an active or back-up process of an Application Server (e.g., part of a distributed virtual switch or database). Examples of ASPs are processes (or process instances) of MGCs, IP-SCPs or IP-HLRs. An ASP contains an SCTP endpoint and may be configured to process signalling traffic within more than one Application Server.~~

~~Sidebottom et al~~ [Page 4]

~~Internet Draft~~ SS7 MTP3 User Adaptation Layer ~~Jul 2001~~

~~Association — An association refers to an SCTP association. The association provides the transport for the delivery of MTP3 User protocol data units and M3UA adaptation layer peer messages.~~

~~IP Server Process (IPSP) — A process instance of an IP-based application. An IPSP is essentially the same as an ASP, except that it uses M3UA in a point-to-point fashion. Conceptually, an IPSP does not use the services of a Signalling Gateway.~~

~~Signalling Gateway Process (SGP) — A process instance of a Signalling Gateway. It serves as an active, back-up or load-sharing process of a~~

~~Signalling Gateway.~~

~~Signalling Gateway~~ An SG is a signaling agent that receives/sends SCN native signaling at the edge of the IP network [1]. An SG appears to the SS7 network as an SS7 Signalling Point. An SG contains a set of one or more unique Signalling Gateway Processes, of which one or more is normally actively processing traffic. Where an SG contains more than one SGP, the SG is a logical entity and the contained SGPs must be coordinated into a single management view to the SS7 network and to the supported Application Servers.

~~Signalling Process~~ A process instance that uses M3UA to communicate with other signalling process. An ASP, an SGP and an IPSP are all signalling processes.

~~Routing Key:~~ A Routing Key describes a set of SS7 parameters and parameter values that uniquely define the range of signalling traffic to be handled by a particular Application Server. Parameters within the Routing Key cannot extend across more than a single SS7 Destination Point Code.

~~Routing Context~~ A value that uniquely identifies a Routing Key. Routing Context values are either configured using a configuration management interface, or by using the routing key management procedures defined in this document.

~~Fail over~~ The capability to re route signalling traffic as required to an alternate Application Server Process, or group of ASPs, within an Application Server in the event of failure or unavailability of a currently used Application Server Process. Fail over also applies upon the return to service of a previously unavailable Application Server Process.

~~Signalling Point Management Cluster (SPMC)~~ The complete set of Application Servers represented to the SS7 network under one specific SS7 Point Code of one specific Network Appearance. SPMCs are used to sum the availability/congestion/User\_Part status of an SS7 destination point code that is distributed in the IP domain, for the purpose of supporting MTP3 management procedures at an SG. In some

~~Sidebottom et al~~ [Page 5]

~~Internet Draft~~ SS7 MTP3 User Adaptation Layer Jul 2001

~~cases, the SG itself may also be a member of the SPMC. In this case, the SG availability/congestion/User\_Part status must also be taken into account when considering any supporting MTP3 management actions.~~

~~MTP~~ The Message Transfer Part of the SS7 protocol.

~~MTP3~~ MTP Level 3, the signalling network layer of SS7

~~MTP3 User~~ Any protocol normally using the services of the SS7 MTP3 (e.g., ISUP, SCCP, TUP, etc.).

~~Network Appearance~~ The Network Appearance uniquely identifies an SS7 entity (Point Code) into an SS7 network, as presented by the SG. It is used for the purposes of logically separating the signalling traffic between the SG and the Application Server Processes over a common SCTP association. This partitioning is necessary where an SG is logically partitioned to appear as end node elements in multiple separate SS7 networks, in which case there is a separate network appearance for each

~~point code in the SS7 networks. It is also necessary when an SG is configured as an STP hosting multiple point codes, or when configured as multiple end nodes within the same network, in which case each point code is a separate network appearance between the SG and the Application Server Processes over a common SCTP Association. An example is where an SG is logically partitioned to appear as an element in four separate national SS7 networks. A Network Appearance implicitly defines the SS7 Point Code(s), Network Indicator and MTP3 protocol type/variant/version used within a specific SS7 network partition.~~

~~Network Byte Order: Most significant byte first, a.k.a Big Endian.~~

~~Layer Management— Layer Management is a nodal function that handles the inputs and outputs between the M3UA layer and a local management entity.~~

~~Host— The computing platform that the ASP process is running on.~~

~~Stream— A stream refers to an SCTP stream; a uni-directional logical channel established from one SCTP endpoint to another associated SCTP endpoint, within which all user messages are delivered in sequence except for those submitted to the un-ordered delivery service.~~

### ~~1.3 M3UA Overview~~

#### ~~1.3.1 Protocol Architecture.~~

~~The framework architecture that has been defined for SCN signalling transport over IP [1] uses multiple components, including a common signalling transport protocol and an adaptation module to support the~~

~~Sidebottom et al [Page 6]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~services expected by a particular SCN signalling protocol from its underlying protocol layer.~~

~~Within the framework architecture, this document defines an MTP3 User adaptation module suitable for supporting the transfer of messages of any protocol layer that is identified to the MTP Level 3 layer, in SS7 terms, as a user part. The list of these protocol layers include, but is not limited to, ISDN User Part (ISUP) [2,3,4], Signalling Connection Control Part (SCCP) [5,6,7] and Telephone User Part (TUP) [8]. TCAP [9,10,11] or RANAP [12] messages are transferred transparently by the M3UA protocol as SCCP payload, as they are SCCP User protocols.~~

~~It is recommended that M3UA use the services of the Stream Control Transmission Protocol (SCTP) [13] as the underlying reliable common signalling transport protocol. This is to take advantage of various SCTP features such as:~~

- ~~— Explicit packet-oriented delivery (not stream-oriented),~~
- ~~— Sequenced delivery of user messages within multiple streams,~~
- ~~— with an option for order-of-arrival delivery of individual user messages,~~
- ~~— Optional multiplexing of user messages into SCTP datagrams,~~
- ~~— Network level fault tolerance through support of multi homing~~

~~— at either or both ends of an association,  
— Resistance to flooding and masquerade attacks, and  
— Data segmentation to conform to discovered path MTU size.~~

~~Under certain scenarios, such as back-to-back connections without redundancy requirements, the SCTP functions above MAY NOT be a requirement and TCP can be used as the underlying common transport protocol.~~

### ~~1.3.2 Services Provided by the M3UA Layer~~

~~The M3UA Layer at an ASP or IPSP provides the equivalent set of primitives at its upper layer to the MTP3 Users as provided by the MTP Level 3 to its local MTP3 Users at an SS7 SEP. In this way, the ISUP and/or SCCP layer at an ASP or IPSP is unaware that the expected MTP3 services are offered remotely from an MTP3 Layer at an SGP, and not by a local MTP3 layer. The MTP3 layer at an SGP may also be unaware that its local users are actually remote user parts over M3UA. In effect, the M3UA extends access to the MTP3 layer services to a remote IP-based application. The M3UA layer does not itself provide the MTP3 services. However, in the case where an ASP is connected to more than one SGP, the M3UA layer at an ASP must maintain the status of configured SS7 destinations and route messages according to the availability and congestion status of the routes to these destinations via each SGP.~~

~~Sidebottom et al. [Page 7]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The M3UA layer may also be used for point-to-point signalling between two IP Server Processes (IPSPs). In this case, the M3UA layer provides the same set of primitives and services at its upper layer as the MTP3. However, in this case the expected MTP3 services are not offered remotely from an SGP. The MTP3 services are provided but the procedures to support these services are a subset of the MTP3 procedures due to the simplified point-to-point nature of the IPSP to IPSP relationship.~~

#### ~~1.3.2.1 Support for the Transport of MTP3 User Messages~~

~~The M3UA layer provides the transport of MTP TRANSFER primitives across an established SCTP association between an SGP and an ASP or between IPSPs.~~

~~The MTP TRANSFER primitive information is encoded as in MTP3 User messages. In this way, the SCCP and ISUP messages received from the SS7 network by the SGP are not re-encoded into a different format for transport between the M3UA peers. The MTP3 Service Information Octet (SIO) and Routing Label (OPC, DPC, and SLS) are included, encoded as expected by the MTP3 and MTP3 User protocol layer.~~

~~At an ASP, in the case where a destination is reachable via multiple SGPs, the M3UA layer must also choose via which SGP the message is to be routed or support load balancing across the SGPs, ensuring that no missequencing occurs.~~

~~The M3UA layer does not impose a 272 octet signalling information field (SIF) length limit as specified by the SS7 MTP Level 2 protocol [14]~~

~~[15] [16]. Larger information blocks can be accommodated directly by M3UA/SCTP, without the need for an upper layer segmentation/re-assembly procedure as specified in recent SCCP or ISUP versions. However, in the context of an SG, the maximum 272 octet block size must be followed when inter-working to a SS7 network that does not support the transfer of larger information blocks to the final destination. This avoids potential ISUP or SCCP fragmentation requirements at the SGs. However, if the SS7 network is provisioned to support the Broadband MTP [20] to the final SS7 destination, the information block size limit may be increased past 272 octets.~~

#### ~~1.3.2.2 Native Management Functions~~

~~The M3UA layer provides management of the underlying SCTP transport protocol to ensure that SGP-ASP and IPSP-IPSP transport is available to the degree called for by the MTP3-User signalling applications.~~

~~The M3UA layer provides the capability to indicate errors associated with received M3UA messages and to notify, as appropriate, local management and/or the peer M3UA.~~

~~Sidebottom et al [Page 8]~~

~~Internet Draft SS7 MTP3-User Adaptation Layer Jul 2001~~

#### ~~1.3.2.3 Inter-working with MTP3 Network Management Functions~~

~~At the SGP, the M3UA layer must also provide inter-working with MTP3 management functions to support seamless operation of the user SCN signalling applications in the SS7 and IP domains. This includes:~~

- ~~— Providing an indication to MTP3-Users at an ASP that a remote destination in the SS7 network is not reachable.~~
- ~~— Providing an indication to MTP3-Users at an ASP that a remote destination in the SS7 network is now reachable.~~
- ~~— Providing an indication to MTP3-Users at an ASP that messages to a remote destination in the SS7 network are experiencing SS7 congestion.~~
- ~~— Providing an indication to the M3UA layer at an ASP that the routes to a remote destination in the SS7 network are restricted.~~
- ~~— Providing an indication to MTP3-Users at an ASP that a remote MTP3-User peer is unavailable.~~

~~The M3UA layer at an ASP may initiate an audit of the availability, the restricted or the congested state of remote SS7 destinations. This information is requested from the M3UA layer at the SGP.~~

~~The M3UA layer at an ASP may also indicate to the SG that the M3UA layer itself or the ASP or the ASP's Host is congested.~~

#### ~~1.3.2.4 Support for the Management of SCTP Associations between the SGP and ASPs.~~

~~The M3UA layer at the SGP maintains the availability state of all configured remote ASPs, in order to manage the SCTP Associations and the traffic between the M3UA peers. As well, the active/inactive and~~

~~congestion state of remote ASPs is maintained.~~

~~The M3UA layer MAY be instructed by local management to establish an SCTP association to a peer M3UA node. This can be achieved using the M\_SCTP\_ESTABLISH primitives to request, indicate and confirm the establishment of an SCTP association with a peer M3UA node. In order to avoid redundant SCTP associations between two M3UA peers, one side (client) SHOULD be designated to establish the SCTP association, or M3UA configuration knowledge maintained to detect redundant associations (e.g., via knowledge of the expected local and remote SCTP endpoint addresses).~~

~~Local management MAY request from the M3UA layer the status of the underlying SCTP associations using the M\_SCTP\_STATUS request and~~

~~Sidebottom et al [Page 9]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~confirm primitives. Also, the M3UA MAY autonomously inform local management of the reason for the release of an SCTP association, determined either locally within the M3UA layer or by a primitive from the SCTP.~~

~~Also the M3UA layer MAY inform the local management of the change in status of an ASP or AS. This may be achieved using the M\_ASP\_request or M\_AS\_STATUS request primitives.~~

#### ~~1.3.2.5 Support for the Management of Connections to Multiple SGPs~~

~~As shown in Figure 1 an ASP may be connected to multiple SGPs. In such a case a particular SS7 destination may be reachable via more than one SGP, i.e., via more than one route. As MTP3 users only maintain status on a destination and not on a route basis, the M3UA layer must maintain the status (availability, restriction, and/or congestion of route to destination) of the individual routes, derive the overall availability or congestion status of the destination from the status of the individual routes, and inform the MTP3 users of this derived status whenever it changes.~~

#### ~~1.3.3 Signalling Network Architecture~~

~~A Signalling Gateway is used to support the transport of MTP3 User signalling traffic received from the SS7 network to multiple distributed ASPs (e.g., MGCs and IP Databases). Clearly, the M3UA protocol is not designed to meet the performance and reliability requirements for such transport by itself. However, the conjunction of distributed architecture and redundant networks does allow for a sufficiently reliable transport of signalling traffic over IP. The M3UA protocol is flexible enough to allow its operation and management in a variety of physical configurations, enabling Network Operators to meet their performance and reliability requirements.~~


~~To meet the stringent SS7 signalling reliability and performance requirements for carrier grade networks, Network Operators SHOULD ensure that no single point of failure is present in the end-to-end network architecture between an SS7 node and an IP based application. This can typically be achieved through the use of redundant SGPs or SGs, redundant hosts, and the provision of redundant QoS-bounded IP network paths for SCTP Associations between SCTP End Points. Obviously, the reliability of the SG, the MGC and other IP based functional~~

~~elements also needs to be taken into account. The distribution of ASPs and SGPs within the available Hosts SHOULD also be considered. As an example, for a particular Application Server, the related ASPs SHOULD be distributed over at least two Hosts.~~

~~One example of a physical network architecture relevant to SS7 carrier-grade operation in the IP network domain is shown in Figure 1 below:~~

~~Sidebottom et al [Page 10]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

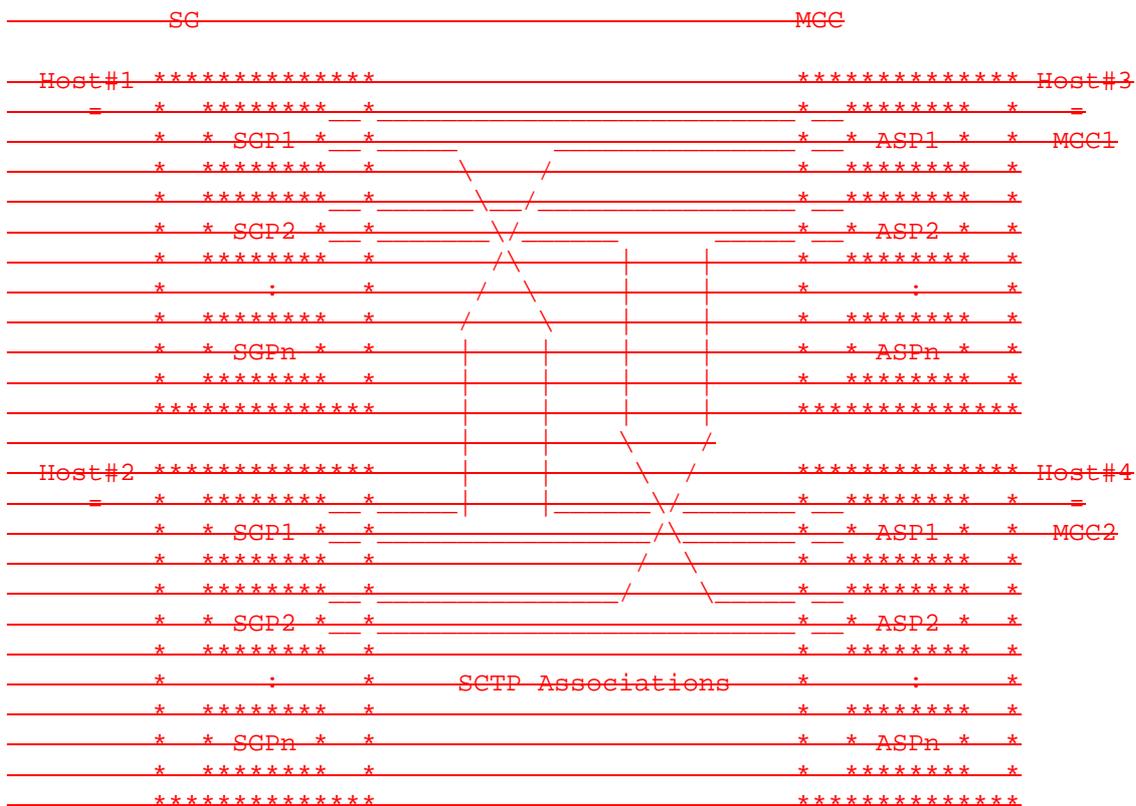

~~Figure 1 Physical Model~~

~~In this model, each host has many application processes. In the case of the MGC, an ASP may provide service to one or more Application Servers, and is identified as an Sctp end point. A pair of signalling gateway processes may represent, as an example, a single Signalling Gateway, serving a signalling point management cluster.~~

~~This example model can also be applied to IPSP-IPSP signalling. In this case, each IPSP would have its services distributed across 2 hosts or more, and may have multiple server processes on each host.~~

~~In the example above, each signalling process (SGP, ASP or IPSP) is the end point to more than one Sctp association, leading to many other signalling processes. To support this, a signalling process must be able to support distribution of M3UA messages to many simultaneous active associations. This message distribution function is based on the status of provisioned routing keys, the availability of signalling points in the SS7 network, and the redundancy model (active standby,~~

~~load sharing, n+k) of the remote signalling processes.~~

~~Sidebottom et al [Page 11]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~For carrier grade networks, the failure or isolation of a particular signalling process SHOULD NOT cause stable calls or transactions to be lost. This implies that signalling processes need, in some cases, to share the call/transaction state or be able to pass the call state information between each other. In the case of ASPs performing call processing, coordination may also be required with the related Media Gateway to transfer the MGC control for a particular trunk termination. However, this sharing or communication of call/transaction state information is outside the scope of this document.~~

~~This model serves as an example. M3UA imposes no restrictions as to the exact layout of the network elements, the message distribution algorithms and the distribution of the signalling processes. Instead, it provides a framework and a set of messages that allow for a flexible and scalable signalling network architecture, aiming to provide reliability and performance.~~

#### ~~1.4 Functional Areas~~

##### ~~1.4.1 Signalling Point Code Representation~~

~~For example, within an SS7 network, a Signalling Gateway might be charged with representing a set of nodes in the IP domain into the SS7 network for routing purposes. The SG itself, as a signalling point in the SS7 network, might also be addressable with an SS7 Point Code for MTP3 Management purposes. The SG Point Code might also be used for addressing any local MTP3 Users at the SG such as an SG resident SCCP function.~~

~~An SG may be logically partitioned to operate in multiple SS7 network appearances. In such a case, the SG must be addressable with a Point Code in each network appearance, and represents a set of nodes in the IP domain into each SS7 network. Alias Point Codes [15] may also be used within an SG network appearance.~~

~~Where an SG contains more than one SCP, the MTP3 routeset, SPMC and remote AS/ASP states of each SCP SHOULD be coordinated across all the SGPs. Re-routing of traffic between the SGPs SHOULD also be supported~~

~~The M3UA places no restrictions on the SS7 Point Code representation of an AS. Application Servers can be represented under the same Point Code of the SG, their own individual Point Codes or grouped with other Application Servers for Point Code preservation purposes. A single Point Code may be used to represent the SG and all the Application Servers together, if desired.~~


~~If an ASP or group of ASPs is available to the SS7 network via more than one SG, each with its own Point Code, the ASP(s) should be represented by a Point Code that is separate from any SG Point Code. This allows these SGs to be viewed from the SS7 network as "STPs", each~~

~~Sidebottom et al [Page 12]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~having an ongoing "route" to the same ASP(s). Under failure conditions where the ASP(s) become(s) unavailable from one of the SGs, this approach enables MTP3 route management messaging between the SG and SS7 network, allowing simple SS7 re-routing through an alternate SG without changing the Destination Point Code Address of SS7 traffic to the ASP(s).~~

~~Where an AS can be reached via more than one SCP it is equally important that the corresponding Routing Keys in the involved SCPs are identical. (Note: It is possible for the SCP Routing Key configuration data to be temporarily out of synch during configuration updates).~~

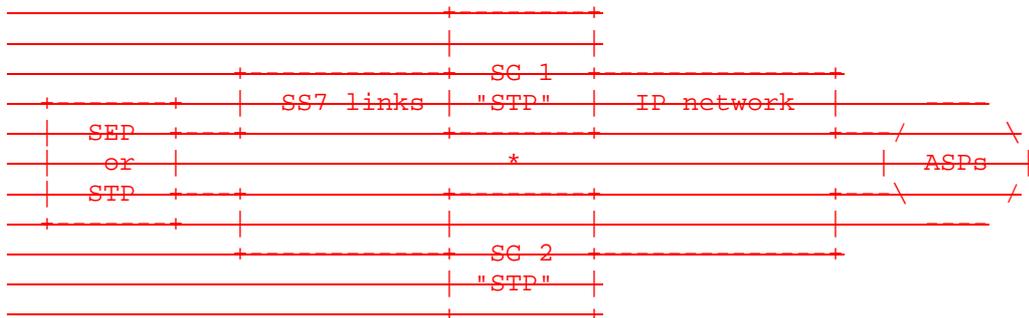

~~\* Note: SC to SC communication is recommended for carrier grade networks, using an MTP3 linkset or an equivalent, to allow re-routing between the SGs in the event of route failures. Where SGPs are used, inter-SCP communication is recommended. Inter-SCP protocol is outside of the scope of this document.~~

~~The following example shows a signalling gateway partitioned into two network appearances.~~

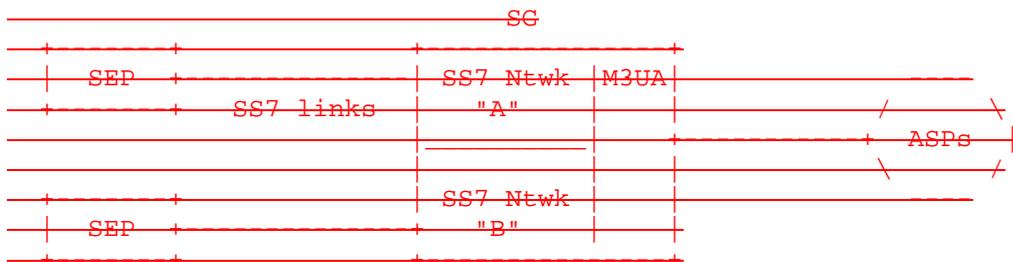

### ~~1.4.2 Routing Contexts and Routing Keys~~

#### ~~1.4.2.1 Overview~~

~~The distribution of SS7 messages between the SCP and the Application Servers is determined by the Routing Keys and their associated Routing Contexts. A Routing Key is essentially a set of SS7 parameters used to~~

~~Sidebottom et al [Page 13]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~filter SS7 messages, whereas the Routing Context parameter is a 4-byte value (integer) that is associated to that Routing Key in a 1:1 relationship. The Routing Context therefore can be viewed as an index~~

~~into a sending node's Message Distribution Table containing the Routing Key entries.~~

~~Possible SS7 address/routing information that comprise a Routing Key entry includes, for example, the OPC, DPC, SIO found in the MTP3 routing label, or MTP3 User specific fields such as the ISUP CIC, SSCP subsystem number, or TCAP transaction ID. Some example Routing Keys are: the DPC alone, the DPC/OPC combination, the DPC/OPC/CIC combination, or the DPC/SSN combination. The particular information used to define an M3UA Routing Key is application and network dependent, and none of the above examples are mandated.~~

~~An Application Server Process may be configured to process signalling traffic related to more than one Application Server, over a single SCTP Association. In ASP Active and ASP Inactive management messages, the signalling traffic to be started or stopped is discriminated by the Routing Context parameter. At an ASP, the Routing Context parameter uniquely identifies the range of signalling traffic associated with each Application Server that the ASP is configured to receive.~~

#### ~~1.4.2.2 Routing Key Limitations~~

~~Routing Keys SHOULD be unique in the sense that each received SS7 signalling message SHOULD have a single routing result to an Application Server. It is not necessary for the parameter range values within a particular Routing Key to be contiguous. For example, an AS could be configured to support call processing for multiple ranges of PSTN trunks that are not represented by contiguous CIC values.~~

#### ~~1.4.2.3 Managing Routing Contexts and Routing Keys~~

~~There are two ways to provision a Routing Key at an SGP. A Routing Key may be configured statically using an implementation dependent management interface, or dynamically using the M3UA Routing Key registration procedure. A Routing Key may also be configured using the M3UA dynamic registration/deregistration procedures defined in this document. An M3UA element must implement at least one method of Routing Key provisioning.~~

~~When using a management interface to configure Routing Keys, the message distribution function within the SGP is not limited to the set of parameters defined in this document. Other implementation dependent distribution algorithms may be used.~~

~~Sidebottom et al [Page 14]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~1.4.2.4 Message Distribution at the SGP~~

~~In order to direct messages received from the SS7 MTP3 network to the appropriate IP destination, the SGP must perform a message distribution function using information from the received MTP3 User message.~~

~~To support this message distribution, the SGP must maintain the~~

~~equivalent of a network address translation table, mapping incoming SS7 message information to an Application Server for a particular application and range of traffic. This is accomplished by comparing elements of the incoming SS7 message to currently defined Routing Keys in the SGP. These Routing Keys in turn make reference to an Application Server that is enabled by one or more ASPs. These ASPs provide dynamic status information on their availability, traffic handling capability and congestion to the SGP using various management messages defined in the M3UA protocol.~~

~~The list of ASPs in an AS is assumed to be dynamic, taking into account the availability, traffic handling capability and congestion status of the individual ASPs in the list, as well as configuration changes and possible fail-over mechanisms.~~

~~Normally, one or more ASPs are active in the AS (i.e., currently processing traffic) but in certain failure and transition cases it is possible that there may be no active ASP available. Both load sharing and backup scenarios are supported.~~

~~When there is no matching Routing Key entry for an incoming SS7 message, a default treatment SHOULD be specified. Possible solutions are to provide a default Application Server at the SGP that directs all unallocated traffic to a (set of) default ASP(s), or to drop the message and provide a notification to layer management. The treatment of unallocated traffic is implementation dependent.~~

#### ~~1.4.2.5 Message Distribution at the ASP~~

~~In order to direct messages to the SS7 network, the ASP must also perform a message distribution function in order to choose the proper SGP for a given message. This is accomplished by observing the Destination Point Code (and possibly other elements of the outgoing message such as the SLS value). Where more than one route (or SGP) is possible for routing to the SS7 network, the ASP SHOULD maintain a dynamic table of available SGP routes for the SS7 destinations, taking into account the SS7 destination availability/restricted/congestion status received from the SGP(s), the availability status of the individual SGPs and configuration changes and fail-over mechanisms. There is, however, no M3UA messaging to manage the status of an SGP (e.g., SGP Up/Down/Active/Inactive messaging). Whenever an SCTP~~

~~Sidebottom et al [Page 15]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~association to an SGP exists, the SGP is assumed to be ready for the purposes of responding to M3UA ASPSM messages.~~

~~Every SGP of one SC ASP regarding one AS provides identical SS7 connectivity to this ASP.~~

#### ~~1.4.3 SS7 and M3UA Interworking~~

~~In the case of SS7 and M3UA inter working, the M3UA adaptation layer is designed to provide an extension of the MTP3 defined user primitives.~~

##### ~~1.4.3.1 Signalling Gateway SS7 Layers~~

~~The SG is responsible for terminating MTP Level 3 of the SS7 protocol, and offering an IP based extension to its users.~~

~~>From an SS7 perspective, it is expected that the Signalling Gateway transmits and receives SS7 Message Signalling Units (MSUs) to and from the PSTN over a standard SS7 network interface, using the SS7 Message Transfer Part (MTP) [14,15,16] to provide reliable transport of the messages.~~

~~As a standard SS7 network interface, the use of MTP Level 2 signalling links is not the only possibility. ATM based High Speed Links can also be used with the services of the Signalling ATM Adaptation Layer (SAAL) [17,18].~~

~~Note: It is also possible for IP based interfaces to be present, using the services of the MTP2 User Adaptation Layer (M2UA) [23] or M2PA []. These may be terminated at a Signalling Transfer Point (STP) or Signalling End Point (SEP). Using the services of MTP3, the SG may be capable of communicating with remote SS7 SEPs in a quasi associated fashion, where STPs may be present in the SS7 path between the SEP and the SG.~~

#### ~~1.4.3.2 SS7 and M3UA Inter Working at the SG~~

~~The SGP provides a functional inter working of transport functions between the SS7 network and the IP network by also supporting the M3UA adaptation layer. It allows the transfer of MTP3 User signalling messages to and from an IP based Application Server Process where the peer MTP3 User protocol layer exists.~~

~~The Signalling Gateway must maintain knowledge of relevant SS7 node and Signalling Point Management Cluster (SPMC) status in their respective domains in order to perform a seamless inter working of the IP based signalling and the SS7 domains. For example, SG knowledge of the availability and/or congestion status of the SPMC and SS7 nodes must be maintained and disseminated in the respective networks, in order to ensure that end-to-end operation is transparent to the communicating SCN protocol peers at the SS7 node and ASP. Where more than one SGP~~

~~Sidebottom et al [Page 16]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~constitutes an SG, the knowledge of the SGPs must be coordinated into an overall SG view.~~

~~For SS7 user part management, it is required that the MTP3 User protocols at ASPs receive indications of SS7 signalling point availability, SS7 network congestion, and remote User Part unavailability as would be expected in an SS7 SEP node. To accomplish this, the MTP\_PAUSE, MTP\_RESUME and MTP\_STATUS indication primitives received at the MTP3 upper layer interface at the SG need to be propagated to the remote MTP3 User lower layer interface at the ASP. (These indication primitives are also made available to any existing local MTP3 Users at the SG, if present.)~~

~~MTP3 management messages (such as TFps or TFAs received from the SS7 network) MUST NOT be encapsulated as Data message Payload Data and sent either from SG to ASP or from ASP to SG. The SG MUST terminate these messages and generate M3UA messages as appropriate.~~

#### ~~1.4.3.3 Application Server~~

~~A cluster of application servers is responsible for providing the~~

~~overall support for one or more SS7 upper layers. From an SS7 standpoint, a Signalling Point Management Cluster (SPMC) provides complete support for the upper layer service for a given point code. As an example, an SPMC providing MGC capabilities must provide complete support for ISUP (and any other MTP3 user located at the point code of the SPMC) for a given point code, according to the local SS7 network specifications.~~

~~This measure is necessary to allow the SG to accurately represent the signalling point on the local SS7 network.~~

~~In the case where an ASP is connected to more than one SCP, the M3UA layer must maintain the status of configured SS7 destinations and route messages according to availability/congestion/restricted status of the routes to these SS7 destinations.~~

#### ~~1.4.3.4 IPSP Considerations~~

~~Since IPSPs use M3UA in a point-to-point fashion, there is no concept of routing of messages beyond the remote end. Therefore, SS7 and M3UA inter-working is not necessary for this model.~~

#### ~~1.4.4 Redundancy Models~~

~~The network address translation and mapping function of the M3UA layer supports signalling process fail-over functions in order to support a high availability of call and transaction processing capability.~~

~~Sidebottom et al [Page 17]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~1.4.4.1 Application Server Redundancy~~

~~All MTP3 User messages (e.g., ISUP, SCCP) incoming to an SG from the SS7 network are assigned to a unique Application Server, based on the information in the message and the provisioned Routing Keys.~~

~~The Application Server is, in practical terms, a list of all ASPs configured to process a range of MTP3 User traffic defined by one Routing Key. One or more ASPs in the list are normally active (i.e., handling traffic) while any others may be unavailable or inactive, to be possibly used in the event of failure or unavailability of the active ASP(s).~~

~~The fail-over model supports an "n+k" redundancy model, where "n" ASPs is the minimum number of redundant ASPs required to handle traffic and "k" ASPs are available to take over for a failed or unavailable ASP. A "1+1" active/back-up redundancy is a subset of this model. A simplex "1+0" model is also supported as a subset, with no ASP redundancy.~~

~~At the SCP, an Application Server list contains active and inactive ASPs to support ASP load sharing and fail-over procedures. The list of ASPs within a logical Application Server is kept updated in the SCP to reflect the active Application Server Process(es).~~

~~To avoid a single point of failure, it is recommended that a minimum of two ASPs be in the list, resident in separate hosts and therefore available over different SCTP Associations. For example, in the~~

~~network shown in Figure 1, all messages to DPC=x could be sent to ASP1 in Host3 or ASP1 in Host4. The AS list at SGP1 in Host 1 might look like the following:~~

```
----- Routing Key {DPC=x} ----- "Application Server #1"
----- ASP1/Host3 ----- State = Active
----- ASP1/Host3 ----- State = Inactive
```

~~In this "1+1" redundancy case, ASP1 in Host3 would be sent any incoming message with DPC=x. ASP1 in Host4 would normally be brought to the "active" state upon failure of, or loss of connectivity to, ASP1/Host1.~~

~~The AS List at SGP1 in Host1 might also be set up in load share mode:~~

```
----- Routing Key {DPC=x} ----- "Application Server #1"
----- ASP1/Host3 ----- State = Active
----- ASP1/Host4 ----- State = Active
```

~~In this case, both the ASPs would be sent a portion of the traffic. For example the two ASPs could together form a database, where incoming queries may be sent to any active ASP.~~

~~Care must be exercised by a Network Operator in the selection of the routing information to be used as the Routing Key for a particular AS.~~

~~Sidebottom et al ----- [Page 18]~~

~~Internet Draft ----- SS7 MTP3 User Adaptation Layer ----- Jul 2001~~

~~For example, where Application Servers are defined using ranges of ISUP CIC values, the Operator is implicitly splitting up control of the related circuit groups. Some CIC value range assignments may interfere with ISUP circuit group management procedures.~~

~~In the process of fail-over, it is recommended that in the case of ASPs supporting call processing, stable calls do not fail. It is possible that calls in "transition" MAY fail, although measures of communication between the ASPs involved can be used to mitigate this. For example, the two ASPs MAY share call state via shared memory, or MAY use an ASP to ASP protocol to pass call state information. Any ASP to ASP protocol to support this function is outside the scope of this document.~~

#### ~~1.4.4.2 Signalling Gateway Redundancy~~

~~Signalling Gateways MAY also be distributed over multiple hosts. Much like the AS model, SGs may comprise one or more SG Processes (SGPs), distributed over one or more hosts, using an active/back-up or a load-sharing model. Also, every SGP within an SG communicating with an ASP provides identical SS7 connectivity to this ASP. Should an SGP lose all or partial SS7 connectivity and other SGPs exist, the SGP SHOULD terminate the SCTP associations to the concerned ASPs.~~

~~It is therefore possible for an ASP to route signalling messages destined to the SS7 network using more than one SGP. In this model, a Signalling Gateway is deployed as a cluster of hosts acting as a single SG. A primary/back-up redundancy model is possible, where the unavailability of the SCTP association to a primary SGP could be used to reroute affected traffic to an alternate SGP. A load sharing model is possible, where the signalling messages are load shared between multiple SGPs. The distribution of the MTP3 user messages over the SGPs should be done in such a way to minimize message mis sequencing,~~

~~as required by the SS7 User Parts.~~

~~It may also be possible for an ASP to use more than one SG to access a specific SS7 end point, in a model that resembles an SS7 STP mated pair. Typically, SS7 STPs are deployed in mated pairs, with traffic load shared between them. Other models are also possible, subject to the limitations of the local SS7 network provisioning guidelines.~~

~~>From the perspective of the M3UA layer at an ASP, a particular SG is capable of transferring traffic to an SS7 destination if an SCTP association with at least one SGP of the SG is established, the SGP has returned an acknowledgement to the ASP to indicate that the ASP is actively handling traffic for that destination, and the SGP has not indicated that the destination is inaccessible. When an ASP is configured to use multiple SGPs for transferring traffic to the SS7 network, the ASP must maintain knowledge of the current capability of the SGPs to handle traffic to destinations of interest. This information is crucial to the overall reliability of the service, for~~

~~Sidebottom et al [Page 19]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~both active/back-up and load-sharing model, in the event of failures, recovery and maintenance activities. The ASP M3UA may also use this information for congestion avoidance purposes. The distribution of the MTP3 user messages over the SGPs should be done in such a way to minimize message mis-sequencing, as required by the SS7 User Parts.~~

#### ~~1.4.5 Flow Control~~

~~Local Management at an ASP may wish to stop traffic across an SCTP association in order to temporarily remove the association from service or to perform testing and maintenance activity. The function could optionally be used to control the start of traffic on to a newly available SCTP association.~~

#### ~~1.4.6 Congestion Management~~

~~The M3UA layer is informed of local and IP network congestion by means of an implementation-dependent function (e.g., an implementation-dependent indication from the SCTP of IP network congestion).~~

~~At an ASP or IPSP, the M3UA layer indicates congestion to local MTP3-Users by means of an MTP-STATUS primitive, as per current MTP3 procedures, to invoke appropriate upper layer responses.~~

~~When an SG determines that the transport of SS7 messages to a Signalling Point Management Cluster (SPMC) is encountering congestion, the SG MAY trigger SS7 MTP3 Transfer Controlled management messages to originating SS7 nodes, per the congestion procedures of the relevant MTP3 standard. The triggering of SS7 MTP3 Management messages from an SG is an implementation-dependent function.~~

~~The M3UA layer at an ASP or IPSP should indicate local congestion to an M3UA peer with an SCON message. When an SG receives a congestion message (SCON) from an ASP, and the SG determines that an SPMC is now encountering congestion, it MAY trigger SS7 MTP3 Transfer Controlled management messages to concerned SS7 destinations according to congestion procedures of the relevant MTP3 standard.~~

#### ~~1.4.7 SCTP Stream Mapping.~~

~~The M3UA layer at both the SCP and ASP also supports the assignment of signalling traffic into streams within an SCTP association. Traffic that requires sequencing must be assigned to the same stream. To accomplish this, MTP3 User traffic may be assigned to individual streams based on, for example, the SLS value in the MTP3 Routing Label or the ISUP CIC assignment, subject of course to the maximum number of streams supported by the underlying SCTP association.~~

~~The use of SCTP streams within M3UA is recommended in order to minimize transmission and buffering delays, therefore improving the overall performance and reliability of the signalling elements. The distribution of the MTP3 user messages over the various streams should~~

~~Sidebottom et al [Page 20]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~be done in such a way to minimize message mis-sequencing, as required by the SS7 User Parts.~~

~~1.4.8 Client/Server Model~~

~~It is recommended that the SCP and ASP be able to support both client and server operation. The peer endpoints using M3UA SHOULD be configured so that one always takes on the role of client and the other the role of server for initiating SCTP associations. The default orientation would be for the SCP to take on the role of server while the ASP is the client. In this case, ASPs SHOULD initiate the SCTP association to the SCP~~


~~In the case of IPSP to IPSP communication, the peer endpoints using M3UA SHOULD be configured so that one always takes on the role of client and the other the role of server for initiating SCTP associations.~~

~~The SCTP Registered User Port Number Assignment for M3UA is 2905.~~

~~1.5 Sample Configurations~~

~~1.5.1 Example 1: ISUP Message Transport~~

~~\*\*\*\*\* SS7 \*\*\*\*\* IP \*\*\*\*\*  
\* SEP \* \* SCP \* \* ASP \*  
\*\*\*\*\* \*\*\*\*\* \*\*\*\*\*~~

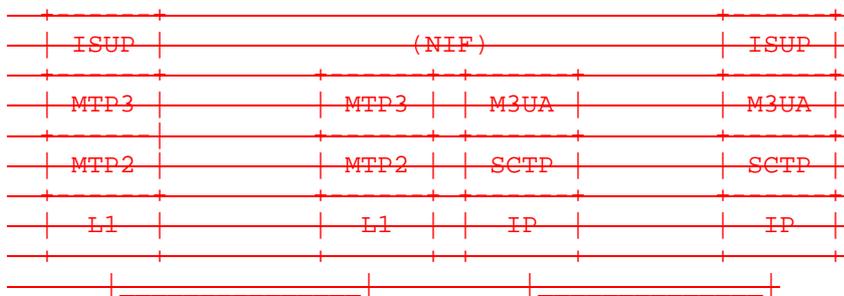

~~SEP SS7 Signalling End Point  
SCTP Stream Control Transmission Protocol  
NIF Nodal Inter-working Function~~

~~In this example, the SCP provides an implementation dependent nodal inter working function (NIF) that allows the MGC to exchange SS7~~


~~signalling messages with the SS7 based SEP. The NIF within the SGP serves as the interface within the SGP between the MTP3 and M3UA. This nodal inter working function has no visible peer protocol with either the MGC or SEP. It also provides network status information to one or both sides of the network.~~

~~Sidebottom et al [Page 21]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~For internal SGP modeling purposes, at the NIF level, SS7 signalling messages that are destined to the MGC are received as MTP TRANSFER indication primitives from the MTP Level 3 upper layer interface, translated to MTP TRANSFER request primitives, and sent to the local M3UA resident message distribution function for ongoing routing to the final IP destination. Messages received from the local M3UA network address translation and mapping function as MTP TRANSFER indication primitives are sent to the MTP Level 3 upper layer interface as MTP TRANSFER request primitives for on going MTP Level 3 routing to an SS7 SEP. For the purposes of providing SS7 network status information the NIF also delivers MTP PAUSE, MTP RESUME and MTP STATUS indication primitives received from the MTP Level 3 upper layer interface to the local M3UA resident management function. In addition, as an implementation and network option, restricted destinations are communicated from MTP network management to the local M3UA resident management function.~~

~~1.5.2 Example 2: SCCP Transport between IPSPs~~

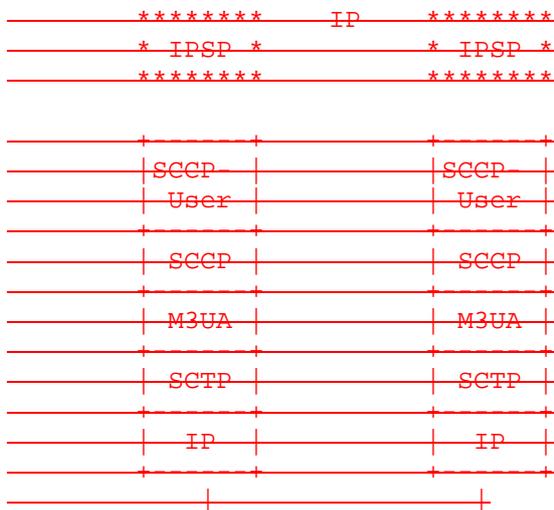

~~This example shows an architecture where no Signalling Gateway is used. In this example, SCCP messages are exchanged directly between two IP-resident IPSPs with resident SCCP User protocol instances, such as RANAP or TCAP. SS7 network inter working is not required, therefore there is no MTP3 network management status information for the SCCP and SCCP User protocols to consider. Any MTP PAUSE, MTP RESUME or MTP STATUS indications from the M3UA layer to the SCCP layer should consider the status of the SCTP Association and underlying IP network and any congestion information received from the remote site.~~

~~Sidebottom et al [Page 22]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~1.5.3 Example 3: SGP Resident SCCP Layer, with Remote ASP~~

```

***** SS7 ***** IP *****
* SEP * * * * *
* or * * SGP * * ASP *
* STP * * * * *
***** ***** *****

```

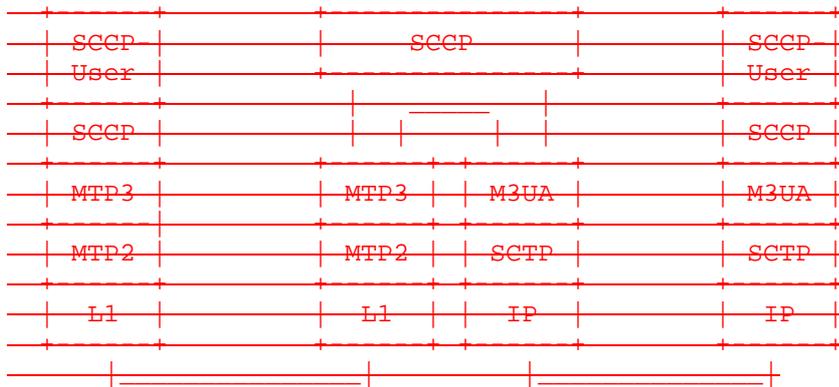

~~STP SS7 Signalling Transfer Point~~

~~In this example, the SGP contains an instance of the SS7 SCCP protocol layer that may, for example, perform the SCCP Global Title Translation (GTT) function for messages logically addressed to the SG SCCP. If the result of a GTT for an SCCP message yields an SS7 DPC or DPC/SSN address of an SCCP peer located in the IP domain, the resulting MTP-TRANSFER request primitive is sent to the local M3UA resident network address translation and mapping function for ongoing routing to the final IP destination.~~

~~Similarly, the SCCP instance in an SGP can perform the SCCP GTT service for messages logically addressed to it from SCCP peers in the IP domain. In this case, MTP-TRANSFER indication primitives are sent from the local M3UA resident network address translation and mapping function to the SCCP for GTT. If the result of the GTT yields the address of an SCCP peer in the SS7 network then the resulting MTP-TRANSFER request primitive is given to the MTP3 for delivery to an SS7-resident node.~~

~~It is possible that the above SCCP GTT at the SGP could yield the address of an SCCP peer in the IP domain and the resulting MTP-TRANSFER request primitive would be sent back to the M3UA layer for delivery to an IP destination.~~

~~For internal SGP modeling purposes, this may be accomplished with the use of an implementation dependent nodal inter working function within the SGP that effectively sits below the SCCP and routes MTP-TRANSFER~~

~~Sidebottom et al [Page 23]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~request/indication messages to/from both the MTP3 and the M3UA layer, based on the SS7 DPC or DPC/SSN address information. This nodal interworking function has no visible peer protocol with either the ASP or SEP.~~

~~Note that the services and interface provided by the M3UA layer are the same as in Example 1 and the functions taking place in the SCCP entity are transparent to the M3UA layer. The SCCP protocol functions are not reproduced in the M3UA protocol.~~

## ~~1.6 Definition of M3UA Boundaries~~

### ~~1.6.1 Definition of the Boundary between M3UA and an MTP3 User.~~

~~>From ITU Q.701 [14]:~~

~~— MTP\_TRANSFER request  
— MTP\_TRANSFER indication  
— MTP\_PAUSE indication  
— MTP\_RESUME indication  
— MTP\_STATUS indication~~

### ~~1.6.2 Definition of the Boundary between M3UA and SCTP~~

~~An example of the upper layer primitives provided by the SCTP are provided in Reference [13] Section 10.~~

### ~~1.6.3 Definition of the Boundary between M3UA and Layer Management~~

~~— M\_SCTP\_ESTABLISH request  
— Direction: LM → M3UA  
— Purpose: LM requests ASP to establish an SCTP association with its peer.~~

~~— M\_SCTP\_ESTABLISH confirm  
— Direction: M3UA → LM  
— Purpose: ASP confirms to LM that it has established an SCTP association with its peer.~~

~~— M\_SCTP\_ESTABLISH indication  
— Direction: M3UA → LM  
— Purpose: M3UA informs LM that a remote ASP has established an SCTP association.~~

~~— M\_SCTP\_RELEASE request  
— Direction: LM → M3UA  
— Purpose: LM requests ASP to release an SCTP association with its peer.~~

~~Sidebottom et al [Page 24]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~— M\_SCTP\_RELEASE confirm  
— Direction: M3UA → LM  
— Purpose: ASP confirms to LM that it has released SCTP association with its peer.~~

~~M\_SCTP\_RELEASE indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA informs LM that a remote ASP has released an SCTP Association or the SCTP association has failed.~~

~~M\_SCTP\_STATUS request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests M3UA to report the status of an SCTP association.~~

~~M\_SCTP\_STATUS confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA responds with the status of an SCTP association.~~

~~M\_SCTP\_STATUS indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports the status of an SCTP association.~~

~~M\_ASP\_STATUS request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests M3UA to report the status of a local or remote ASP.~~

~~M\_ASP\_STATUS confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports status of local or remote ASP.~~

~~M\_AS\_STATUS request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests M3UA to report the status of an AS.~~

~~M\_AS\_STATUS confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports the status of an AS.~~

~~M\_NOTIFY indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports that it has received a Notify message from its peer.~~

~~M\_ERROR indication~~  
~~Direction: M3UA → LM~~  
~~Purpose: M3UA reports that it has received an Error message from its peer or that a local operation has been unsuccessful.~~

Sidebottom et al \_\_\_\_\_ [Page 25]

Internet Draft \_\_\_\_\_ SS7 MTP3 User Adaptation Layer \_\_\_\_\_ Jul 2001

~~M\_ASP\_UP request~~  
~~Direction: LM → M3UA~~  
~~Purpose: LM requests ASP to start its operation and send an ASP Up message to its peer.~~

~~M\_ASP\_UP confirm~~  
~~Direction: M3UA → LM~~  
~~Purpose: ASP reports that is has received an ASP UP Ack message from its peer.~~

~~M\_ASP\_UP indication~~  
~~Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Up message from its peer.~~

~~— M-ASP\_DOWN request~~

~~— Direction: LM → M3UA~~

~~— Purpose: LM requests ASP to stop its operation and send an ASP Down message to its peer.~~

~~— M-ASP\_DOWN confirm~~

~~— Direction: M3UA → LM~~

~~— Purpose: ASP reports that it has received an ASP Down Ack message from its peer.~~

~~— M-ASP\_DOWN indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Down message from its peer, or the SCTP association has been lost/reset.~~

~~— M-ASP\_ACTIVE request~~

~~— Direction: LM → M3UA~~

~~— Purpose: LM requests ASP to send an ASP Active message to its peer.~~

~~— M-ASP\_ACTIVE confirm~~

~~— Direction: M3UA → LM~~

~~— Purpose: ASP reports that it has received an ASP Active Ack message from its peer.~~

~~— M-ASP\_ACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Active message from its peer.~~

~~— M-ASP\_INACTIVE request~~

~~— Direction: LM → M3UA~~

~~— Purpose: LM requests ASP to send an ASP Inactive message to its peer.~~

~~Sidebottom et al [Page 26]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~— M-ASP\_INACTIVE confirm~~

~~— Direction: LM → M3UA~~

~~— Purpose: ASP reports that it has received an ASP Inactive Ack message from its peer.~~

~~— M-ASP\_INACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports it has successfully processed an incoming ASP Inactive message from its peer.~~

~~— M-AS\_ACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports that an AS has moved to the AS\_ACTIVE state.~~

~~— M-AS\_INACTIVE indication~~

~~— Direction: M3UA → LM~~

~~— Purpose: M3UA reports that an AS has moved to the AS\_INACTIVE state.~~

~~M\_AS\_DOWN indication  
 Direction: M3UA → LM  
 Purpose: M3UA reports that an AS has moved to the AS-DOWN state.~~

~~If dynamic registration of RK is supported by the M3UA layer, the layer MAY support the following additional primitives:~~

~~M\_RK\_REG request  
 Direction: LM → M3UA  
 Purpose: LM requests ASP to register RK(s) with its peer by sending  
 REG\_REQ message~~

~~M\_RK\_REG confirm  
 Direction: M3UA → LM  
 Purpose: ASP reports that it has received REG\_RSP message with  
 registration status as successful from its peer.~~

~~M\_RK\_REG indication  
 Direction: M3UA → LM  
 Purpose: M3UA informs LM that it has successfully processed an  
 incoming REG\_REQ message.~~

~~M\_RK\_DEREG request  
 Direction: LM → M3UA  
 Purpose: LM requests ASP to de-register RK(s) with its peer by  
 sending DEREG\_REQ message.~~

~~M\_RK\_DEREG confirm  
 Direction: M3UA → LM  
 Purpose: ASP reports that it has received DEREG\_REQ message with de-  
 registration status as successful from its peer.~~

~~Sidebottom et al [Page 27]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~M\_RK\_DEREG indication  
 Direction: M3UA → LM  
 Purpose: M3UA informs LM that it has successfully processed an  
 incoming DEREG\_REQ from its peer.~~

## ~~2.0 Conventions~~

~~The keywords MUST, MUST NOT, REQUIRED, SHALL, SHALL NOT, SHOULD, SHOULD NOT, RECOMMENDED, NOT RECOMMENDED, MAY, and OPTIONAL, when they appear in this document, are to be interpreted as described in [RFC2119].~~


## ~~3. M3UA Protocol Elements~~

~~The general M3UA message format includes a Common Message Header followed by zero or more parameters as defined by the Message Type. For forward compatibility, all Message Types may have attached parameters even if none are specified in this version.~~

### ~~3.1 Common Message Header~~

~~The protocol messages for MTP3 User Adaptation require a message header~~

~~which contains the adaptation layer version, the message type, and message length.~~

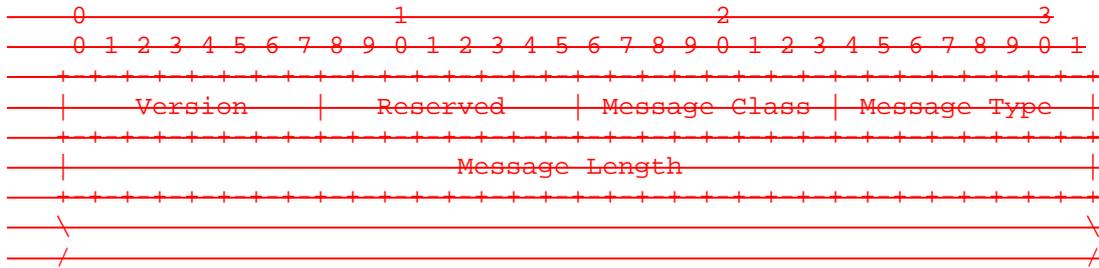

~~All fields in an M3UA message MUST be transmitted in the network byte order, unless otherwise stated.~~

~~3.1.1 M3UA Protocol Version: 8 bits (unsigned integer)~~

~~The version field contains the version of the M3UA adaptation layer.~~

~~The supported versions are the following:~~

- ~~1 Release 1.0~~

~~3.1.2 Message Classes and Types~~

~~The following list contains the valid Message Classes:~~

~~Message Class: 8 bits (unsigned integer)~~

~~The following list contains the valid Message Type Classes:~~

- ~~0 Management (MGMT) Message~~
- ~~1 Transfer Messages~~
- ~~2 SS7 Signalling Network Management (SSNM) Messages~~
- ~~3 ASP State Maintenance (ASPSM) Messages~~
- ~~4 ASP Traffic Maintenance (ASPTM) Messages~~
- ~~5 Reserved for Other Sigtran Adaptation Layers~~
- ~~6 Reserved for Other Sigtran Adaptation Layers~~
- ~~7 Reserved for Other Sigtran Adaptation Layers~~
- ~~8 Reserved for Other Sigtran Adaptation Layers~~
- ~~9 Routing Key Management (RKM) Messages~~
- ~~10 to 127 Reserved by the IETF~~
- ~~128 to 255 Reserved for IETF Defined Message Class extensions~~

~~Message Type: 8 bits (unsigned integer)~~

~~The following list contains the message types for the defined messages.~~

~~Management (MGMT) Messages (See Section 3.6)~~

- ~~0 Error (ERR)~~

~~1 Notify (NTFY)~~  
~~2 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined MGMT extensions~~

~~Transfer Messages (See Section 3.3)~~

~~0 Reserved~~  
~~1 Payload Data (DATA)~~  
~~2 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined Transfer extensions~~

~~SS7 Signalling Network Management (SSNM) Messages (See Section 3.4)~~

~~0 Reserved~~  
~~1 Destination Unavailable (DUNA)~~  
~~2 Destination Available (DAVA)~~  
~~3 Destination State Audit (DAUD)~~  
~~4 SS7 Network Congestion (SCON)~~  
~~5 Destination User Part Unavailable (DUPU)~~  
~~6 Destination Restricted (DRST)~~  
~~7 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined SSNM extensions~~

~~Sidebottom et al [Page 29]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~ASP State Maintenance (ASPSM) Messages (See Section 3.5)~~

~~0 Reserved~~  
~~1 ASP Up (ASPUP)~~  
~~2 ASP Down (ASPDN)~~  
~~3 Heartbeat (BEAT)~~  
~~4 ASP Up Acknowledgement (ASPUP ACK)~~  
~~5 ASP Down Acknowledgement (ASPDN ACK)~~  
~~6 Heartbeat Acknowledgement (BEAT ACK)~~  
~~7 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined ASPSM extensions~~

~~ASP Traffic Maintenance (ASPTM) Messages (See Section 3.5)~~

~~0 Reserved~~  
~~1 ASP Active (ASPAC)~~  
~~2 ASP Inactive (ASPIA)~~  
~~3 ASP Active Acknowledgement (ASPAC ACK)~~  
~~4 ASP Inactive Acknowledgement (ASPIA ACK)~~  
~~5 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined ASPTM extensions~~

~~Routing Key Management (RKM) Messages (See Section 3.7)~~

~~0 Reserved~~  
~~1 Registration Request (REG REQ)~~  
~~2 Registration Response (REG RSP)~~  
~~3 Deregistration Request (DEREG REQ)~~  
~~4 Deregistration Response (DEREG RSP)~~  
~~5 to 127 Reserved by the IETF~~  
~~128 to 255 Reserved for IETF Defined RKM extensions~~

~~3.1.3 Reserved: 8 bits~~

~~The Reserved field SHOULD be set to all '0's and ignored by the~~

~~receiver.~~

~~3.1.4 Message Length: 32 bits (unsigned integer)~~

~~The Message Length defines the length of the message in octets, including the Common Header. For messages with a final parameter containing padding, the parameter padding MUST be included in the Message Length.~~


~~Note: A receiver SHOULD accept the message whether or not the final parameter padding is included in the message length.~~

~~Sidebottom et al [Page 30]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~3.2 Variable Length Parameter Format~~

~~M3UA messages consist of a Common Header followed by zero or more variable length parameters, as defined by the message type. All the parameters contained in a message are defined in a Tag Length Value format as shown below.~~

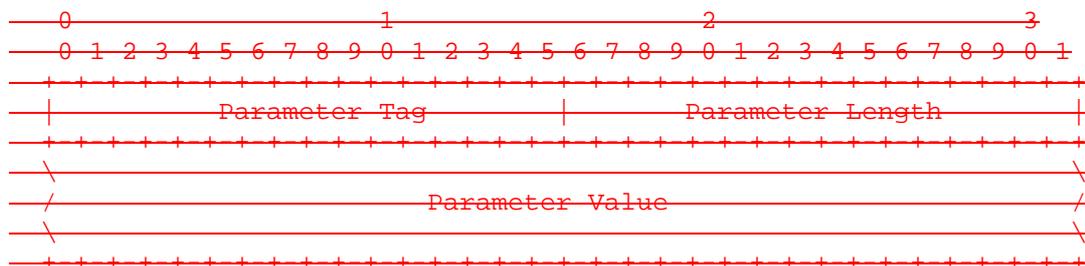

~~Where more than one parameter is included in a message, the parameters may be in any order, except where explicitly mandated. A receiver SHOULD accept the parameters in any order.~~

~~Parameter Tag: 16 bits (unsigned integer)~~

~~The Tag field is a 16-bit identifier of the type of parameter. It takes a value of 0 to 65534. Common parameters used by adaptation layers are in the range of 0x00 to 0xff. M3UA specific parameters have Tags in the range 0x80 to 0xbf. The parameter Tags defined are as follows:~~

- ~~0x00 Reserved~~
- ~~0x80 Network Appearance~~
- ~~0x81 Protocol Data 1~~
- ~~0x82 Protocol Data 2~~
- ~~0x04 INFO String~~
- ~~0x83 Affected Destinations~~
- ~~0x06 Routing Context~~
- ~~0x07 Diagnostic Information~~
- ~~0x09 Heartbeat Data~~
- ~~0x84 User/Cause~~
- ~~0x0a Reason~~
- ~~0x0b Traffic Mode Type~~

<del>0x0c</del>	<del>Error Code</del>
<del>0x0d</del>	<del>Status</del>
<del>0x85</del>	<del>Congestion Indications</del>
<del>0x86</del>	<del>Concerned Destination</del>
<del>0x87</del>	<del>Routing Key</del>
<del>0x88</del>	<del>Registration Result</del>
<del>0x89</del>	<del>De-registration Result</del>
<del>0x8a</del>	<del>Local Routing Key Identifier</del>
<del>0x8b</del>	<del>Destination Point Code</del>
<del>0x8c</del>	<del>Service Indicators</del>

~~Sidebottom et al~~ ~~[Page 31]~~

~~Internet Draft~~ ~~SS7 MTP3 User Adaptation Layer~~ ~~Jul 2001~~

<del>0x8d</del>	<del>Subsystem Numbers</del>
<del>0x8e</del>	<del>Originating Point Code List</del>
<del>0x8f</del>	<del>Circuit Range</del>
<del>0x90</del>	<del>Registration Results</del>
<del>0x91</del>	<del>De-Registration Results</del>
<del>0x92 to ffff</del>	<del>...Reserved by the IETF</del>

~~The value of 65535 is reserved for IETF defined extensions. Values other than those defined in specific parameter description are reserved for use by the IETF.~~

~~Parameter Length: 16 bits (unsigned integer)~~

~~The Parameter Length field contains the size of the parameter in bytes, including the Parameter Tag, Parameter Length, and Parameter Value fields. The Parameter Length does not include any padding bytes.~~

~~Parameter Value: variable-length.~~

~~The Parameter Value field contains the actual information to be transferred in the parameter.~~

~~The total length of a parameter (including Tag, Parameter Length and Value fields) MUST be a multiple of 4 bytes. If the length of the parameter is not a multiple of 4 bytes, the sender pads the Parameter at the end (i.e., after the Parameter Value field) with all zero bytes. The length of the padding is NOT included in the parameter length field. A sender SHOULD NOT pad with more than 3 bytes. The receiver MUST ignore the padding bytes.~~

### ~~3.3 Transfer Messages~~

~~The following section describes the Transfer messages and parameter contents.~~

#### ~~3.3.1 Payload Data Message (DATA)~~


~~The DATA message contains the SS7 MTP3 User protocol data, which is an MTP TRANSFER primitive, including the complete MTP3 Routing Label. The DATA message contains the following variable length parameters:~~

<del>Network Appearance</del>	<del>Optional</del>
<del>Protocol Data 1 or 2</del>	<del>Mandatory</del>

~~Sidebottom et al [Page 32]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The following format MUST be used for the Data Message:~~

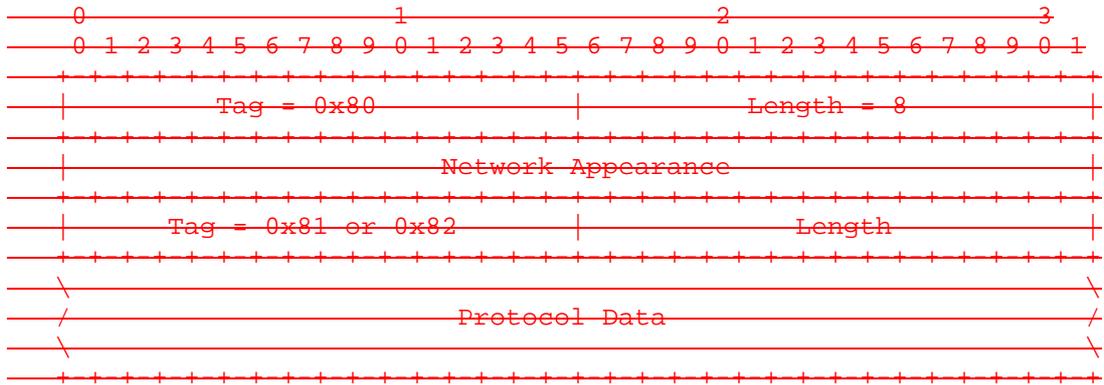

~~Network Appearance: 32 bits (unsigned integer)~~

~~The optional Network Appearance parameter identifies the SS7 network context for the message, for the purposes of logically separating the signalling traffic between the SCP and the ASP over a common SCTP association. An example is where an SG is logically partitioned to appear as an element in four different national SS7 networks.~~

~~In a DATA message, the Network Appearance implicitly defines the SS7 Point Code format used, the SS7 Network Indicator value, and the MTP3 and possibly the MTP3 User protocol type/variant/version used within the SS7 network partition. Where an SG operates in the context of a single SS7 network, or individual SCTP associations are dedicated to each SS7 network context, the Network Appearance parameter is not required. In other cases the parameter MUST be included.~~

~~The Network Appearance parameter value is of local significance only, coordinated between the SCP and ASP. Therefore, in the case where an ASP is connected to more than one SCP, the same SS7 network context may be identified by different Network Appearance values depending over which SCP a message is being transmitted/received.~~

~~Where the optional Network Appearance parameter is present, it must be the first parameter in the message as it defines the format of the Protocol Data field~~

~~One of two possible Protocol Data parameters are included in a DATA message: Protocol Data 1 or Protocol Data 2.~~

~~Sidebottom et al [Page 33]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Protocol Data 1 or 2: variable length~~

~~The Protocol Data 1 parameter contains the original SS7 MTP3 message, including the Service Information Octet and Routing Label.~~

~~The Protocol Data 1 parameter contains the following fields:~~

~~Service Information Octet. Includes:~~

~~Service Indicator,  
Network Indicator,  
and Spare/Priority codes.~~

~~Routing Label. Includes:~~

~~Destination Point Code,  
Originating Point Code,  
And Signalling Link Selection Code (SLS).~~

~~User Protocol Data. Includes:~~

~~MTP3 User protocol elements (e.g., ISUP, SCCP, or TUP parameters).~~

~~The Protocol Data 2 parameter contains all the information in Protocol Data 1 as described above, plus the MTP2 Length Indicator octet. The MTP2 Length Indicator (LI) octet appears before the SIO and Routing Label information. The MTP2 Length Indicator octet is required for some national MTP variants that use the spare bits in the LI to carry additional information of interest to the MTP3 and MTP3 User (e.g., the Japan TTC standard use of LI spare bits to indicate message priority)~~


~~The Payload Data format is as defined in the relevant MTP standards for the SS7 protocol being transported. The format is either implicitly known or identified by the Network Appearance parameter. Note: In the SS7 Recommendations, the format of the messages and fields within the messages are based on bit transmission order. In these recommendations the Least Significant Bit (LSB) of each field is positioned to the right. The received SS7 fields are populated octet by octet as received into the 4 octet word as shown in the two examples below.~~

~~For the ANSI protocol example, the Protocol Data 1 field format is shown below:~~

~~Sidebottom et al [Page 34]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~0 1 2 3~~

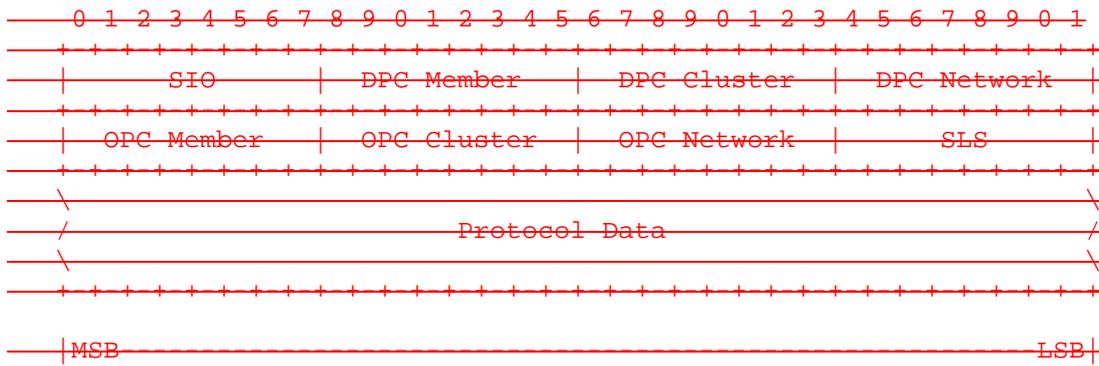

~~Within each octet the Least Significant Bit (LSB) per the SS7 Recommendations is to the right (e.g., bit 7 of SIO is the LSB).~~

~~For the ITU international protocol example (with the 3/8/3 Point Code format), the Protocol Data 1 field is shown below.~~

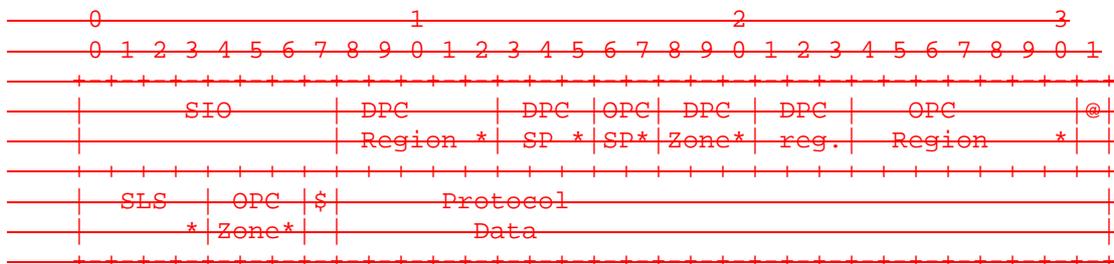

~~\* marks LSB of each field; @ = OPC SP MSB; \$ = OPC region MSB~~

### ~~3.4 SS7 Signalling Network Management (SSNM) Messages~~

#### ~~3.4.1 Destination Unavailable (DUNA)~~

~~The DUNA message is sent from all SGP in an SG to all concerned ASPs to indicate that the SG has determined that one or more SS7 destinations are unreachable. It is also sent by an SGP in response to a message from the ASP to an unreachable SS7 destination. As an implementation option the SG may suppress the sending of subsequent "response" DUNA messages regarding a certain unreachable SS7 destination for a certain period in order to give the remote side time to react. The MTP3 User at the ASP is expected to stop traffic to the affected destination through the SGP initiating the DUNA message as per the defined MTP3 User procedures.~~


~~Sidebottom et al [Page 35]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The DUNA message contains the following parameters:~~

- ~~Network Appearance Optional~~
- ~~Affected Destinations Mandatory~~
- ~~INFO String Optional~~

~~The format for DUNA Message parameters is as follows:~~

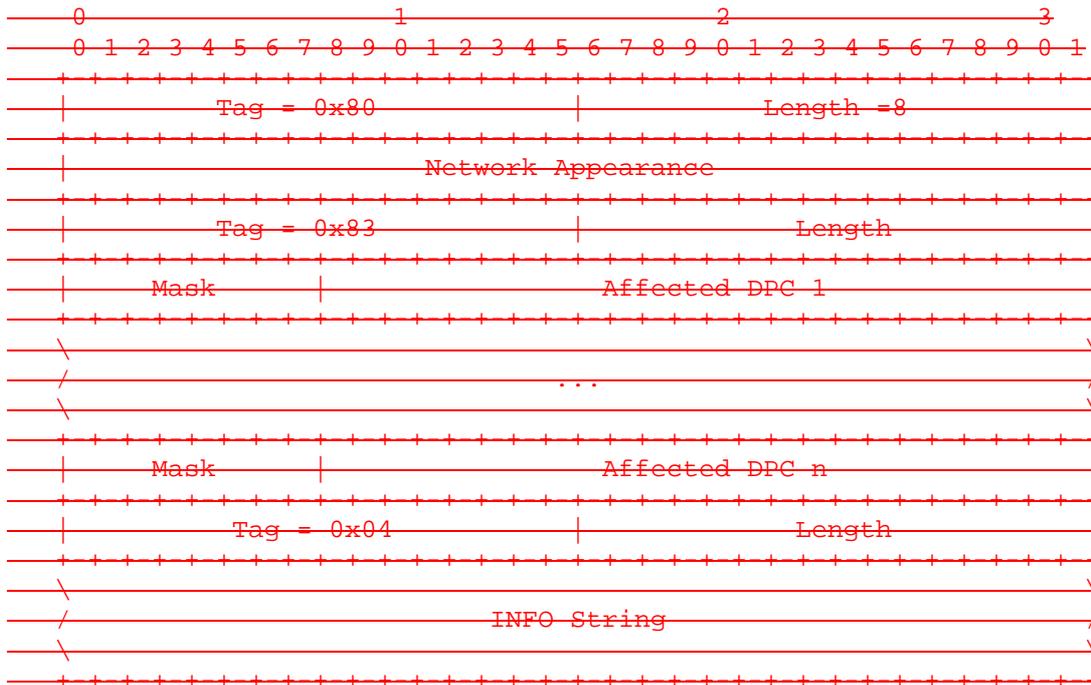

~~Network Appearance: 32 bit unsigned integer~~

~~— See Section 3.3.1~~


~~Affected Destinations: n x 32 bits~~

~~The Affected Destinations parameter contains up to sixteen Affected Destination Point Code fields, each a three octet parameter to allow for 14, 16 and 24 bit binary formatted SS7 Point Codes. Affected Point Codes that are less than 24 bits, are padded on the left to the 24 bit boundary. The encoding is shown below for ANSI and ITU Point Code examples.~~

~~Sidebottom et al [Page 36]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~ANSI 24 bit Point Code:~~

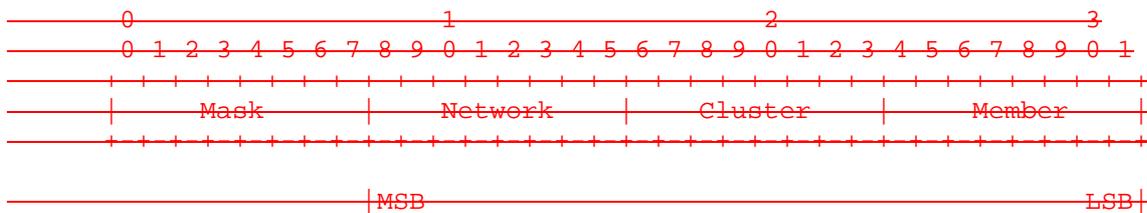

~~ITU 14 bit Point Code:~~



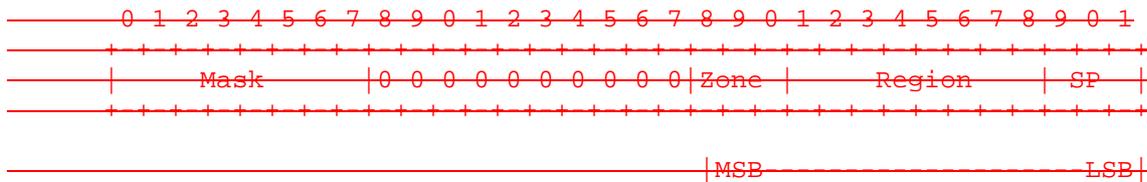

~~It is optional to send an Affected Destinations parameter with more than one Affected DPC but it is mandatory to receive and process it. All the Affected DPCs included must be within the same Network Appearance. Including multiple Affected DPCs may be useful when reception of an MTP3 management message or a linkset event simultaneously affects the availability status of a list of destinations at an SG.~~

~~Mask: 8 bits (unsigned integer)~~

~~The Mask field associated with each Affected DPC in the Affected Destinations parameter, used to identify a contiguous range of Affected Destination Point Codes, independent of the point code format. Identifying a contiguous range of Affected DPCs may be useful when reception of an MTP3 management message or a linkset event simultaneously affects the availability status of a series of destinations at an SG. For example, if all DPCs in an ANSI cluster are determined to be unavailable due to local linkset unavailability, the DUNA could identify potentially 256 Affected DPCs in a single Affected DPC field.~~

~~The Mask parameter represents a bit mask that can be applied to the related Affected DPC field. The bit mask identifies how many bits of the Affected DPC field are significant and which are effectively "wildcarded". For example, a mask of "8" indicates that the least significant eight bits of the DPC is "wildcarded". For an ANSI 24-bit Affected DPC, this is equivalent to signalling that all DPCs in an ANSI Cluster are unavailable. A mask of "3" indicates that the least significant three bits of the DPC is "wildcarded". For a 14-bit ITU Affected DPC, this is equivalent to signaling that an ITU~~

~~Sidebottom et al [Page 37]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Region is unavailable. A mask value equal to the number of bits in the DPC indicates that the entire network appearance is affected & this is used to indicate network isolation to the ASP.~~

~~INFO String: variable length~~

~~The optional INFO String parameter can carry any 8 bit ASCII character string along with the message. Length of the INFO String parameter is from 0 to 255 characters. No procedures are presently identified for its use but the INFO String MAY be used by Operators to identify in text form the location reflected by the Affected DPC for debugging purposes.~~

~~3.4.2 Destination Available (DAVA)~~

~~The DAVA message is sent from the SGP to all concerned ASPs to indicate that the SG has determined that one or more SS7 destinations are now reachable (and not restricted), or in response to a DAUD message if appropriate. The ASP MTP3 User protocol is informed and may now resume traffic to the affected destination. The ASP M3UA layer routes the~~

~~MTP3\_user traffic through the SCP(s) initiating the DAVA message.~~

~~The DAVA message contains the following parameters:~~

- ~~— Network Appearance — Optional~~
- ~~— Affected Destinations — Mandatory~~
- ~~— INFO String — Optional~~

~~The format and description of the Network Appearance, Affected Destinations and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

### ~~3.4.3 Destination State Audit (DAUD)~~

~~The DAUD message MAY be sent from the ASP to the SCP to audit the availability/congestion state of SS7 routes to one or more affected destinations.~~

~~The DAUD message contains the following parameters:~~

- ~~— Network Appearance — Optional~~
- ~~— Affected Destinations — Mandatory~~
- ~~— INFO String — Optional~~

~~The format and description of DAUD Message parameters is the same as for the DUNA message (See Section 3.4.1).~~

### ~~3.4.4 SS7 Network Congestion (SCON)~~

~~The SCON message can be sent from the SCP to all concerned ASPs to indicate congestion in the SS7 network to one or more destinations, or~~

~~Sidebottom et al [Page 38]~~


~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~to an ASP in response to a DATA or DAUD message as appropriate. For some MTP protocol variants (e.g., ANSI MTP) the SCON message may be sent when the SS7 congestion level changes. The SCON message MAY also be sent from the M3UA layer of an ASP to an M3UA peer indicating that the M3UA layer or the ASP is congested.~~

~~The SCON message contains the following parameters:~~

- ~~— Network Appearance — Optional~~
- ~~— Affected Destinations — Mandatory~~
- ~~— Concerned Destination — Optional~~
- ~~— Congestion Indications — Optional~~
- ~~— INFO String — Optional~~

~~The format for SCON Message parameters is as follows:~~

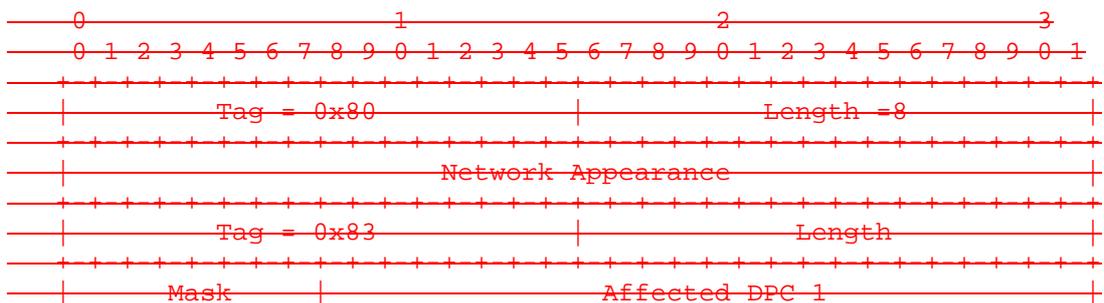

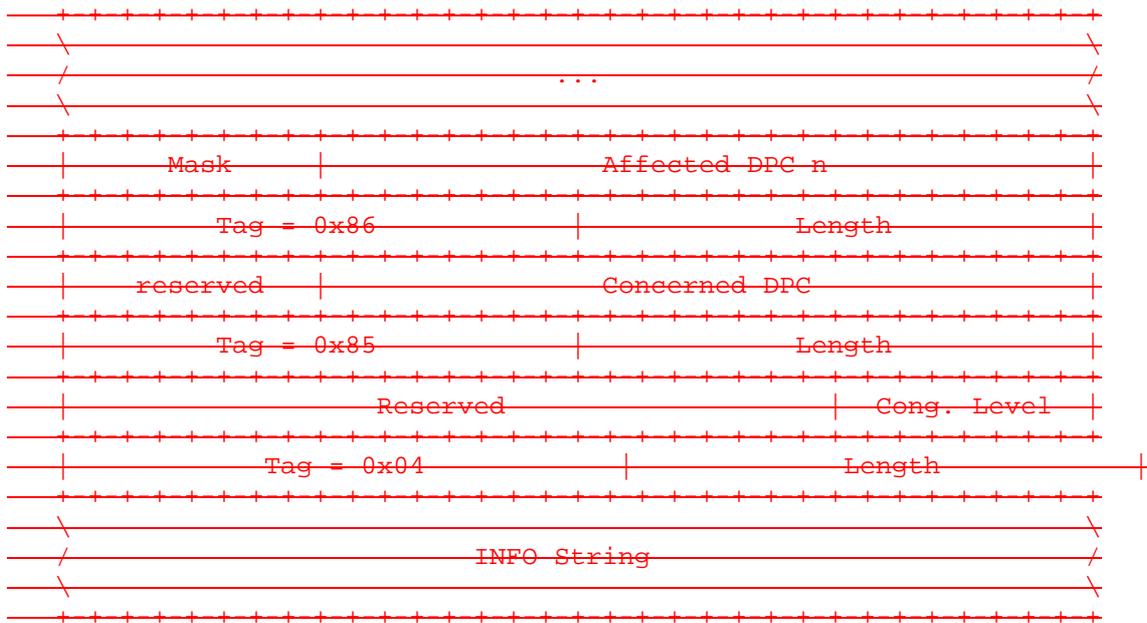

~~The format and description of the Network Appearance, Affected Destinations, and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

~~Sidebottom et al [Page 39]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The Affected Destinations parameter can be used to indicate congestion of multiple destinations or ranges of destinations. However, an SCON message MUST not be delayed in order to "collect" individual congested destinations into a single SCON message as any delay might affect the timing of congestion indications to the M3UA Users. One use for including a range of Congested DPCs is when the SG supports an ANSI cluster route set to the SS7 network that becomes congested due to outgoing link set congestion.~~

~~Concerned Destination: 32 bits~~

~~The optional Concerned Destination parameter is only used if the SCON message is sent from an ASP to the SGP. It contains the point code of the originator of the message that triggered the SCON message. The Concerned Destination parameter contains one Concerned Destination Point Code field, a three octet parameter to allow for 14, 16 and 24 bit binary formatted SS7 Point Codes. A Concerned Point Code that is less than 24 bits is padded on the left to the 24 bit boundary. Any resulting Transfer Controlled (TFC) message from the SG is sent to the Concerned Point Code using the single Affected DPC contained in the SCON message to populate the (affected) Destination field of the TFC message~~

~~Congested Indications: 32 bits~~

~~The optional Congestion Indications parameter contains a Congestion Level field. This optional parameter is used to communicate congestion levels in national MTP networks with multiple congestion thresholds, such as in ANSI MTP3. For MTP congestion methods without multiple congestion levels (e.g., the ITU international method) the parameter is not included.~~

~~Congestion Level field: 8 bits (unsigned integer)~~

~~The Congestion Level field, associated with all of the Affected DPC(s) in the Affected Destinations parameter, contains one of the following values:~~

- ~~0 No Congestion or Undefined~~
- ~~1 Congestion Level 1~~
- ~~2 Congestion Level 2~~
- ~~3 Congestion Level 3~~

~~The congestion levels are defined in the congestion method in the appropriate national MTP recommendations [14,15].~~

~~3.4.5 Destination User Part Unavailable (DUPU)~~

~~The DUPU message is used by an SGP to inform an ASP that a remote peer MTP3 User Part (e.g., ISUP or SCCP) at an SS7 node is unavailable.~~


~~Sidebottom et al [Page 40]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The DUPU message contains the following parameters:~~

- ~~Network Appearance Optional~~
- ~~Affected Destinations Mandatory~~
- ~~User/Cause Mandatory~~
- ~~INFO String Optional~~

~~The format for DUPU message parameters is as follows:~~

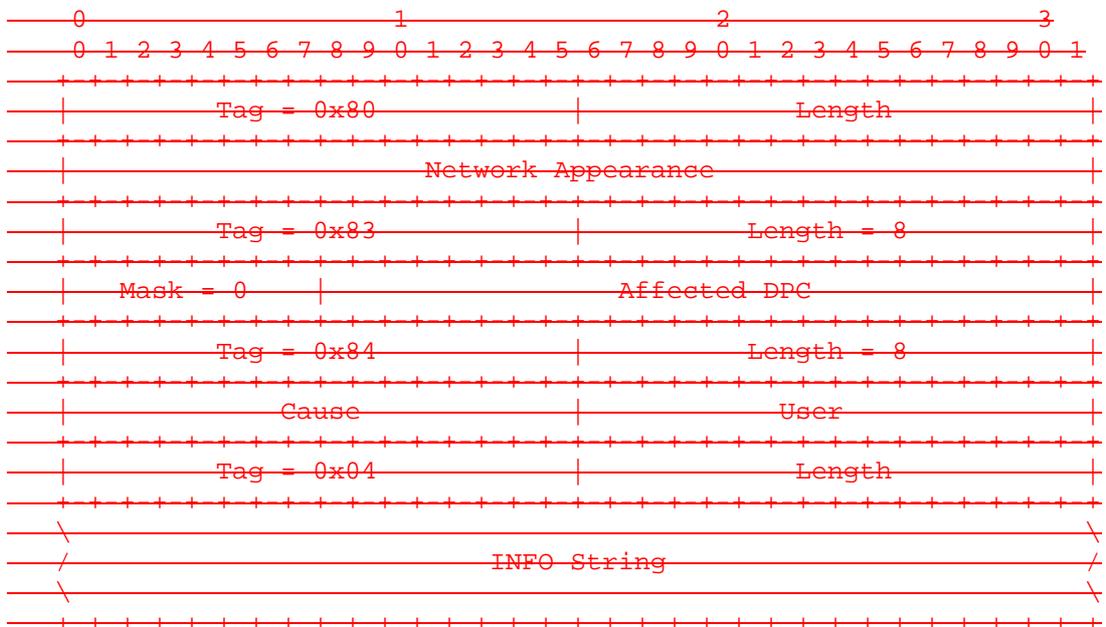

~~User/Cause: 32 bits~~

~~The Unavailability Cause and MTP3 User Identity fields, associated with the Affected DPC in the Affected Destinations parameter, are encoded as follows:~~

~~Unavailability Cause field: 16 bits (unsigned integer)~~

~~The Unavailability Cause parameter provides the reason for the unavailability of the MTP3 User. The valid values for the Unavailability Cause parameter are shown in the following table. The values agree with those provided in the SS7 MTP3 User Part Unavailable message. Depending on the MTP3 protocol used in the Network Appearance, additional values may be used—the specification of the relevant MTP3 protocol variant/version recommendation is definitive.~~

<del>0</del>	<del>Unknown</del>
<del>1</del>	<del>Unequipped Remote User</del>
<del>2</del>	<del>Inaccessible Remote User</del>

~~Sidebottom et al [Page 41]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~MTP3 User Identity field: 16 bits (unsigned integer)~~

~~The MTP3 User Identity describes the specific MTP3 User that is unavailable (e.g., ISUP, SCCP, ...). Some of the valid values for the MTP3 User Identity are shown below. The values align with those provided in the SS7 MTP3 User Part Unavailable message and Service Indicator. Depending on the MTP3 protocol variant/version used in the network appearance, additional values may be used. The relevant MTP3 protocol variant/version recommendation is definitive.~~

<del>0 to 2</del>	<del>Reserved</del>
<del>3</del>	<del>SCCP</del>
<del>4</del>	<del>TUP</del>
<del>5</del>	<del>ISUP</del>
<del>6 to 8</del>	<del>Reserved</del>
<del>9</del>	<del>Broadband ISUP</del>
<del>10</del>	<del>Satellite ISUP</del>
<del>11</del>	<del>Reserved</del>
<del>12</del>	<del>AAL type 2 Signalling</del>
<del>13</del>	<del>Bearer Independent Call Control (BICC)</del>
<del>14</del>	<del>Gateway Control Protocol</del>
<del>15</del>	<del>Reserved</del>

~~The format and description of the Affected Destinations parameter is the same as for the DUNA message (See Section 3.4.1.) except that the Mask field is not used and only a single Affected DPC is included. Ranges and lists of Affected DPCs cannot be signalled in a DUPU message, but this is consistent with UPU operation in the SS7 network. The Affected Destinations parameter in an MTP3 User Part Unavailable message (UPU) received by an SGP from the SS7 network contains only one destination.~~

~~The format and description of the Network Appearance and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

### ~~3.4.6 Destination Restricted (DRST)~~

~~The DRST message is optionally sent from the SGP to all concerned ASPs to indicate that the SG has determined that one or more SS7 destinations are now restricted from the point of view of the SGP, or in response to a DAUD message if appropriate. The M3UA layer at the ASP is expected to send traffic to the affected destination via an~~

~~alternate SCP of equal priority, but only if such an alternate route exists and is available. If the affected destination is currently considered unavailable by the ASP, The MTP3 User should be informed that traffic to the affected destination can be resumed. In this case, the M3UA layer should route the traffic through the SCP initiating the DRST message.~~

~~Sidebottom et al [Page 42]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~This message is optional for the SCP to send and it is optional for the ASP to act on any information received in the message. It is for use in the "STP" case described in Section 1.4.1.~~

~~The DRST message contains the following parameters:~~

- ~~Network Appearance Optional~~
- ~~Affected Destinations Mandatory~~
- ~~INFO String Optional~~

~~The format and description of the Network Appearance, Affected Destinations and INFO String parameters is the same as for the DUNA message (See Section 3.4.1).~~

### ~~3.5 ASP State Maintenance (ASPSM) Messages~~


#### ~~3.5.1 ASP Up~~

~~The ASP Up message is used to indicate to a remote M3UA peer that the adaptation layer is ready to receive any SSNM or ASPSM/ASPTM messages for all Routing Keys that the ASP is configured to serve.~~

~~The ASP Up message contains the following parameters:~~

- ~~INFO String Optional~~

~~The format for ASP Up message parameters is as follows:~~

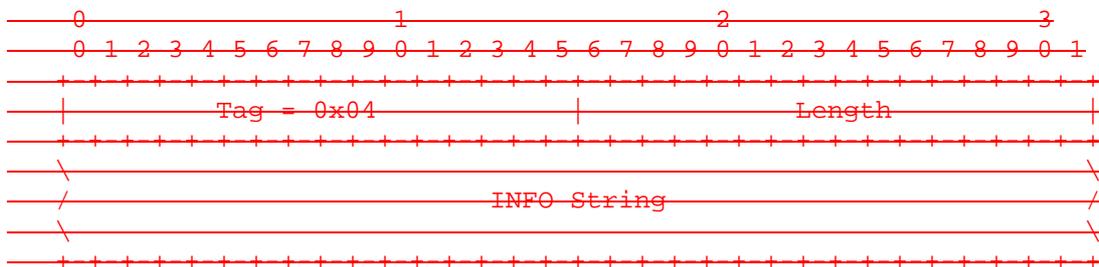

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

#### ~~3.5.2 ASP Up Acknowledgement (ASP Up Ack)~~

~~The ASP UP Ack message is used to acknowledge an ASP Up message received from a remote M3UA peer.~~


~~Sidebottom et al [Page 43]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The ASP Up Ack message contains the following parameters:~~

~~INFO String (optional)~~

~~The format for ASP Up Ack message parameters is as follows:~~

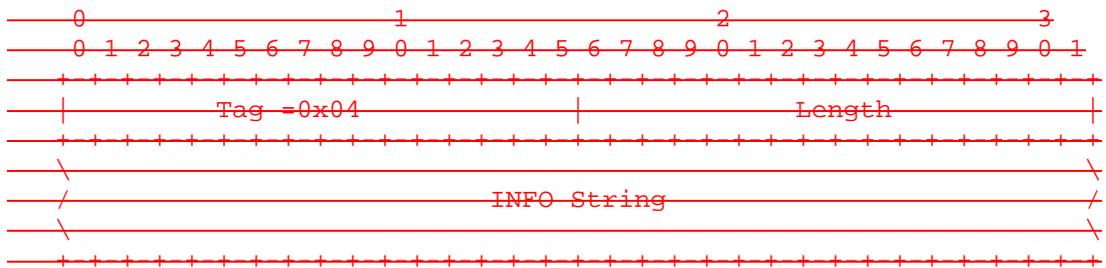

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1). The INFO String in an ASP Up Ack message is independent from the INFO String in the ASP Up message (i.e., it does not have to echo back the INFO String received).~~


~~3.5.3 ASP Down~~

~~The ASP Down message is used to indicate to a remote M3UA peer that the adaptation layer is NOT ready to receive DATA, SSNM or ASPTM messages.~~

~~The ASP Down message contains the following parameters:~~

~~Reason Mandatory  
INFO String Optional~~

~~The format for the ASP Down message parameters is as follows:~~

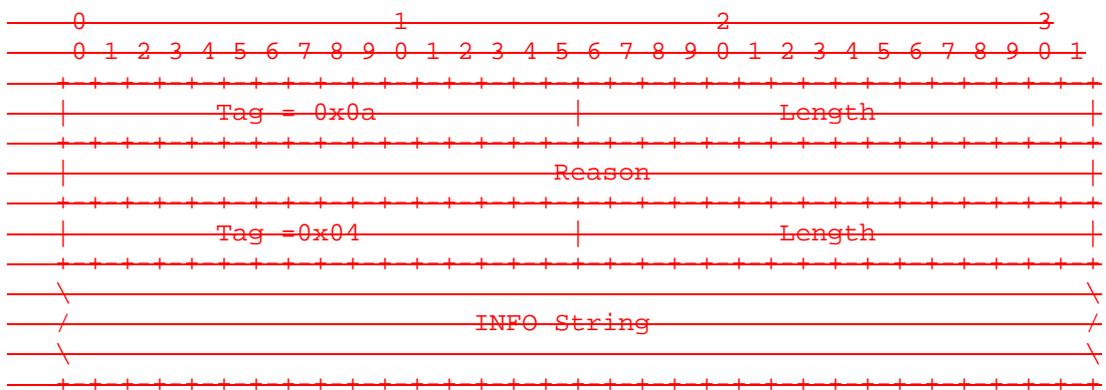

~~Sidebottom et al [Page 44]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

~~Reason: 32 bit (unsigned integer)~~

~~The Reason parameter indicates the reason that the remote M3UA adaptation layer is unavailable. The valid values for Reason are shown in the following table.~~

<del>0</del>	<del>Unspecified</del>
<del>1</del>	<del>User Unavailable</del>
<del>2</del>	<del>Management Blocking</del>


### ~~3.5.4 ASP Down Acknowledgement (ASP Down Ack)~~

~~The ASP Down Ack message is used to acknowledge an ASP Down message received from a remote M3UA peer.~~

~~The ASP Down Ack message contains the following parameters:~~

<del>Reason</del>	<del>Mandatory</del>
<del>INFO String</del>	<del>Optional</del>

~~The format for the ASP Down Ack message parameters is as follows:~~

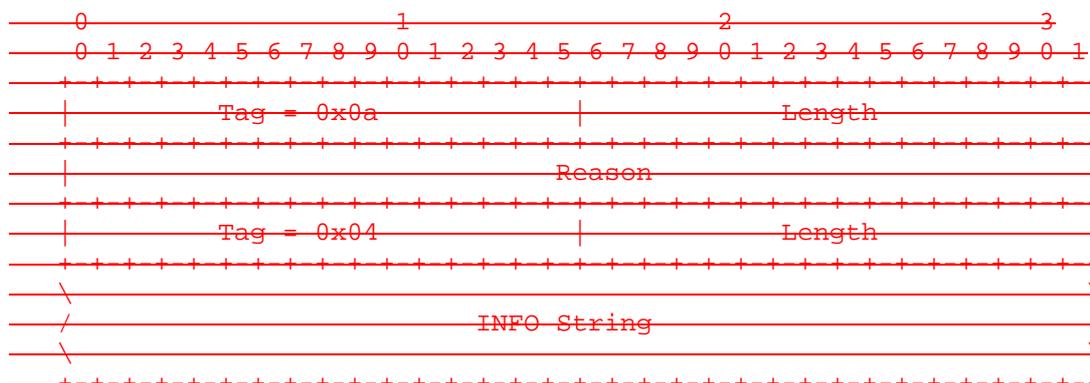

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

~~The INFO String in an ASP Down Ack message is independent from the INFO String in the ASP Down message (i.e., it does not have to echo back the INFO String received).~~

~~The format of the Reason parameter is the same as for the ASP Down message. (See Section 3.5.3).~~

### ~~3.5.5 Heartbeat (BEAT)~~


~~The BEAT message is optionally used to ensure that the M3UA peers are still available to each other. It is recommended for use when the~~

~~M3UA runs over a transport layer other than the SCTP, which has its own heartbeat.~~

~~The BEAT message contains the following parameters:~~

~~—— Heatbeat Data —— Optional~~

~~The format for the BEAT message is as follows:~~

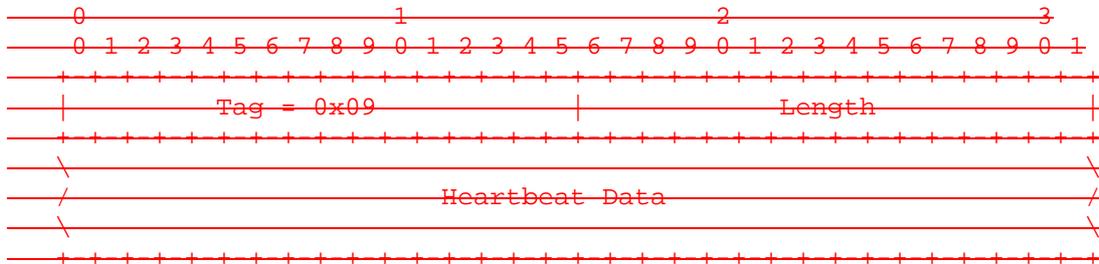

~~The Heartbeat Data parameter contents are defined by the sending node. The Heartbeat Data could include, for example, a Heartbeat Sequence Number and/or Timestamp. The receiver of a BEAT message does not process this field as it is only of significance to the sender. The receiver MUST respond with a BEAT Ack message.~~

~~3.5.6 Heartbeat Acknowledgement (BEAT Ack)~~

~~The BEAT Ack message is sent in response to a received BEAT message. It includes all the parameters of the received BEAT message, without any change.~~

~~3.6 Routing Key Management (RKM) Messages~~

~~3.6.1 Registration Request (REG REQ)~~

~~The REG REQ message is sent by an ASP to indicate to a remote M3UA peer that it wishes to register one or more given Routing Keys with the remote peer. Typically, an ASP would send this message to an SGP, and expects to receive a REG RSP message in return with an associated Routing Context value.~~


~~The REG REQ message contains the following parameters:~~

~~—— Routing Key —— Mandatory~~

~~Sidebottom et al [Page 46]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format for the REG REQ message is as follows:~~

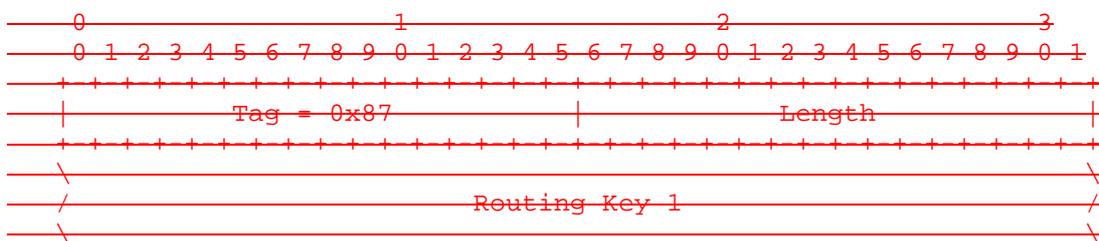



~~Routing Key: variable length~~


~~The Routing Key parameter is mandatory. The sender of this message expects that the receiver of this message will create a Routing Key entry and assign a unique Routing Context value to it, if the Routing Key entry does not already exist.~~

~~The Routing Key parameter may be present multiple times in the same message. This is used to allow the registration of multiple Routing Keys in a single message.~~

~~Sidebottom et al [Page 47]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format of the Routing Key parameter is as follows.~~

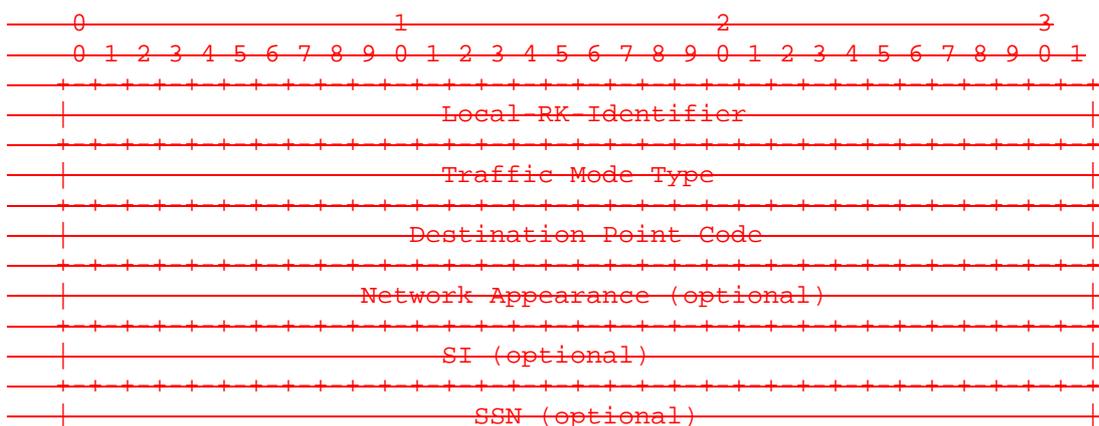




~~Local RK Identifier: 32-bit integer~~

~~The mandatory Local RK Identifier field is used to uniquely identify the registration request. The Identifier value is assigned by the ASP, and is used to correlate the response in an REG RSP message with the original registration request. The Identifier value must remain unique until the REG RSP message is received.~~

~~The format of the Local RK Identifier field is as follows:~~

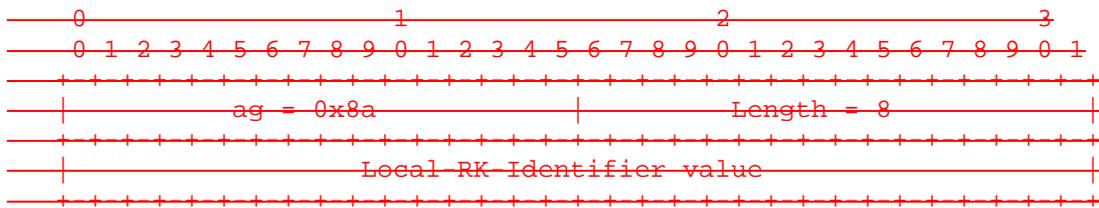

~~Traffic Mode Type: 32-bit (unsigned integer)~~

~~The Traffic Mode Type parameter is mandatory and identifies the traffic mode of operation of the ASP(s) within an Application Server. The valid values for Traffic Mode Type are shown in the following table:~~

- ~~1 Over-ride~~
- ~~2 Load-share~~


~~Sidebottom et al [Page 48]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If the receiver of the REG REQ creates a new Routing Key entry, then the Traffic Mode Type sets the traffic mode for the new Application Server. If the receiver of the REG REQ determines that a matching Routing Key already exists, the Traffic Mode Type MUST match the existing traffic mode for the AS.~~


~~Destination Point Code:~~

~~The Destination Point Code parameter is mandatory, and identifies the Destination Point Code of incoming SS7 traffic for which the ASP is registering. The format is the same as described for the Affected Destination parameter in the DUNA message (See Section 3.4.1). Its format is:~~

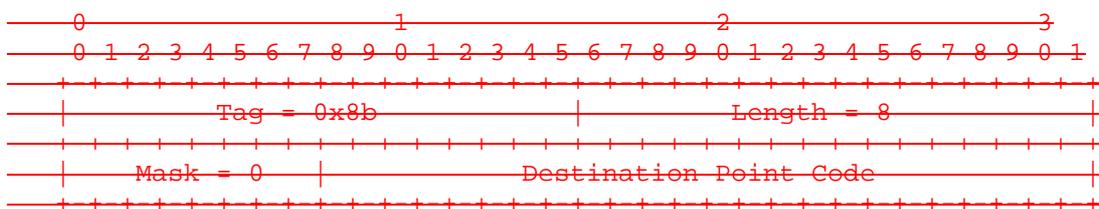

~~Network Appearance:~~

~~The optional Network Appearance parameter field identifies the SS7 network context for the Routing Key, and has the same format as in the DATA message (See Section 3.3.1). The absence of the Network Appearance parameter in the Routing Key indicates the use of any Network Appearance value, its format is:~~

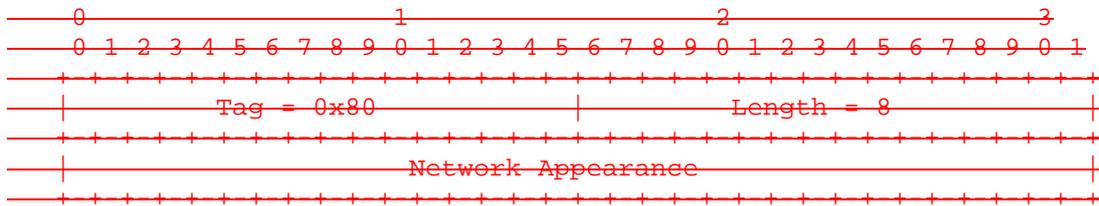


~~Service Indicators (SI): n X 8-bit integers~~

~~The optional SI field contains one or more Service Indicators from the values as described in the MTP3 User Identity field of the DUPU message. The absence of the SI parameter in the Routing Key indicates the use of any SI value, excluding of course MTP management. Where an SI parameter does not contain a multiple of four SIs, the parameter is padded out to 32 byte alignment. An SI value of zero is not valid in M3UA. The SI format is:~~


~~Sidebottom et al [Page 49]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

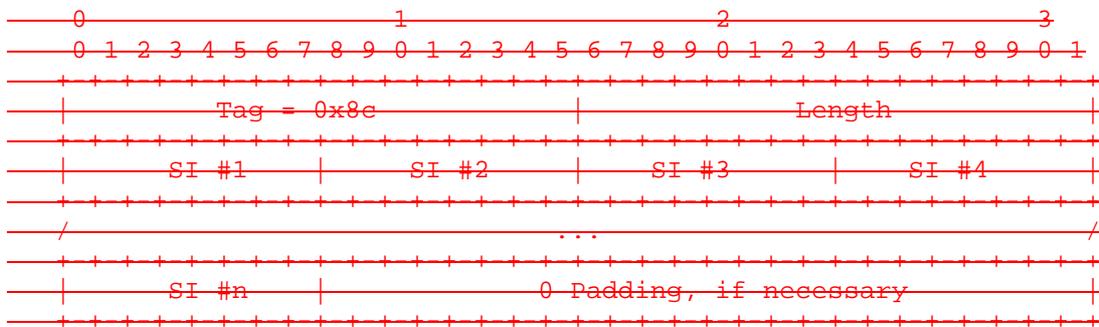

~~Subsystem Numbers (SSN): n X 8-bit integers~~


~~The optional SSN field contains one or more SCCP subsystem numbers, and is used in conjunction with an SI values of 3 (i.e., SCCP) only. The absence of the SSN parameter in the Routing Key indicates the use of any SSN value, in the case of SCCP traffic. Where an SSN parameter does not contain a multiple of four SSNs, the parameter is padded out to 32 byte alignment. The subsystem number values associated are defined by the local network operator, and typically follow ITU-T Recommendation Q.713 [5]. An SSN value of zero is not valid in M3UA. The format of this field is as follows:~~

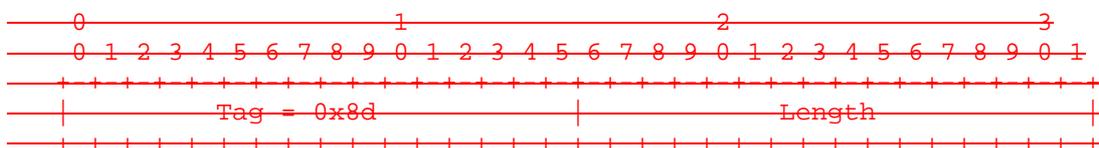



~~OPC List:~~


~~The Originating Point Code List parameter contains one or more SS7 OPC entries, and its format is the same as the Destination Point Code parameter. The absence of the OPC List parameter in the Routing Key indicates the use of any OPC value,~~

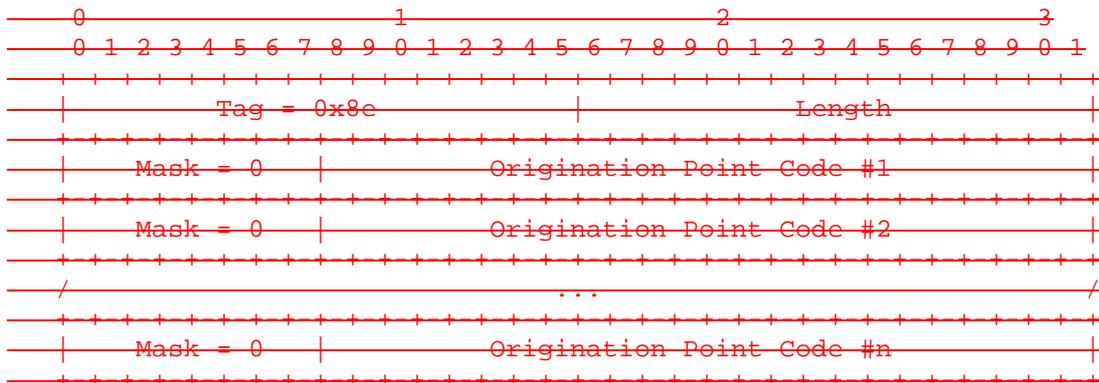


~~Circuit Range:~~

~~An ISUP controlled circuit is uniquely identified by the SS7 OPC, DPC and CIC value. For the purposes of identifying Circuit Ranges in an M3UA Routing Key, the optional Circuit Range parameter includes one or more circuit ranges, each identified by an OPC and Upper/Lower CIC value. The DPC is implicit as it is mandatory and already included in the DPC parameter of the Routing Key. The absence of the Circuit Range parameter in the Routing Key indicates the use of any Circuit Range values, in the case of ISUP/TUP traffic. The Origination Point Code is encoded the same as the Destination Point Code parameter, while the CIC values are 16 bit integers.~~

~~The Circuit Range format is as follows:~~

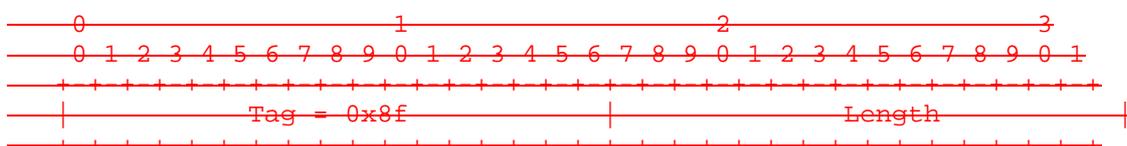

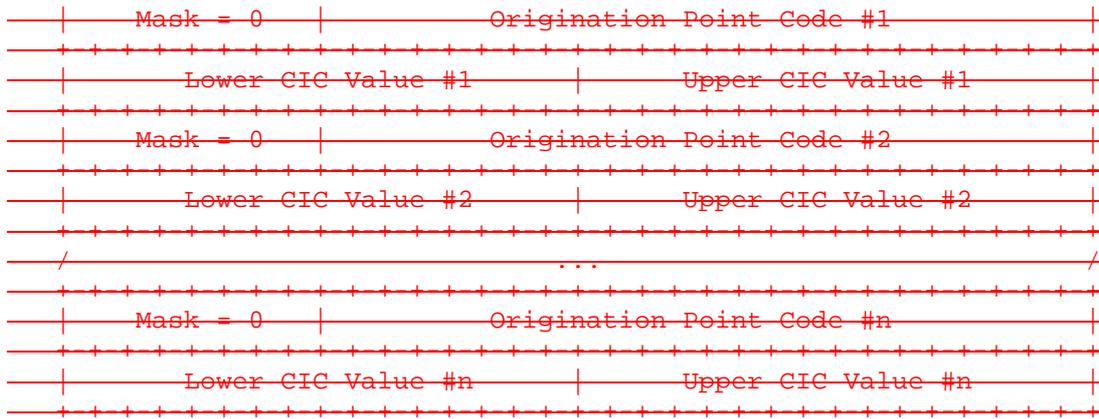

~~Sidebottom et al [Page 51]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~3.6.2 Registration Response (REG RSP)~~

~~The REG RSP message is used as a response to the REG REQ message from a remote M3UA peer. It contains indications of success/failure for registration requests and returns a unique Routing Context value for successful registration requests, to be used in subsequent M3UA Traffic Management protocol.~~

~~The REG RSP message contains the following parameters:~~


~~Registration Results Mandatory~~

~~The format for the REG RSP message is as follows:~~

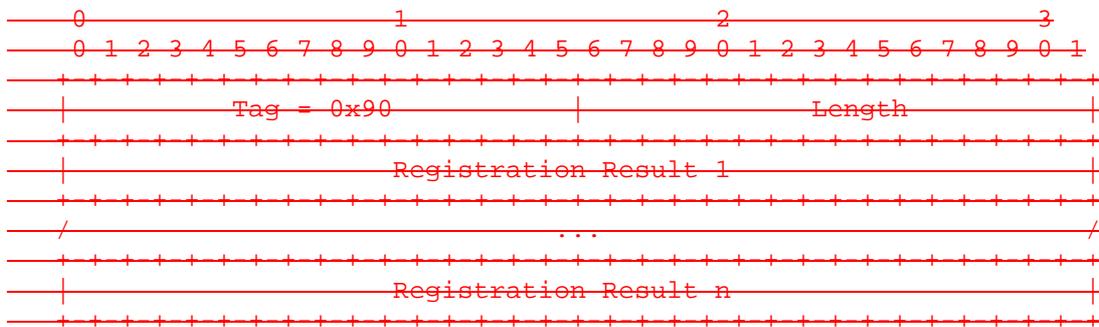

~~Registration Results:~~

~~The Registration Results parameter contains one or more results, each containing the registration status for a single Routing Key in an REG REQ message. The number of results in a single REG RSP message MAY match the number of Routing Key parameters found in the corresponding REG REQ message. The format of each result is as follows:~~

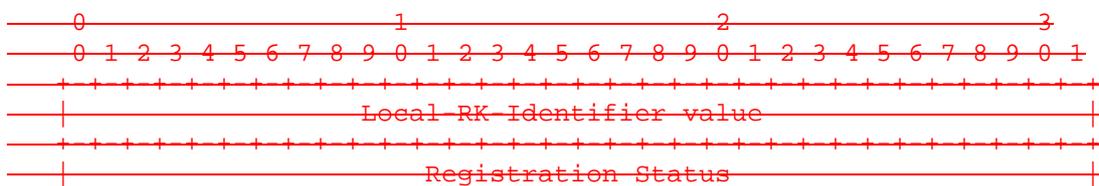



~~Local RK Identifier: 32 bit integer~~

~~The Local RK Identifier contains the same value as found in the matching Routing Key parameter found in the REG REQ message (See Section 3.5.5.1).~~

~~Sidebottom et al [Page 52]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Registration Status: 32 bit integer~~

~~The Registration Result Status field indicates the success or the reason for failure of a registration request.~~

~~Its values may be:~~

- ~~0 Successfully Registered~~
- ~~1 Error Unknown~~
- ~~2 Error Invalid DPC~~
- ~~3 Error Invalid Network Appearance~~
- ~~4 Error Invalid Routing Key~~
- ~~5 Error Permission Denied~~
- ~~6 Error Cannot Support Unique Routing~~
- ~~7 Error Routing Key not Currently Provisioned~~
- ~~8 Error Insufficient Resources~~
- ~~9 Error Unsupported RK parameter Field~~
- ~~10 Error - Unsupported/Invalid Traffic Handling Mode~~

~~Routing Context: 32 bit integer~~

~~The Routing Context field contains the Routing Context value for the associated Routing Key if the registration was successful. It is set to "0" if the registration was not successful.~~


~~3.6.3 De-Registration Request (DEREG REQ)~~

~~The DEREG REQ message is sent by an ASP to indicate to a remote M3UA peer that it wishes to de-register a given Routing Key. Typically, an ASP would send this message to an SCP, and expects to receive a DEREG RSP message in return with the associated Routing Context value.~~

~~The DEREG REQ message contains the following parameters:~~

- ~~Routing Context Mandatory~~

~~The format for the DEREG REQ message is as follows:~~

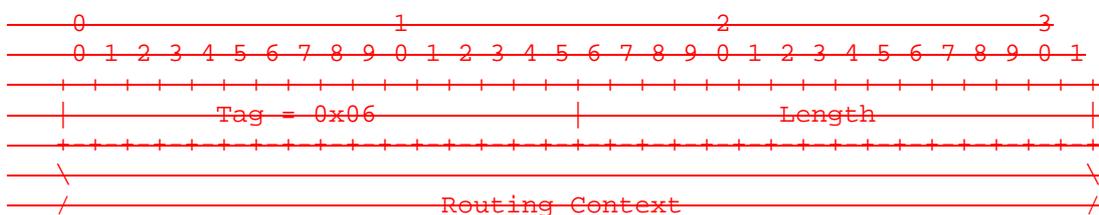

~~Sidebottom et al [Page 53]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Routing Context: n X 32-bit integers~~

~~The Routing Context parameter contains (a list of) integers indexing the Application Server traffic that the sending ASP is currently registered to receive from the SGP but now wishes to deregister.~~


~~3.6.4 De-Registration Response (DEREG-RSP)~~

~~The DEREG-RSP message is used as a response to the DEREG-REQ message from a remote M3UA peer.~~

~~The DEREG-RSP message contains the following parameters:~~


~~De-registration Results Mandatory~~

~~The format for the DEREG-RSP message is as follows:~~

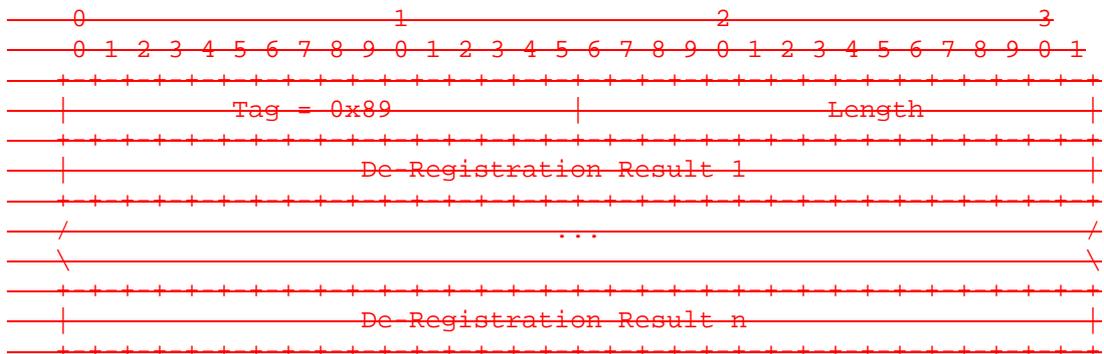

~~De-Registration Results:~~

~~The De-Registration Results parameter contains one or more results, each containing the de-registration status for a single Routing Context in a DEREG-REQ message. The number of results in a single DEREG-RSP message MAY match the number of Routing Contexts found in the corresponding DEREG-REQ message. The format of each result is as follows:~~

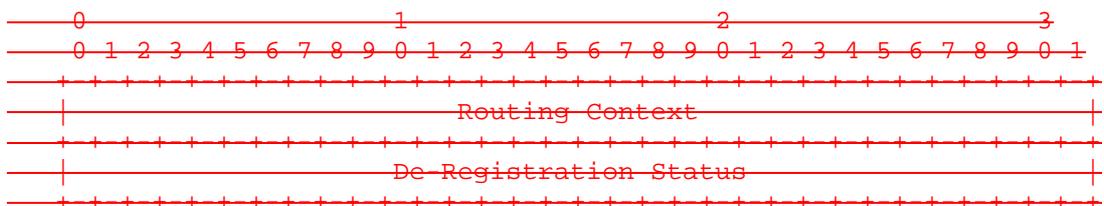

~~Sidebottom et al [Page 54]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Routing Context: 32 bit integer~~

~~The Routing Context field contains the Routing Context value of the matching Routing Key to deregister, as found in the DEREG REQ message.~~

~~De-Registration Status: 32 bit integer~~

~~The De-Registration Result Status field indicates the success or the reason for failure of the de-registration.~~

~~Its values may be:~~

<del>0</del>	<del>Successfully De-registered</del>
<del>1</del>	<del>Error - Unknown</del>
<del>2</del>	<del>Error - Invalid Routing Context</del>
<del>3</del>	<del>Error - Permission Denied</del>
<del>4</del>	<del>Error - Not Registered</del>
<del>5</del>	<del>Error - ASP Currently Active for Routing Context</del>

### ~~3.7 ASP Traffic Maintenance (ASPTM) Messages~~

#### ~~3.7.1 ASP Active~~

~~The ASP Active message is sent by an ASP to indicate to a remote M3UA peer that it is ready to process signalling traffic for a particular Application Server. The ASP Active message affects only the ASP state for the Routing Keys identified by the Routing Contexts, if present.~~


~~The ASP Active message contains the following parameters:~~

<del>Traffic Mode Type</del>	<del>Mandatory</del>
<del>Routing Context</del>	<del>Optional</del>
<del>INFO String</del>	<del>Optional</del>

~~Sidebottom et al [Page 55]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format for the ASP Active message is as follows:~~

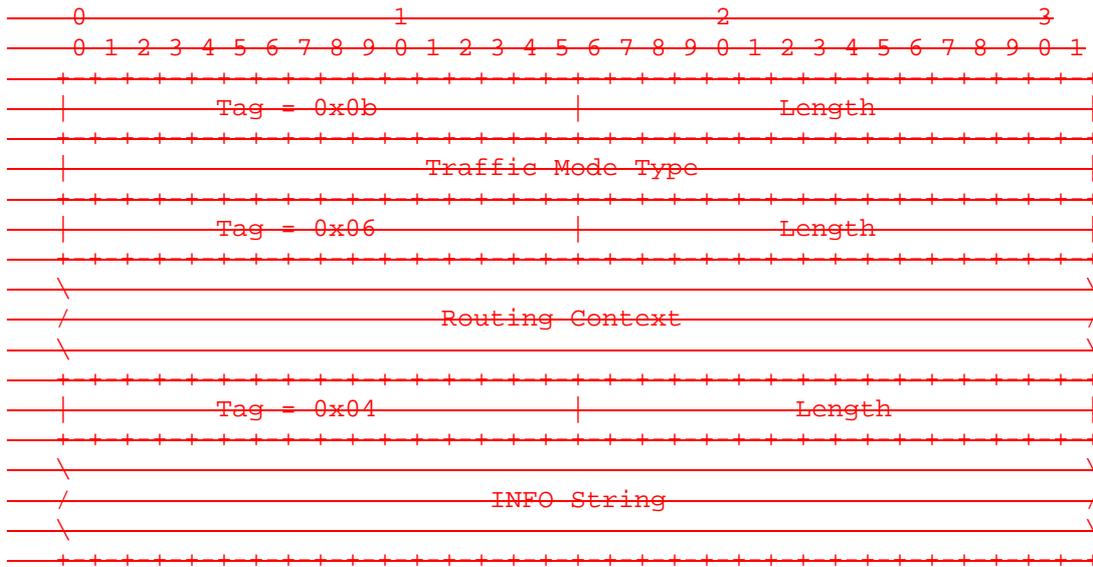

~~Traffic Mode Type: 32-bit (unsigned integer)~~

~~The Traffic Mode Type parameter identifies the traffic mode of operation of the ASP within an AS. The valid values for Traffic Mode Type are shown in the following table:~~

<del>1</del>	<del>Over-ride</del>
<del>2</del>	<del>Load share</del>
<del>3</del>	<del>Over-ride (Standby)</del>
<del>4</del>	<del>Load share (Standby)</del>

~~Within a particular Routing Context, Over-ride and Load share, either active or standby, MUST NOT be mixed. The Over-ride value indicates that the ASP is operating in Over-ride mode, and the ASP takes over all traffic in an Application Server (i.e., primary/backup operation), over-riding any currently active ASPs in the AS. In Load share mode, the ASP will share in the traffic distribution with any other currently active ASPs. The Standby versions of the Over-ride and Load share Types indicate that the ASP is declaring itself ready to accept traffic but leaves it up to the sender as to when the traffic is started. Over-ride (Standby) indicates that the traffic sender continues to use the currently active ASP until it can no longer send/receive traffic (i.e., the currently active ASP transitions to state ASP-DOWN or ASP-ACTIVE). At this point the sender MUST move the standby ASP to the ASP-ACTIVE state and commence traffic. Load share (Standby) is similar the sender continues to load share to the current ASPs until it is determined~~

~~Sidebottom et al [Page 56]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~that there is insufficient resources in the Load share group. When there are insufficient ASPs, the sender MUST move the ASP to state ASP-ACTIVE.~~

~~Routing Context: n X 32-bit integers~~

~~The optional Routing Context parameter contains (a list of) integers indexing the Application Server traffic that the sending ASP is~~

~~— configured/registered to receive.~~

~~— There is one to one relationship between an index entry and an SGP Routing Key or AS Name. Because an AS can only appear in one Network Appearance, the Network Appearance parameter is not required in the ASP Active message.~~

~~— An Application Server Process may be configured to process traffic for more than one logical Application Server. From the perspective of an ASP, a Routing Context defines a range of signalling traffic that the ASP is currently configured to receive from the SGP. For example, an ASP could be configured to support call processing for multiple ranges of PSTN trunks and therefore receive related signalling traffic, identified by separate SS7 DPC/OPC/CIC ranges.~~

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).~~

~~3.7.2 ASP Active Acknowledgement (ASP Active Ack)~~

~~The ASP Active Ack message is used to acknowledge an ASP Active message received from a remote M3UA peer. In the case where an ASP Active (Over-ride (standby)) or ASP Active (Load share (standby)) message is received, a second ASP Active Ack message is sent when the ASP is moved from the ASP STANDBY to the ASP ACTIVE state.~~


~~The ASP Active Ack message contains the following parameters:~~


- ~~— Traffic Mode Type — Mandatory~~
- ~~— Routing Context — Optional~~
- ~~— INFO String — Optional~~

~~Sidebottom et al ————— [Page 57]~~

~~Internet Draft — SS7 MTP3 User Adaptation Layer — Jul 2001~~

~~The format for the ASP Active Ack message is as follows:~~

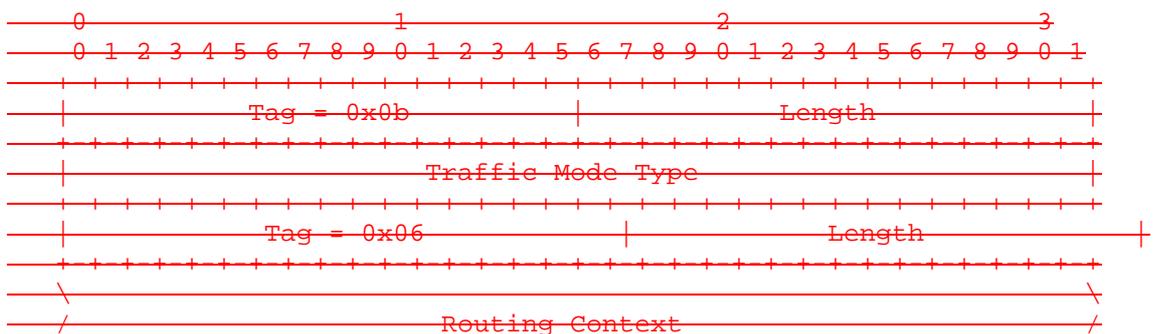

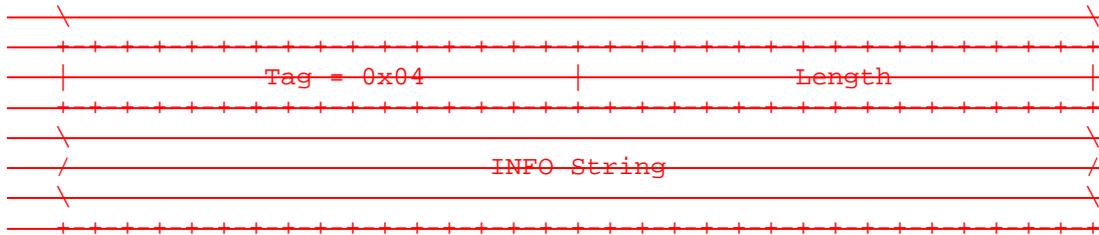

The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1).

The INFO String in an ASP Active Ack message is independent from the INFO String in the ASP Active message (i.e., it does not have to echo back the INFO String received).

The format of the Traffic Mode Type and Routing Context parameters is the same as for the ASP Active message. (See Section 3.5.5).

### 3.7.3 ASP Inactive

The ASP Inactive message is sent by an ASP to indicate to a remote M3UA peer that it is no longer an active ASP to be used from within a list of ASPs. The ASP Inactive message affects only the ASP state in the Routing Keys identified by the Routing Contexts, if present.


The ASP Inactive message contains the following parameters:

- Routing Context Optional
- INFO String Optional

Sidebottom et al [Page 58]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

The format for the ASP Inactive message parameters is as follows:

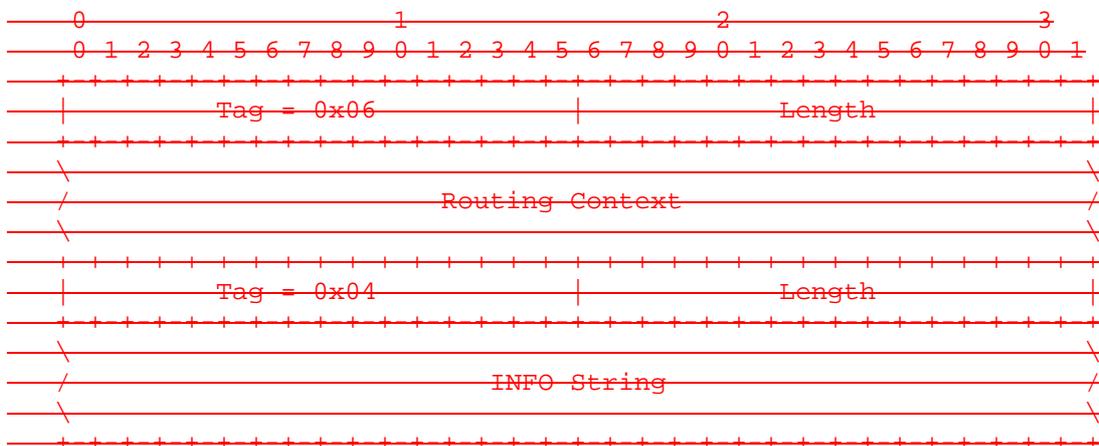

The format and description of the optional Routing Context and INFO

~~String parameters is the same as for the ASP Active message (See Section 3.5.5.)~~


~~3.7.4 ASP Inactive Acknowledgement (ASP Inactive Ack)~~

~~The ASP Inactive Ack message is used to acknowledge an ASP Inactive message received from a remote M3UA peer.~~

~~The ASP Inactive Ack message contains the following parameters:~~

- ~~Routing Context Optional~~
- ~~INFO String Optional~~

~~The format for the ASP Inactive Ack message is as follows:~~

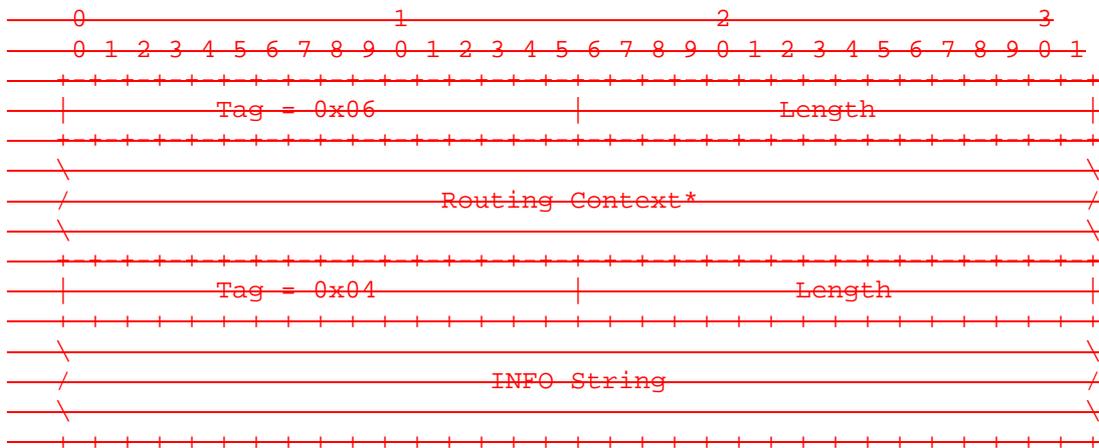

~~Sidebottom et al [Page 59]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format and description of the optional INFO String parameter is the same as for the DUNA message (See Section 3.4.1.)~~

~~The INFO String in an ASP Inactive Ack message is independent from the INFO String in the ASP Inactive message (i.e., it does not have to echo back the INFO String received).~~

~~The format of the Routing Context parameter is the same as for the ASP Inactive message. (See Section 3.5.7).~~

~~3.8 Management (MGMT) Messages~~


~~3.8.1 Error~~

~~The Error message is used to notify a peer of an error event associated with an incoming message. For example, the message type might be unexpected given the current state, or a parameter value might be invalid.~~

~~The Error message contains the following parameters:~~

- ~~Error Code Mandatory~~
- ~~Diagnostic Information Optional~~

The format for the Error message is as follows:

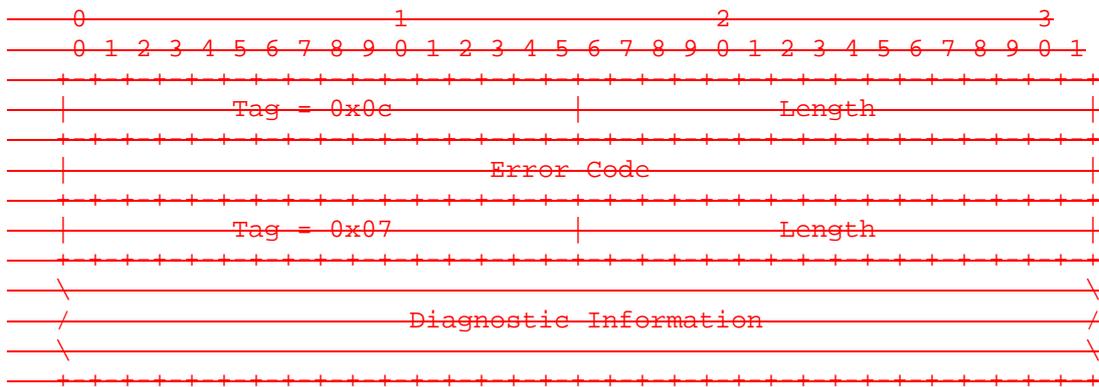

Error Code: 32 bits (unsigned integer)

The Error Code parameter indicates the reason for the Error Message. The Error parameter value can be one of the following values:

- 1 Invalid Version
- 2 Invalid Network Appearance
- 3 Unsupported Message Class

Sidebottom et al [Page 60]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

- 4 Unsupported Message Type
- 5 Unsupported/Invalid Traffic Handling Mode
- 6 Unexpected Message
- 7 Protocol Error
- 8 Invalid Routing Context
- 9 Invalid Stream Identifier
- 10 Invalid Parameter Value
- 11 Refused Management Blocking
- 12 Unknown Routing Context

The "Invalid Version" error is sent if a message was received with an invalid or unsupported version. The Error message contains the supported version in the Common header. The Error message could optionally provide the supported version in the Diagnostic Information area.

The "Invalid Network Appearance" error is sent by a SGP if an ASP sends a message with an invalid (unconfigured) Network Appearance value.

The "Unsupported Message Class" error is sent if a message with an unexpected or unsupported Message Class is received.

The "Unsupported Message Type" error is sent if a message with an unexpected or unsupported Message Type is received.

The "Unsupported/Invalid Traffic Handling Mode" error is sent by a SGP if an ASP sends an ASP Active message with an unsupported Traffic Mode Type or a Traffic Mode Type that is inconsistent with the presently configured mode for the Application Server. An example would be a case in which the SGP did not support load sharing.

~~The "Unexpected Message" error MAY be sent if a defined and recognized message is received that is not expected in the current state (in some cases the ASP may optionally silently discard the message and not send an Error message). For example, silent discard is used by an ASP if it received a DATA message from an SCP while it was in the ASP INACTIVE state.~~

~~The "Protocol Error" error is sent for any protocol anomaly (i.e., reception of a parameter that is syntactically correct but unexpected in the current situation).~~

~~The "Invalid Routing Context" error is sent if a message is received from a peer with an invalid (unconfigured) Routing Context value.~~

~~The "Invalid Stream Identifier" error is sent if a message is received on an unexpected SCTP stream (e.g., a Management message was received on a stream other than "0").~~

~~Sidebottom et al [Page 61]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The "Invalid Parameter Value" error is sent if a message is received with an invalid parameter value (e.g., a DUPU message was received with a Mask value other than "0").~~

~~The "Refused Management Blocking" error is sent when an ASP Up or ASP Active message is received and the request is refused for management reasons (e.g., management lock out).~~

~~The "Unknown Routing Context" Error is sent if a message is received from a peer without a Routing Context parameter and it is not known by configuration data which Application Servers are referenced.~~

~~Diagnostic Information: variable length~~

~~When included, the optional Diagnostic information can be any information germane to the error condition, to assist in identification of the error condition. In the case of an Invalid Network Appearance, Traffic Handling Mode, Routing Context or Parameter Value, the Diagnostic information parameter MUST be added and include the offending parameter. In the other cases, the Diagnostic information MAY be the first 40 bytes of the offending message.~~

~~Error messages MUST NOT be generated in response to other Error messages.~~

### ~~3.8.2 Notify~~


~~The Notify message used to provide an autonomous indication of M3UA events to an M3UA peer.~~

~~The Notify message contains the following parameters:~~

<del>Status</del>	<del>Mandatory</del>
<del>Routing Context</del>	<del>Optional</del>
<del>INFO String</del>	<del>Optional</del>

~~Sidebottom et al [Page 62]  
Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The format for the Notify message is as follows:~~

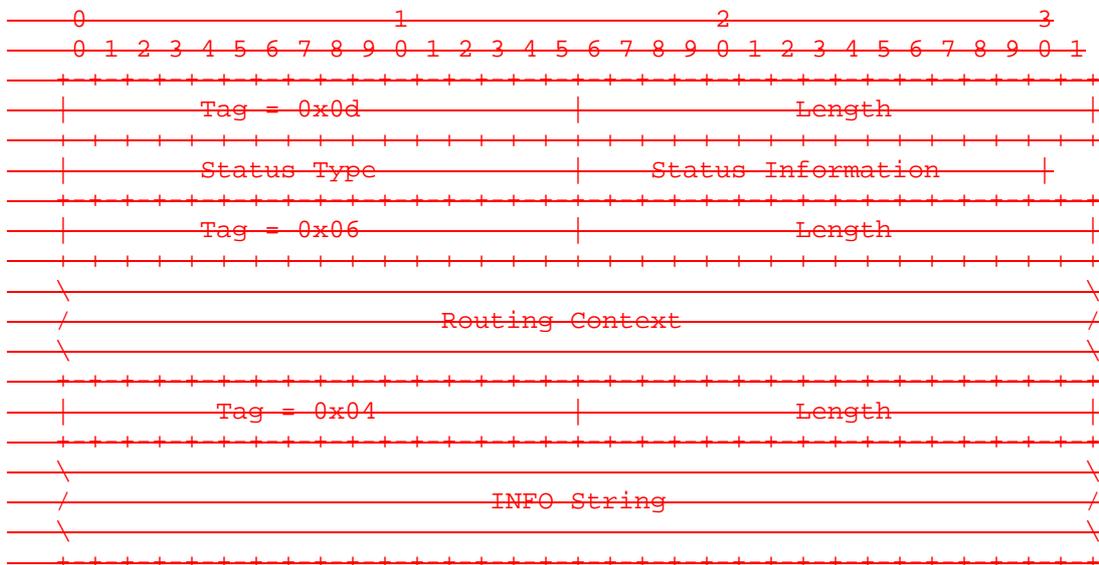

~~Status Type: 16 bits (unsigned integer)~~

~~The Status Type parameter identifies the type of the Notify message. The following are the valid Status Type values:~~

- ~~1 Application Server State Change (AS State\_Change)~~
- ~~2 Other~~

~~Status Information: 16 bits (unsigned integer)~~

~~The Status Information parameter contains more detailed information for the notification, based on the value of the Status Type.~~

~~If the Status Type is AS State\_Change the following Status Information values are used:~~

- ~~1 reserved~~
- ~~2 Application Server Inactive (AS INACTIVE)~~
- ~~3 Application Server Active (AS ACTIVE)~~
- ~~4 Application Server Pending (AS PENDING)~~

~~These notifications are sent from an SCP to an ASP upon a change in status of a particular Application Server. The value reflects the new state of the Application Server.~~

~~Sidebottom et al [Page 63]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If the Status Type is Other, then the following Status Information values are defined:~~

- ~~1 Insufficient ASP Resources Active in AS~~
- ~~2 Alternate ASP Active~~

~~These notifications are not based on the SCP reporting the state change of an ASP or AS. In the Insufficient ASP Resources case, the SCP is indicating to an ASP\_INACTIVE ASP in the AS that another ASP is required in order to handle the load of the AS (Load sharing mode). For the Alternate ASP Active case, an ASP is informed when an alternate ASP transitions to the ASP\_ACTIVE state in Over ride mode.~~

~~The format and description of the optional Routing Context and Info String parameters is the same as for the ASP Active message (See Section 3.5.5.)~~

#### ~~4. Procedures~~

~~The M3UA layer needs to respond to various local primitives it receives from other layers as well as the messages that it receives from the peer M3UA layer. This section describes the M3UA procedures in response to these events.~~

##### ~~4.1 Procedures to Support the M3UA User and Layer Management Layers~~

###### ~~4.1.1 Receipt of Primitives from the M3UA User~~

~~On receiving an MTP\_TRANSFER request primitive from an upper layer at an ASP/IPSP, or the nodal inter-working function at an SCP, the M3UA layer sends a corresponding DATA message (see Section 3) to its M3UA peer. The M3UA peer receiving the DATA message sends an MTP\_TRANSFER indication primitive to the upper layer.~~

~~The M3UA message distribution function (see Section 1.4.2.1) determines the Application Server (AS) based on comparing the information in the MTP\_TRANSFER request primitive with a provisioned Routing Key.~~

~~>From the list of ASPs within the AS table, an ASP in the ASP\_ACTIVE state is selected and a DATA message is constructed and issued on the corresponding SCTP association. If more than one ASP is in the ASP\_ACTIVE state (i.e., traffic is to be load shared across more than one ASP), one of the ASPs in the ASP\_ACTIVE state is selected from the list. The selection algorithm is implementation dependent but could, for example, be round robin or based on, for example, the SLS or ISUP CIC. The appropriate selection algorithm must be chosen carefully as it is dependent on application assumptions and understanding of the~~

~~degree of state coordination between the ASP\_ACTIVE ASPs in the AS.~~

~~Sidebottom et al [Page 64]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~In addition, the message needs to be sent on the appropriate SCTP stream, again taking care to meet the message sequencing needs of the signalling application.~~

~~When there is no Routing Key match, or only a partial match, for an incoming SS7 message, a default treatment MUST be specified. Possible solutions are to provide a default Application Server at the SGP that directs all unallocated traffic to a (set of) default ASP(s), or to drop the message and provide a notification to Layer Management in an M\_ERROR indication primitive. The treatment of unallocated traffic is implementation dependent.~~

#### ~~4.1.2 Receipt of Primitives from the Layer Management~~

~~On receiving primitives from the local Layer Management, the M3UA layer will take the requested action and provide an appropriate response primitive to Layer Management.~~

~~An M\_SCTP\_ESTABLISH request primitive from Layer Management at an ASP or IPSP will initiate the establishment of an SCTP association. The M3UA layer will attempt to establish an SCTP association with the remote M3UA peer by sending an SCTP\_ASSOCIATE primitive to the local SCTP layer.~~

~~When an SCTP association has been successfully established, the SCTP will send an SCTP\_COMMUNICATION\_UP notification primitive to the local M3UA layer. At the SGP or IPSP that initiated the request, the M3UA layer will send an M\_SCTP\_ESTABLISH confirm primitive to Layer Management when the association set up is complete. At the peer M3UA layer, an M\_SCTP\_ESTABLISH indication primitive is sent to Layer Management upon successful completion of an incoming SCTP association set up.~~

~~An M\_SCTP\_RELEASE request primitive from Layer Management initiates the tear-down of an SCTP association. The M3UA layer accomplishes a graceful shutdown of the SCTP association by sending an SCTP\_SHUTDOWN primitive to the SCTP layer.~~

~~When the graceful shutdown of the SCTP association has been accomplished, the SCTP layer returns an SCTP\_SHUTDOWN\_COMPLETE notification primitive to the local M3UA layer. At the M3UA Layer that initiated the request, the M3UA layer will send an M\_SCTP\_RELEASE confirm primitive to Layer Management when the association teardown is complete. At the peer M3UA Layer, an M\_SCTP\_RELEASE indication primitive is sent to Layer Management upon successful tear-down of an SCTP association.~~

~~An M\_SCTP\_STATUS request primitive supports a Layer Management query of the local status of a particular SCTP association. The M3UA layer simply maps the M\_SCTP\_STATUS request primitive to an SCTP\_STATUS~~

~~Sidebottom et al [Page 65]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~primitive to the SCTP layer. When the SCTP responds, the M3UA layer maps the association status information to an M-SCTP\_STATUS confirm primitive. No peer protocol is invoked.~~

~~Similar LM to M3UA to SCTP and/or SCTP to M3UA to LM primitive mappings can be described for the various other SCTP Upper Layer primitives in RFC2960 [13] such as INITIALIZE, SET PRIMARY, CHANGE HEARTBEAT, REQUEST HEARTBEAT, GET SRRTT REPORT, SET FAILURE THRESHOLD, SET PROTOCOL PARAMETERS, DESTROY SCTP INSTANCE, SEND FAILURE, AND NETWORK STATUS CHANGE. Alternatively, these SCTP Upper Layer primitives (and Status as well) can be considered for modeling purposes as a Layer Management interaction directly with the SCTP Layer.~~

~~M-NOTIFY indication and M-ERROR indication primitives indicate to Layer Management the notification or error information contained in a received M3UA Notify or Error message respectively. These indications can also be generated based on local M3UA events.~~

~~An M-ASP\_STATUS request primitive supports a Layer Management query of the status of a particular local or remote ASP. The M3UA layer responds with the status in an M-ASP\_STATUS confirm primitive. No M3UA peer protocol is invoked.~~

~~An M-AS\_STATUS request supports a Layer Management query of the status of a particular AS. The M3UA responds with an M-AS\_STATUS confirm primitive. No M3UA peer protocol is invoked.~~

~~M-ASP\_UP request, M-ASP\_DOWN request, M-ASP\_ACTIVE request and M-ASP\_INACTIVE request primitives allow Layer Management at an ASP to initiate state changes. Upon successful completion, a corresponding confirm primitive is provided by the M3UA layer to Layer Management. If an invocation is unsuccessful, an Error indication primitive is provided in the primitive.~~

~~These requests result in outgoing ASP Up, ASP Down, ASP Active and ASP Inactive messages to the remote M3UA peer at an SCP or IPSP.~~

#### ~~4.1.3 Receipt of M3UA Peer Management Messages~~

~~Upon successful state changes resulting from reception of ASP Up, ASP Down, ASP Active and ASP Inactive messages from a peer M3UA, the M3UA layer SHOULD invoke corresponding M-ASP\_UP, M-ASP\_DOWN, M-ASP\_ACTIVE and M-ASP\_INACTIVE, M-AS\_ACTIVE, M-AS\_INACTIVE, and M-AS\_DOWN indication primitives to the local Layer Management.~~

~~M-NOTIFY indication and M-ERROR indication primitives indicate to Layer Management the notification or error information contained in a received M3UA Notify or Error message. These indications can also be generated based on local M3UA events.~~

~~Sidebottom et al [Page 66]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~4.2 Procedures to Support the Management of SCTP Associations with M3UA Peers~~

~~These procedures support the M3UA management of SCTP Associations between SGPs and ASPs or between IPSPs.~~

4.2.1 AS and ASP State Maintenance

The M3UA layer on the SCP maintains the state of each remote ASP, in each Application Server that the ASP is configured to receive traffic, as input to the M3UA message distribution function. Similarly, where IPSPs use M3UA in a point to point fashion, the M3UA layer in an IPSP maintains the state of remote IPSPs. For the purposes of the following procedures, only the SCP/ASP case is described but the SCP side of the procedures also apply to an IPSP sending traffic to an AS consisting of a set of remote IPSPs.

4.2.1.1 ASP States

The state of each remote ASP, in each AS that it is configured to operate, is maintained in the M3UA layer in the SCP. The state of a particular ASP in a particular AS changes due to events. The events include:

- \* Reception of messages from the peer M3UA layer at the ASP;
- \* Reception of some messages from the peer M3UA layer at other ASPs in the AS (e.g., ASP Active message indicating "Over ride");
- \* Reception of indications from the SCTP layer; or
- \* Local Management intervention.

The ASP state transition diagram is shown in Figure 4. The possible states of an ASP are:

ASP-DOWN: The remote M3UA peer at the ASP is unavailable and/or the related SCTP association is down. Initially all ASPs will be in this state. An ASP in this state SHOULD NOT be sent any M3UA messages.

ASP-INACTIVE: The remote M3UA peer at the ASP is available (and the related SCTP association is up) but application traffic is stopped. In this state the ASP MAY be sent any non-DATA M3UA messages.


ASP-ACTIVE: The remote M3UA peer at the ASP is available and application traffic is active (for a particular Routing Context or set of Routing Contexts).


ASP-STANDBY: The remote M3UA peer at the ASP is available and ready to receive application traffic at any time (for a particular Routing Context or set of Routing Contexts). In this state the ASP MAY be sent any non-Data M3UA messages.

Sidebottom et al [Page 67]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

Figure 4: ASP State Transition Diagram

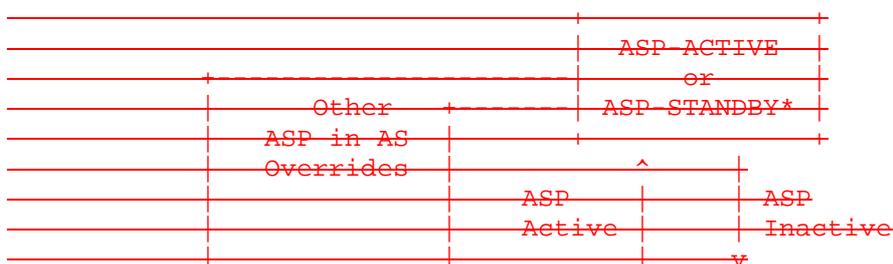

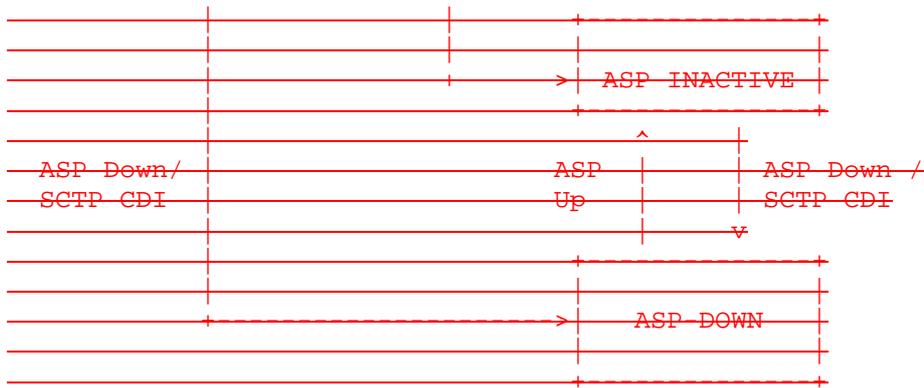

~~\*Note: ASP\_ACTIVE and ASP\_STANDBY differ only in whether the ASP is currently receiving Data traffic within the AS.~~

~~SCTP CDI: The SCTP CDI denotes the local SCTP layer's Communication Down Indication to the Upper Layer Protocol (M3UA) on an SCP. The local SCTP layer will send this indication when it detects the loss of connectivity to the ASP's peer SCTP layer. SCTP CDI is understood as either a SHUTDOWN\_COMPLETE notification or COMMUNICATION\_LOST notification from the SCTP layer.~~

~~4.2.1.2 AS States~~

~~The state of the AS is maintained in the M3UA layer on the SCP. The state of an AS changes due to events. These events include:~~

- ~~\* ASP state transitions~~
- ~~\* Recovery timer triggers~~

~~The possible states of an AS are:~~

~~AS-DOWN: The Application Server is unavailable. This state implies that all related ASPs are in the ASP-DOWN state for this AS. Initially the AS will be in this state. An Application Server MUST be in the AS-DOWN state before it can be removed from a configuration.~~

~~Sidebottom et al [Page 68]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~AS-INACTIVE: The Application Server is available but no application traffic is active (i.e., one or more related ASPs are in the ASP-INACTIVE state, but none in the ASP\_ACTIVE or ASP\_STANDBY states). The recovery timer T(r) is not running or has expired.~~

~~AS-ACTIVE: The Application Server is available and application traffic is active. This state implies that at least one ASP is in the ASP-ACTIVE state.~~

~~AS-PENDING: An active ASP has transitioned to ASP-INACTIVE or ASP-DOWN and it was the last remaining active ASP in the AS (and no ASPs in the ASP\_STANDBY state are available. A recovery timer T(r) SHOULD be started and all incoming signalling messages SHOULD be queued by the SCP. If an ASP becomes ASP\_ACTIVE before T(r) expires, the AS is moved to the AS\_ACTIVE state and all the queued messages will be sent to the ASP.~~

If  $T(r)$  expires before an ASP becomes ASP ACTIVE, the SGP stops queuing messages and discards all previously queued messages. The AS will move to the AS INACTIVE state if at least one ASP is in ASP INACTIVE state, otherwise it will move to AS DOWN state.


Figure 5 shows an example AS state machine for the case where the AS/ASP data is pre-configured. For other cases where the AS/ASP configuration data is created dynamically, there would be differences in the state machine, especially at creation of the AS.


For example, where the AS/ASP configuration data is not created until Registration of the first ASP, the AS INACTIVE state is entered directly upon the first successful REG REQ from an ASP. Another example is where the AS/ASP configuration data is not created until the first ASP successfully enters the ASP ACTIVE state. In this case the AS ACTIVE state is entered directly.

Sidebottom et al [Page 69]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

Figure 5: AS State Transition Diagram

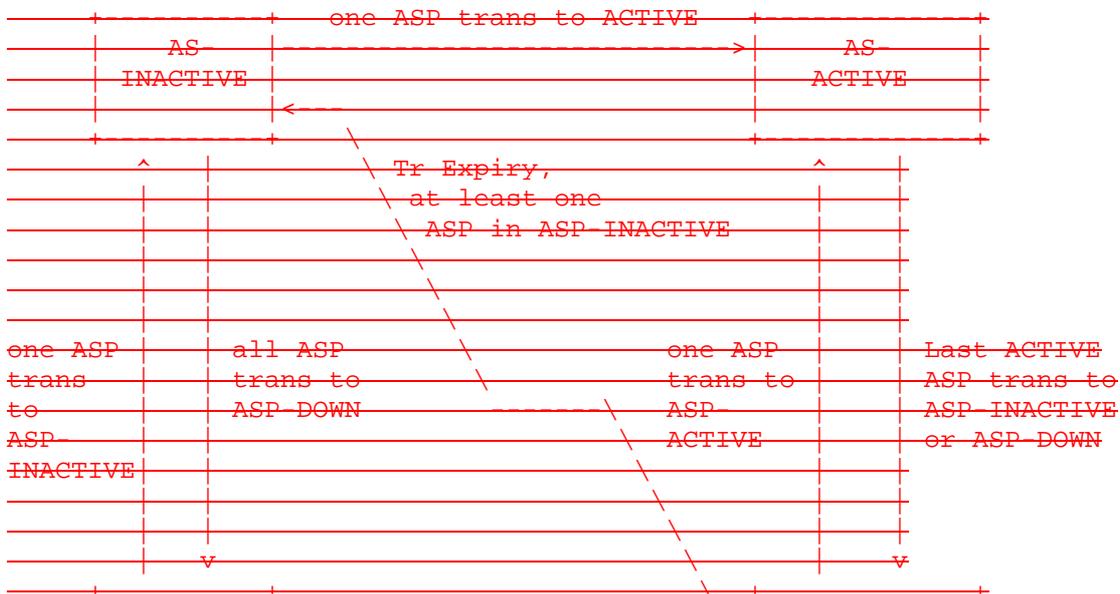

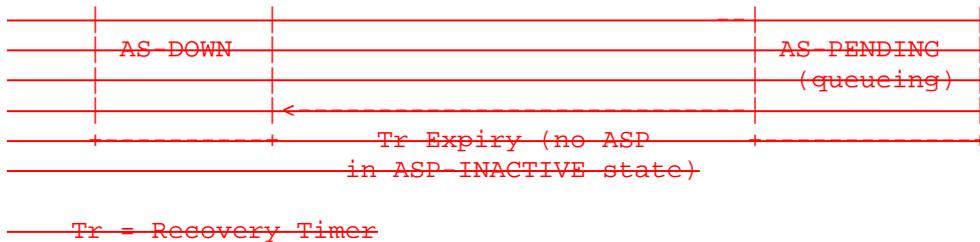

~~4.2.2 M3UA Management Procedures for Primitives~~

~~Before the establishment of an SCTP association the ASP state at both the SGP and ASP is assumed to be in the state ASP\_DOWN.~~

~~Once the SCTP association is established (see Section 4.1.2) and assuming that the local M3UA User is ready, the local M3UA ASP Maintenance (ASPM) function will initiate the relevant procedures, using the ASP Up/ASP Down/ASP Active/ASP Inactive messages to convey the ASP state to the SGP (see Section 4.3.3).~~

~~If the M3UA layer subsequently receives an SCTP\_COMMUNICATION\_DOWN or SCTP\_RESTART indication primitive from the underlying SCTP layer, it will inform the Layer Management by invoking the M\_SCTP\_STATUS indication primitive. The state of the ASP will be moved to ASP\_DOWN. At an ASP, the MTP3 User will be informed of the unavailability of any affected SS7 destinations through the use of MTP\_PAUSE indication primitives. In the case~~

~~Sidebottom et al [Page 70]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~of SS7 network isolation, the local MTP3 Users MAY be informed by implementation dependent means, as there is currently no primitive defined for conveying this information.~~

~~In the case of SCTP\_COMMUNICATION\_DOWN, the SCTP client MAY try to re-establish the SCTP Association. This MAY be done by the M3UA layer automatically, or Layer Management MAY re-establish using the M\_SCTP\_ESTABLISH request primitive.~~

~~In the case of an SCTP\_RESTART indication at an ASP, the ASP is now considered by its M3UA peer to be in the ASP\_DOWN state. The ASP, if it is to recover, must begin any recovery with the ASP Up procedure.~~

~~4.2.3 M3UA Management Procedures for Peer to Peer Messages~~

~~All M3UA Management and ASP State and Traffic Maintenance messages are sent on a sequenced stream to ensure ordering. SCTP stream '0' is used.~~

~~4.2.3.1 ASP Up Procedures~~

~~After an ASP has successfully established an SCTP association to an SGP, the SGP waits for the ASP to send an ASP Up message, indicating that the ASP M3UA peer is available. The ASP is always the initiator of the ASP Up message. This action MAY be initiated at the ASP by an M\_ASP\_UP request primitive from Layer Management or MAY be initiated automatically by an M3UA management function.~~

~~When an ASP Up message is received at an SGP and internally the remote ASP is in the ASP-DOWN state and not considered locked out for local management reasons, the SGP marks the remote ASP in the state ASP-INACTIVE and informs Layer Management with an M-ASP\_Up indication primitive. If the SGP is aware, via current configuration data, which Application Servers the ASP is configured to operate in, the SGP updates the ASP state to ASP-INACTIVE in each AS that it is a member. Alternatively, the SGP may move the ASP into a pool of Inactive ASPs available for future configuration within Application Server(s), determined in a subsequent Registration Request or ASP Active procedure. The SGP responds with an ASP Up Ack message in acknowledgement. The SGP sends an ASP Up Ack message in response to a received ASP Up message even if the ASP is already marked as ASP-INACTIVE at the SGP.~~

~~If for any local reason (e.g., management lock-out) the SGP cannot respond with an ASP Up Ack message, the SGP responds to an ASP Up message with an Error message with Reason "Refused - Management Blocking".~~

~~At the ASP, the ASP Up Ack message received is not acknowledged. Layer Management is informed with an M-ASP\_UP confirm primitive. When an ASP~~

~~Sidebottom et al [Page 71]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~enters the ASP-Inactive state from the ASP\_Down state towards an SCP the M3UA MUST mark all SS7 destinations configured to be reachable via this SGP as available.~~

~~When the ASP sends an ASP Up message it starts timer T(ack). If the ASP does not receive a response to an ASP Up message within T(ack), the ASP MAY restart T(ack) and resend ASP Up messages until it receives an ASP Up Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Up messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in an M-ASP\_UP confirm primitive carrying a negative indication.~~

~~The ASP must wait for the ASP Up Ack message before sending any other M3UA messages (e.g., ASP Active or REG REQ). If the SGP receives any other M3UA messages before an ASP Up message is received, the SGP SHOULD discard them.~~

~~If an ASP Up message is received and internally the remote ASP is in the ASP-ACTIVE or ASP-STANDBY state, an ASP Up Ack message is returned, as well as an Error message ("Unexpected Message), and the remote ASP state is changed to ASP-INACTIVE in all relevant Application Servers.~~

~~If an ASP Up message is received and internally the remote ASP is already in the ASP-INACTIVE state, an ASP Up Ack message is returned and no further action is taken.~~

#### ~~4.2.3.1.1 M3UA Version Control~~

~~If an ASP Up message with an unsupported version is received, the receiving end responds with an Error message, indicating the version the receiving node supports and notifies Layer Management.~~

~~This is useful when protocol version upgrades are being performed in a network. A node upgraded to a newer version should support the older~~

~~versions used on other nodes it is communicating with. Because ASPs initiate the ASP Up procedure it is assumed that the Error message would normally come from the SGP.~~

#### ~~4.2.3.1.2 IPSP Considerations~~

~~In the case of peer-to-peer IPSPs, either of the IPSPs (IPSP\_A) may start operations by sending an ASP Up message to the remote peer (IPSP\_B). When the ASP Up message is received at IPSP\_B and internally the remote IPSP\_A is in the ASP-DOWN state and not considered locked-out for local management reasons, IPSP\_B marks the remote IPSP\_A in the state ASP-INACTIVE and informs Layer Management with an M-ASP-Up indication primitive. IPSP\_B returns an ASP Up Ack message to IPSP\_A. IPSP\_A moves IPSP\_B to the ASP-INACTIVE state upon reception of an ASP Up Ack message, if it is not already in the ASP-INACTIVE state, and informs Layer Management with an M-ASP-UP confirmation primitive.~~

~~Sidebottom et al [Page 72]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If for any local reason (e.g., management lock-out) the IPSP\_B cannot respond with an ASP Up Ack message, it responds to an ASP Up message with an Error message with Reason "Refused - Management Blocking" and leaves IPSP\_A in the ASP-DOWN state.~~

#### ~~4.2.3.2 ASP-Down Procedures~~

~~The ASP will send an ASP Down message to an SGP when the ASP wishes to be removed from service in all Application Servers that it is a member and no longer receive any DATA, SSNM or ASPTM messages. This action MAY be initiated at the ASP by an M-ASP-DOWN request primitive from Layer Management or MAY be initiated automatically by an M3UA management function.~~

~~Whether the ASP is permanently removed from any AS is a function of configuration management. In the case where the ASP previously used the Registration procedures (see Section 3.5.5) to register within Application Servers but has not deregistered from all of them prior to sending the ASP Down message, the SGP SHOULD consider the ASP as Deregistered in all Application Servers that it is still a member.~~

~~The SGP marks the ASP as ASP-DOWN, informs Layer Management with an M-ASP-Down indication primitive, and returns an ASP Down Ack message to the ASP. has locked out the ASP for management reasons.~~

~~The SGP sends an ASP Down Ack message in response to a received ASP-Down message from the ASP even if the ASP is already marked as ASP-DOWN at the SGP. The SGP sends an ASP Down Ack message even if the reason in the received ASP Down message is considered invalid.~~

~~At the ASP, the ASP Down Ack message received is not acknowledged. Layer Management is informed with an M-ASP-DOWN confirm primitive. If the ASP receives an ASP Down Ack without having sent an ASP Down message, the ASP should now consider itself as in the ASP-DOWN state. If the ASP was previously in the ASP-ACTIVE or ASP-INACTIVE state, the ASP should then initiate procedures to return itself to its previous state.~~

~~When the ASP sends an ASP Down message it starts timer T(ack). If the ASP does not receive a response to an ASP Down message within T(ack), the ASP MAY restart T(ack) and resend ASP Down messages until it receives an ASP Down Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Down messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in an M-ASP\_DOWN confirm primitive carrying a negative indication.~~

~~Sidebottom et al [Page 73]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~4.2.3.4 ASP Active Procedures~~

~~Anytime after the ASP has received an ASP Up Ack message from the SCP or IPSP, the ASP sends an ASP Active message to the SCP indicating that the ASP is ready to start processing traffic. This action MAY be initiated at the ASP by an M-ASP\_ACTIVE request primitive from Layer Management or MAY be initiated automatically by an M3UA management function. In the case where an ASP wishes to process the traffic for more than one Application Server across a common SCTP association, the ASP Active message(s) SHOULD contain a list of one or more Routing Contexts to indicate for which Application Servers the ASP Active message applies. It is not necessary for the ASP to include all Routing Contexts of interest in a single ASP Active message, thus requesting to become active in all Routing Contexts at the same time. Multiple ASP Active messages MAY be used to activate within the Application Servers independently, or in sets. In the case where an ASP Active message does not contain a Routing Context parameter, the receiver must know, via configuration data, which Application Server(s) the ASP is a member.~~

~~For the Application Servers that the ASP can be successfully activated, the SCP or IPSP responds with one or more ASP Active Ack messages, including the associated Routing Context and Traffic Mode Type values. The Routing Context parameter MUST be included in the Asp Active Ack message if the received ASP Active message contained any Routing Contexts. Depending on the ASP Active Message Traffic Mode Type request, the SCP moves the ASP to the correct ASP traffic state within the associated Application Server(s). Layer Management is informed with an M-ASP\_Active indication. If the SCP or IPSP receives any Data messages before an ASP Active message is received, the SCP or IPSP MAY discard them. By sending an ASP Active Ack message, the SCP or IPSP is now ready to receive and send traffic for the related Routing Context(s). The ASP SHOULD NOT send Data messages for the related Routing Context(s) before receiving an ASP Active Ack message, or it will risk message loss.~~

~~Multiple ASP Active Ack messages MAY be used in response to an ASP Active message containing multiple Routing Contexts, allowing the SCP or IPSP to independently acknowledge the ASP Active message for different (sets of) Routing Contexts. The SCP or IPSP sends an Error message ("Invalid Routing Context") for each Routing Context value that the ASP cannot be successfully activated.~~

~~In the case where an "out-of-the-blue" ASP Active message is received (i.e., the ASP has not registered with the SC or the SC has no static configuration data for the ASP), the message may be silently discarded.~~

~~The SCP MUST send an ASP Active Ack message in response to a received ASP Active message from the ASP, if the ASP is already marked in the ASP\_ACTIVE state at the SCP.~~

~~Sidebottom et al [Page 74]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~At the ASP, the ASP Active Ack message received is not acknowledged. Layer Management is informed with an M-ASP\_ACTIVE confirm primitive. It is possible for the ASP to receive Data message(s) before the ASP Active Ack message as the ASP Active Ack and Data messages from an SG or IPSP may be sent on different SCTP streams. Message loss is possible as the ASP does not consider itself in the ASP\_ACTIVE state until reception of the ASP Active Ack message.~~

~~When the ASP sends an ASP Active message it starts timer T(ack). If the ASP does not receive a response to an ASP Active message within T(ack), the ASP MAY restart T(ack) and resend ASP Active messages until it receives an ASP Active Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Active messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in an M-ASP\_ACTIVE confirm primitive carrying a negative indication.~~

~~There are four modes of Application Server traffic handling in the SCP M3UA layer: Over-ride, Over-ride (Standby), Load share and Load share (Standby). The Traffic Mode Type parameter in the ASP Active message indicates the traffic handling mode used in a particular Application Server. If the SCP determines that the mode indicated in an ASP Active message is unsupported or incompatible with the mode currently configured for the AS, the SCP responds with an Error message ("Unsupported / Invalid Traffic Handling Mode"). If the Traffic Handling mode of the Application Server is not already known via configuration data, then the Traffic Handling mode indicated in the first ASP Active message causing the transition of the Application Server state to AS\_ACTIVE MAY be used to set the mode.~~

~~In the case of an Over-ride mode AS, reception of an ASP Active message at an SCP causes the (re)direction of all traffic for the AS to the ASP that sent the ASP Active message. Any previously active ASP in the AS is now considered to be in state ASP\_INACTIVE and SHOULD no longer receive traffic from the SCP within the AS. The SCP or IPSP then MUST send a Notify message ("Alternate ASP Active") to the previously active ASP in the AS, and SHOULD stop traffic to/from that ASP. The ASP receiving this Notify MUST consider itself now in the ASP\_INACTIVE state, if it is not already aware of this via inter-ASP communication with the Over-riding ASP.~~

~~In the case of Over-ride (Standby) mode the traffic is not started to the ASP until the currently active ASP transitions to the ASP\_INACTIVE or ASP\_DOWN state. At this point the ASP that sent the ASP Active message ("Over-Ride (Standby)") is moved to the ASP\_ACTIVE state and the traffic is redirected. A second ASP Active Ack message with a new Traffic Mode Type ("Over-ride", previously "Over-ride(Standby)") is sent to the ASP. A Notify message ("Alternate ASP Active") is not sent in this case.~~

~~Sidebottom et al [Page 75]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If there is no currently active ASP, an ASP Active Ack message ("Override") is returned right away and the traffic is directed to the ASP.~~

~~In the case of a Load share mode AS, reception of an ASP Active message at an SCP or IPSP causes the direction of traffic to the ASP sending the ASP Active message, in addition to all the other ASPs that are currently active in the AS. The algorithm at the SCP for load sharing traffic within an AS to all the active ASPs is implementation dependent. The algorithm could, for example, be round robin or based on information in the Data message (e.g., the SLS, SCCP SSN, ISUP CIC value).~~

~~An SCP or IPSP, upon reception of an ASP Active message for the first ASP in a Loadshare AS, MAY choose not to direct traffic to a newly active ASP until it determines that there are sufficient resources to handle the expected load (e.g., until there are "n" ASPs in state ASP\_ACTIVE in the AS).~~

~~In the case of a Load share (Standby) mode AS, the traffic is not started to the ASP until the SCP or IPSP determines that there are insufficient resources available in the AS. This is likely when one of the active load sharing ASPs transitions to either the ASP\_INACTIVE or ASP\_DOWN state. At this point the ASP that sent the ASP Active message ("Load share (Standby)") is moved to the ASP\_ACTIVE state and traffic is started. A second ASP Active Ack message with a new Traffic Mode Type ("Load share" previously "Loadshare(Standby)") is sent to the ASP. A Notify message ("Insufficient ASP resources active in AS ") is not sent in this case.~~

~~If there is no currently active ASP, an ASP Active Ack message ("Loadshare") is returned right away and the traffic is directed to the ASP.~~

~~All ASPs within a load sharing mode AS must be able to process any Data message received for the AS, in order to accommodate any potential fail-over or rebalancing of the offered load.~~

#### ~~4.2.3.5 ASP Inactive Procedures~~

~~When an ASP wishes to withdraw from receiving traffic within an AS, the ASP sends an ASP Inactive message to the SCP or IPSP. This action MAY be initiated at the ASP by an M ASP\_INACTIVE request primitive from Layer Management or MAY be initiated automatically by an M3UA management function. In the case where an ASP is processing the traffic for more than one Application Server across a common SCTP association, the ASP Inactive message contains one or more Routing Contexts to indicate for which Application Servers the ASP Inactive message applies. In the case where an ASP Inactive message does not contain a Routing Context parameter, the receiver must know, via~~

~~Sidebottom et al [Page 76]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~configuration data, which Application Servers the ASP is a member and move the ASP to the ASP\_INACTIVE state in each all Application Servers.~~

~~In the case of an Over-ride mode AS, where another ASP has already taken over the traffic within the AS with an ASP Active ("Over-ride") message, the ASP that sends the ASP Inactive message is already considered by the SCP to be in state ASP\_INACTIVE. An ASP Inactive Ack message is sent to the ASP, after ensuring that all traffic is stopped to the ASP.~~

~~In the case of a Load-share mode AS, the SCP moves the ASP to the ASP\_INACTIVE state and the AS traffic is re-allocated across the remaining ASPs in the state ASP\_ACTIVE, as per the load sharing algorithm currently used within the AS. A Notify message("Insufficient ASP resources active in AS") MAY be sent to all inactive ASPs, if required. However, if a Loadshare ("Standby") ASP is available, it may be now immediately included in the loadshare group and a Notify message is not sent. An ASP Inactive Ack message is sent to the ASP after all traffic is halted and Layer Management is informed with an M-ASP\_INACTIVE indication primitive.~~

~~Multiple ASP Inactive Ack messages MAY be used in response to an ASP Inactive message containing multiple Routing Contexts, allowing the SCP or IPSP to independently acknowledge for different (sets of) Routing Contexts. The SCP or IPSP sends an Error message ("Invalid Routing Context") message for each invalid or un-configured Routing Context value in a received ASP Inactive message message.~~

~~The SCP MUST send an ASP Inactive Ack message in response to a received ASP Inactive message from the ASP and the ASP is already marked as ASP\_INACTIVE at the SCP.~~

~~At the ASP, the ASP Inactive Ack message received is not acknowledged. Layer Management is informed with an M-ASP\_INACTIVE confirm primitive. When the ASP sends an ASP Inactive message it starts timer T(ack). If the ASP does not receive a response to an ASP Inactive message within T(ack), the ASP MAY restart T(ack) and resend ASP Inactive messages until it receives an ASP Inactive Ack message. T(ack) is provisionable, with a default of 2 seconds. Alternatively, retransmission of ASP Inactive messages MAY be put under control of Layer Management. In this method, expiry of T(ack) results in a M-ASP\_Inactive confirm primitive carrying a negative indication.~~

~~If no other ASPs in the Application Server are in the state ASP\_ACTIVE or ASP\_STANDBY, the SCP MUST send a Notify message ("AS-Pending") to all of the ASPs in the AS which are in the state ASP\_INACTIVE. The SCP SHOULD start buffering the incoming messages for T(r)seconds, after which messages MAY be discarded. T(r) is configurable by the network operator. If the SCP receives an ASP Active message from an ASP in the AS before expiry of T(r), the buffered traffic is directed to that ASP and the timer is cancelled. If T(r) expires, the AS is moved to the AS\_INACTIVE state.~~

~~Sidebottom et al [Page 77]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

#### ~~4.2.3.6 Notify Procedures~~

~~A Notify message reflecting a change in the AS state SHOULD be sent to all ASPs in the AS, except those in the ASP\_DOWN state, with appropriate Status Information. The Notify message MUST be sent after any ASP State or Traffic Management acknowledgement messages (e.g., ASP Up Ack, ASP Down Ack, ASP Active Ack, or ASP Inactive Ack). At the~~

~~ASP, Layer Management is informed with an M-NOTIFY indication primitive.~~

~~In the case where a Notify message ("AS Pending") message is sent by an SGP that now has no ASPs active to service the traffic, or where a Notify message ("Insufficient ASP resources active in AS") is sent in the Loadshare mode, the Notify message does not explicitly compel the ASP(s) receiving the message to become active. The ASPs remain in control of what (and when) traffic action is taken.~~

~~In the case where a Notify message does not contain a Routing Context parameter, the receiver must know, via configuration data, of which Application Servers the ASP is a member and take the appropriate action for the ASP in each AS.~~

#### ~~4.2.3.7 Heartbeat Procedures~~

~~The optional Heartbeat procedures MAY be used when operating over transport layers that do not have their own heartbeat mechanism for detecting loss of the transport association (i.e., other than SCTP).~~

~~After receiving an ASP Up Ack message from an M3UA peer in response to an ASP Up message, an ASP may optionally send Heartbeat messages periodically, subject to a provisionable timer T(beat). Upon receiving a Heartbeat message, the M3UA peer MUST respond with a Heartbeat ACK message.~~

~~At the ASP, if no Heartbeat Ack message (or any other M3UA message) is received from the M3UA peer within 2\*T(beat), the remote M3UA peer is considered unavailable. Transmission of Heartbeat messages is stopped and the ASP SHOULD attempt to re-establish communication with the SGP M3UA peer.~~

~~The Heartbeat message may optionally contain an opaque Heartbeat Data parameter that MUST be echoed back unchanged in the related Heartbeat Ack message. The ASP, upon examining the contents of the returned Heartbeat Ack message, MAY choose to consider the remote M3UA peer as unavailable. The contents/format of the Heartbeat Data parameter is implementation dependent and only of local interest to the original sender. The contents may be used, for example, to support a Heartbeat sequence algorithm (to detect missing Heartbeats), and/or a timestamp mechanism (to evaluate delays).~~

~~Sidebottom et al [Page 78]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Note: Heartbeat related events are not shown in Figure 4 "ASP state transition diagram".~~

#### ~~4.2.4 Routing Key Management Procedures~~

##### ~~4.2.4.1 Registration~~

~~An ASP MAY dynamically register with an SGP as an ASP within an Application Server using the REG-REQ message. A Routing Key parameter in the REG-REQ message specifies the parameters associated with the Routing Key.~~

~~The SGP examines the contents of the received Routing Key parameter and~~

~~compares it with the currently provisioned Routing Keys. If the received Routing Key matches an existing SGP Routing Key entry, and the ASP is not currently included in the list of ASPs for the related Application Server, the SGP MAY authorize the ASP to be added to the AS. Or, if the Routing Key does not currently exist and the received Routing Key data is valid and unique, an SGP supporting dynamic configuration MAY authorize the creation of a new Routing Key and related Application Server and add the ASP to the new AS. In either case, the SGP returns a Registration Response message to the ASP, containing the same Local RK Identifier as provided in the initial request, and a Registration Result "Successfully Registered". A unique Routing Context value assigned to the SGP Routing Key is included. The method of Routing Context value assignment at the SC/SCP is implementation dependent but must be guaranteed to be unique across all SGPs in an SC.~~

~~If the SGP determines that the received Routing Key data is invalid, or contains invalid parameter values, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Invalid Routing Key", "Error Invalid DPC", "Error Invalid Network Appearance" as appropriate.~~

~~If the SGP determines that a unique Routing Key cannot be created, the SGP returns a Registration Response message to the ASP, with a Registration Status of "Error Cannot Support Unique Routing". An incoming signalling message received at an SGP should not match against more than one Routing Key.~~

~~If the SGP does not authorize the registration request, the SGP returns a REG\_RSP message to the ASP containing the Registration Result "Error Permission Denied".~~

~~If an SGP determines that a received Routing Key does not currently exist and the SGP does not support dynamic configuration, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Routing Key not Currently Provisioned".~~

~~Sidebottom et al [Page 79]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~If an SGP determines that a received Routing Key does not currently exist and the SGP supports dynamic configuration but does not have the capacity to add new Routing Key and Application Server entries, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Insufficient Resources".~~

~~If an SGP determines that one or more of the Routing Key parameters are not supported for the purpose of creating new Routing Key entries, the SGP returns a Registration Response message to the ASP, containing a Registration Result "Error Unsupported RK parameter field". This result MAY be used if, for example, the SGP does not support RK Circuit Range Lists in a Routing Key because the SGP does not support ISUP traffic, or does not provide CIC range granularity.~~

~~A Registration Response "Error Unsupported Traffic Handling Mode" is returned if the Routing Key in the REG\_REQ contains a Traffic Handling Mode that is inconsistent with the presently configured mode for the matching Application Server.~~

~~An ASP MAY register multiple Routing Keys at once by including a number~~

~~of Routing Key parameters in a single REG REQ message. The SCP MAY respond to each registration request in a single REG RSP message, indicating the success or failure result for each Routing Key in a separate Registration Result parameter. Alternatively the SCP MAY respond with multiple REG RSP messages, each with one or more Registration Result parameters. The ASP uses the Local RK Identifier parameter to correlate the requests with the responses.~~

~~Upon successful registration of an ASP in an AS, the SCP can now send related SS7 Signalling Network Management messaging, if this did not previously start upon the ASP transitioning to state ASP\_INACTIVE~~

#### ~~4.2.4.2 Deregistration~~

~~An ASP MAY dynamically deregister with an SCP as an ASP within an Application Server using the DEREQ REQ message. A Routing Context parameter in the DEREQ REQ message specifies which Routing Keys to deregister. An ASP SHOULD move to the ASP\_INACTIVE state for an Application Server before attempting to deregister the Routing Key (i.e., deregister after receiving an ASP Inactive Ack). Also, an ASP SHOULD deregister from all Application Servers that it is a member before attempting to move to the ASP Down state.~~

~~The SCP examines the contents of the received Routing Context parameter and validates that the ASP is currently registered in the Application Server(s) related to the included Routing Context(s). If validated, the ASP is de-registered as an ASP in the related Application Server.~~

~~Sidebottom et al [Page 80]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~The deregistration procedure does not necessarily imply the deletion of Routing Key and Application Server configuration data at the SCP. Other ASPs may continue to be associated with the Application Server, in which case the Routing Key data MUST NOT be deleted. If a Deregistration results in no more ASPs in an Application Server, an SCP MAY delete the Routing Key data.~~

~~The SCP acknowledges the deregistration request by returning a DEREQ RSP message to the requesting ASP. The result of the deregistration is found in the Deregistration Result parameter, indicating success or failure with cause.~~

~~An ASP MAY deregister multiple Routing Contexts at once by including a number of Routing Contexts in a single DEREQ REQ message. The SCP MAY respond to each deregistration request in a single DEREQ RSP message, indicating the success or failure result for each Routing Context in a separate Deregistration Result parameter.~~

### ~~4.3 Procedures to Support the Availability or Congestion Status of SS7 Destination~~

#### ~~4.3.1 At an SCP~~

~~On receiving an MTP\_PAUSE, MTP\_RESUME or MTP\_STATUS indication primitive from the nodal inter working function at an SCP, the SCP M3UA~~

~~layer will send a corresponding SS7 Signalling Network Management (SSNM) DUNA, DAVA, SCON, or DUPU message (see Section 3.4) to the M3UA peers at concerned ASPs. The M3UA layer must fill in various fields of the SSNM messages consistently with the information received in the primitives.~~

~~The SGP M3UA layer determines the set of concerned ASPs to be informed based on the SS7 network partition for which the primitive indication is relevant. In this way, all ASPs configured to send/receive traffic within a particular network appearance are informed. If the SGP operates within a single SS7 network appearance, then all ASPs are informed.~~

~~The SG M3UA MAY filter further based on the Affected Point Code in the MTP PAUSE, MTP RESUME or MTP STATUS indication primitives. In this way ASPs can be informed only of affected destinations to which they actually communicate. The SGP M3UA layer MAY also suppress DUPU messages to ASPs that do not implement an MTP3 User protocol peer for the affected MTP3 User.~~

~~DUNA, DAVA, SCON, and DRST messages MUST be sent sequentially and processed at the receiver in the order sent. SCTP stream "0" is used to provide the sequencing. The only exception to this is if the international congestion method (see Q.704) is used. If so, the Unordered bit in the SCTP DATA chunk MAY be used for the SCON message.~~

~~Sidebottom et al [Page 81]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Sequencing is not required for the DUPU or DAUD messages, which MAY be sent un-sequenced. Again, SCTP stream 0 is used, with optional use of the Unordered bit in the SCTP DATA chunk.~~

#### ~~4.3.2 At an ASP~~

##### ~~4.3.2.1 Single SGP Configurations~~

~~At an ASP, upon receiving an SS7 Signalling Network Management (SSNM) message from the remote M3UA Peer, the M3UA layer invokes the appropriate primitive indications to the resident M3UA Users. Local management is informed.~~

~~In the case where a local event has caused the unavailability or congestion status of SS7 destinations, the M3UA layer at the ASP MUST pass up appropriate indications in the primitives to the M3UA User, as though equivalent SSNM messages were received. For example, the loss of an SCTP association to an SGP may cause the unavailability of a set of SS7 destinations. MTP PAUSE indication primitives to the M3UA User are appropriate. To accomplish this, the M3UA layer at an ASP maintains the status of routes via the SG(P), much like an MTP3 layer maintains route set status.~~

##### ~~4.3.2.2 Multiple SGP Configurations~~

~~At an ASP, upon receiving a Signalling Network Management message from the remote M3UA Peer, the M3UA layer updates the status of the affected route(s) via the originating SGP and determines, whether or not the overall availability or congestion status of the effected destination(s) has changed. If so, the M3UA layer invokes the appropriate primitive indications to the resident M3UA Users. Local~~

~~management is informed.~~

~~An M3UA layer at the ASP MAY choose to maintain knowledge of which SGPs are included in Signalling Gateways for the purpose of interpreting SSNM messaging from one SGP so as to apply to all the SGPs in the SG.~~

#### ~~4.3.3 ASP Auditing~~

~~An ASP may optionally initiate an audit procedure in order to enquire of an SGP the availability and, if the national congestion method with multiple congestion levels and message priorities is used, congestion status of an SS7 destination or set of destinations. A Destination Audit (DAUD) message is sent from the ASP to the SGP requesting the current availability and congestion status of one or more SS7 Destination Point Codes.~~

~~The DAUD message MAY be sent un-sequenced. The DAUD MAY be sent by the ASP in the following cases:~~

~~Sidebottom et al [Page 82]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Periodic. A Timer originally set upon reception of a DUNA, SCON or DRST message has expired without a subsequent DAVA, DUNA, SCON or DRST message updating the availability/congestion status of the affected Destination Point Codes. The Timer is reset upon issuing a DAUD. In this case the DAUD is sent to the SGP that originally sent the SSNM message.~~

~~Isolation. The ASP is newly ASP INACTIVE or ASP ACTIVE or has been isolated from an SGP for an extended period. The ASP MAY request the availability/congestion status of one or more SS7 destinations to which it expects to communicate.~~

~~In the first of the cases above, the auditing procedure must not be invoked for the case of a received SCON message containing a congestion level value of "no congestion" or "undefined" (i.e., congestion Level = "0"). This is because the value indicates either congestion abatement or that the ITU MTP3 international congestion method is being used. In the international congestion method, the MTP3 layer at the SGP does not maintain the congestion status of any destinations and therefore the SGP cannot provide any congestion information in response to the DAUD. For the same reason, in the second of the cases above a DAUD message cannot reveal any congested destination(s).~~

~~The SGP MUST respond to a DAUD message with the MTP3 availability/congested status of the routeset associated with each Destination Point Code(s) in the DAUD message. The status of each SS7 destination requested is indicated in a DUNA message (if unavailable), a DAVA message (if available), or a DRST (if restricted and the SGP supports this feature). If the SS7 destination is available and congested, the SGP responds with an SCON message in addition to the DAVA message. If the SS7 destination is restricted and congested, the SGP responds with an SCON message in addition to the DRST. If the SGP has no information on the availability/congestion status of the SS7 destination, the SGP responds with a DUNA message, as it has no routing~~

~~information to allow it to route traffic to this destination~~

~~Any DUNA or DAVA message in response to a DAUD message MAY contain a list of up to sixteen Affected Point Codes.~~

#### ~~4.4 MTP3 Restart~~

~~In the case where the MTP3 in the SC undergoes an MTP restart, event communication SHOULD be handled as follows:~~

~~When the SC discovers SS7 network isolation, the SCPs send an indication to all concerned available ASPs (i.e., ASPs in the ASP ACTIVE, ASP STANDBY or ASP INACTIVE state) using a DUNA message. For the purpose of MTP restart, all Signalling Point Management Clusters with point codes~~

~~Sidebottom et al [Page 83]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~different from that of the SC with at least one ASP in the ASP ACTIVE state or that has sent an ASP ACTIVE message to the SC during the first part of the restart procedure should be considered as available. If the M3UA layer at the SGP receives any ASP ACTIVE messages during the restart procedure, it delays the ASP ACTIVE ACK messages until the end of the restart procedure. During the second part of the restart procedure the SGP M3UA layers at the SGPs inform all concerned ASPs in the ASP ACTIVE, ASP STANDBY or ASP INACTIVE states of any unavailable SS7 destinations using the DUNA message. At the end of the restart procedure the SGP M3UA layers send an ASP ACTIVE ACK message to all ASPs in the ASP ACTIVE state.~~

~~When the M3UA layer at an ASP receives a DUNA message indicating SS7 network isolation at an SC, it will stop any affected traffic via this route. When the M3UA subsequently receives any DUNA messages from an SGP it will mark the affected SS7 destinations as unavailable via that SC. When the M3UA receives an ASP ACTIVE ACK message it can resume traffic to available SS7 destinations via this SGP, provided the ASP is in the ASP ACTIVE state towards this SGP. The ASP MAY choose to audit the availability of any unavailable destinations~~

#### ~~5. Examples of M3UA Procedures~~


##### ~~5.1 Establishment of Association and Traffic between SGPs and ASPs~~

###### ~~5.1.1 Single ASP in an Application Server ("1+0" sparing),~~

###### ~~5.1.1.1 Single ASP in an Application Server ("1+0" sparing), No Registration~~

~~This scenario shows the example M3UA message flows for the establishment of traffic between an SGP and an ASP, where only one ASP is configured within an AS (no backup). It is assumed that the SCTP association is already set up. The sending of any DUNA/SCON messages by the SGP is not shown but is similar to the case described in Section 5.1.2.~~



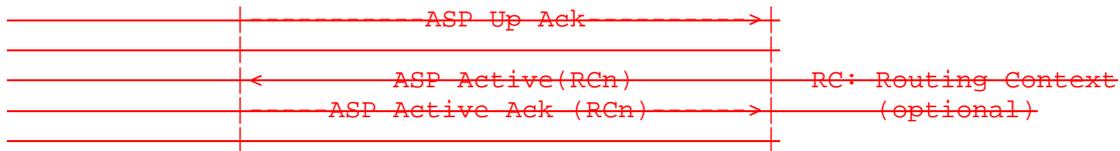


~~Note: If the ASP Active message contains an optional Routing Context parameter, The ASP Active message only applies for the specified RC value(s). For an unknown RC value, the SGP responds with an Error message.~~

~~Sidebottom et al [Page 84]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~


~~5.1.1.2 Single ASP in Application Server ("1+0" sparing), Dynamic Registration~~


~~This scenario is the same as for 5.1.1.1 but with the optional exchange of registration information. In this case the Registration is accepted by the SGP.~~

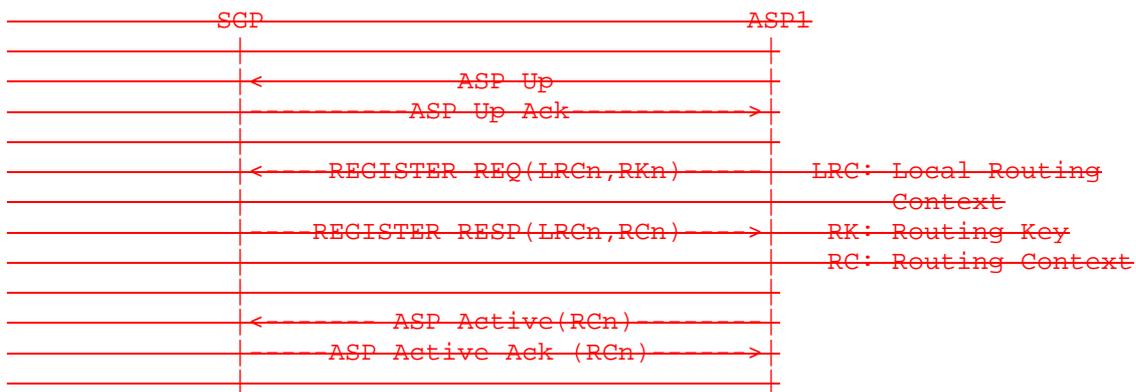

~~Note: In the case of an unsuccessful registration attempt (e.g., Invalid RKn), the Register Response message will contain an unsuccessful indication and the ASP will not subsequently send an ASP Active message.~~

~~5.1.1.3 Single ASP in Multiple Application Servers (each with "1+0" sparing), Dynamic Registration (Case 1 - Multiple Registration Requests)~~

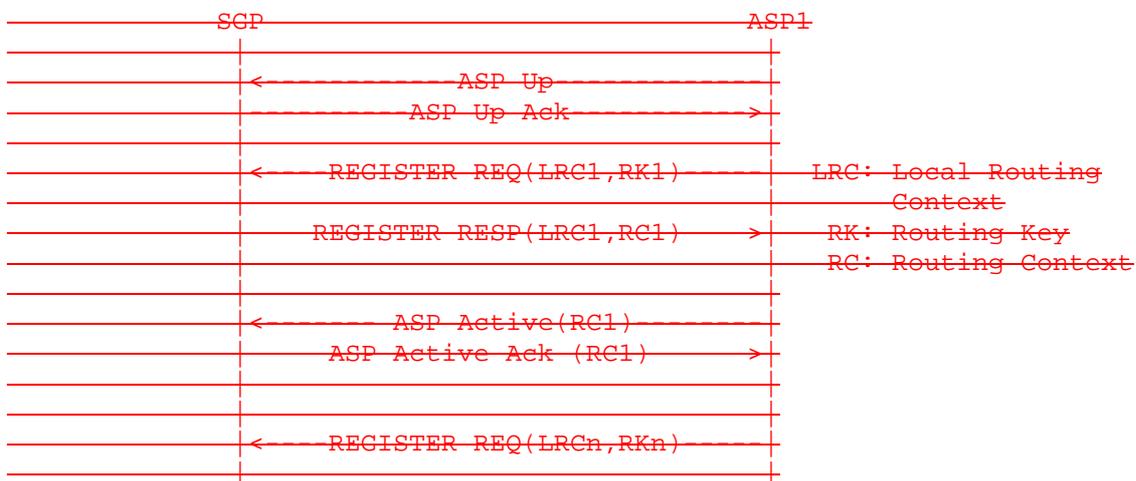

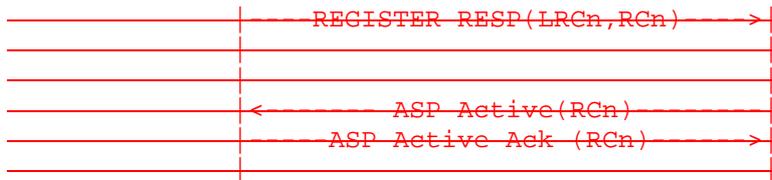


~~Sidebottom et al [Page 85]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Note: In the case of an unsuccessful registration attempt (e.g., Invalid RKn), the Register Response message will contain an unsuccessful indication and the ASP will not subsequently send an ASP Active message. Each LRC/RK pair registration is considered independently.~~

~~It is not necessary to follow a Registration Request/Response message pair with an ASP Active message before sending the next Registration Request. The ASP Active message can be sent at any time after the related successful registration.~~

~~5.1.1.4 Single ASP in Multiple Application Servers (each with "1+0" sparing), Dynamic Registration (Case 2 - Single Registration Request)~~

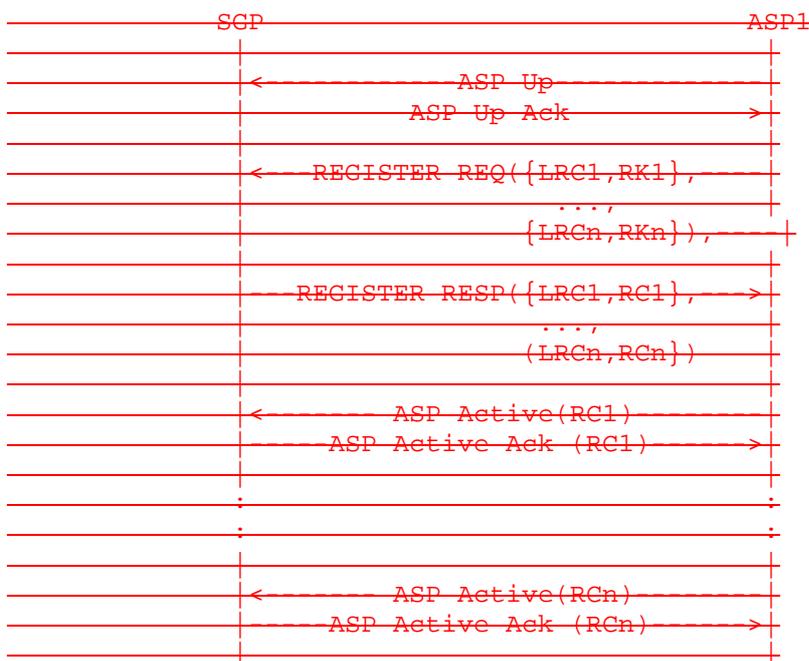


~~Note: In the case of an unsuccessful registration attempt (e.g., Invalid RKn), the Register Response message will contain an unsuccessful indication and the ASP will not subsequently send an ASP Active message. Each LRC/RK pair registration is considered independently.~~

~~The ASP Active message can be sent at any time after the related successful registration, and may have more than one RC.~~

~~5.1.2 Two ASPs in Application Server ("1+1" sparing)~~


~~This scenario shows the example M3UA message flows for the establishment of traffic between an SGP and two ASPs in the same Application Server, where ASP1 is configured to be in the ASP ACTIVE state and ASP2 is to be a "back up" in the event of communication failure or the withdrawal from service of ASP1. ASP2 may act as a hot, warm, or cold back up depending on the extent to which ASP1 and ASP2 share call/transaction state or can communicate call state under failure/withdrawal events. The example message flow is the same whether the ASP Active messages indicate "Over ride" or "Load share" mode, although typically this example would use an Over ride mode. The SGP MAY start sending any relevant DUNA, DRST and SCON messages to ASPs as soon as they enter the ASP INACTIVE state. In the case of MTP Restart, the ASP Active Ack message is only sent after all relevant DUNA/DRST/SCON messages have been transmitted to the concerned ASP.~~

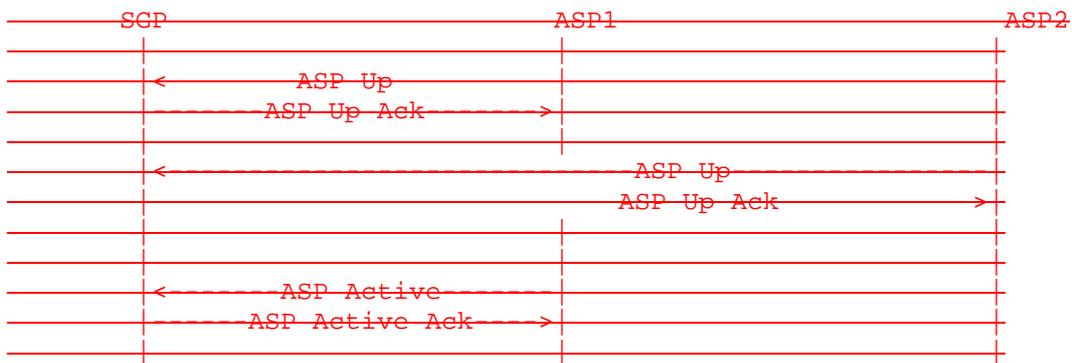

~~Note: It is also possible for ASP2 to send an ASP Active ("Over ride Standby") message after ASP1 goes ASP ACTIVE. A similar sparing arrangement is created, except that the SGP may re direct traffic to ASP2 more quickly in certain fail over cases.~~


~~5.1.3 Two ASPs in an Application Server ("1+1" sparing, load sharing case)~~

~~This scenario shows a similar case to Section 5.1.2 but where the two ASPs are brought to the state ASP ACTIVE and subsequently load share the traffic. In this case, one ASP is sufficient to handle the total traffic load. The sending of DUNA, DRST and SCON messages by the SGP is not shown but is similar to the case described in Section 5.1.2.~~

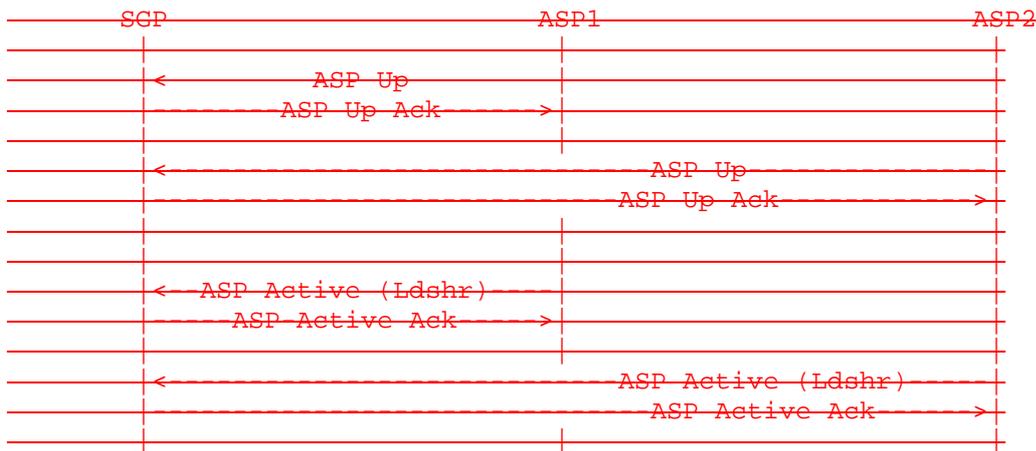

5.1.4 Three ASPs in an Application Server ("n+k" sparing, load sharing case)

This scenario shows the example M3UA message flows for the establishment of traffic between an SCP and three ASPs in the same Application Server, where two of the ASPs are brought to the state ASP ACTIVE and subsequently share the load. In this case, a minimum of two ASPs are required to handle the total traffic load (2+1 sparing). The sending of DUNA, DRST and SCON messages by the SCP is not shown but is similar to the case described in Section 5.1.2.

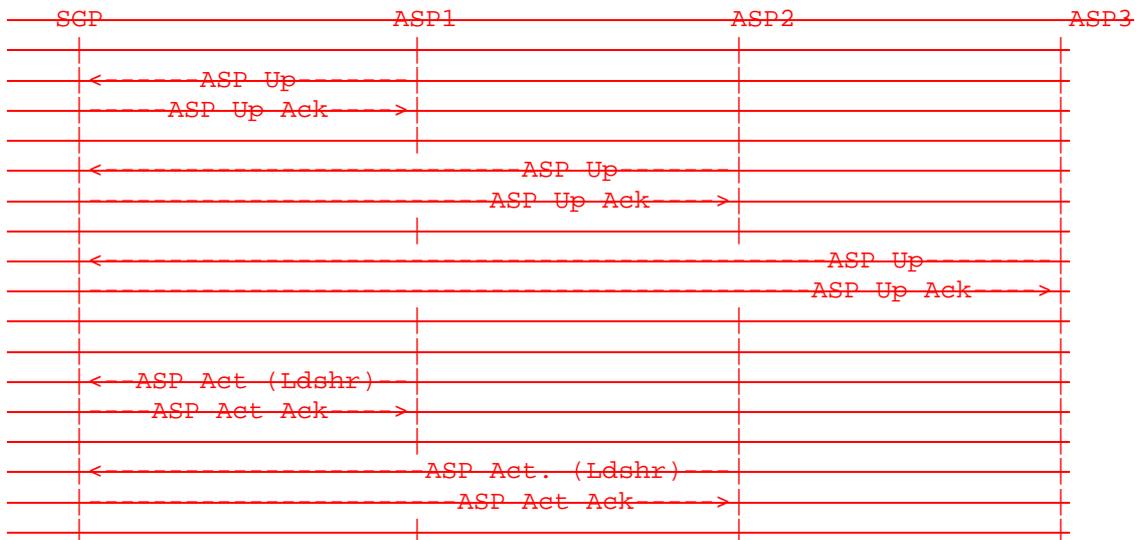

Sidebottom et al [Page 88]


Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001

Note: It is also possible for ASP3 to send an ASP Active message ("Loadshare Standby") after ASP1 and ASP2 go to the ASP ACTIVE state. A similar sparing arrangement is created, except that the SCP may redirect traffic to ASP3 more quickly in certain fail over cases.

5.2 ASP Traffic Fail over Examples

~~5.2.1 (1+1 Sparing, Withdrawal of ASP, Back up Over ride)~~


~~Following on from the example in Section 5.1.2, and ASP1 withdraws from service:~~

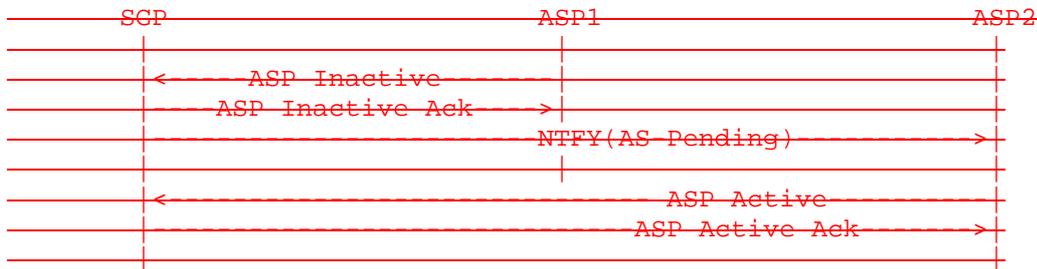

~~Note: If the SGP M3UA layer detects the loss of the M3UA peer (M3UA heartbeat loss or detection of SCTP failure), the initial ASP Inactive message exchange (i.e., SGP to ASP1) would not occur.~~


~~5.2.2 (1+1 Sparing, Back up Over ride)~~

~~Following on from the example in Section 5.1.2, and ASP2 wishes to over ride ASP1 and take over the traffic:~~

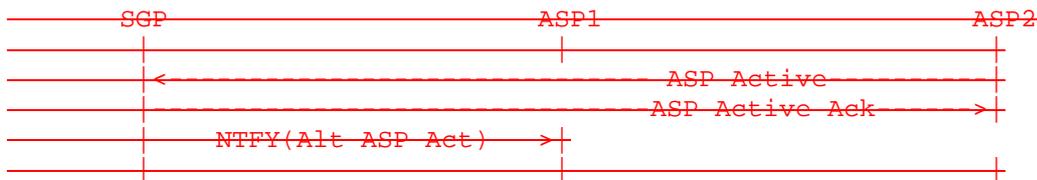

~~5.2.3 (n+k Sparing, Load sharing case, Withdrawal of ASP)~~

~~Following on from the example in Section 5.1.4, and ASP1 withdraws from service:~~

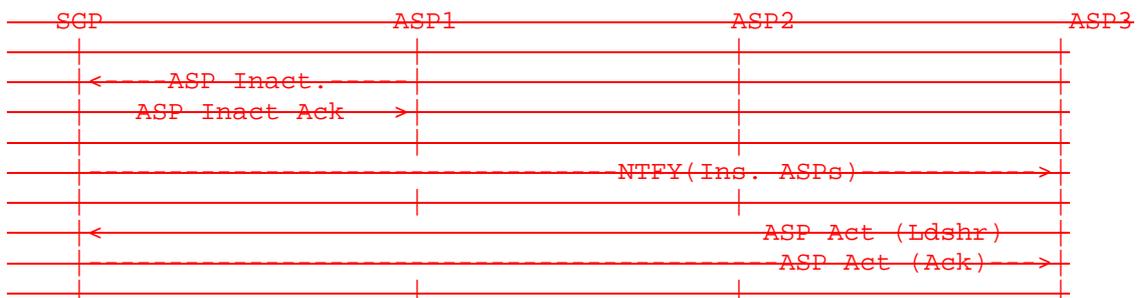


~~For the Notify message to be sent, the SC maintains knowledge of the minimum ASP resources required (e.g., if the SC knows that "n+k" = "2+1" for a load share AS and "n" currently equals "1").~~

~~Note: If the SCP detects loss of the ASP1 M3UA peer (M3UA heartbeat loss or detection of SCTP failure), the initial ASP Inactive message exchange (i.e., SCP-ASP1) would not occur.~~

### ~~5.3 Normal Withdrawal of an ASP from an Application Server and Tear-down of an Association~~

~~An ASP which is now confirmed in the state ASP INACTIVE (i.e., the ASP has received an ASP Inactive Ack message) may now proceed to the ASP-DOWN state, if it is to be removed from service. Following on from Section 5.2.1 or 5.2.3, where ASP1 has moved to the "Inactive" state:~~

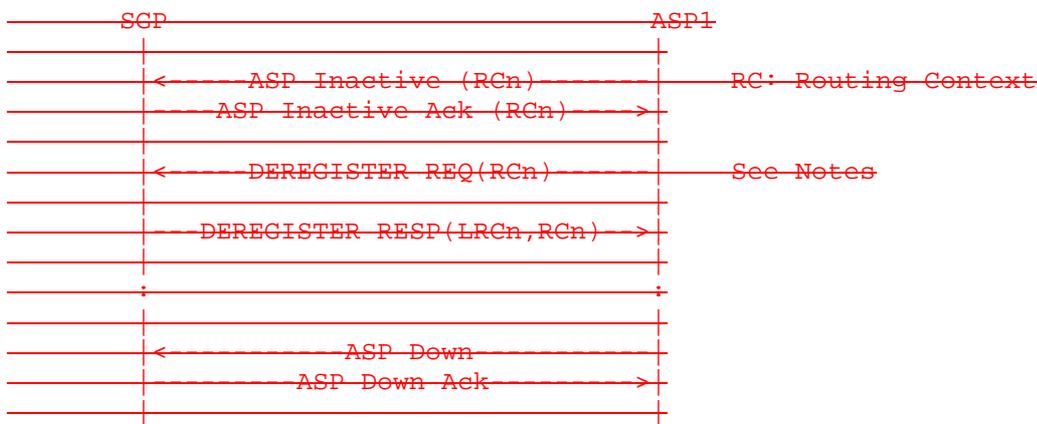

~~Note: The Deregistration procedure MUST be used if the ASP previously used the Registration procedures for configuration within the Application Server. ASP Inactive and Deregister messages exchanges may contain multiple Routing Contexts.~~

~~The ASP SHOULD be ASP INACTIVE and de-registered in all its Routing Contexts before attempting to move to the ASP-DOWN state.~~

### ~~5.4 M3UA/MTP3 User Boundary Examples~~

#### ~~5.4.1 At an ASP~~

~~This section describes the primitive mapping between the MTP3 User and the M3UA layer at an ASP.~~


##### ~~5.4.1.1 Support for MTP TRANSFER Primitives at the ASP~~

###### ~~5.4.1.1.1 Support for MTP TRANSFER Request Primitive~~

~~When the MTP3 User on the ASP has data to send into the SS7 network, it uses the MTP TRANSFER request primitive. The M3UA layer at the ASP will do the following when it receives an MTP TRANSFER request~~

~~primitive from the M3UA user:~~

- ~~— Determine the correct SGP;~~
- ~~— Determine the correct association to the chosen SGP;~~
- ~~— Determine the correct stream in the association (e.g., based on SLS);~~
- ~~— Determine whether to complete the optional fields of the DATA message;~~
- ~~— Map the MTP TRANSFER request primitive into the Protocol Data field of a DATA message;~~
- ~~— Send the DATA message to the remote M3UA peer at the SGP, over the SCTP association.~~



~~5.4.1.1.2 Support for the MTP TRANSFER Indication Primitive~~


~~When the M3UA layer on the ASP receives a DATA message from the remote M3UA peer at the SGP, it will do the following:~~

- ~~— Evaluate the optional fields of the DATA message, if present;~~

~~Sidebottom et al [Page 91]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

- ~~— Map the Protocol Data field of a DATA message into the MTP TRANSFER indication primitive;~~
- ~~— Pass the MTP TRANSFER indication primitive to the user part. In case of multiple user parts, the optional fields of the Data message are used to determine the concerned user part.~~



~~5.4.1.1.3 Support for ASP Querying of SS7 Destination States~~

~~There are situations such as temporary loss of connectivity to the SGP that may cause the M3UA layer at the ASP to audit SS7 destination availability/congestion states. Note: there is no primitive for the MTP3 User to request this audit from the M3UA layer as this is initiated by an internal M3UA management function.~~





5.4.2 At an SCP

This section describes the primitive mapping between the MTP3 User and the M3UA layer at an SCP.

5.4.2.1 Support for MTP TRANSFER Request Primitive at the SCP

When the M3UA layer at the SCP has received DATA messages from its peer destined to the SS7 network it will do the following:

- Evaluate the optional fields of the DATA message, if present, to determine the Network Appearance;
- Map the Protocol data field of the DATA message into an MTP TRANSFER request primitive;
- Pass the MTP TRANSFER request primitive to the MTP3 of the concerned Network Appearance.

Sidebottom et al [Page 92]

Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001




5.4.2.2 Support for MTP TRANSFER Indication Primitive at the SCP

When the MTP3 layer at the SCP has data to pass its user parts, it will use the MTP TRANSFER indication primitive. The M3UA layer at the SCP will do the following when it receives an MTP TRANSFER indication primitive:

- Determine the correct ASP;
- Determine the correct association to the chosen ASP;
- Determine the correct stream in the association (e.g., based on SLS);
- Determine whether to complete the optional fields of the DATA message;
- Map the MTP TRANSFER indication primitive into the Protocol Data field of a DATA message;
- Send the DATA message to the remote M3UA peer in the ASP, over the SCTP association





~~5.4.2.3 Support for MTP\_PAUSE, MTP\_RESUME, MTP\_STATUS Indication Primitives~~

~~The MTP\_PAUSE, MTP\_RESUME and MTP\_STATUS indication primitives from the MTP3 upper layer interface at the SCP need to be made available to the remote MTP3 User Part lower layer interface at the concerned ASP(s).~~

~~5.4.2.3.1 Destination Unavailable~~

~~The MTP3 layer at the SCP will generate an MTP\_PAUSE indication primitive when it determines locally that an SS7 destination is unreachable. The M3UA layer will map this primitive to a DUNA message. The SCP M3UA layer determines the set of concerned ASPs to be informed based on internal SS7 network information associated with the MTP\_PAUSE indication primitive indication.~~

~~Sidebottom et al [Page 93]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~




~~5.4.2.3.2 Destination Available~~

~~The MTP3 at the SCP will generate an MTP\_RESUME indication primitive when it determines locally that an SS7 destination that was previously unreachable is now reachable. The M3UA layer will map this primitive to a DAVA message. The SCP M3UA determines the set of concerned ASPs to be informed based on internal SS7 network information associated with the MTP\_RESUME indication primitive.~~



~~5.4.2.3.3 SS7 Network Congestion~~

~~The MTP3 layer at the SCP will generate an MTP\_STATUS indication primitive when it determines locally that the route to an SS7 destination is congested. The M3UA layer will map this primitive to a SCON message. It will determine which ASP(s) to send the SCON message to, based on the intended Application Server.~~

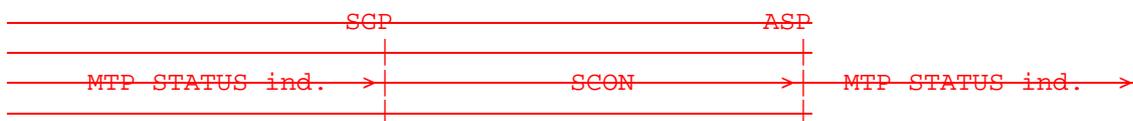

~~5.4.2.3.4 Destination User Part Unavailable~~

~~The MTP3 layer at the SCP will generate an MTP\_STATUS indication primitive when it receives an UPU message from the SS7 network. The M3UA layer will map this primitive to a DUPU message. It will determine which ASP(s) to send the DUPU based on the intended Application Server.~~



~~Sidebottom et al [Page 94]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

## ~~6. Security~~

### ~~6.1 Introduction~~

~~M3UA is designed to carry signalling messages for telephony services. As such, M3UA must involve the security needs of several parties: the end users of the services; the network providers and the applications involved. Additional requirements may come from local regulation. While having some overlapping security needs, any security solution should fulfil all of the different parties' needs.~~

### ~~6.2 Threats~~

~~There is no quick fix, one size fits all solution for security. As a transport protocol, M3UA has the following security objectives:~~

- ~~\* Availability of reliable and timely user data transport.~~
- ~~\* Integrity of user data transport.~~
- ~~\* Confidentiality of user data.~~

~~M3UA is recommended to be transported on SCTP. SCTP [13] provides certain transport related security features, such as some protection against:~~

- ~~\* Blind Denial of Service Attacks~~
- ~~\* Flooding~~
- ~~\* Masquerade~~
- ~~\* Improper Monopolization of Services~~

~~When M3UA is running in professionally managed corporate or service provider network, it is reasonable to expect that this network includes an appropriate security policy framework. The "Site Security Handbook" [21] should be consulted for guidance.~~

~~When the network in which M3UA runs in involves more than one party, it may not be reasonable to expect that all parties have implemented security in a sufficient manner. In such a case, it is recommended that IPSEC is used to ensure confidentiality of user payload. Consult [22] for more information on configuring IPSEC services.~~

### ~~6.3 Protecting Confidentiality~~

~~Particularly for mobile users, the requirement for confidentiality may include the masking of IP addresses and ports. In this case application level encryption is not sufficient; IPSEC ESP [23] SHOULD be used instead. Regardless of which level performs the encryption, the IPSEC ISAKMP [24] service SHOULD be used for key management.~~

~~Sidebottom et al [Page 95]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

## ~~7. IANA Considerations~~

### ~~7.1 SCTP Payload Protocol Identifier~~

~~IANA has assigned an M3UA value for the Payload Protocol Identifier in the SCTP DATA chunk. The following SCTP Payload Protocol Identifier is registered:~~

~~----- M3UA ----- "3"~~

~~The SCTP Payload Protocol Identifier value "3" SHOULD be included in each SCTP DATA chunk, to indicate that the SCTP is carrying the M3UA protocol. The value "0" (unspecified) is also allowed but any other values MUST not be used. This Payload Protocol Identifier is not directly used by SCTP but MAY be used by certain network entities to identify the type of information being carried in a DATA chunk.~~

~~The User Adaptation peer MAY use the Payload Protocol Identifier as a way of determining additional information about the data being presented to it by SCTP.~~

### ~~7.2 M3UA Port Number~~

~~IANA has registered SCTP (and UDP/TCP) Port Number 2905 for M3UA.~~

### ~~7.3 M3UA Protocol Extensions~~

~~This protocol may also be extended through IANA in three ways:  
----- through definition of additional message classes,  
----- through definition of additional message types, and  
----- through definition of additional message parameters~~

~~The definition and use of new message classes, types and parameters is an integral part of SIGTRAN adaptation layers. Thus these extensions are assigned by IANA through an IETF Consensus action as defined in Guidelines for Writing an IANA Considerations Section in RFCs (25)~~

~~The proposed extension must in no way adversely affect the general working of the protocol.~~

#### ~~7.3.1 IETF Defined Message Classes~~

~~The documentation for a new message class MUST include the following information:~~

- ~~(a) A long and short name for the new message class;~~
- ~~(b) A detailed description of the purpose of the message class.~~

#### ~~7.3.2 IETF Defined Message Types~~

~~The documentation for a new message type MUST include the following information:~~

~~Sidebottom et al [Page 96]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

- ~~(a) A long and short name for the new message type;~~
- ~~(b) A detailed description of the structure of the message;~~
- ~~(c) A detailed definition and description of intended use for each field within the message;~~
- ~~(d) A detailed procedural description of the use of the new message type within the operation of the protocol;~~
- ~~(e) A detailed description of error conditions when receiving this message type.~~

~~When an implementation receives a message type which it does not support, it MUST respond with an Error (ERR) message ("Unsupported Message Type").~~

### ~~7.3.3 IETF Defined Parameter Extension~~

~~Documentation of the message parameter MUST contain the following information:~~

- ~~(a) Name of the parameter type;~~
- ~~(b) Detailed description of the structure of the parameter field. This structure MUST conform to the general type length value format described in Section 3.2;~~
- ~~(c) Detailed definition of each component of the parameter value;~~
- ~~(d) Detailed description of the intended use of this parameter type, and an indication of whether and under what circumstances multiple instances of this parameter type may be found within the same message.~~

## ~~8. Acknowledgements~~

~~The authors would like to thank Antonio Roque Alvarez, Joyce Archibald, Tolga Asveren, Brian Bidulock, Dan Brendes, Nikhil Jain, Joe Keller, Kurt Kite, Ming Lin, Steve Lorusso, John Loughney, Naoto Makinae, Howard May, Barry Nagelberg, Neil Olson, Heinz Prantner, Shyamal Prasad, Mukesh Punhani, Selvam Rengasami, Ray Singh, Michael Tuexen, Nitin Tomar, Gery Verwimp, Kazuo Watanabe, Ben Wilson and many others for their valuable comments and suggestions.~~

## ~~9. References~~

- ~~[1] RFC 2719, "Framework Architecture for Signaling Transport", L. Ong et al, October 1999~~
- ~~[2] ITU-T Recommendations Q.761 to Q.767, "Signalling System No.7 (SS7) ISDN User Part (ISUP)"~~
- ~~[3] ANSI T1.113 - "Signaling System Number 7 ISDN User Part"~~

~~Sidebottom et al [Page 97]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~[4] ETSI ETS 300 356 1 "Integrated Services Digital Network (ISDN);  
Signalling System No.7; ISDN User Part (ISUP) version 2 for the  
international interface; Part 1: Basic services"~~

~~[5] ITU-T Recommendations Q.711 to Q.715, "Signalling System No. 7  
(SS7) Signalling Connection Control Part (SCCP)"~~

~~[6] ANSI T1.112 "Signaling System Number 7 Signaling Connection  
Control Part"~~

~~[7] ETSI ETS 300 009 1, "Integrated Services Digital Network (ISDN);  
Signalling System No.7; Signalling Connection Control Part (SCCP)  
(connectionless and connection-oriented class 2) to support  
international interconnection; Part 1: Protocol specification"~~

~~[8] ITU-T Recommendation Q.720, "Telephone User Part"~~

~~[9] ITU-T Recommendations Q.771 to Q.775 "Signalling System No. 7 (SS7)  
Transaction Capabilities (TCAP)"~~

~~[10] ANSI T1.114 "Signaling System Number 7 Transaction Capabilities  
Application Part"~~

~~[11] ETSI ETS 300 287 1, "Integrated Services Digital Network (ISDN);  
Signalling System No.7; Transaction Capabilities (TC) version 2;  
Part 1: Protocol specification"~~

~~[12] 3G TS 25.410 V4.0.0 (2001-04) "Technical Specification 3rd  
Generation partnership Project; Technical Specification Group  
Radio Access Network; UTRAN Iu Interface: General Aspects and  
Principles"~~

~~[13] RFC 2960, "Stream Control Transport Protocol", R. Stewart et al,  
October 2000.~~

~~[14] ITU-T Recommendations Q.701 to Q.705, "Signalling System No. 7  
(SS7) Message Transfer Part (MTP)"~~

~~[15] ANSI T1.111 "Signaling System Number 7 Message Transfer Part"~~

~~[16] ETSI ETS 300 008 1, "Integrated Services Digital Network (ISDN);  
Signalling System No.7; Message Transfer Part (MTP) to support  
international interconnection; Part 1: Protocol specification"~~

~~[17] ITU-T Recommendation Q.2140 "B-ISDN ATM Adaptation Layer Service  
Specific Coordination Function for signalling at the Network Node  
Interface (SSCF at NNI)"~~

~~[18] ITU-T Recommendation Q.2110 "B-ISDN ATM Adaptation Layer Service  
Specific Connection Oriented Protocol (SSCOP)"~~

~~Sidebottom et al [Page 98]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~[19] RFC 2119, "Key words for use in RFCs to Indicate Requirement  
Levels", S. Bradner, March 1997.~~

~~[20] ITU-T Recommendation Q.2210 "Message Transfer Part Level 3 functions and messages using the services of ITU Recommendation Q.2140"~~

~~[21] RFC 2196, "Site Security Handbook", B. Fraser Ed., September 1997~~

~~[22] RFC 2401, "Security Architecture for the Internet Protocol", S. Kent, R. Atkinson, November 1998.~~

~~[23] RFC 2406, "IP Encapsulating Security Payload (ESP)", S. Kent and R. Atkinson, November 1998.~~

~~[24] RFC 2408, "Internet Security Association and Key Management Protocol", D. Maughan, M. Schertler, M. Schneider and J. Turner, November 1998.~~

~~[25] RFC 2434, "Guidelines for Writing an IANA Considerations Section in RFCs", T. Narten and H. Alvestrand, October 1998~~

#### ~~10. Bibliography~~

~~[26] <draft-ietf-sigtran-m2ua-07.txt>, "MTP2 User Adaptation Layer", K. Morneault et al, February 2001 (Work in Progress)~~

#### ~~11. Author's Addresses~~

~~Greg Sidebottom  
Kanata, Ontario, Canada  
gregside@home.com~~

~~Guy Mousseau  
Nortel Networks  
3685 Richmond Rd  
Nepean, Ontario, Canada K2H 5B7~~

~~Lyndon Ong  
Ciena  
10480 Ridgeview Court  
Cupertino, CA 95014  
lyong@ciena.com~~

~~Ian Rytina  
Eriesson Australia  
37/360 Elizabeth Street  
Melbourne, Victoria 3000, Australia  
ian.rytina@ericsson.com.au~~

~~Sidebottom et al [Page 99]~~

~~Internet Draft SS7 MTP3 User Adaptation Layer Jul 2001~~

~~Hanns Juergen Schwarzbauer  
SIEMENS AG  
Hofmannstr. 51  
81359 Munich, Germany  
HannsJuergen.Schwarzbauer@icn.siemens.de~~

~~Klaus D. Gradischnig  
NeuStar, Inc  
1120 Vermont Ave. N.W. Suite 400  
Washington D.C 20005  
klaus.gradischnig@neustar.com~~

~~Ken Morneault  
Cisco Systems Inc.  
13615 Dulles Technology Drive  
Herndon, VA, USA 20171  
EMail: kmorneau@cisco.com~~

~~Malleswar Kalla  
Telcordia Technologies  
MCC 1J211R  
445 South Street  
Morristown, NJ, USA 07960  
Email: kalla@research.telcordia.com~~

~~Normand Claude  
Performance Technologies  
150 Metcalf Sreet, Suite 1300  
Ottawa, Ontario, Canada K2P 1P1  
EMail: nglau@microlegend.com~~

~~This draft expires December 2001.~~