

---

**Source:** SA5 (Telecom Management)  
**Title:** Rel-6 TR 32.805 Process guide; Backward compatibility recommendations  
**Document for:** Approval  
**Agenda Item:** 7.5.3

---

**3GPP TSG-SA5 (Telecom Management)**  
**Meeting #40, Sanya, CHINA, 15 - 19 November 2004**

**S5-047037**

## **Presentation of Technical Report to TSG SA**

---

**Presentation to:** TSG SA Meeting #26  
**Document for presentation:** TR 32.805, Version 1.0.0  
Backward Compatibility Recommendations  
**Presented for:** Approval

---

**Abstract of document:**

This is a TR defining the context and the requirements for IRP based backward compatible systems.

Work done against the WID contained in SP-020754 (OAM-NIM).

---

**Purpose of These Specifications:**

This TR captures:

- a) the requirements for IRP Backward Compatible systems and
- b) the scope of standard recommendations that facilitate interworking of IRPManagers and IRPAgents of different IRPVersions.

---

**Changes since last presentation to TSG-SA:**

New.

---

**Outstanding Issues:**

None.

---

**Contentious Issues:**

None.

# 3GPP TR 32.805 V1.0.0 (2004-12)

---

*Technical Report*

**3rd Generation Partnership Project;  
Technical Specification Group Services and System Aspects;  
Telecommunication management;  
Process guide;  
Backward compatibility recommendations  
(Release 6)**

---



The present document has been developed within the 3<sup>rd</sup> Generation Partnership Project (3GPP<sup>TM</sup>) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organizational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organizational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP<sup>TM</sup> system should be obtained via the 3GPP Organizational Partners' Publications Offices.

---

Keywords

---

Telecommunication management, Backward  
Compatibility

**3GPP**

Postal address

---

3GPP support office address

---

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

---

<http://www.3gpp.org>

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2004, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TTA, TTC).  
All rights reserved.

---

# Contents

Foreword.....	4
Introduction .....	5
1 Scope .....	5
2 References .....	5
3 Definitions and abbreviations.....	6
3.1 Definitions .....	6
3.2 Abbreviations .....	6
4 BC recommendations .....	6
4.1 Prerequisite.....	6
4.2 Recommendations .....	7
5. BC context.....	7
5.1 IRP Level – “Specification BC” .....	8
5.2 IRP Agent Level – “System/Implementation BC” .....	9
<b>Annex A (informative): BC and Conformance Tests .....</b>	<b>11</b>
<b>Annex B (informative): Change history .....</b>	<b>12</b>

---

## Foreword

This Technical Report (TR) has been produced by the 3<sup>rd</sup> Generation Partnership Project; Technical Specification Group Services and System Aspects.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

## Introduction

The Itf-N partitions two groups of interacting entities called IRPManager(s) and IRPAgent(s).

The interactions between an IRPManager and IRPAgent are specified by the set of IRP specifications the IRPAgent supports, and which the IRPManager uses.

Each YyyIRP (where “Yyy” stands for Alarm, BasicCM, etc.) permits a manager to, via `getIRPVersion`, inspect its supported IRPVersion(s). Each such IRPVersion uniquely identifies one supported Interface IRP SS.

Each YyyIRP may also permit an IRPManager to, via `getNRMIRPVersions`, inspect its supported NRM IRPVersion(s). Each such IRPVersion uniquely identifies one supported NRM IRP SS.

The 3GPP IRP specifications are expected to evolve. For example, 3GPP Release 6 specifications include more or modified features compared to the corresponding set in Release 5.

An IRPManager and IRPAgent, with implementations conformant to the same IRP specification (at the same IRPVersion(s)) will be able to communicate.

However, an upgrade of the IRPVersion, if not performed by both IRPAgent and IRPManager, can result in inter-working failure if Backward Compatibility (BC) issues are not addressed.

The present document is applicable/relevant to a system context of a group of interacting IRPManagers and IRPAgents where some members are using one IRPVersion while others are using an upgraded IRPVersion.

---

## 1 Scope

The present document gives recommendations to develop future IRP specifications in a Backward Compatible (BC) way so that the group of IRPManager(s) and IRPAgent(s) are not forced to be upgraded in lock step.

The business case for supporting such group, as described above, is complex. It may not relate to the functions of the supported IRPs alone. Rather, it can relate to the cost of coordination of IRPVersion upgrades, the cost of maintaining an old IRPVersion and the cost of using single-vendor or multi-vendor IRPAgents. These considerations are operator deployment scenarios specific.

Clause 2 provides the list of references. Clause 3 provides the definitions and abbreviations used in the document. Clause 4 specifies the Recommendations. Clause 5 describes the system context where the Recommendations are applicable.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".

[2] 3GPP TS 32.102: "Telecommunication management; Architecture".

[3] 3GPP TS 32.111-2: "Telecommunication management; Fault Management; Part 2: Alarm Integration Reference Point (IRP): Information Service (IS)".

- [4] 3GPP TS 32.311: "Telecommunication management; Generic Integration Reference Point (IRP) management; Requirements".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

Element Manager (EM): See 3GPP TS 32.101 [1].

IRPAgent: See 3GPP TS 32.102 [2].

IRPManager: See 3GPP TS 32.102 [2].

IRPVersion: See "IRP document version number string" or "IRPVersion" of 3GPP TS 32.311 [4] subclause 3.1.

Network Manager (NM): See 3GPP TS 32.101 [1].

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BC	Backward Compatible \ Compatibility
EM	Element Manager
IS	Information Service
IRP	Integration Reference Point
NE	Network Element
NRM	Network Resource Model
VSE	Vendor Specific Extension (to 3GPP IRP specification)
SS	Solution Set

---

## 4 BC recommendations

### 4.1 Prerequisite

The words old and new, when qualifying an IRPVersion, refer to a single Interface IRPVersion of the same kind, e.g., Alarm IRP. They also refer to NRM IRPVersion of the same kind, e.g., Core NRM. The 'new' refers to a later release compared to the 'old'.

The words old and new, when qualifying an IRPManager, refer to an entity that is using the old or the new (Interface or NRM) IRPVersion.

The words old and new, when qualifying an IRPAgent, refer to an entity that contains an IRP that is supporting the old or the new (Interface or NRM) IRPVersion.

In majority cases, an IRPAgent instance contains multiple IRPs, each of which is using a particular Interface IRPVersion. In these cases, each Recommendation statement should be repeated to cover all IRPs involved.

The Recommendations do not imply that equipment vendors shall always supply their new IRPAgents in compliance to the solutions satisfying the Recommendations. The Recommendations simply identify the expected behaviours of a new system when it, claiming BC, interacts with an old system. Whether or not an IRPAgent should satisfy the Recommendations is a decision of the equipment vendor/supplier.

The Recommendations do not imply that the next release of 3GPP Interface IRP or NRM IRP specification must be BC (to the older one). Whether or not a new release of an Interface IRP or NRM IRP should be BC to its older version is a decision of the 3GPP specification author, on a case-by-case basis.

## 4.2 Recommendations

- [REC-1] An old IRPManager inter-operates with an old IRPAgent-A and a new IRPAgent-B. The interaction shall be successful in that the IRPManager can obtain the network management services (capabilities and features) defined by the old IRPVersion from both IRPAgents. The IRPManager needs not have knowledge of new network management services defined by the new IRPVersion.
- [REC-2] A new IRPManager inter-operates with a new IRPAgent-A and an old IRPAgent-B. The interaction shall be successful in that the IRPManager can obtain the network management services defined by (a) the new IRPVersion from IRPAgent-A and (b) the old IRPVersion from IRPAgent-B.

NOTE: If the next minor and/or major release of 3GPP Interface IRP or NRM IRP specification is BC (to the older one), one could reduce or eliminate the difficult coordination task to introduce IRPVersion upgrades in a large management domain containing multiple IRPManagers and IRPAgents. It can be more cost-effective if IRPVersion upgrades to individual entity (i.e., IRPManager and IRPAgent) are done at different times.


---

## 5. BC context

This clause defines the context under which the requirements specified in the present document are applicable.

The word ‘old’ qualifies the related entity (i.e., the AlarmIRP of an IRPAgent instance or Alarm IRPManager) that is using an older 3GPP IRPVersion (called old version). The word ‘new’ qualifies the related entity that is using a newer (upgraded) 3GPP IRPVersion. For example, 32.123 V6.0.0 is considered the old version with reference to 32.123 V6.1.0. The two versions in question can belong to the same or different major releases (i.e. Rel-5 or Rel-6).

The box labelled EM in the below diagram conveys the same idea as the box of the same label in the System Context-A of other IRP specifications such as Alarm IRP IS [3]. One or all EM-labelled boxes of this figure can be interchanged with the NE-labelled box (see System Context-B of other IRP specifications such as Alarm IRP IS [3]). The NE entities are not shown in order to make the figure easier to read.

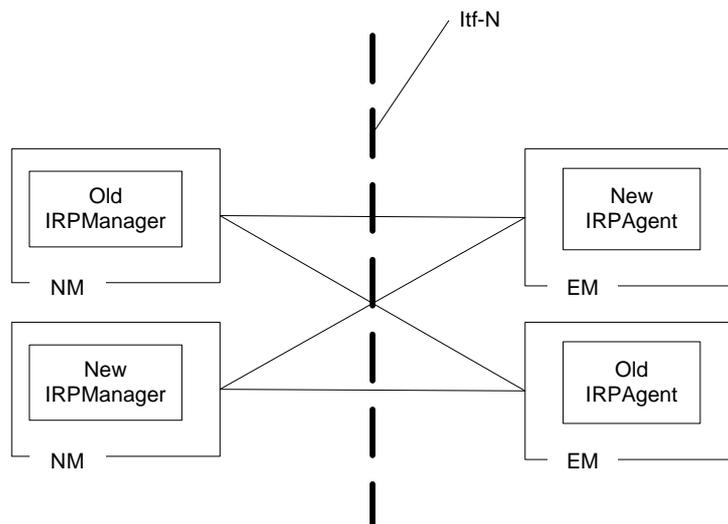

**Figure: Overall BC System Context**


In general, an IRPAgent instance may contain several Interface xxxIRP instances and associated supporting yyy NRM IRPs (where “xxx” can be for example “Alarm”, “Test Management”, “Notification”, etc and where “yyy” can be for example “Generic”). The Interface xxx and yyy NRM IRP specifications of particular IRPVersion(s) together specify the behaviour of an xxxIRP supporting yyy NRM(s).

NOTE: The IRPVersion concept is related to the IRP. The IRPVersion concept is not related to the IRPAgent as this may contain multiple IRPs.

Given this background, the BC issues are addressed at two separate but related levels as described in 5.1 and 5.2.

## 5.1 IRP Level – “Specification BC”

The two diagrams in Figure 5.1 illustrate conceptually the two possible contexts when we address BC at this IRP Level.

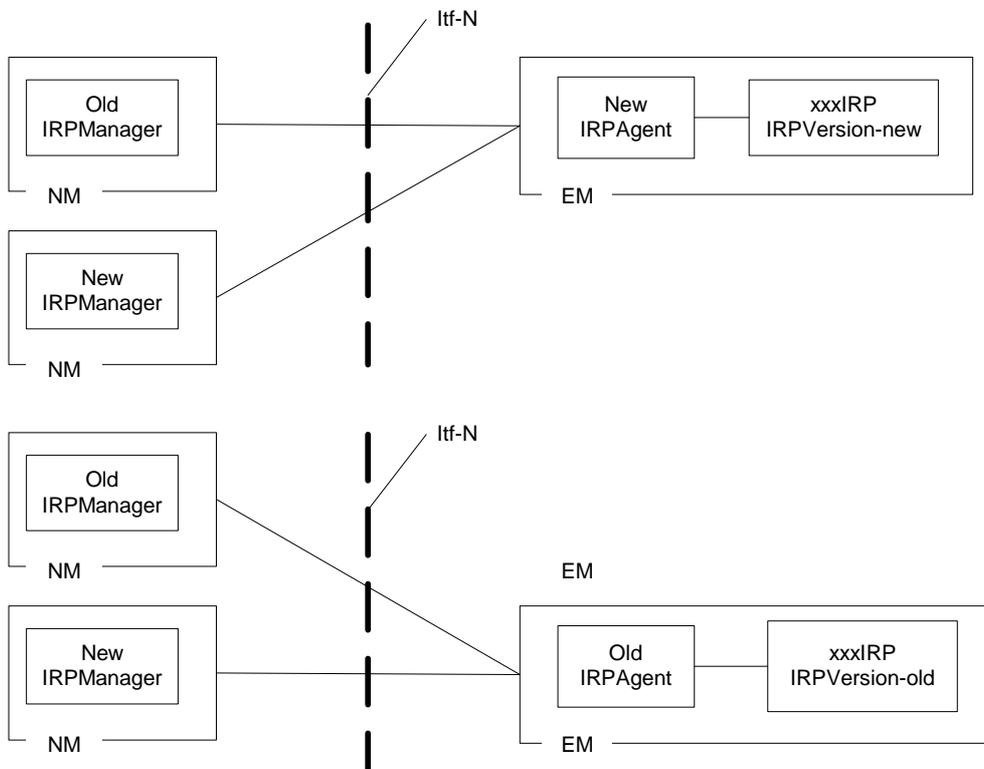

**Figure 5.1: Specification BC System Context**

An XxxIRP instance supports a particular Interface IRPVersion and a particular set of NRM IRPVersions. An IRPManager uses a particular Interface IRPVersion and a particular set of NRM IRPVersions.

If an XxxIRP instance supports Interface IRPVersion-X and NRM IRPVersions-Y, then it can interact successfully with an IRPManager that uses the same IRPVersions. This is illustrated by the case of the “Old IRPManager” and the “Old IRPAgent” of the bottom diagram (and note that the diagram does not show the NRM IRP version support).

If this same XxxIRP instance upgrades its Interface IRPVersion-X to X2 that is BC to X, then it can interact successfully with an IRPManager that uses the Interface IRPVersion-X or IRPVersion-X2. The top diagram of figure 5.1 illustrates this case (and note that the diagram does not show the NRM IRP version support).

If this same XxxIRP instance upgrades its NRM IRPVersion-Y to Y2 that is BC to Y, then it can interact successfully with an IRPManager that uses the NRM IRPVersion-Y or NRM IRPVersion-Y2. The top diagram of figure 5.1 illustrated this case (and note that the diagram does not show the NRM IRP version support).

Given the above, the BC issues addressed at this specification level are:

- How to determine if an IRP IS or SS specification (Interface IRP or NRM IRP) is BC to an earlier version ?

This can be addressed in another way.

What are the BC-rules that the author of a 3GPP IRP specification should use to extend an old-version to produce a new version that can claim BC (to that old-version) ?

At this level, the specification author shall define BC-rules for each of the following:


- Interface IRP- Requirements
- Interface IRP IS

- Interface IRP SS(s)
- NRM IRP requirements
- NRM IRP IS
- NRM IRP SS(s)
- Data Definition IRP IS
- Data Definition IRP SS(s)

One reason why the specification author addresses BC at this IRP Level is that, for certain technologies, such as CORBA, it is possible that one entity using (compiles with) one IRP SS specification (i.e., the CORBA SS) while the other communicating entity using a new but BC version can interact successfully (such as the case of the IRPManager and IRPAgent-A of [REC-1]).

## 5.2 IRPAgent Level – “System/Implementation BC”

The two diagrams in Figure 5.2 illustrate the two possible contexts when we address BC at this IRPAgent Level.

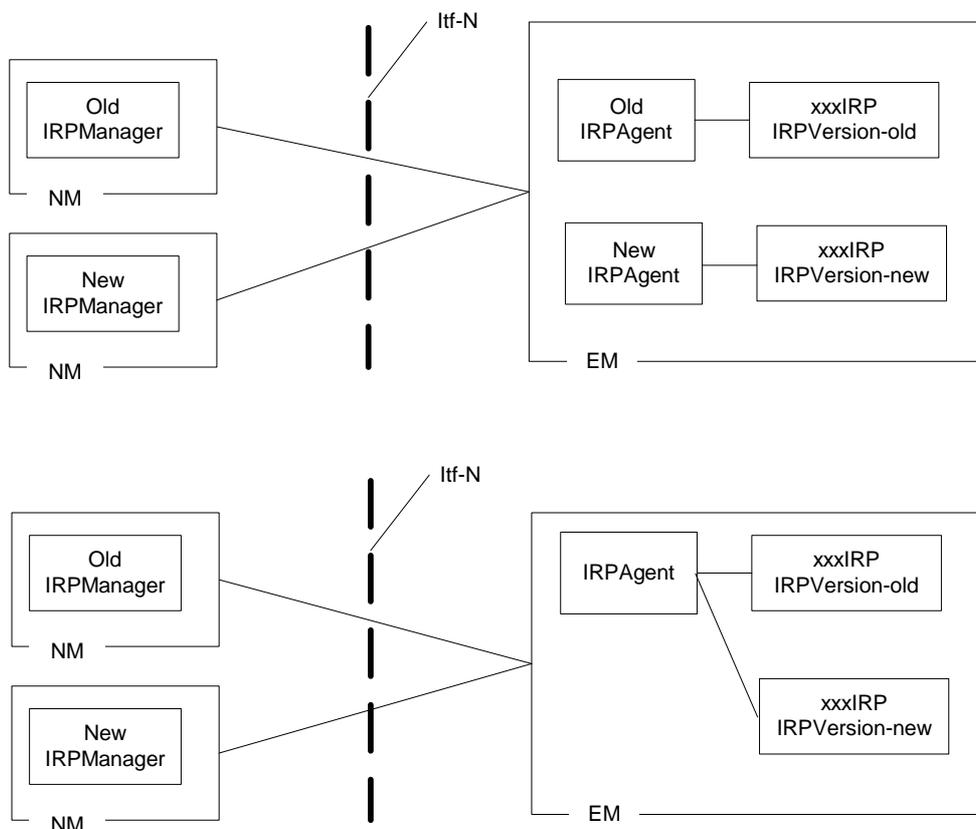

**Figure 1: System/Implementation BC System Context**

NOTE 1: An IRPAgent instance contains multiple XxxIRP instances such as Alarm IRP, Notification IRP, Test Management IRP, etc. Each XxxIRP instance implements/supports the corresponding XxxIRP specification of a particular IRPVersion.

Suppose IRPAgent-A contains xxxIRP of Interface IRPVersion-4, YyyIRP of Interface IRPVersion-5 and zzzIRP of Interface IRPVersion-6 and all IRPs support NRM IRPVersion-7 (see Note 2), this IRPAgent-A is BC if it can inter-operate successfully with the following

- xxxIRPManager of Interface IRPVersion-4 or 3 using NRM IRPVersion-7 or 6.
- yyyIRPManager of Interface IRPVersion-5 or 4 using NRM IRPVersion-7 or 6.
- zzzIRPManager of Interface IRPVersion-6 or 5 using NRM IRPVersion-7 or 6.

NOTE 2 All IRPs contained by the same IRPAgent instance should support the same set of NRM IRPVersions.

It is anticipated that the IRPAgent Level BC solution includes:

- An IRPAgent service allowing IRPManager to discover all the IRPAgent supported Interface IRPVersion(s).
- An IRPAgent service allowing IRPManager to discover the IRPAgent supported NRM IRPVersion(s).
- An IRPAgent service allowing IRPManager to discover the reference/address of the IRP instance (of the IRPAgent) supporting a particular Interface IRPVersion.

The above two diagrams in Figure 5.2 illustrate the two possible ways to support BC at this so-called IRPAgent Level.


The IRPVersion-new needs not to be BC to IRPVersion-old. In the case that IRPVersion-new is BC to IRPVersion-old, it is EM supplier's choice if "IRP Level" or "IRPAgent Level" solution will be used to support BC. In the case that the IRPVersion-new is not BC to IRPVersion-old, then the EM supplier will have no choice but to use "IRPAgent Level" solution if it wants its EM to support BC.

NOTE 3: IRPAgent service supporting "discovery" (as stated by the above three bullets) is not illustrated in the two diagrams.

## Annex A (informative): BC and Conformance Tests

This annex illustrates that:

an IRP, implementing a new-version IRP specification that is BC to an old-version IRP specification, may or may not be compliant to the old-version IRP specification.

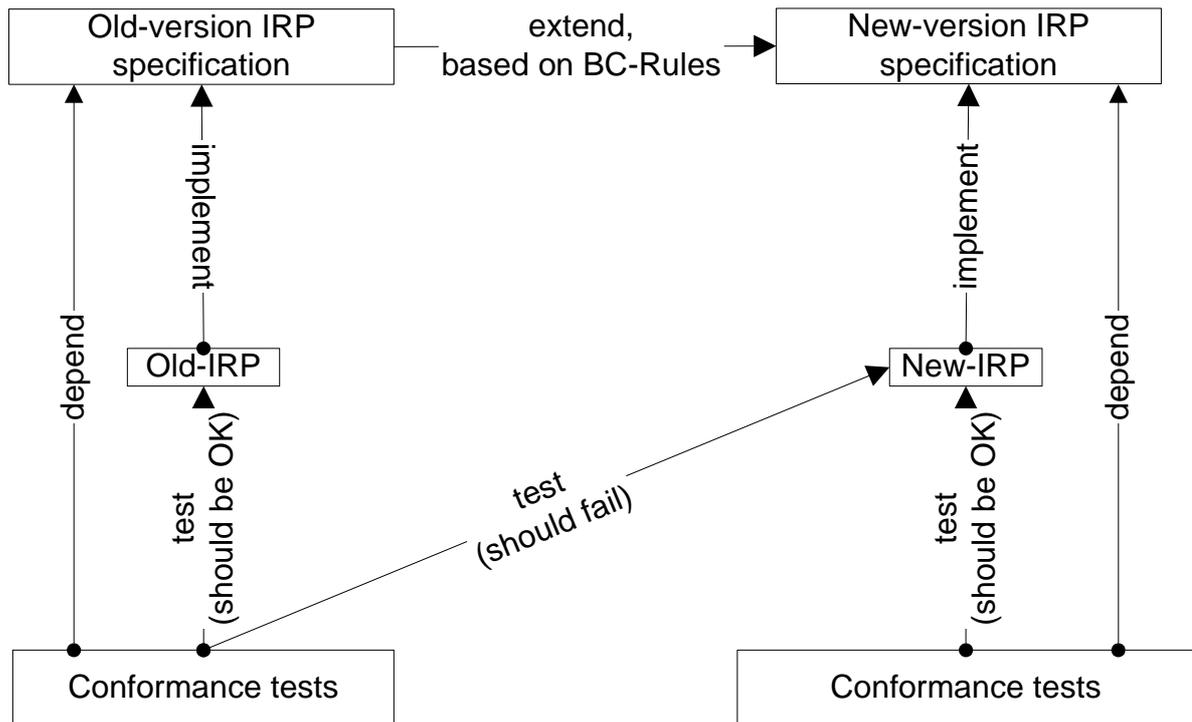

**Figure 2 : BC and Conformance Tests Scenario**

Suppose 3GPP has an older-version IRP specification (the “Old-version IRP specification” box) and there is a valid/correct implementation (the “Old-IRP” box).

Suppose also that 3GPP produce a “New-version IRP specification” by extending the “Old-version IRP specification” using the BC-rules.

The “New-IRP” should interwork with IRPManager that uses the “New-version IRP specification”.

This “New-IRP” should also interwork with IRPManager that uses the “Old-version IRP specification”.

The “Old-IRP” should pass the conformance test that is based on (see “depend” relation) the “Old-version IRP specification”.

Likewise, the “New-IRP” should pass the conformance test that is based on the “New-version IRP specification”.

However, this “New-IRP” may not be able to pass the conformance test that is based on “Old-version IRP specification” (see “test (should fail)” relation).

Likewise, the “Old-IRP” should not be able to pass the conformance test that is based on “New-Version IRP specification”.

---

## Annex B (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
Dec 2004	S_26	SP-040821	--	--	Submitted to SA#26 for Approval	1.0.0	