

Source: TSG SA1

Title: CRs to 22.001 and 22.003 on editorial modifications regarding
SMS CB to CBS

Document for: Approval

Agenda Item: 5.1.3

| Doc-1st-Level | Status-1st-Level | Spec | CR | Rev | Phase | Subject | Cat | Version - Current | Version-New |
|---------------|------------------|--------|-----|-----|-------|--|-----|-------------------|-------------|
| SP-000069 | | 22.001 | 002 | | R99 | Editorial modification for change of SMS-CB to CBS | D | 3.1.1 | 3.2.0 |
| SP-000069 | | 22.003 | 002 | | R99 | Editorial modification for change of SMS-CB to CBS and to correct the references | D | 3.1.0 | 3.2.0 |

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

22.001 CR 002

Current Version: **3.1.1**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **SA # 7**
list expected approval meeting # here ↑

for approval for information

strategic non-strategic (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <http://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects: (U)SIM ME UTRAN / Radio Core Network
(at least one should be marked with an X)

Source: TSG SA1 **Date:** 1/2/2000

Subject: Editorial modification for change of SMS-CB to CBS

Work item:

Category: F Correction **Release:** Phase 2
(only one category shall be marked with an X) A Corresponds to a correction in an earlier release Release 96
 B Addition of feature Release 97
 C Functional modification of feature Release 98
 D Editorial modification Release 99
 Release 00

Reason for change: ←SMS-CB changed to CBS

Clauses affected: 4.1

Other specs affected: Other 3G core specifications → List of CRs:
 Other GSM core specifications → List of CRs:
 MS test specifications → List of CRs:
 BSS test specifications → List of CRs:
 O&M specifications → List of CRs:

Other comments:



<----- double-click here for help and instructions on how to create a CR.

4.1 Subscription checking for Basic Services

General

Subscription checking is the function/process to ascertaining whether a subscriber has the authorization to use the particular Basic Service deduced from the call set-up parameters. It is the responsibility of the HPLMN to transfer, to the VPLMN, only the subscription data corresponding to those services a given subscriber is entitled to use in that VPLMN.

For mobile originated calls, subscription checking is performed in the VLR, whilst for mobile terminated calls it is performed in either the HLR or the VLR (determined as described below). The prerequisite for executing the subscription check is a successful deduction of a Basic Service from the Compatibility Information contained in the call set up, i.e. Bearer Capability Information Element and, in some cases, also the Low Layer and High Layer Compatibility Information elements.

For mobile originated calls an UE shall indicate the requested service by appropriate compatibility information elements according to GSM 27.001 [8]. This information is mapped to an individual Basic Service code (i.e. the MAP representation) by the MSC in order to be compared with the subscriber data available in the VLR.

An equivalent process is required in the HLR for mobile terminated calls, where the caller's requested service is indicated to the HLR (by the ISDN) by exhaustive compatibility information consisting of ISDN Bearer Capability Information Elements and in some cases - depending on the service requested - also of Low Layer and High layer Compatibility information elements. In case the compatibility information is not exhaustive, e.g. when the call is originated/transited by a PSTN, no Basic Service can be deduced and subscription checking cannot be performed in the "normal" way. Instead, rules for the Single and Multi Numbering Schemes apply.

In the Multi Numbering Scheme the Basic Service can be deduced by information stored in the HLR against the called number and hence an implicit subscription check is performed. In the Single Numbering Scheme, the Basic Service cannot be deduced until the UE has responded to the set up and therefore the HLR cannot perform subscription check. Instead, the VLR/MSC will perform the subscription check or calls are passed "unfiltered" (as regards subscription check), at the network operators' discretion.

Bearer Services

GSM 02.02 lists the Bearer Services, each of them with a specific "BS number". Single services defined independent of the fixed network user rate are called General Bearer Services. These distinct [numbered] services may individually be provided to a subscriber. Whichever the subscription arrangements are, all PLMNs (MSCs, VLRs and HLRs) shall be able to allow - as regards subscription checking - the use of individually subscribed-to Basic Services, within the range of services supported by the PLMN. That is, whenever it is possible to deduce the Basic Service from a call set up, subscription check shall be performed at the granularity of that particular Basic Service or the group to which it belongs.

TeleServices

TS 22.003 [6] lists the TeleServices, each of them with a specific "TS number". These may be provided to subscribers individually or combined, to the operators' discretion, however TS 12 (Emergency-calls) and TS 23 (CBS) are not subscribable. But, as for Bearer Services, networks shall be able to handle subscription checking at the granularity of individual

CHANGE REQUEST

Please see embedded help file at the bottom of this page for instructions on how to fill in this form correctly.

22.003 CR 002

Current Version: **3.1.0**

GSM (AA.BB) or 3G (AA.BBB) specification number ↑

↑ CR number as allocated by MCC support team

For submission to: **SA # 7**
list expected approval meeting # here ↑

for approval for information

strategic non-strategic (for SMG use only)

Form: CR cover sheet, version 2 for 3GPP and SMG The latest version of this form is available from: <http://ftp.3gpp.org/Information/CR-Form-v2.doc>

Proposed change affects:

(at least one should be marked with an X)

(U)SIM ME UTRAN / Radio Core Network

Source:

TSG SA1

Date:

1/2/2000

Subject:

Editorial modification for change of SMS-CB to CBS and to correct the references

Work item:

Category:

(only one category shall be marked with an X)

F Correction
A Corresponds to a correction in an earlier release
B Addition of feature
C Functional modification of feature
D Editorial modification

Release:

Phase 2
Release 96
Release 97
Release 98
Release 99
Release 00

Reason for change:

SMS-CB changed to CBS

Clauses affected:

4.1

Other specs affected:

Other 3G core specifications → List of CRs:
Other GSM core specifications → List of CRs:
MS test specifications → List of CRs:
BSS test specifications → List of CRs:
O&M specifications → List of CRs:

Other comments:



help.doc

<----- double-click here for help and instructions on how to create a CR.

0 Scope

This Technical Specification (TS) describes and defines a recommended set of Circuit Teleservices to be supported by a PLMN in connection with other networks as a basis for defining the network capabilities required.

0.1 Normative references

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] TS 22.001: " Principles of circuit telecommunication services supported by a ~~GSM~~ Public Land Mobile Network (PLMN)".
- [3] TS 22.002: "Circuit Bearer Services (BS) supported by a ~~GSM~~ Public Land Mobile Network (PLMN)".
- [4] TS 22.004: " General on supplementary services".
- [5] GSM 02.68 : " Digital cellular telecommunications system (Phase 2+); Voice Group Call Service (VGCS) - Stage 1".
- [6] GSM 22.69 : " Digital cellular telecommunications system (Phase 2+); Voice Broadcast Service (VBS) - Stage 1".
- [7] TS 23.040: " Technical realization of the Short Message Service (SMS) Point-to-Point (PP)".
- [8] TS 23.041 : " Technical realization of Short Message Service Cell Broadcast (SMSCB)".
- [9] GSM 04.08: " Mobile radio interface layer 3 specification".
- [10] TS 27.001 : " General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [11] TS 27.005: " Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS)".
- [12] ITU-T Recommendation T.4: "Standardization of group 3 facsimile apparatus for document transmission".
- [13] ITU-T Recommendation T.30: "Procedures for document facsimile transmission in the general switched telephone network".
- [14] TR 21.905: "Vocabulary for 3GPP Specifications"
- [15] TS 22.101: "UMTS Service Principles".

0.2 Abbreviations

Abbreviations used in this TS are listed in GSM 01.04 [1] and TS 21.905[14].

1 Framework for describing circuit teleservices supported


Teleservices supported by a PLMN are described by a number of attributes which are intended to be largely independent.

These attributes are described and defined in specification TS 22.001 [2].

They are grouped into three categories:

- High layer attributes;
- Low layer attributes (describing the Bearer capabilities which support the Teleservice).
 - information transfer attributes;
 - access attributes.
- General attributes.

Figure 1 shows the relationship between the different categories of services attributes, and their scope within a Teleservice.

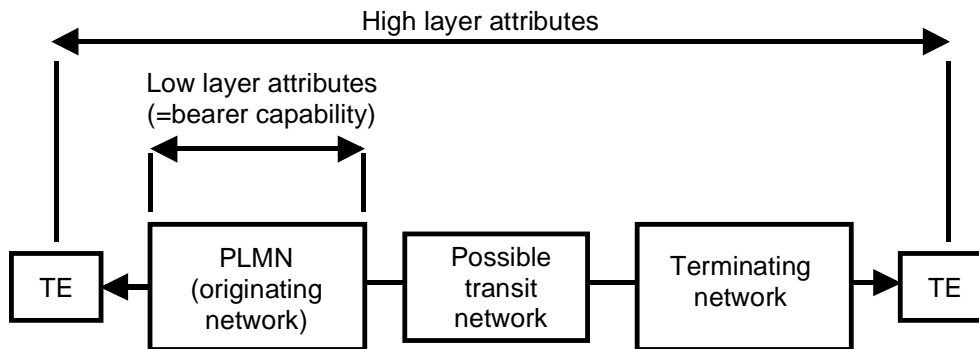

NOTE 1: A transit network may not exist.

NOTE 2: Communication may be established from both ends in principle.

Figure 1: Relationship between the categories of services attributes and their scope within a Teleservice

2 List of the teleservice attributes

Table 1 gives the list of the attributes. For the definitions and possible values of these attributes, see TS 22.001 [2].

Table 1: List of Teleservice attributes

| | | |
|---|---|--|
| 1. High layer capabilities | 1.1 Type of user information 1.2 Layer 4 protocol functions 1.3 Layer 5 " " 1.4 Layer 6 " " 1.5 Layer 7 " " | Dominant Teleservice attribute category Secondary attributes " " |
| 2. Low layer capabilities (describing the Bearer capability which supports the Teleservice) | 2.1 Information transfer 2.1.1 Information transfer capabilities 2.1.2 Information transfer mode 2.1.3 Information transfer rate 2.1.4 Structure 2.1.5 Establishment of communication 2.1.6 Communication configuration 2.1.7 Symmetry | " " " " " " Individual services (in the category) |
| | 2.2 Access (TS 22.001) 2.2.1 Signalling access 2.2.2 Information access 2.3 Interworking 2.3.1 Terminating network type 2.3.2 National/international interworking 2.3.3 Interface of terminal equipment | Qualifying attributes " " " " " " " " Further specify the individual services |
| 3. General | 3.1 Supplementary services provided 3.2 Quality of service 3.3 Operational and commercial | |

3 List of teleservice categories and individual teleservices

Table 2 presents a list of all Teleservices categories and of individual Teleservices and the associated dominant and secondary attributes.

4 Description of individual teleservices

The annex contains a data sheet per Teleservice with all attributes and comments.

5 Bearer capabilities supporting teleservices

According to specification TS 22.001 [2] the Bearer Capability defines the technical features of a Teleservice as they appear to the user at the customer access point or an appropriate interface of a fixed network. The Bearer Capability is characterized by information transfer, access and interworking attributes. The same set of attributes as for a Bearer Service is used. A Bearer Capability is associated with every Teleservice.

Table 2: Teleservice categories and Teleservices

| Dominant attribute | Category of teleservice | | Individual Teleservice | | |
|--------------------------|-------------------------|------------------------|------------------------|---|--|
| | No | Name | No | Name | |
| Type of user information | | | | | |
| Speech | 1 | Speech transmission | 11 12 | Telephony Emergency Calls | |
| Short message | 2 | Short message service | 21 22 23 | Short message MT/PP Short message MO/PP Short message e Cell broadcast service | |
| Facsimile | 6 | Facsimile transmission | 61 | Alternate speech and facsimile group 3 | |
| | | | 62 | Automatic Facsimile group 3 | |
| Speech | 9 | Voice Group service | 91 | Voice Group Call Service | |
| | | | 92 | Voice Broadcast Service | |

Annex A (normative):
Description of individual Teleservices

NOTE 1: Within the PLMN the "Information transfer rate" attribute is not indicated.

A.1 Individual Teleservices

A.1.1 Telephony

| Teleservice 11, Telephony | | | | | | | | | |
|--|------------------------------------|--------------------------------|---------------------------------------|--------|---------------------------------------|---------------------|---------------------------------|--|--|
| A T T R I B U T E S | 1. HLC | 1.1 Type or user information | | speech | | | | | |
| | | 1.2 Layer 4 protocol functions | | - | | | | | |
| | | 1.3 Layer 5 protocol functions | | - | | | | | |
| | | 1.4 Layer 6 protocol functions | | - | | | | | |
| | | 1.5 Layer 7 protocol functions | | - | | | | | |
| | 2. LLC | Inform transfer | 2.1 | | 2.1.1 Information transfer capability | | speech (digital representation) | | |
| | | | | | 2.1.2 Information transfer mode | | circuit | | |
| | | | | | 2.1.3 Information transfer rate | | not applicable | | |
| | | | | | 2.1.4 Structure | | not applicable | | |
| | | | | | 2.1.5 Establishment of connection | | demand MO MT | | |
| | | | | | 2.1.6 Communication configuration | | point-to-point | | |
| | | | | | 2.1.7 Symmetry | | bidirectional symmetry | | |
| | | Access at UE | 2.2 | | 2.2.1 Signalling access | | manual | | |
| | | | 2.2.2 Information access | | rate | full rate/half rate | | | |
| | | | (TS 22.001) | | interface | | | | |
| Inter- working | 2.3 | | 2.3.1 Visible network type | | PSTN/ISDN/ -PLMN | | | | |
| | | | 2.3.2 National/Internat. interworking | | international/national | | | | |
| | | | 2.3.3 Interface of TE to terminating | | 2 wire, analogue | 4 wire S (B+B+D) | ME | | |
| 3. Gen | 3.1 Supplementary service provided | | TSGSM 022.004 | | | | | | |
| | 3.2 Quality of service | | | | | | | | |

Comments:

This service provides the transmission of speech information and audible signalling tones of the PSTN/ISDN. In the PLMN and the fixed network processing technique appropriate for speech such as analogue transmission, echo cancellation and low bit rate voice encoding may be used. Hence, bit integrity is not assured.

- 1) Transparency for telephone signalling tones is provided.
- 2) Transparency for voice band facsimile signals is not mandatory. (Appropriate bearer services see ~~GSM-TS 202.002~~ [3].)
- 3) Transparency for end to end speech encryption is not mandatory. If a user needs to apply this technique an appropriate bearer service (~~TSGSM 022.002~~ [3]) can be used.
- 4) Transmission of DTMF is provided in the mobile to fixed direction (e.g. for controlling voice mail boxes) during any time of an established call.
- 5) GERAN speech teleservices may be provided using the Full Rate (full rate, version 1), Enhanced Full Rate (full rate, version 2), Half Rate (half rate, version 1) or Adaptive Multirate (AMR) speech codecs. The default speech codec to provide speech service across the GERAN is Full Rate.
- 6) The default speech codec to provide speech service across the UTRAN is AMR.

A.1.2 Emergency calls

| Teleservice 12, Emergency calls | | | | | | |
|--|------------------------------------|--------------------------------|---|-----------|---------------------------------|------|
| A T T R I B U T E S | 1. HLC | 1.1 Type or user information | | speech | | |
| | | 1.2 Layer 4 protocol functions | | - | | |
| | | 1.3 Layer 5 protocol functions | | - | | |
| | | 1.4 Layer 6 protocol functions | | - | | |
| | | 1.5 Layer 7 protocol functions | | - | | |
| | 2. LLC | 2.1 Inform transfer | 2.1.1 Information transfer capability | | speech (digital representation) | |
| | | | 2.1.2 Information transfer mode | | circuit | |
| | | | 2.1.3 Information transfer rate | | not applicable | |
| | | | 2.1.4 Structure | | not applicable | |
| | | | 2.1.5 Establishment of connection | | demand MO MT | |
| | | | 2.1.6 Communication configuration | | point-to-point | |
| | | | 2.1.7 Symmetry | | bidirectional symmetry | |
| | | 2.2 Access at UE | 2.2.1 Signalling access | | manual | |
| | | | 2.2.2 Information access (TS 22.001) | rate | full rate/half rate | |
| | | | | interface | | |
| | | 2.3 Inter- working | 2.3.1 Visible network type | | PSTN | ISDN |
| | | | 2.3.2 National/Internat. interworking | | national | |
| 2.3.3 Interface of TE to terminating Ntwk. | | | 2 wire | 4 wire | | |
| 3. Gen | 3.1 Supplementary service provided | | TSGSM-0 22.004 (see note 3) | | | |
| | 3.2 Quality of service | | | | | |

Comments:

- 1) A standardized access method throughout all PLMNs is mandatory. See TS 22.101[5] for further information on emergency call requirements.
- 2) It shall be an option of the network operator whether to accept emergency calls coming from user equipment which do not transmit an IMSI or a TMSI.
- 3) Emergency calls supersede all constraints imposed by supplementary services or user equipment features used for other Tele or Bearer services. The lock state of the UE is overridden by the SOS-procedure.
- 4) Emergency calls will be routed to the emergency services in accordance with national regulations.
- 5) In order to help identifying callers in cases of misuse databases in the PLMN may be accessed to retrieve the identity of the calling UE.

A.1.3 Short Message Service (SMS)

A.1.3.1 Short message service MT/PP

| Teleservice 21, Short Message MT point-to-point 1), 2) | | | | | |
|--|--|--------------------------------|---|---------------------------------------|----------------|
| A T T R I B U T E S | 1. | 1.1 Type or user information | | short message, ≤ 160 characters | |
| | | 1.2 Layer 4 protocol functions | | | |
| | | 1.3 Layer 5 protocol functions | | see TS 23.040GSM 03.40 | |
| | | 1.4 Layer 6 protocol functions | | see TS 23.040GSM 03.40 | |
| | | 1.5 Layer 7 protocol functions | | see TS 23.040GSM 03.40 | |
| | I B U T E S | 2. | Inform transfer | 2.1.1 Information transfer capability | not applicable |
| | | | | 2.1.2 Information transfer mode | not applicable |
| | | | | 2.1.3 Information transfer rate | not applicable |
| | | | | 2.1.4 Structure | not applicable |
| | | | | 2.1.5 Establishment of connection | not applicable |
| | | | | 2.1.6 Communication configuration | not applicable |
| | | | | 2.1.7 Symmetry | not applicable |
| | | Access at UE | 2.2.1 Signalling access | see TS 22.005GSM 07.05 | |
| | | | 2.2.2 Information access (TS 22.001) | rate | not applicable |
| interface | | | | | |
| Inter- working | 2.3.1 Visible network type | not applicable 3) | | | |
| | 2.3.2 National/Internat. interworking | not applicable 3) | | | |
| | 2.3.3 Interface of TE to terminating Ntwk. | not applicable 3) | | | |
| 3. | 3.1 Supplementary service provided | | TSGSM 0 22.004 | | |
| | 3.2 Quality of service | | | | |
| Gen | | | | | |

Comments:

- 1) This service provides the transmission of a short message from a message handling system (service centre) to a user equipment. The service centre is functionally separated from the PLMN.
- 2) After reception an acknowledgement message should be sent back.
- 3) There is only an interworking between the PLMN and SMS Service Centre (SMS-SC). Connections from the fixed network to the SMS-SC are out of the scope of the 3GPP specifications.
- 4) The information transfer attributes refer to the connection-oriented services (ISDN, Bluebook Q.931). The Short Message Service is not a connection orientated service, hence the transfer attributes here are not applicable.
- 5) SMS MT/PP teleservice can be provided via both the CS and PS domains.

A.1.3.2 Short message service MO/PP

| Teleservice 22, Short Message MO point-to-point 1), 2) | | | | | |
|--|---|--------------------------------|---|---------------------------------------|---------------------------------------|
| A T T R I B U T E S | 1. | 1.1 Type or user information | | short message, ≤ 160 characters | |
| | | 1.2 Layer 4 protocol functions | | | |
| | | 1.3 Layer 5 protocol functions | | see <u>GSM 03.40</u> <u>TS 23.040</u> | |
| | | 1.4 Layer 6 protocol functions | | see <u>TS 23.040</u> <u>GSM 03.40</u> | |
| | | 1.5 Layer 7 protocol functions | | see <u>TS 23.040</u> <u>GSM 03.40</u> | |
| | I N F O R M A T I O N | 2.1 Inform transfer | 2.1.1 Information transfer capability | | not applicable |
| | | | 2.1.2 Information transfer mode | | not applicable |
| | | | 2.1.3 Information transfer rate | | not applicable |
| | | | 2.1.4 Structure | | not applicable |
| | | | 2.1.5 Establishment of connection | | not applicable |
| | | | 2.1.6 Communication configuration | | not applicable |
| | | | 2.1.7 Symmetry | | not applicable |
| | | 2.2 Access at UE | 2.2.1 Signalling access | | see <u>TS 27.005</u> <u>GSM 07.05</u> |
| | | | 2.2.2 Information access (TS 22.001) | rate | not applicable |
| | | | | interface | |
| 2.3 Inter- working | 2.3.1 Visible network type | | not applicable 3) | | |
| | 2.3.2 National/Internat. interworking | | not applicable 3) | | |
| | 2.3.3 Interface of TE to terminating Ntwk. | | not applicable 3) | | |
| 3. Gen | 3.1 Supplementary service provided | | <u>TS 22.004</u> <u>GSM 02.04</u> | | |
| | 3.2 Quality of service | | | | |

Comments:

- 1) This service provides the transmission of a short message from a user equipment to a message handling system (service centre). The service centre is functionally separated from the PLMN.
- 2) After reception an acknowledgement message is sent back.
- 3) There is only an interworking between the PLMN and SMS Service Centre (SMS-SC). Connections from the fixed network to the SMS-SC are out of the scope of the 3GPP specifications.
- 4) The information transfer attributes refer to the connection-oriented services (ISDN, Bluebook Q.931). The Short Message Service is not a connection orientated service, hence the transfer attributes here are not applicable.
- 5) Information from the following sources at the UE might be transmitted:
 - a pre-recorded message in a store;
 - a number from the dialling key pad;
 - information from an external keyboard or terminal equipment connected to the ME.
- 6) SMS MO/PP teleservice can be provided via both the CS and PS domains.

A.1.3.3 Short message service Cell Broadcast Service (CBS)

| Teleservice 23, Short Message transmission eCell broadcast service | | | | | |
|--|---|--------------------------------|---|---|----------------|
| A T T R I B U T E S | 1. | 1.1 Type or user information | | short message, ≤ 93 characters 4) | |
| | | 1.2 Layer 4 protocol functions | | | |
| | | 1.3 Layer 5 protocol functions | | see <u>TS 23.041</u> GSM 03.41 | |
| | | 1.4 Layer 6 protocol functions | | see <u>TS 23.041</u> GSM 03.41 | |
| | | 1.5 Layer 7 protocol functions | | see <u>TS 23.041</u> GSM 03.41 | |
| | I N F O R M A T I O N | 2.1 Inform transfer | 2.1.1 Information transfer capability | | not applicable |
| | | | 2.1.2 Information transfer mode | | not applicable |
| | | | 2.1.3 Information transfer rate | | not applicable |
| | | | 2.1.4 Structure | | not applicable |
| | | | 2.1.5 Establishment of connection | | not applicable |
| | | | 2.1.6 Communication configuration | | not applicable |
| | | | 2.1.7 Symmetry | | |
| | | 2.2 Access at UE | 2.2.1 Signalling access | | not applicable |
| | | | 2.2.2 Information access (TS 22.001) | rate | not applicable |
| | | | | interface | not applicable |
| 2.3 Inter- working | 2.3.1 Visible network type | | 2) | | |
| | 2.3.2 National/Internat. interworking | | 2) | | |
| | 2.3.3 Interface of TE to terminating Ntwk. | | 2) | | |
| 3. Gen | 3.1 Supplementary service provided | | <u>TS 22.004</u> GSM 02.04 | | |
| | 3.2 Quality of service | | | | |

Comments:

- 1) This service provides the transmission of a short message from a message handling system to all user equipments in the area of a Base Station. The service centre is functionally separated from the PLMN. There is no acknowledgement message after reception.
- 2) An interworking only with the Cell-Broadcast Service Centre is foreseen. Connections from the fixed network to the SC are out of the scope of the 3GPP specifications.
- 3) The information transfer attributes refer to the connection-oriented services (ISDN, Bluebook Q.931). The Short Message Service is not a connection orientated service, hence the transfer attributes here are not applicable.
- 4) TS 23.041~~GSM 03.41~~ provides up to 15 concatenated "pages" of up to 93 characters each.

A.1.3.4 Short message service description

Description of:

teleservice 21, "Short message MT/PP";

teleservice 22 "Short message MO/PP"; and

teleservice 23 "Cell broadcast ~~short messages~~service".

1 Introduction

The purpose of this annex is to describe the short message teleservice.

Three different types of short messages are defined, namely short message MT/PP (Mobile Terminated/Point-to-point), short message MO/PP (Mobile Originated/Point-to-point) and Cell Broadcast service ~~short~~ messages.

2 Definition of the short message service MT/PP and MO/PP

For both mobile originated and mobile terminated services the Service Centre acts as store and forward centre. The Service Centre is functionally separate from the PLMN although this does not preclude an integrated implementation.

More than one service centre may be connected to a PLMN. Messages may be input to the service centre from a fixed network customer by means of a suitable telecommunications service either from the fixed network, e.g. speech, telex, facsimile, etc. or from a mobile network customer. The list is not intended to be comprehensive and it is entirely open to the service centre provider what telecommunication services it supports. The service centre shall then reformat the message into that provided by the short message service, for delivery to the user equipment.

For mobile originated SMS messages the SMT formats the message into that used by the SMS service and sends to the service centre (to allow interworking with ERMES also ERMES-format addresses may be sent from the UE to the SC). In general the user may use alphanumeric addresses for more user convenience. In principle the message may be intended for a subscriber on the fixed network or for another mobile subscriber. For the message to another mobile subscriber the service centre should deliver as described in this section.

The message text is limited to a length of 160 characters.

The originator does not need to know the location of the mobile subscriber to whom he wants to send a message. The message is addressed to the recipient's Directory Number.

As a part of the basic service for both MT and MO, an acknowledgement will be provided on a message by message basis to the SC (MT) or UE (MO). This acknowledgement indicates that the PLMN has successfully transferred the message to the UE (MT) or SC (MO).

Optionally, the SC may offer final delivery notification to the originator. In this case, the originator may request to have a notification returned from the SC informing her about the delivery of the Short Message to the recipient. This delivery report indicates whether this particular message has been correctly received at the receiving station or not, to the extent that the SC is able to establish this. It does not indicate whether the message has been read. If the delivery report is negative, i.e. the message has not been successfully delivered to the recipient, it shall include the failure cause.

The delivery report is sent to the originator, if reachable, as soon as the information (positive or negative) is available.

In addition, the SC may use the delivery report capabilities for other purposes, such as intermediate status reports etc. All point-to-point short messages are either to or from the service centre. A message from one user equipment to another must pass through a service centre. This case is effectively an MO and MT message together. The two transactions are separate, though clearly related.

Point-to-point messages may be sent or received when the UE is engaged on a call (voice or data), or in idle mode.

However, messages which overlap the boundary of such a call, or during a handover, may be lost, in which case they will be sent again.

The accounting between the SC and PLMN if applicable is for agreement between those parties.

The originator of a short message may notify the SC of an expiry time after which the message is no longer of value and may be deleted by the SC. During the validity period of the message, the SC shall try to deliver the message. After the expiry date the SC will take no further step to deliver the message, but its status may be kept by the SC to enable the originator to enquire the result. If the originator of the short message does not request any expiry time a standard value, e.g. 24 hours, is used.

The Service Centre may give a short message a priority status. This priority message will be attempted to be delivered irrespective of whether or not the UE has been identified as temporarily absent. Delivery of non-priority messages will not be attempted if the UE has been identified as temporarily absent.

If necessary, the originator may request the SC to perform specific operations on a previously submitted short message, such as provision/cancellation of a report or deletion of the short message.

The recipient of a short message will be informed by the message about the date and time it was submitted to the SC.

If the UE Message Store is full, the Message Store Overflow indicator is activated, and any further messages received will not be accepted. An appropriate specific non-acknowledgement message shall be returned. By help of an optional flow control mechanism further waiting short messages will be transmitted after the UE has memory available again.

3 Reply path

The reply path facility is an enhancement to the point-to-point SMS. In the mobile originated case the mobile user will request his Service Centre to guarantee to forward a single reply to his message back to him (Reply Path).

In the mobile terminated case the recipient of the Short Message will get an indication by the service centre that a reply via this Service centre will be accepted on a subscriptionless basis. The recipient may then submit a reply to this SC (within a period of time defined by the SC operator), which is then forwarded to the submitter of the original message. No subscription with the Service centre is needed by the replying user. The costs, if any, for the reply path are allocated to the originator.

4 Definition of the cell broadcast ~~service short message~~

The cell broadcast service is a Teleservice which enables an Information Provider to submit short messages for broadcasting to a specified area within the PLMN.

The cell broadcast service is characterized by the following aspects:

- ⊖ No acknowledgement is sent from the UE.

- ⊖ The cell broadcast message is sent in a limited area, defined by the originator of the message, by agreement with the PLMN.

- An identifier is associated with each message. This identifier is received by the UE and used by the short message function of the UE not to store broadcast messages which are not wanted or which have already been received.
- Generally, cell broadcast messages will be sent continuously, so that all such messages are sent in turn, and then repeated. The cycle time will need to be short enough for important messages to be received by travellers moving through a group of cells.
- Cell broadcast messages are MT only. The origination of these messages is outside the scope of 3GPP specifications.
- The maximum length of each cell broadcast message will be 93 characters.
- Cell broadcast DRX mode is defined to improve the battery life for User equipment. This feature is optional.
- Reception of CBS messages for a UE is not a requirement if it is connected in the CS domain. It should be possible for a UE to receive messages if it is connected in the PS domain and no data is currently transmitted.

A.1.4 Alternate speech/facsimile G3

| Teleservice 61, Alternate speech and facsimile group 3 | | | | | | |
|--|------------------------------------|---------------------------------------|----------------------------|--|------------------------------|-----------------|
| A T T R I B U T E S | 1. HLC | 1.1 Type or user information | | facsimile/speech | | |
| | | 1.2 Layer 4 protocol functions | | Procedures according to <u>ITU-T-CCITT</u> recommendation T.30/T4. | | |
| | | 1.3 Layer 5 protocol functions | | | | |
| | | 1.4 Layer 6 protocol functions | | | | |
| | | 1.5 Layer 7 protocol functions | | | | |
| | I B U T E S | 2. LLC | 2.1 | 2.1.1 Information transfer capability | alternate speech/group 3 fax | |
| | | | | 2.1.2 Information transfer mode | circuit | |
| | | | Inform transfer | 2.1.3 Information transfer rate | up to 14400 bits/s | |
| | | | | 2.1.4 Structure | not applicable | |
| | | | | 2.1.5 Establishment of connection | demand (MO MT) | |
| | | | | 2.1.6 Communication configuration | point-to-point | |
| | | | | 2.1.7 Symmetry | bidirectional symmetry | |
| | | 2.2 | 2.2.1 Signalling access | I.440/450 (GSM 04.08) | | |
| | | | Access at UE | 2.2.2 Information access | rate | fullrate |
| | | | | (TS 22.001) | interface | 2 wire analogue |
| 2.3 | Inter- working | 2.3.1 Visible network type | PSTN | ISDN | PLMN | |
| | | 2.3.2 National/Internat. interworking | international/national | | | |
| | | 2.3.3 Interface of TE to terminating | 2 wire, analogue/UE | | | |
| 3. Gen | 3.1 Supplementary service provided | | <u>TS 22.004</u> GSM 02.04 | | | |
| | 3.2 Quality of service | | | | | |

Comments:

- 1) This Teleservice allows the connection of ITU-T-CCITT group 3 fax apparatus (send and/or receive) to the user equipments of a PLMN. Facsimile connections may be established to/from group 3 apparatus in the PSTN, ISDN or PLMN.
- 2) A high quality of service even under bad radio conditions and/or in connection to/from moving vehicles is required.
- 3) Both speech and fax portions of the call will use a full rate. The fax portion of the call may use multiple full rate channels.
- 4) Subscription for TS61 includes also subscription for TS62 (refer to TS TS 22.001[2]). For this reason and in order to allow a user to change between ME supporting TS61 or TS62 both a network and a UE supporting TS61 shall also accept call set-ups for TS62. If a subscriber originates/receives a TS61 call but either the UE or the network do not support TS61 (but supports TS62), then TS61 shall be negotiated to TS62 in accordance to the rules specified in ~~GSM 07.04~~ TS 27.001 [10]. If the negotiation does not succeed, then the call shall be released.

A.1.5 Automatic facsimile G3

| Teleservice 62, Alternate facsimile group 3 | | | | | | |
|--|------------------------------------|---------------------------------------|-------------------------|---|------------------------|------------------|
| A T T R I B U T E S | 1. HLC | 1.1 Type or user information | | facsimile | | |
| | | 1.2 Layer 4 protocol functions | | Procedures according to ITU-TCCITT | | |
| | | 1.3 Layer 5 protocol functions | | recommendation T.30/T4. | | |
| | | 1.4 Layer 6 protocol functions | | | | |
| | | 1.5 Layer 7 protocol functions | | | | |
| | I B U T E S | 2. LLC | 2.1 | 2.1.1 Information transfer capability | Facsimile group 3 | |
| | | | | 2.1.2 Information transfer mode | circuit | |
| | | | Inform | 2.1.3 Information transfer rate | up to 14400 bits/s | |
| | | | | 2.1.4 Structure | not applicable | |
| | | | Transfer | 2.1.5 Establishment of connection | demand (MO MT) | |
| | | | | 2.1.6 Communication configuration | point-to-point | |
| | | | | 2.1.7 Symmetry | bidirectional symmetry | |
| | | 2.2 | 2.2.1 Signalling access | | L440/450 (GSM 04.08) | |
| | | | Access | 2.2.2 Information access | rate | fullrate |
| | | | | At UE (TS 22.001) | interface | 2 wire, analogue |
| 2.3 | 2.3.1 Visible network type | | PSTN | ISDN | PLMN | |
| | Inter-Working | 2.3.2 National/Internat. interworking | | international/national | | |
| | | 2.3.3 Interface of TE to terminating | | 2 wire, analogue/UE | | |
| 3. Gen | 3.1 Supplementary service provided | | TS 22.004GSM 02.04 | | | |
| | 3.2 Quality of service | | | | | |

Comments:

- 1) This teleservice supports a Facsimile Group 3 Autocalling/Autoanswering mode only.
- 2) This teleservice allows connection of ~~ITU-TCCITT~~ group 3 fax apparatus to and from the user equipments of a PLMN. Facsimile connections may be established to and from group 3 apparatus in the PSTN, ISDN or PLMN.
- 3) A high quality of service even under bad radio conditions and/or in connection to/from moving vehicles is required.
- 4) If a Network receives a call set-up for TS61 and if the subscriber in question has a subscription for TS62 only, then the network shall negotiate TS61 to TS62 in accordance to the rules specified in ~~GSM 07.01~~TS 27.001 [10]. If the negotiation does not succeed, then the call shall be released. See also item 4) in the description of TS61.
- 5) This teleservice may use the multislot mechanism of GERAN.

A.1.6 Voice Group Call Service

| Teleservice 91, Voice Group Call Service | | | | | |
|--|-----------|------------------------------------|---|----------------|---------------------------------|
| A T T R I B U T E S | 1. HLC | 1.1 Type or user Information | | speech | |
| | | 1.2 Layer 4 protocol functions | | - | |
| | | 1.3 Layer 5 protocol functions | | - | |
| | | 1.4 Layer 6 protocol functions | | - | |
| | | 1.5 Layer 7 protocol functions | | - | |
| | 2. LLC | 2.1 Inform transfer | 2.1.1 Information transfer capability | | speech (digital representation) |
| | | | 2.1.2 Information transfer mode | | circuit |
| | | | 2.1.3 Information transfer rate | | not applicable |
| | | | 2.1.4 Structure | | not applicable |
| | | | 2.1.5 Establishment of connection | | demand MO MT |
| | | | 2.1.6 Communication configuration | | multipoint |
| | | | 2.1.7 Symmetry | | bidirectional symmetry |
| | | 2.2 Access at UE | 2.2.1 Signalling access | | manual |
| | | | 2.2.2 Information access (TS 22.001) | rate | full rate/half rate |
| | | | | interface | |
| | | 2.3 Inter- working | 2.3.1 Visible network type | | PSTN/ISDN/ PLMN |
| | | | 2.3.2 National/Internat. interworking | | international/national |
| | | | 2.3.3 Interface of TE to terminating | | 2 wire, analogue |
| | 3. Gen | 3.1 Supplementary service provided | | TSGSM 0 22.068 | |
| | | 3.2 Quality of service | | | |

Comments:

This service provides for speech conversation of a predefined group of service subscribers in half duplex mode on the radio link taking into account multiple mobile service subscribers involved in the VGCS call per cell. A detailed service description is given in TS 22.068 [5].

This teleservice shall only be provided via a GERAN.

A.1.7 Voice Broadcast Service

| Teleservice 92, Voice Broadcast Service | | | | | | | | | |
|--|------------------------------------|--------------------------------------|--------------------------------------|-----------------------------------|---------------------------------------|---------------------------------------|---------------------------------|--|--|
| A T T R I B U T E S | 1. HLC | 1.1 Type or user Information | | speech | | | | | |
| | | 1.2 Layer 4 protocol functions | | - | | | | | |
| | | 1.3 Layer 5 protocol functions | | - | | | | | |
| | | 1.4 Layer 6 protocol functions | | - | | | | | |
| | | 1.5 Layer 7 protocol functions | | - | | | | | |
| | I B U T E S | 2. LLC | Inform transfer | 2.1 | | 2.1.1 Information transfer capability | speech (digital representation) | | |
| | | | | 2.1.2 Information transfer mode | | circuit | | | |
| | | | | 2.1.3 Information transfer rate | | not applicable | | | |
| | | | | 2.1.4 Structure | | not applicable | | | |
| | | | | 2.1.5 Establishment of connection | | demand MO MT | | | |
| | | | | 2.1.6 Communication configuration | | broadcast | | | |
| | | | | 2.1.7 Symmetry | | unidirectional | | | |
| | | Access at UE | 2.2 | | 2.2.1 Signalling access | | manual | | |
| | | | 2.2.2 Information access (TS 22.001) | | rate | full rate/half rate | | | |
| | | | | | interface | | | | |
| | | | 2.3 | | 2.3.1 Visible network type | | PSTN/ISDN/ PLMN | | |
| | | | Inter- working | | 2.3.2 National/Internat. interworking | | international/national | | |
| | | 2.3.3 Interface of TE to terminating | | 2 wire, analogue | 4 wire S (B+B+D) | ME | | | |
| 3. Gen | 3.1 Supplementary service provided | | GSM-0TS 22.069 | | | | | | |
| | 3.2 Quality of service | | | | | | | | |

Comments:

This service provides for the distribution of speech, generated by a service subscriber, to all or a predefined group service subscribers located in this area. A detailed service description is given in GSM-0TS 22.069 [6].

This teleservice shall only be provided via a GERAN.